

## ADH700 Series

### 700 Watt Half-Brick DC-DC Converter

#### Data Sheet

**Total Power:** 700 Watt  
(28 V @ 25 A)  
**Input Voltage:** 36 - 65 Vdc  
**Single Output:** 28 V Nom

#### SPECIAL FEATURES

- 700 W continuous power
- Ultra high efficiency 95% @ 100% load
- 36 - 65 Vdc Telecom input range
- Contact cooling or heatsink mounting
- Excellent thermal performance
- Remote output sense
- Fully regulated output voltage
- No minimum load requirement
- Remote control function
- Low ripple and noise
- Fixed switching frequency
- Trim function: 50% ~118%
- High reliability
- RoHS 6 compliant
- UL94 V-0 materials
- Output overcurrent protection
- Output shortcircuit protection
- Output overvoltage protection
- Overtemperature protection
- Industry standard half-brick
- Two year warranty (consult factory for extended terms)

#### SAFETY

- EN60950
- CSA
- CE
- UL



#### Electrical Specifications

Input	
Input voltage	36 - 65 Vdc
Input surge	100 V / 100 mSec (Non-operation)
Input UVLO	Turn-on: 34 Vdc typical Turn-off: 32 Vdc typical Hysteresis: 2 Vdc typical
I/O insulation	Basic insulation
I/O isolation	1500 Vdc
Efficiency (48 Vin, 25 °C ambient)	95% @ 100% load 95% @ 100% load
Output	
Output voltage (Vin = 48 V)	28 V
Output current maximum	25 A
Noise & ripple	130 mV pk-pk typical
Overtemperature protection	115 °C typical
Overvoltage protection method / OVP operation	35 - 42 V window / Hiccup and auto restart
Overcurrent protection method / OCP operation	26.5 - 35 A window / Hiccup and auto restart
Control	
Enable	TTL compatible
Switching frequency	280 KHz fixed frequency

### Environmental Specifications

Operating temperature	-40° C to +85 °C
Storage temperature	-55 °C to +125 °C
MTBF	2 million hours

### Ordering Information

Model number	Input voltage	Output voltage set point	Output current	Efficiency
ADH700-48S28-6L	36 - 65 Vdc	28 Vdc	25 A	95% (100% load)
ADH700-48S28P-6L	36 - 65 Vdc	28 Vdc	25 A	95% (100% load)

B = Baseplate  
 -6 = 3.8 mm pin length  
 P = Positive logic control



### Pin Length Options

Device code suffix	L
-4	4.6 mm ± 0.5 mm
-6	3.8 mm ± 0.5 mm
-8	2.8 mm ± 0.5 mm
None	5.8 mm ± 0.5 mm

### Pin Designations

Pin	Function	Function
1	Vin+	Positive input voltage
2	CNT	Remote ON/OFF control
3	Case	Case
4	Vin-	Negative input voltage
5	Vo-	Negative output sense
6	S-	Negative output sense
7	Trim	Output voltage trim
8	S+	Positive output sense
9	Vo+	Positive output voltage

### Mechanical Drawing

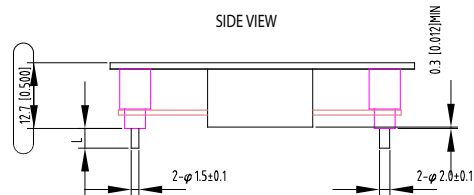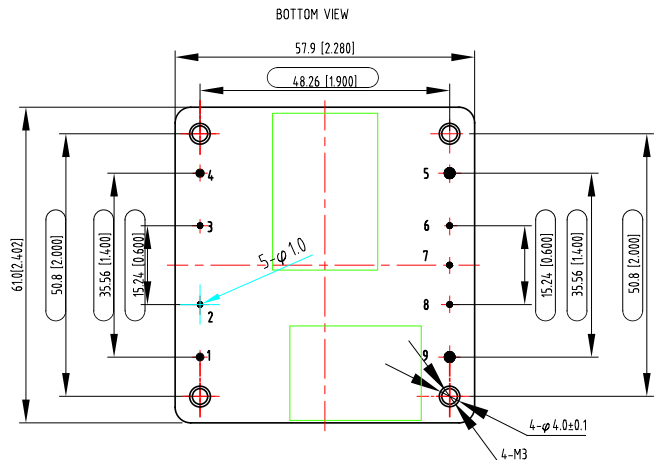

UNIT: mm[inch]      L=3.80±0.25mm  
 TOLERANCE: X.Xmm±0.5mm[X.XX in.±0.02in.]  
 X.XXmm±0.25mm[X.XXX in.±0.01in.]

Notes: Dimensions within the box are critical dimensions.

### WORLDWIDE OFFICES

#### Americas

2900 S.Diablo Way  
 Tempe, AZ 85282  
 USA  
 +1 888 412 7832

#### Europe (UK)

Waterfront Business Park  
 Merry Hill, Dudley  
 West Midlands, DY5 1LX  
 United Kingdom  
 +44 (0) 1384 842 211

#### Asia (HK)

14/F, Lu Plaza  
 2 Wing Yip Street  
 Kwun Tong, Kowloon  
 Hong Kong  
 +852 2176 3333



www.artesyn.com

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2018 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
 For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А