

## Small signal Schottky diodes

### Features


- Low conduction and reverse losses
- Negligible switching losses
- Low forward and reverse recovery times
- Extremely fast switching
- Surface mount device
- Low capacitance diode

### Description

The BAT54 series uses 40 V Schottky barrier diodes packaged in SOD- 23, SOD-323, SOD-523, SOT-23, SOT-323, or SOT-666.

**Table 1. Device summary**

| Symbol      | Value  |
|-------------|--------|
| $I_F$       | 300 mA |
| $V_{RRM}$   | 40 V   |
| $C$ (typ)   | 7 pF   |
| $T_j$ (max) | 150 °C |

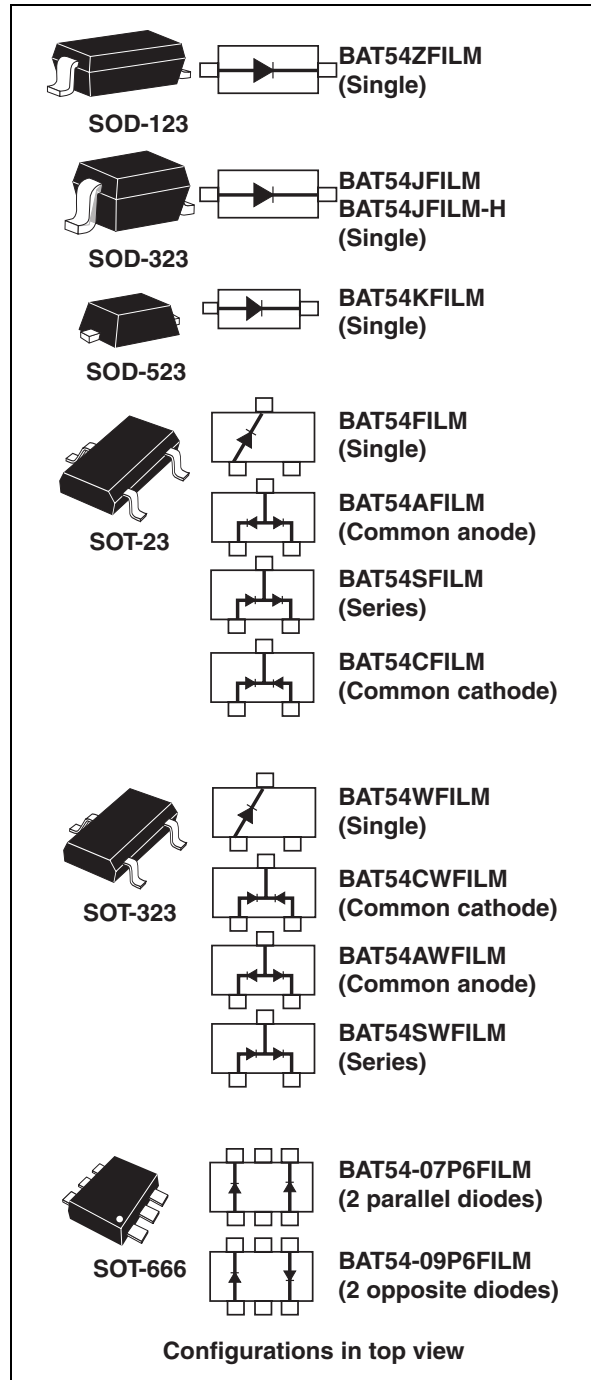

# 1 Characteristics

**Table 2. Absolute ratings (limiting values at  $T_j = 25\text{ °C}$ , unless otherwise specified)**

| Symbol    | Parameter                            | Value                           | Unit |
|-----------|--------------------------------------|---------------------------------|------|
| $V_{RRM}$ | Repetitive peak reverse voltage      | 40                              | V    |
| $I_F$     | Continuous forward current           | 300                             | mA   |
| $I_{FSM}$ | Surge non repetitive forward current | $t_p = 10\text{ ms}$ Sinusoidal | A    |
| $T_{stg}$ | Storage temperature range            | -65 to +150                     | °C   |
| $T_j$     | Operating junction temperature range | -40 to +150                     | °C   |
| $T_L$     | Maximum soldering temperature        | 260                             | °C   |

**Table 3. Thermal parameters**

| Symbol        | Parameter                          | Value             | Unit |
|---------------|------------------------------------|-------------------|------|
| $R_{th(j-a)}$ | Junction to ambient <sup>(1)</sup> | SOT-23, SOD-123   | 500  |
|               |                                    | SOT-323, SOD-323, | 550  |
|               |                                    | SOD-523, SOT-666  | 600  |

1. Epoxy printed circuit board with recommended pad layout

**Table 4. Static electrical characteristics**

| Symbol      | Parameter               | Test conditions       | Min.                  | Typ. | Max. | Unit          |
|-------------|-------------------------|-----------------------|-----------------------|------|------|---------------|
| $I_R^{(1)}$ | Reverse leakage current | $T_j = 25\text{ °C}$  |                       |      | 1    | $\mu\text{A}$ |
|             |                         | $T_j = 100\text{ °C}$ |                       |      | 100  |               |
| $V_F^{(2)}$ | Forward voltage drop    | $T_j = 25\text{ °C}$  | $I_F = 0.1\text{ mA}$ |      | 240  | mV            |
|             |                         |                       | $I_F = 1\text{ mA}$   |      | 320  |               |
|             |                         |                       | $I_F = 10\text{ mA}$  |      | 400  |               |
|             |                         |                       | $I_F = 30\text{ mA}$  |      | 500  |               |
|             |                         |                       | $I_F = 100\text{ mA}$ |      | 900  |               |

1. Pulse test:  $t_p = 5\text{ ms}$ ,  $\delta < 2\%$

2. Pulse test:  $t_p = 380\text{ }\mu\text{s}$ ,  $\delta < 2\%$

**Table 5. Dynamic characteristics**

| Symbol   | Parameter             | Test conditions                                                                                                          | Min. | Typ. | Max. | Unit |
|----------|-----------------------|--------------------------------------------------------------------------------------------------------------------------|------|------|------|------|
| C        | Diode capacitance     | $V_R = 1\text{ V}$ , $F = 1\text{ MHz}$                                                                                  |      | 7    | 10   | pF   |
| $t_{rr}$ | Reverse recovery time | $I_F = 10\text{ mA}$ , $I_R = 10\text{ mA}$ , $T_j = 25\text{ °C}$<br>$I_{rr} = 1\text{ mA}$ , $R_L = 100\text{ }\Omega$ |      |      | 5    | ns   |

Figure 1. Average forward power dissipation

Figure 2. Average forward current versus ambient temperature ( $\delta = 1$ )

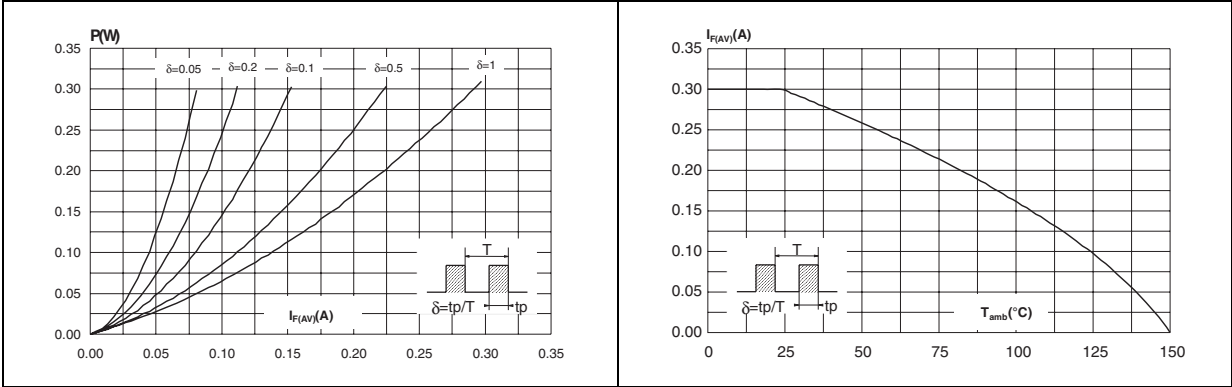


Figure 3. Reverse leakage current versus reverse applied voltage (typical values)

Figure 4. Reverse leakage current versus junction temperature



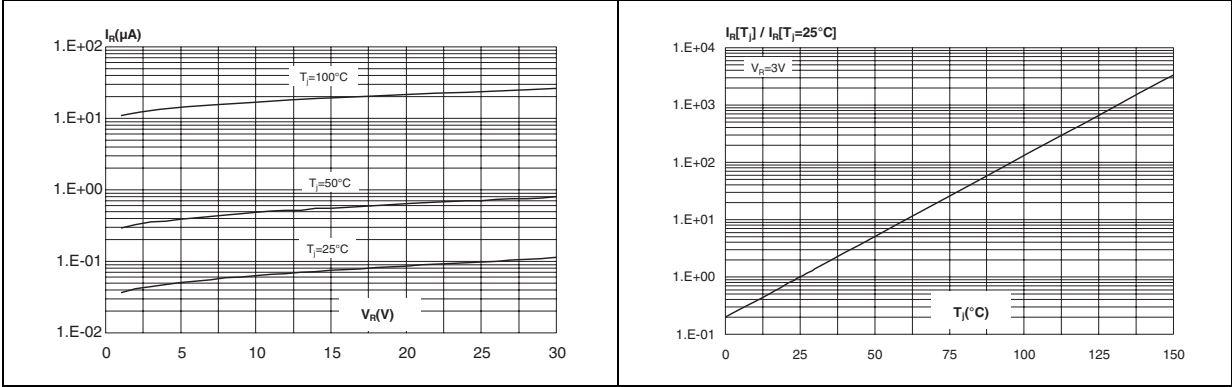


Figure 5. Junction capacitance versus reverse applied voltage (typical values)


Figure 6. Forward voltage drop versus forward current (typical values)

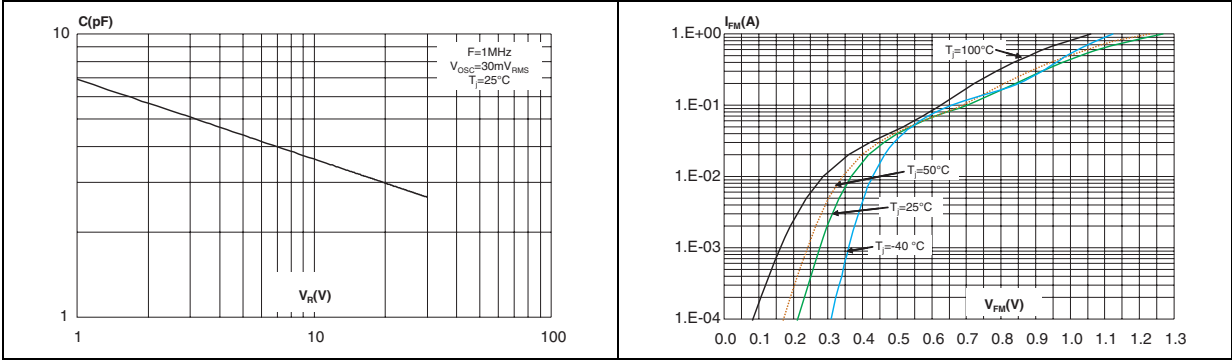


**Figure 7. Thermal resistance junction to ambient versus copper surface under each lead (SOD-323)**

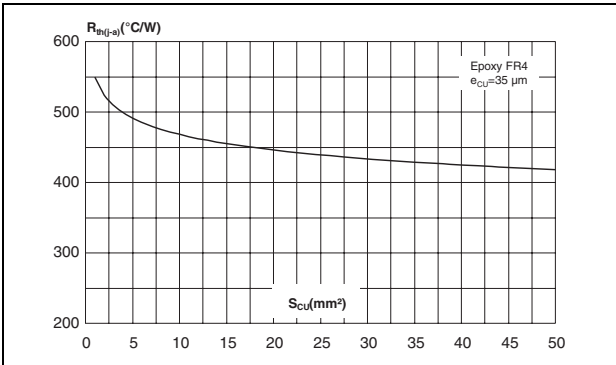


**Figure 8. Relative variation of thermal impedance junction to ambient versus pulse duration (SOD-323)**

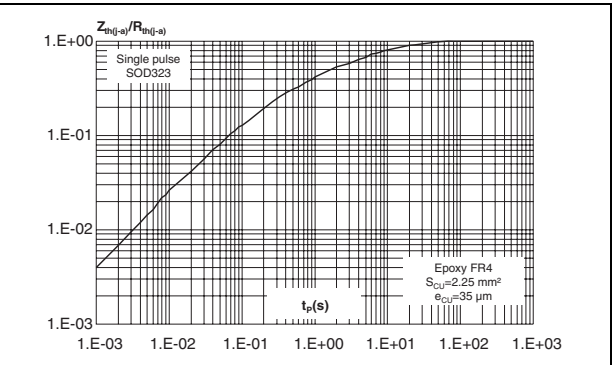


**Figure 9. Relative variation of thermal impedance junction to ambient versus pulse duration (SOT-23)**

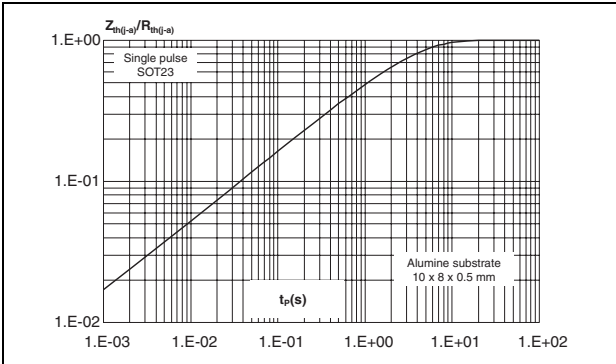

**Figure 10. Relative variation of thermal impedance junction to ambient versus pulse duration (SOD-523)**

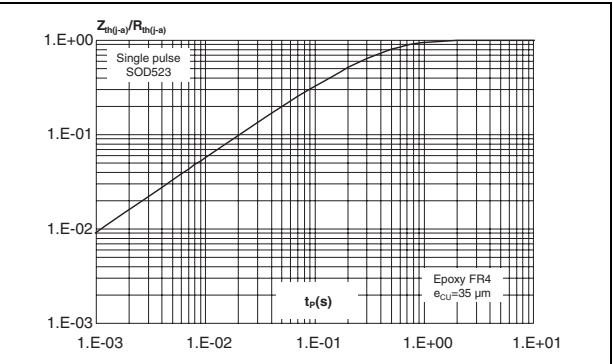


**Figure 11. Relative variation of thermal impedance junction to ambient versus pulse duration**

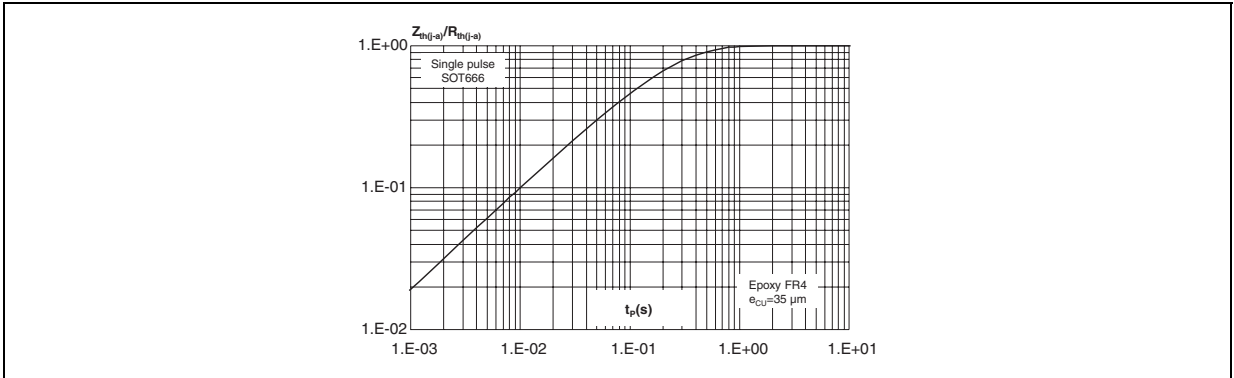

## 2 Ordering information scheme

Figure 12. Ordering information scheme

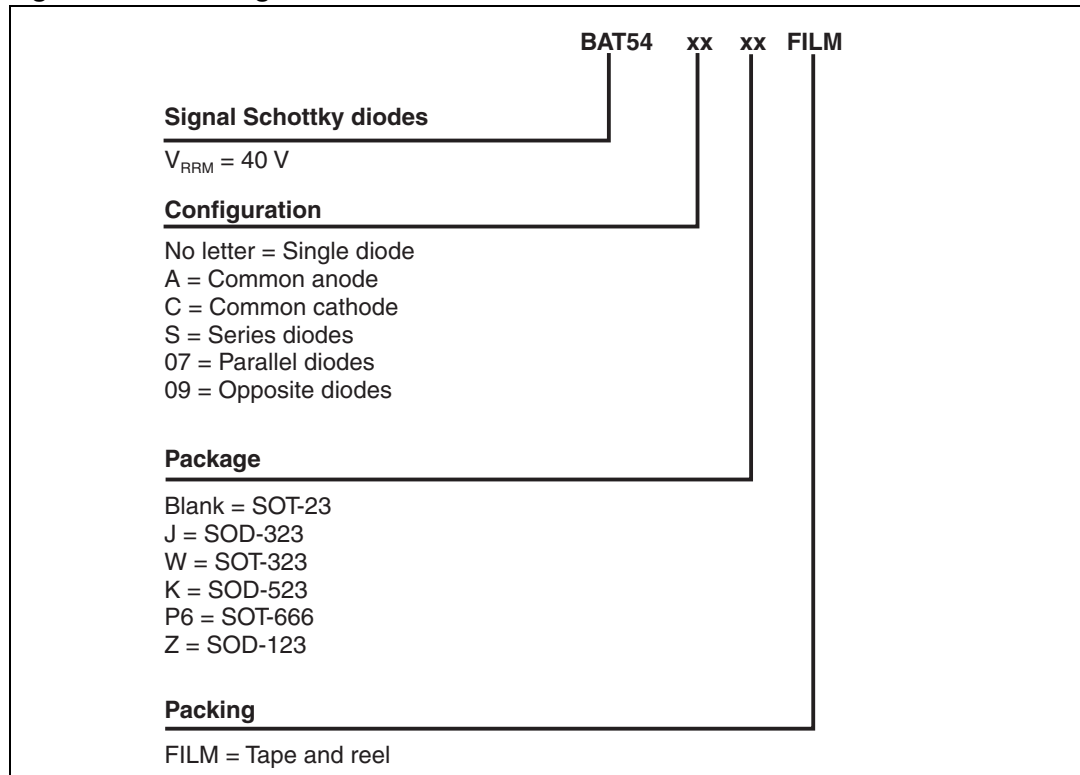

# 3 Package information

- Epoxy meets UL94, V0
- Lead-free packages

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

**Table 6. SOD-123 dimensions**

| Ref. | Dimensions  |      |            |       |
|------|-------------|------|------------|-------|
|      | Millimeters |      | Inches     |       |
|      | Min.        | Max. | Min.       | Max.  |
| A    |             | 1.45 |            | 0.057 |
| A1   | 0           | 0.1  | 0          | 0.004 |
| A2   | 0.85        | 1.35 | 0.033      | 0.053 |
| b    | 0.55 Typ.   |      | 0.022 Typ. |       |
| c    | 0.15 Typ.   |      | 0.039 Typ. |       |
| D    | 2.55        | 2.85 | 0.1        | 0.112 |
| E    | 1.4         | 1.7  | 0.055      | 0.067 |
| G    | 0.25        |      | 0.01       |       |
| H    | 3.55        | 3.95 | 0.14       | 0.156 |

**Figure 13. SOD-123 footprint (dimensions in mm)**

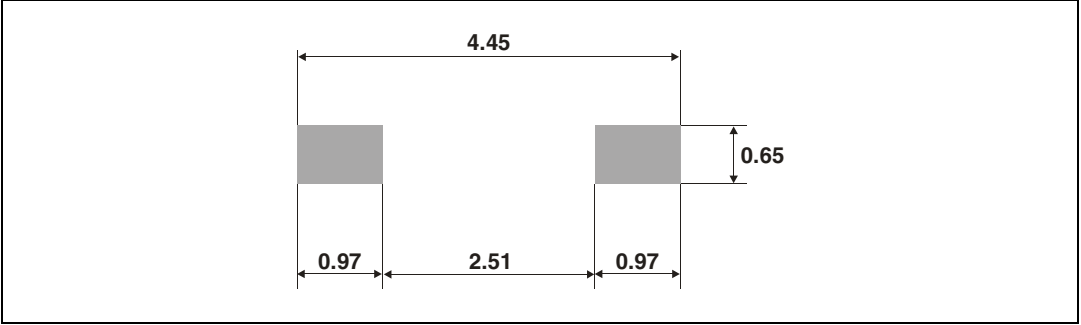


Table 7. SOD-323 dimensions

| Ref. | Dimensions  |      |        |       |
|------|-------------|------|--------|-------|
|      | Millimeters |      | Inches |       |
|      | Min.        | Max. | Min.   | Max.  |
| A    |             | 1.17 |        | 0.046 |
| A1   | 0           | 0.1  | 0      | 0.004 |
| b    | 0.25        | 0.44 | 0.01   | 0.017 |
| c    | 0.1         | 0.25 | 0.004  | 0.01  |
| D    | 1.52        | 1.8  | 0.06   | 0.071 |
| E    | 1.11        | 1.45 | 0.044  | 0.057 |
| H    | 2.3         | 2.7  | 0.09   | 0.106 |
| L    | 0.1         | 0.46 | 0.004  | 0.02  |
| Q1   | 0.1         | 0.41 | 0.004  | 0.016 |

Figure 14. SOD-323 footprint (dimensions in mm)

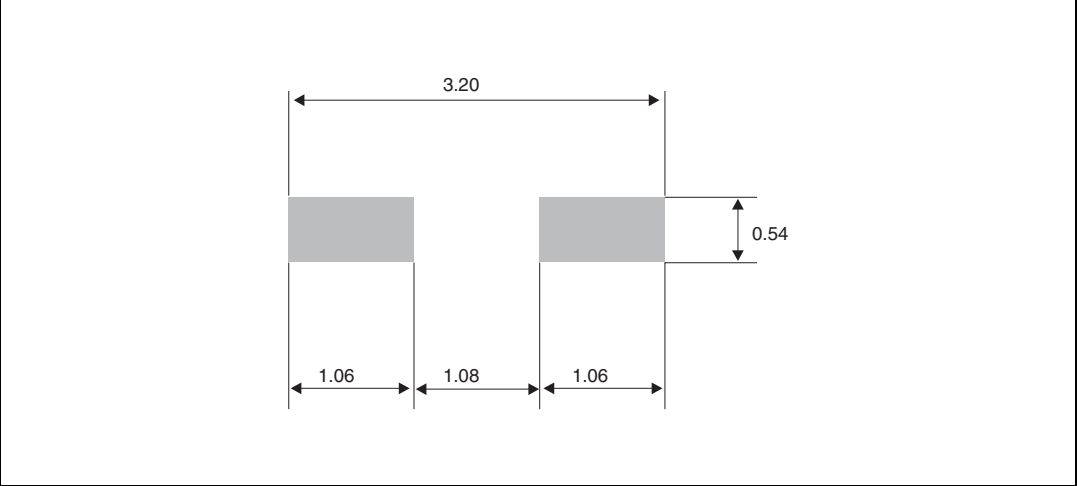


Table 8. SOD-523 dimensions

| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    | 0.50        | 0.60 | 0.70 | 0.020  | 0.024 | 0.028 |
| E    | 1.50        | 1.60 | 1.70 | 0.059  | 0.063 | 0.067 |
| E1   | 1.10        | 1.20 | 1.30 | 0.043  | 0.047 | 0.051 |
| D    | 0.70        | 0.80 | 0.90 | 0.028  | 0.031 | 0.035 |
| b    | 0.25        |      | 0.35 | 0.010  |       | 0.014 |
| c    | 0.07        |      | 0.20 | 0.003  |       | 0.008 |
| L    | 0.15        | 0.20 | 0.25 | 0.006  | 0.008 | 0.010 |
| L1   | 0.05        |      | 0.20 | 0.002  |       | 0.008 |

Figure 15. SOD-523 footprint (dimensions in mm)

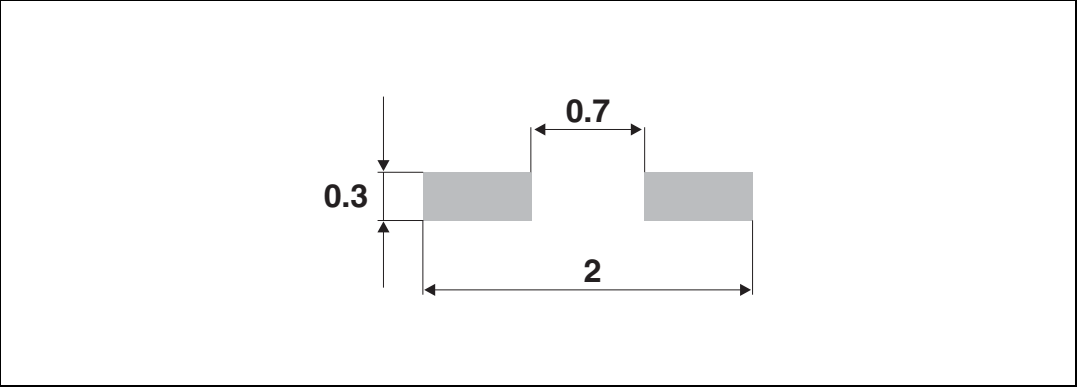


Table 9. SOT-23 dimensions

| Ref. | Dimensions  |      |            |       |
|------|-------------|------|------------|-------|
|      | Millimeters |      | Inches     |       |
|      | Min.        | Max. | Min.       | Max.  |
| A    | 0.89        | 1.4  | 0.035      | 0.055 |
| A1   | 0           | 0.1  | 0          | 0.004 |
| B    | 0.3         | 0.51 | 0.012      | 0.02  |
| c    | 0.085       | 0.18 | 0.003      | 0.007 |
| D    | 2.75        | 3.04 | 0.108      | 0.12  |
| e    | 0.85        | 1.05 | 0.033      | 0.041 |
| e1   | 1.7         | 2.1  | 0.067      | 0.083 |
| E    | 1.2         | 1.6  | 0.047      | 0.063 |
| H    | 2.1         | 2.75 | 0.083      | 0.108 |
| L    | 0.6 typ.    |      | 0.024 typ. |       |
| S    | 0.35        | 0.65 | 0.014      | 0.026 |

Figure 16. SOT-23 footprint (dimensions in mm)

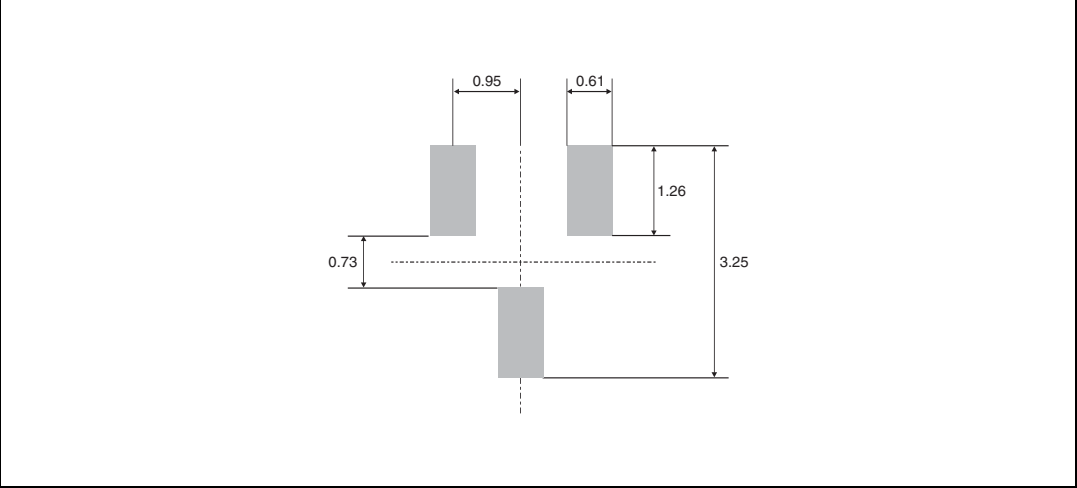


Table 10. SOT-323 dimensions

| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    | 0.8         |      | 1.1  | 0.031  |       | 0.043 |
| A1   | 0.0         |      | 0.1  | 0.0    |       | 0.004 |
| b    | 0.25        |      | 0.4  | 0.010  |       | 0.016 |
| c    | 0.1         |      | 0.26 | 0.004  |       | 0.010 |
| D    | 1.8         | 2.0  | 2.2  | 0.071  | 0.079 | 0.086 |
| E    | 1.15        | 1.25 | 1.35 | 0.045  | 0.049 | 0.053 |
| e    |             | 0.65 |      |        | 0.026 |       |
| H    | 1.8         | 2.1  | 2.4  | 0.071  | 0.083 | 0.094 |
| L    | 0.1         | 0.2  | 0.3  | 0.004  | 0.008 | 0.012 |
| q    | 0           |      | 30°  | 0      |       | 30°   |

Figure 17. SOT-323 footprint (dimensions in mm)


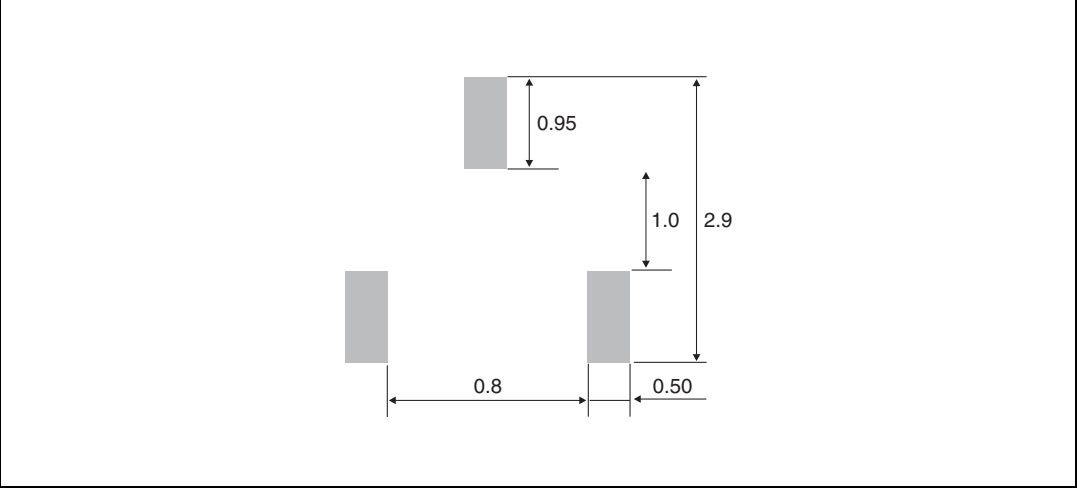


Table 11. SOT-666 dimensions

| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    | 0.45        |      | 0.60 | 0.018  |       | 0.024 |
| A3   | 0.08        |      | 0.18 | 0.003  |       | 0.007 |
| b    | 0.17        |      | 0.34 | 0.007  |       | 0.013 |
| b1   | 0.19        | 0.27 | 0.34 | 0.007  | 0.011 | 0.013 |
| D    | 1.50        |      | 1.70 | 0.059  |       | 0.067 |
| E    | 1.50        |      | 1.70 | 0.059  |       | 0.067 |
| E1   | 1.10        |      | 1.30 | 0.043  |       | 0.051 |
| e    |             | 0.50 |      |        | 0.020 |       |
| L1   |             | 0.19 |      |        | 0.007 |       |
| L2   | 0.10        |      | 0.30 | 0.004  |       | 0.012 |
| L3   |             | 0.10 |      |        | 0.004 |       |

Figure 18. SOT-666 footprint (dimensions in mm)

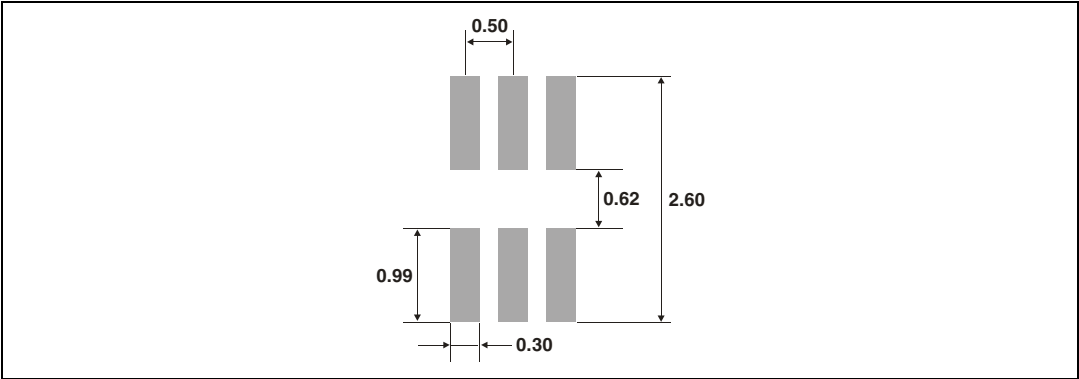

## 4 Ordering information

**Table 12. Ordering information**

| Order code     | Marking | Package                                           | Weight | Base qty | Delivery mode |
|----------------|---------|---------------------------------------------------|--------|----------|---------------|
| BAT54FILM      | D86     | SOT-23 Single                                     | 10 mg  | 3000     | Tape and reel |
| BAT54SFILM     | D88     | SOT-23 Serial                                     | 10 mg  | 3000     | Tape and reel |
| BAT54CFILM     | D87     | SOT-23<br>Common cathode                          | 10 mg  | 3000     | Tape and reel |
| BAT54AFILM     | D84     | SOT-23<br>Common anode                            | 10 mg  | 3000     | Tape and reel |
| BAT54WFILM     | D73     | SOT-323 Single                                    | 6 mg   | 3000     | Tape and reel |
| BAT54SWFILM    | D78     | SOT-323 Serial                                    | 6 mg   | 3000     | Tape and reel |
| BAT54CWFILM    | D77     | SOT-323<br>Common cathode                         | 6 mg   | 3000     | Tape and reel |
| BAT54AWFILM    | D74     | SOT-323<br>Common anode                           | 6 mg   | 3000     | Tape and reel |
| BAT54JFILM     | 86      | SOD-323                                           | 5 mg   | 3000     | Tape and reel |
| BAT54JFILM-H   | 86      | SOD-323<br>ECOPACK <sup>®</sup> 2<br>halogen-free | 5 mg   | 3000     | Tape and reel |
| BAT54KFILM     | 86      | SOD-523                                           | 1.4 mg | 3000     | Tape and reel |
| BAT54-07P6FILM | P4      | SOT-666 Parallel                                  | 2.9 mg | 3000     | Tape and reel |
| BAT54-09P6FILM | Q4      | SOT-666 Opposite                                  | 2.9 mg | 3000     | Tape and reel |
| BAT54ZFILM     | D72     | SOD-123                                           | 10 mg  | 3000     | Tape and reel |

## 5 Revision history

**Table 13. Document revision history**

| Date        | Revision | Changes                                                                                                                                    |
|-------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Jun-1999    | 8        | Last update.                                                                                                                               |
| 24-Jul-2006 | 9        | BAT54, A, C, S and BAT54J / W / AW / CW /SW datasheets merged.<br>ECOPACK statement added. SOD-123, SOD-523 and SOT-666<br>packages added. |
| 13-Oct-2009 | 10       | Updated Table 8 quote "L1" from 0.10 to 0.05.                                                                                              |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А