

1. PART NO. EXPRESSION :

SDB12051R5YZF
(a) (b) (c) (d)(e)(f)

(a) Series code

(b) Dimension code


(c) Inductance code : 1R5 = 1.5uH

(d) Tolerance code : M = $\pm 20\%$, Y = $\pm 25\%$

(e) X, Y, Z : Standard part

(f) F : Lead Free


2. CONFIGURATION & DIMENSIONS :

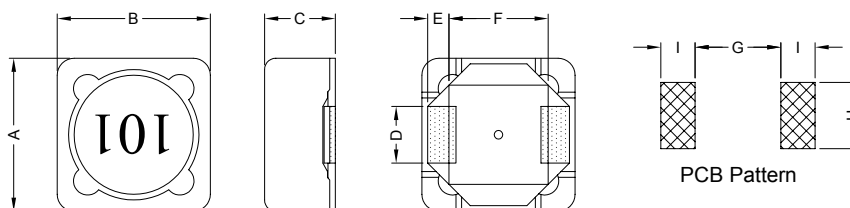


Unit:m/m

A	B	C	D	E	F	G	H	I
12.5 $\pm$ 0.3	12.5 $\pm$ 0.3	6.00 Max.	5.0 $\pm$ 0.2	2.2 $\pm$ 0.2	7.6 $\pm$ 0.2	7.0 Ref.	5.4 Ref.	2.8 Ref.

3. SCHEMATIC :



4. MATERIALS :



(a) Core : DR Ferrite Core

(b) Core : SI Ferrite Core

(c) Base : LCP

(d) Wire : Enamelled Copper Wire

(e) Tape : Mylar Tape

(f) Terminal : Tinned Copper Plate

(g) Adhesive : Epoxy

(h) Ink : Bon Margue

5. GENERAL SPECIFICATION :

a) Temp. rise : 40°C Max.

b) Rated current : Base on temp. rise & $\Delta L/L0A = 20\%$ Max.

c) Storage temp. : -40°C to +125°C

d) Operating temp. : -40°C to +80°C

e) Resistance to solder heat : 260°C.10secs



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

07.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 1

6. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (μ H)	Test Frequency (Hz)	RDC (m Ω) Max.	IDC (A) Max.
SDB12051R5YZF	1.5 $\pm$ 25%	1V / 100K	12	8.00
SDB12052R2YZF	2.2 $\pm$ 25%	1V / 100K	14	7.00
SDB12053R1YZF	3.1 $\pm$ 25%	1V / 100K	17	6.00
SDB12054R4YZF	4.4 $\pm$ 25%	1V / 100K	20	5.00
SDB12055R2YZF	5.2 $\pm$ 25%	1V / 100K	21	4.40
SDB12057R5YZF	7.5 $\pm$ 25%	1V / 100K	24	4.20
SDB1205100MZF	10.0 $\pm$ 20%	1V / 1K	25	4.00
SDB1205120MZF	12.0 $\pm$ 20%	1V / 1K	27	3.50
SDB1205150MZF	15.0 $\pm$ 20%	1V / 1K	30	3.30
SDB1205180MZF	18.0 $\pm$ 20%	1V / 1K	34	3.00
SDB1205220MZF	22.0 $\pm$ 20%	1V / 1K	36	2.80
SDB1205270MZF	27.0 $\pm$ 20%	1V / 1K	51	2.30
SDB1205330MZF	33.0 $\pm$ 20%	1V / 1K	57	2.10
SDB1205390MZF	39.0 $\pm$ 20%	1V / 1K	68	2.00
SDB1205470MZF	47.0 $\pm$ 20%	1V / 1K	75	1.80
SDB1205560MZF	56.0 $\pm$ 20%	1V / 1K	110	1.70
SDB1205680MZF	68.0 $\pm$ 20%	1V / 1K	120	1.50
SDB1205820MZF	82.0 $\pm$ 20%	1V / 1K	140	1.40
SDB1205101MZF	100.0 $\pm$ 20%	1V / 1K	160	1.30
SDB1205121MZF	120.0 $\pm$ 20%	1V / 1K	170	1.10
SDB1205151MZF	150.0 $\pm$ 20%	1V / 1K	230	1.00
SDB1205181MZF	180.0 $\pm$ 20%	1V / 1K	290	0.90
SDB1205221MZF	220.0 $\pm$ 20%	1V / 1K	400	0.80
SDB1205271MZF	270.0 $\pm$ 20%	1V / 1K	460	0.75
SDB1205331MZF	330.0 $\pm$ 20%	1V / 1K	510	0.68
SDB1205391MZF	390.0 $\pm$ 20%	1V / 1K	690	0.65
SDB1205471MZF	470.0 $\pm$ 20%	1V / 1K	770	0.58
SDB1205561MZF	560.0 $\pm$ 20%	1V / 1K	860	0.54
SDB1205681MZF	680.0 $\pm$ 20%	1V / 1K	1200	0.48
SDB1205821MZF	820.0 $\pm$ 20%	1V / 1K	1340	0.43
SDB1205102MZF	1000.0 $\pm$ 20%	1V / 1K	1530	0.40



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.


07.05.2008




SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :


@ TEMP. RISE VS. DC SUPERPOSITION RESPONSE CURVE

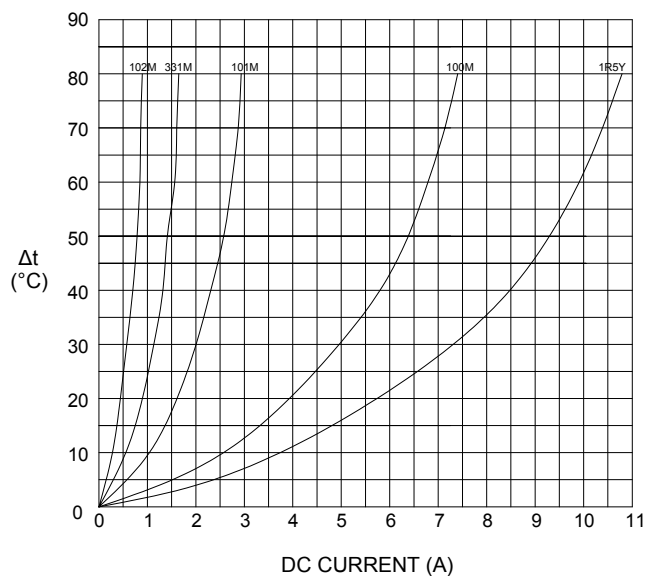

@ INDUCTANCE VS. FREQUENCY RESPONSE CURVE

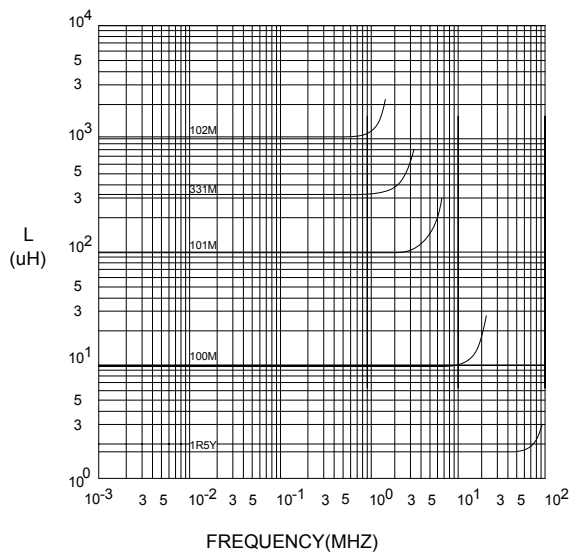

@ INDUCTANCE VS. DC SUPERPOSITION RESPONSE CURVE

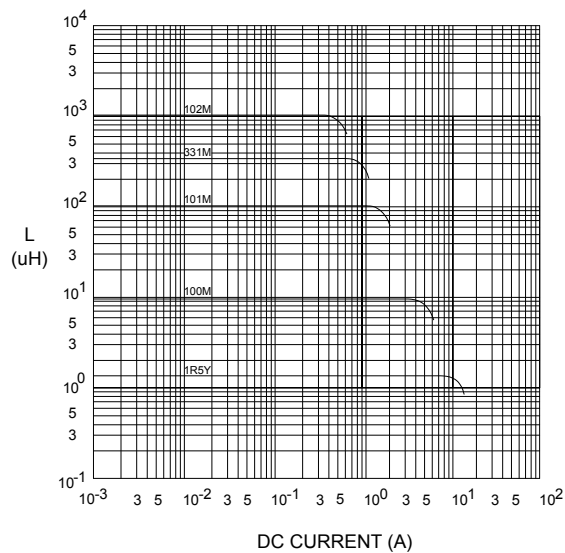

NOTE : Specifications subject to change without notice. Please check our website for latest information.




RoHS Compliant

07.05.2008




SUPERWORLD ELECTRONICS (S) PTE LTD

RECOMMENDED SOLDERING CONDITIONS REFLOW SOLDERINGS

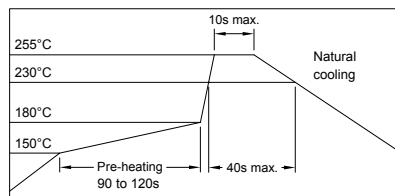


8. PACKAGING INFORMATION :

(1) CONFIGURATION

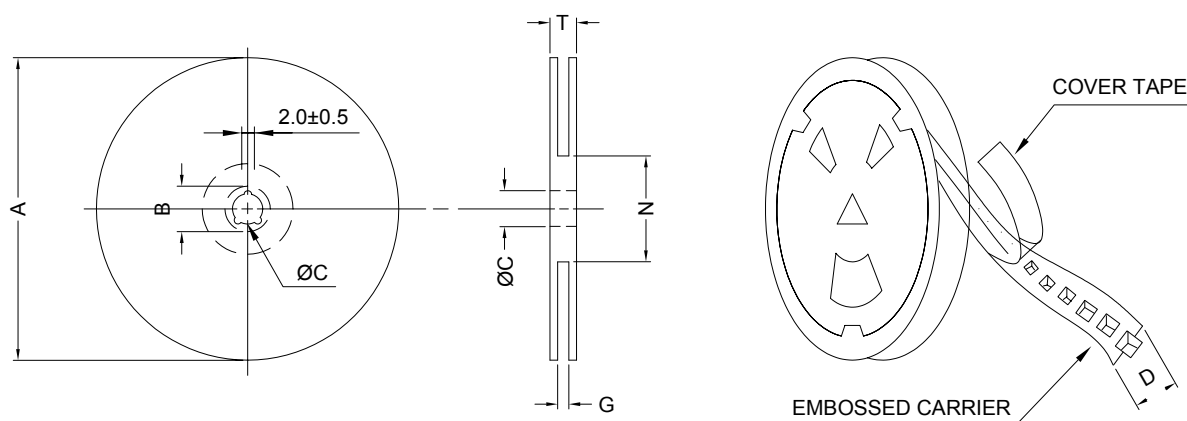

* CARRIER TAPE WIDTH : D

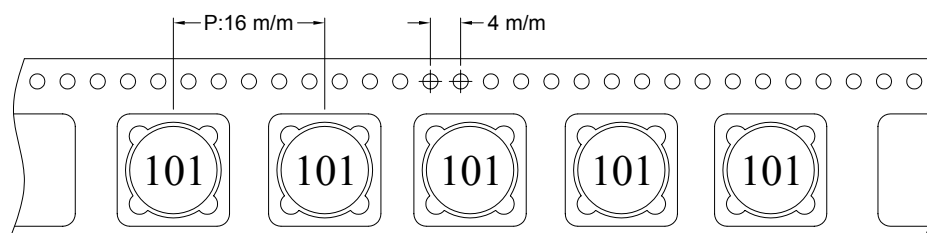

(2) DIMENSIONS

Unit: m/m

STYLE	A	B	C	D	G	N	T
13-24	330	21±0.8	13±0.5	24	26 ⁺⁰	50 ⁻⁰	30.4

(3) Q'TY & G.W. PER PACKAGE

SERIES	INNER : REEL			OUTER : CARTON		
	Q'TY (PCS)	G.W. (gw)	STYLE	Q'TY (PCS)	G.W. (Kg)	SIZE (cm)
SDB1205	600	1900	13-24	2400	11.1	40 x 40 x 24



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

07.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

9. RELIABILITY AND TEST CONDITION :

TEST ITEM	SPECIFICATION	TEST CONDITION
SOLDERABILITY	MORE THAN 90% OF THE TERMINAL ELECTRODE SHALL BE COVERED WITH FRESH SOLDER.	PREHEAT : 125±25°C FOR 60 SECONDS SOLDER : 99%Sn/0.3%Ag/0.7%Cu OR EQUIVALENT SOLDER TEMP. : 245±5°C FLUX : ROSIN DIP TIME : 4±1 SECONDS
THERMAL SHOCK TEST (TEMP. CYCLE)	INDUCTANCE SHALL NOT CHANGE MORE THAN ±20%	ROOM TEMP. → -25±2°C 15 MINUTES 30 MINUTES ROOM TEMP. → 85±2°C 15 MINUTES 30 MINUTES TOTAL : 50 CYCLES
HUMIDITY RESISTANCE TEST		TEMPERATURE : 40±2°C HUMIDITY : 90 ~ 95% APPLIED CURRENT : PER SPEC. TIME : 500 HOURS
HIGH TEMP. RESISTANCE TEST		TEMPERATURE : 85±2°C APPLIED CURRENT : PER SPEC. TIME : 500 HOURS



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

07.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

10. UL CARD :

OBMW2		November 30, 2000		
Magnet Wire - Component				
PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD				E201757
607 BAOLONG INDUSTRIAL ESTATE LONGGANG, SHENZHEN				
GUANGDONG CHINA				
	Coating Type		ANSI	
Mtl Dsg	BC	TC	Type	TI
UEW/U	Polyurethane	—	—	130
PEW/U	Polyester	—	MW5-C	155°C
PEWH/U	Modified Polyester	—	MW30-C	180
PEW-NY/U	Polyester	Polyamide	MW24-C	155
HAI/U	Polyester(Amide)(Imide)	Polyamideimide	MW35,73	200
UEW-NY/U	Polyurethane	Polyamide	MW80-C	155
			MW28-C	130
Marking: Company name and material designation or marked designation on package or reel, and Recognized Component Mark.				
See General Information Preceding These Recognitions				
1/3/2001	Underwriters Laboratories Inc.			Card 1 of 2

SUMITOMO CHEMICAL CO LTD E54705 (M)
5-33 KITAHAMA 4-CHOME CHUO-KO, OSAKA JAPAN

Mtl Dsg	Col	Min Thk mm	UL94 Flame Class	Elec	RTI Mech with Imp	w/o Imp	H W I	H A I	H V T R	D 4 9 5	C T I
Liquid crystal polyester (LCP), designated "EKONOL" or "SUMIKASUPER", furnished in the form of pellets, (Contd)											
E4008, E400X	NC, BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4
E4008	NC, WT, BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4
E4010	NC, BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4
E400(Y)L, E4008L	NC, BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4
E4810	NC, BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	0	4	—	—	—
		1.5	94V-0	130	130	130	0	4	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4

(X) Denotes any number 1 thru 9.
(Y) Denotes any number 1 thru 7.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

07.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 6

10. UL CARD :

TERAOKA SEISAKUSHO CO LTD
4-22 1-CHOME HIROMACHI SHINAGAWA-KU, TOKYO
JAPAN
E56086 (S)

Flame retardant aramid paper tape, Cat. Nos. 512F+, 560F+, 565S+, 681S+.
Flame retardant aramid paper tape, Cat. Nos. 560S+, 561S+, 562S+, rated 200 C.
Flame retardant acetate cloth tape, Cat. Nos. 570F+, 571F+, 573F+.
Flame retardant polyester film tape, Cat. Nos. 680F+, 684F+.
Flame retardant glass cloth tape, Cat. Nos. 510F+, 540S+, 541F+, 685S+.
Flame retardant glass cloth tape, Cat. No. 54S, rated 200 C.
Flame retardant cotton cloth tape, Cat. Nos. 590F+, 715F+.
Flame retardant polyimide film tape, Cat. No. 650S+, rated 200 C.
Flame retardant tellon tape, Cat. Nos. 841+, 846+.
Flame retardant PVC tape, Cat. Nos. 305F+, 307F+, 380F+.
Flame retardant polyester fiber tape, Cat. Nos. 511F+, 551F+.
Flame retardant epoxy varnish impregnated polyester web tape, Cat. Nos. 530F+.
Flame retardant epoxy varnish impregnated glass paper tape, Cat. No. 531F+.
Flame retardant copper foil tape, Cat. No. 831S+.
Flame retardant copper foil tape, Cat. No. 8321+.
Flame retardant aluminum foil tape, Cat. Nos. 833+, 834+.
Epoxy varnish impregnated polyester non-woven fabric tape, cat. no. 530F° rated 150 C.
polyester film tape, Cat. Nos. 631S°, 632S, rated 130 C.
Flame retardant polyester film tape, Cat. No. 630F°, rated 130 C.
Flame retardant polyester film/epoxy varnish impregnated polyester fiber tape Cat. No. 673F°, rated 130 C.
Flame retardant polyester film/epoxy varnish impregnated polyester fiber/polyester film tape, Cat. No. 850F°, rated 130 C.
+ - Subjected to Flame Retardant tests only.
° - Complies with Flame Retardant requirements when so marked.
Marking: Company name or "E56086" and catalog designation and "Flame Retardant" if apply, bie. printed on the central paper or outer package.

OANZ2 August 7, 1989
Component-Insulating Tape
FOUR PILLARS ENTERPRISE CO LTD
NO 18 HENGYANG RD , TAIPEI TAIWAN
E50292 (S)
(A card)

Flame retardant polyvinyl chloride tape, Cat. No. 33047+.
Polyester film tape, Cat. No. 35660° rated 130C.
Flame retardant double sided acrylic tape, Cat. No. DS31+.
Arme paper tape, Cat. No. NM130° rated 155C.
Glass cloth backing with silicone adhesive, Cat. No. GL06° rated 180C.
Glass cloth backing with acrylic adhesive, Cat. No. GL15 rated 155C.
Glass cloth backing with rubber adhesive, Cat. No. GL27 rated 130C.
Polyesterfilm insulating tape with acrylic adhesive, Cat. No. MY130 rated 130C.
Polyesterfilm insulating tape with silicone base adhesive, Cat. No. KA180° rated 180C.
Acetate cloth backing with acrylic base adhesive, Cat. No. AC0 rated 130C.

Reports: March 25, 1985; March 26, 1985; March 27, 1985; March 7, 1986; July 2, 1987;
July 2, 1987; July 2, 1987; March 9, 1989; March 10, 1989; August 15, 1989.

Replaces E50292A dated February 28, 1989.
369021002 Underwriters Laboratories Inc.®
(Cont. on B card)
D11/0114874
51



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

07.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 7

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А