

# G3VM-□AY□/□DY□

MOS FET Relays Small DIP4 package with High dielectric strength type

## Small DIP4 package with Dielectric Strength of 5,000 VAC between I/O

- Load voltage 40V/60V/200V/350V/400V/600V
- Standard type: Trigger LED forward current 3mA (max.)
- High sensitive type: Trigger LED forward current 2mA (max.)



**NEW**

Note: The actual product is marked differently from the image shown here.


RoHS Compliant

Refer to "Common Precautions".

### Application Examples

- Electrical power unit
- Security equipment
- Medical equipment
- Test & measurement equipment
- Industrial equipment

### Package (Unit : mm, Average)

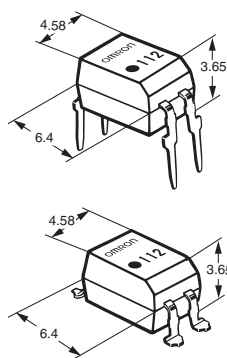

Note: The actual product is marked differently from the image shown here.

### Model Number Legend

G3VM-□□□□□  
1 2 3 4 5

#### 1. Load Voltage

- 4: 40V
- 6: 60V
- 20: 200V
- 35: 350V
- 40: 400V
- 60: 600V

#### 2. Contact form

- 1: 1a (SPST-NO)

#### 3. Package type

- A: DIP4 pin PCB terminals
- D: DIP4 pin Surface-mounting Terminals

#### 4. Additional functions

- Y: Dielectric strength between I/O above 2,500V type

#### 5. Other informations

When specifications overlap, serial code is added in the recorded order.

### Ordering Information

#### Standard type

Package type	Contact form	Load voltage (peak value) *	Continuous load current (peak value) *	Packing/Tube		Packing/Tape & reel		
				Model		Minimum package quantity	Model	Minimum package quantity
				PCB terminals	Surface-mounting Terminals			
DIP4	1a	40V	2000mA	G3VM-41AY1	G3VM-41DY1	100 pcs.	G3VM-41DY1(TR05)	500 pcs.
		60V	500mA	G3VM-61AY1	G3VM-61DY1		G3VM-61DY1(TR05)	
		200V	250mA	G3VM-201AY1	G3VM-201DY1		G3VM-201DY1(TR05)	
		350V	100mA	G3VM-351AY1	G3VM-351DY1		G3VM-351DY1(TR05)	
		400V	120mA	G3VM-401AY1	G3VM-401DY1		G3VM-401DY1(TR05)	
		600V	90mA	G3VM-601AY1	G3VM-601DY1		G3VM-601DY1(TR05)	

\* The AC peak and DC value are given for the load voltage and continuous load current.

#### High sensitive type

Package type	Contact form	Load voltage (peak value) *	Continuous load current (peak value) *	Packing/Tube		Packing/Tape & reel		
				Model		Minimum package quantity	Model	Minimum package quantity
				PCB terminals	Surface-mounting Terminals			
DIP4	1a	40V	2000mA	G3VM-41AY	G3VM-41DY	100 pcs.	G3VM-41DY(TR)	1,500 pcs.
		60V	500mA	G3VM-61AY	G3VM-61DY		G3VM-61DY(TR)	
		200V	250mA	G3VM-201AY	G3VM-201DY		G3VM-201DY(TR)	
		350V	100mA	G3VM-351AY	G3VM-351DY		G3VM-351DY(TR)	
		400V	120mA	G3VM-401AY	G3VM-401DY		G3VM-401DY(TR)	
		600V	90mA	G3VM-601AY	G3VM-601DY		G3VM-601DY(TR)	

\* The AC peak and DC value are given for the load voltage and continuous load current.

### ■ Absolute Maximum Ratings (Ta = 25°C)

● Standard type, High sensitive type

Item	Symbol	G3VM-41AY1	G3VM-61AY1	G3VM-201AY1	G3VM-351AY1	G3VM-401AY1	G3VM-601AY1	Unit	Measurement conditions	
		G3VM-41DY1	G3VM-61DY1	G3VM-201DY1	G3VM-351DY1	G3VM-401DY1	G3VM-601DY1			
Input	LED forward current	IF						30	mA	
	Repetitive peak LED forward current	IFP						1	A	100 μs pulses, 100 pps
	LED forward current reduction rate	ΔIF/°C						-0.3	mA/°C	Ta≥25°C
	LED reverse voltage	VR						5	V	
	Connection temperature	TJ						125	°C	
Output	Load voltage (AC peak/DC)	VOFF						40    60    200    350    400    600	V	
	Continuous load current (AC peak/DC)	Io						2,000    500    250    100    120    90	mA	
	ON current reduction rate	ΔIo/°C						-20    -5    -2.5    -1    -1.2    -0.9	mA/°C	Ta≥25°C
	Pulse ON current	Iop						6    1.5    0.75    0.3    0.36    0.27	A	t=100ms, Duty=1/10
	Connection temperature	TJ						125	°C	
Dielectric strength between I/O (See note 1.)	VI-o						5,000	Vrms	AC for 1 min	
Ambient operating temperature	Ta						-40~+85	°C	With no icing or condensation	
Ambient storage temperature	Tstg						-55~+125	°C		
Soldering temperature	-						260	°C	10s	

**Note: 1.** The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

DIP

G3VM□AY□/□DY□

## ■Electrical Characteristics (Ta = 25°C)


### ●Standard type

Item	Symbol	Model								Unit	Measurement conditions							
		G3VM-41AY1 G3VM-41DY1	G3VM-61AY1 G3VM-61DY1	G3VM-201AY1 G3VM-201DY1	G3VM-351AY1 G3VM-351DY1	G3VM-401AY1 G3VM-401DY1	G3VM-601AY1 G3VM-601DY1											
Input	LED forward voltage	V <sub>F</sub>	Minimum								V	I <sub>F</sub> =10mA						
			1.1															
			Typical															
		1.27																
		Maximum																
		1.4																
Reverse current	I <sub>R</sub>	Maximum								μA	V <sub>R</sub> =5V							
Capacity between terminals	C <sub>T</sub>	Typical								pF	V=0, f=1MHz							
Trigger LED forward current	I <sub>FT</sub>	Minimum		0.5				0.6		0.5		mA	G3VM-41AY1/DY1 : I <sub>o</sub> =1A Others : I <sub>o</sub> =Continuous load current ratings					
		Maximum								3								
Release LED forward current	I <sub>FC</sub>	Minimum								0.1		mA	I <sub>OFF</sub> =10μA					
Maximum resistance with output ON	R <sub>ON</sub>	Typical		0.09(0.06)	0.6	5	35(25)	22(17)	45(30)	Ω	I <sub>F</sub> =5mA, I <sub>o</sub> =Continuous load current ratings (value at t<1s)							
		Maximum		0.15(0.10)	2	8	50(35)	35(28)	60(40)									
Current leakage when the relay is open	I <sub>LEAK</sub>	Maximum								1		μA	V <sub>OFF</sub> =Load voltage ratings					
Capacity between terminals	C <sub>OFF</sub>	Typical								300		130	90	30	80	75	pF	V=0, f=1MHz
Capacity between I/O terminals	C <sub>I-O</sub>	Typical								0.8		pF	f=1MHz, V <sub>S</sub> =0V					
Insulation resistance between I/O terminals	R <sub>I-O</sub>	Minimum								1000		MΩ	V <sub>I-O</sub> =500VDC, R <sub>oH</sub> ≤60%					
		Typical								10 <sup>8</sup>								
Turn-ON time	t <sub>ON</sub>	Typical		2.8	1		0.3		0.6		0.5		ms	G3VM-41AY1/DY1 : R <sub>L</sub> =200Ω, I <sub>F</sub> =10mA, V <sub>DD</sub> =20V G3VM-601AY1/DY1 : R <sub>L</sub> =200Ω, I <sub>F</sub> =5mA, V <sub>DD</sub> =10V Others : R <sub>L</sub> =200Ω, I <sub>F</sub> =5mA, V <sub>DD</sub> =20V (See note 2.)				
		Maximum		5	3		2											
Turn-OFF time	t <sub>OFF</sub>	Typical		0.3	0.2		0.1		0.2				ms					
		Maximum								1								

### ●High sensitive type

Item	Symbol	Model								Unit	Measurement conditions							
		G3VM-41AY G3VM-41DY	G3VM-61AY G3VM-61DY	G3VM-201AY G3VM-201DY	G3VM-351AY G3VM-351DY	G3VM-401AY G3VM-401DY	G3VM-601AY G3VM-601DY											
Input	LED forward voltage	V <sub>F</sub>	Minimum								V	I <sub>F</sub> =10mA						
			1.45															
			Typical															
		1.63																
		Maximum																
	1.75																	
Reverse current	I <sub>R</sub>	Maximum								10		μA	V <sub>R</sub> =5V					
Capacity between terminals	C <sub>T</sub>	Typical								40		pF	V=0, f=1MHz					
Trigger LED forward current	I <sub>FT</sub>	Minimum								0.3		mA	G3VM-41AY/DY : I <sub>o</sub> =1A Others : I <sub>o</sub> =Continuous load current ratings					
		Maximum								2								
Release LED forward current	I <sub>FC</sub>	Minimum								0.1		mA	I <sub>OFF</sub> =10μA					
Maximum resistance with output ON	R <sub>ON</sub>	Typical		0.09(0.06)	0.6	5	35(25)	22(17)	45(30)	Ω	I <sub>F</sub> =5mA, I <sub>o</sub> =Continuous load current ratings (value at t<1s)							
		Maximum		0.15(0.10)	2	8	50(35)	35(28)	60(40)									
Current leakage when the relay is open	I <sub>LEAK</sub>	Maximum								1		μA	V <sub>OFF</sub> =Load voltage ratings					
Capacity between terminals	C <sub>OFF</sub>	Typical								300		130	90	30	80	75	pF	V=0, f=1MHz
Capacity between I/O terminals	C <sub>I-O</sub>	Typical								0.8		pF	f=1MHz, V <sub>S</sub> =0V					
Insulation resistance between I/O terminals	R <sub>I-O</sub>	Minimum								1000		MΩ	V <sub>I-O</sub> =500VDC, R <sub>oH</sub> ≤60%					
		Typical								10 <sup>8</sup>								
Turn-ON time	t <sub>ON</sub>	Typical		2	0.5		0.1		0.2		ms	G3VM-601AY/DY : R <sub>L</sub> =200Ω, I <sub>F</sub> =5mA, V <sub>DD</sub> =10V Others : R <sub>L</sub> =200Ω, I <sub>F</sub> =5mA, V <sub>DD</sub> =20V (See note 2.)						
		Maximum		5	1													
Turn-OFF time	t <sub>OFF</sub>	Typical		0.3			0.2				ms							
		Maximum								1								

Note: 2. Turn-ON and Turn-OFF Times



## Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

### Standard type

Item	Symbol		G3VM-41AY1	G3VM-61AY1	G3VM-201AY1	G3VM-351AY1	G3VM-401AY1	G3VM-601AY1	Unit	
			G3VM-41DY1	G3VM-61DY1	G3VM-201DY1	G3VM-351DY1	G3VM-401DY1	G3VM-601DY1		
Load voltage (AC peak/DC)	V <sub>DD</sub>	Maximum	32	48	160	280	320	480	V	
		Minimum	5							
Operating LED forward current	I <sub>F</sub>	Typical	7.5							mA
		Maximum	25							
		Maximum	2000	500	250	100	120	90		
Continuous load current (AC peak/DC)	I <sub>o</sub>	Maximum	2000	500	250	100	120	90		
Ambient operating temperature	T <sub>a</sub>	Minimum	-20							°C
		Maximum	65							

### High sensitive type

Item	Symbol		G3VM-41AY	G3VM-61AY	G3VM-201AY	G3VM-351AY	G3VM-401AY	G3VM-601AY	Unit	
			G3VM-41DY	G3VM-61DY	G3VM-201DY	G3VM-351DY	G3VM-401DY	G3VM-601DY		
Load voltage (AC peak/DC)	V <sub>DD</sub>	Maximum	32	48	160	280	320	480	V	
		Minimum	3							
Operating LED forward current	I <sub>F</sub>	Typical	5							mA
		Maximum	15		20					
		Maximum	2000	500	250	100	120	90		
Continuous load current (AC peak/DC)	I <sub>o</sub>	Maximum	2000	500	250	100	120	90		
Ambient operating temperature	T <sub>a</sub>	Minimum	-20							°C
		Maximum	65							

## Spacing and Insulation

### Standard type and High sensitive type

Item	Standard	Unit
Creepage distances	Minimum 7.0	mm
Clearance distances	Minimum 7.0	
Internal isolation thickness	Minimum 0.4	

DIP


G3VM-□AY□/□DY□

## Engineering Data


DIP

G3VM-□AY□/□DY□

### LED forward current vs. Ambient temperature

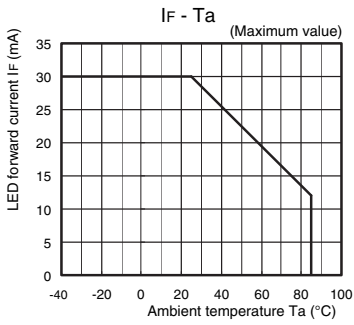


### LED forward current vs. LED forward voltage

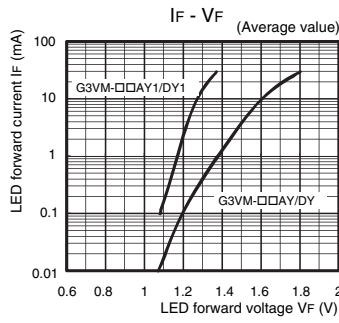


### Continuous load current vs. Ambient temperature


G3VM-41AY/DY/AY1/DY1

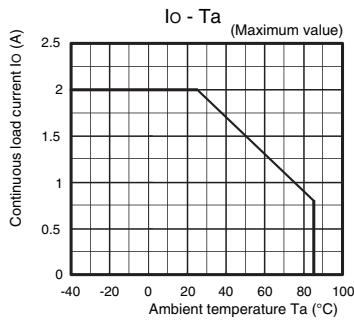

G3VM-61AY/DY/AY1/DY1  
G3VM-201AY/DY/AY1/DY1

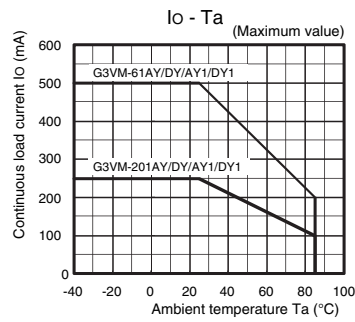


G3VM-351AY/DY/AY1/DY1  
G3VM-401AY/DY/AY1/DY1  
G3VM-601AY/DY/AY1/DY1

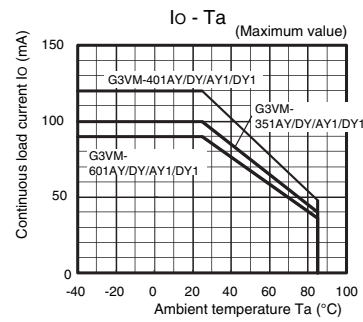


### Continuous load current vs. On-state voltage


G3VM-41AY/DY/AY1/DY1

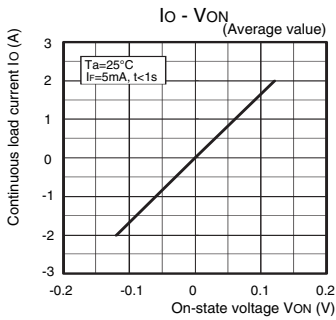

G3VM-61AY/DY/AY1/DY1  
G3VM-201AY/DY/AY1/DY1

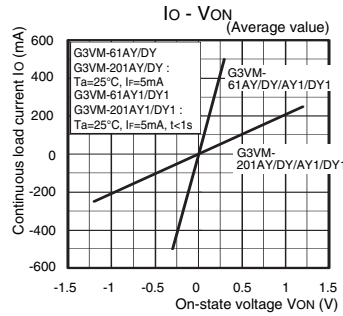


G3VM-351AY/DY/AY1/DY1  
G3VM-401AY/DY/AY1/DY1  
G3VM-601AY/DY/AY1/DY1

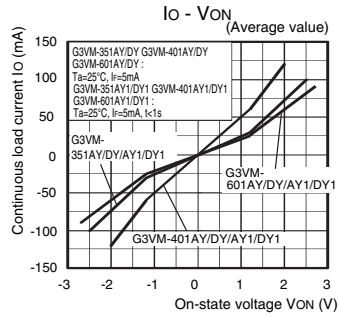


### On-state resistance vs. Ambient temperature


G3VM-41AY/DY/AY1/DY1

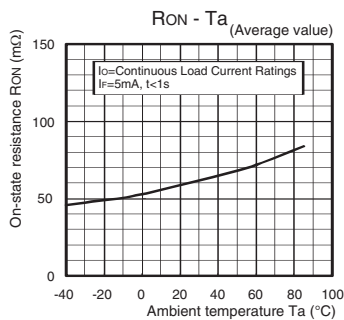

G3VM-61AY/DY/AY1/DY1  
G3VM-201AY/DY/AY1/DY1

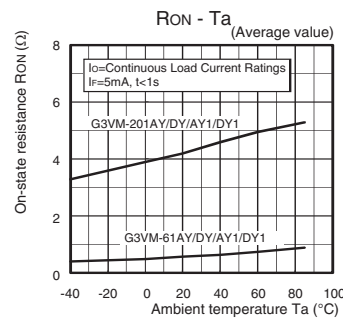


G3VM-351AY/DY/AY1/DY1  
G3VM-401AY/DY/AY1/DY1  
G3VM-601AY/DY/AY1/DY1

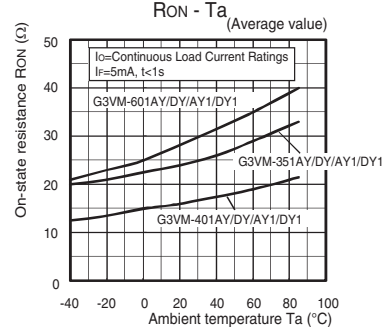


## Engineering Data

### Trigger LED forward current vs. Ambient temperature


G3VM-41AY/DY/AY1/DY1  
G3VM-61AY/DY/AY1/DY1

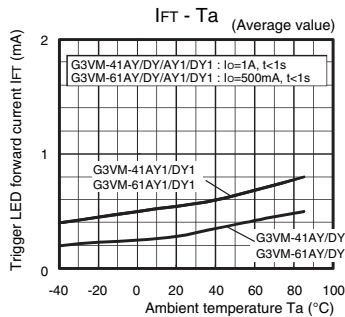

G3VM-201AY/DY/AY1/DY1  
G3VM-351AY/DY/AY1/DY1

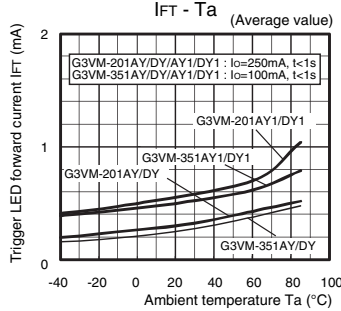


G3VM-401AY/DY/AY1/DY1  
G3VM-601AY/DY/AY1/DY1

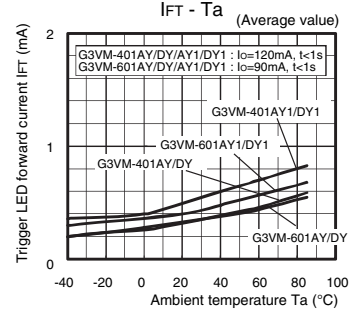


### Turn ON, Turn OFF time vs. LED forward current


G3VM-41AY1/DY1  
G3VM-61AY1/DY1

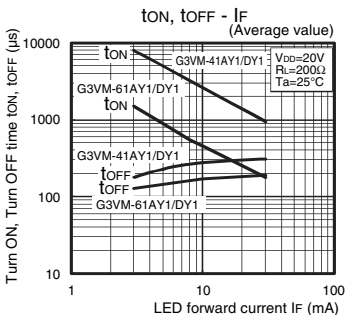


G3VM-201AY1/DY1  
G3VM-351AY1/DY1

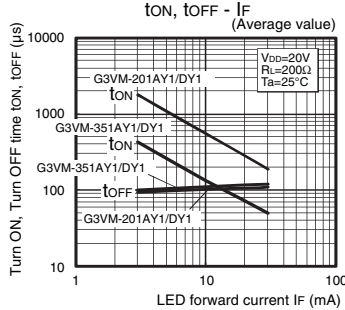


G3VM-401AY1/DY1  
G3VM-601AY1/DY1

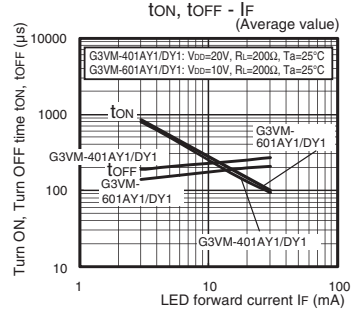


G3VM-41AY/DY  
G3VM-61AY/DY

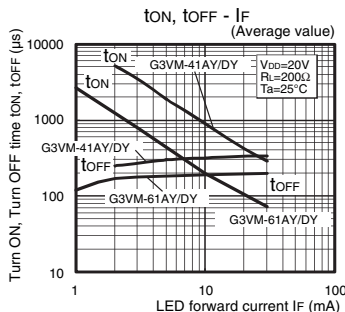

G3VM-201AY/DY  
G3VM-351AY/DY

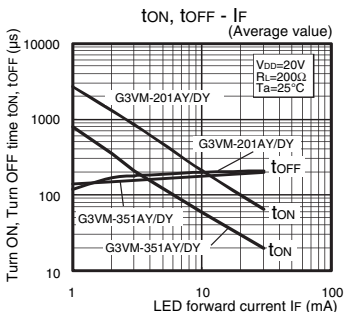


G3VM-401AY/DY  
G3VM-601AY/DY

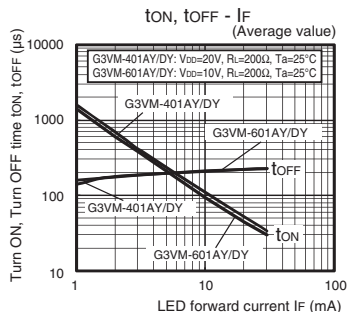


### Turn ON, Turn OFF time vs. Ambient temperature


G3VM-41AY1/DY1  
G3VM-61AY1/DY1

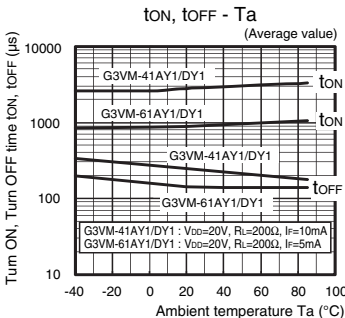

G3VM-201AY1/DY1  
G3VM-351AY1/DY1

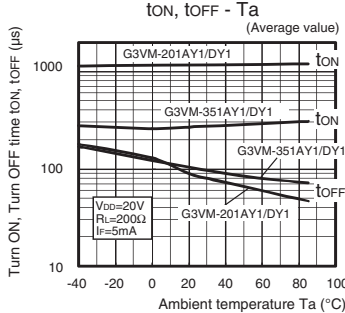


G3VM-401AY1/DY1  
G3VM-601AY1/DY1

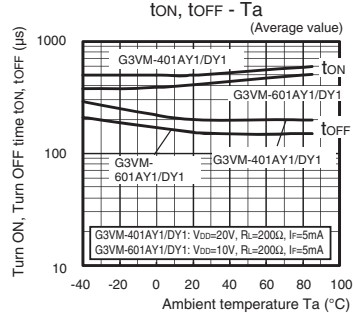


## Engineering Data

### ● Turn ON, Turn OFF time vs. Ambient temperature


G3VM-41AY1/DY1  
G3VM-61AY1/DY1

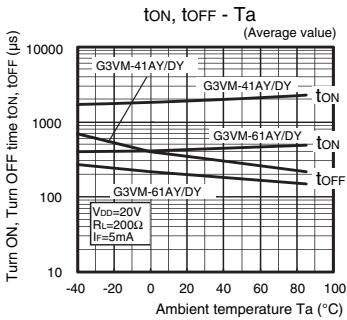

G3VM-201AY/DY  
G3VM-351AY/DY

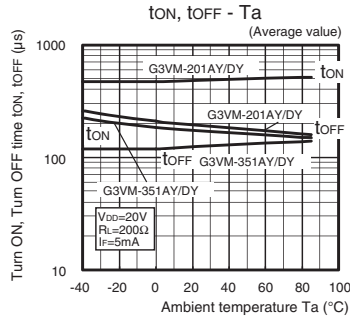


G3VM-401AY/DY  
G3VM-601AY/DY

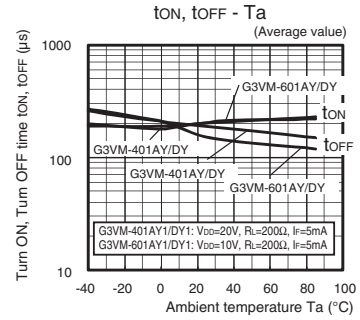


### ● Current leakage vs. Ambient temperature


G3VM-41AY/DY/AY1/DY1  
G3VM-61AY/DY/AY1/DY1

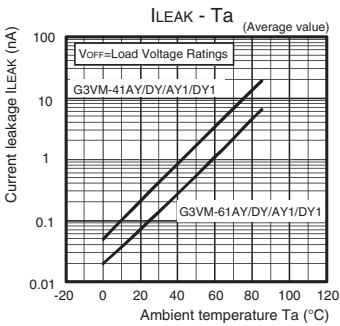

G3VM-201AY/DY/AY1/DY1  
G3VM-351AY/DY/AY1/DY1

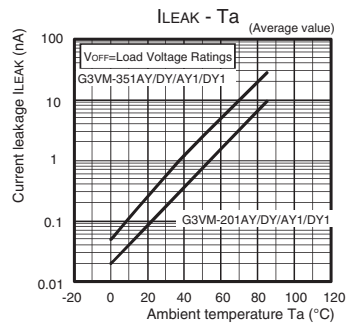

G3VM-401AY/DY/AY1/DY1  
G3VM-601AY/DY/AY1/DY1

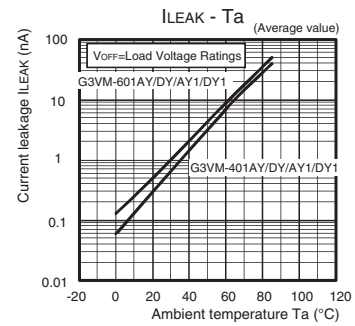

DIP


G3VM-□AY□/□DY□

## ■Appearance/Terminal Arrangement/Internal Connections

### ■Appearance

#### DIP (Dual Inline Package)


DIP4

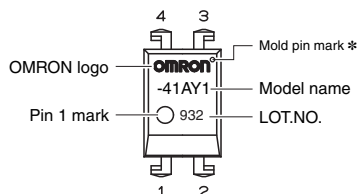

Note: The actual product is marked differently from the image shown here.

\* The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

### ■ Terminal Arrangement/Internal Connections




## ■Dimensions (Unit: mm)




### PCB Terminals

Weight: 0.25 g

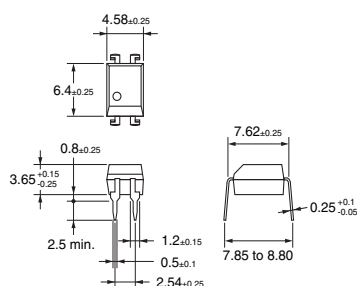


### Surface-mounting Terminals

Weight: 0.25 g

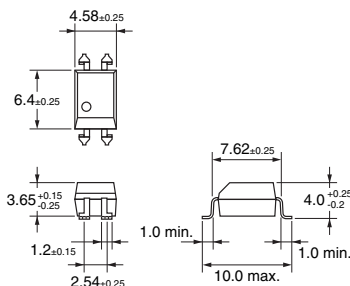


### PCB Dimensions (BOTTOM VIEW)



### Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

## ■Approved Standards

UL recognized

●Standard type and High sensitive type

Approved Standards	Contact form	File No.
UL recognized	1a (SPST-NO)	E80555

## ■Safety Precautions

• Refer to "Common Precautions" for all G3VM models.

• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.  
 • Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

DIP  
G3VM-□AY□/□DY□



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А