

## Stacking Height Guide for Parallel Board-to-Board Applications


### Stacking Height Guide for Parallel Board-to-Board Applications (Continued)

[illegible]

## 0.6mm Free Height (FH) and GIGA Connectors

### Product Facts

- 0.6 [.024] pitch SMT connectors for parallel board stacking
- Connector sizes ranging from 50 to 280 positions
- Solder pegs included for anti-peeling
- Available packaged on "tape-and-reel" for automatic placement per EIA standards
- Surface areas provided to accommodate vacuum nozzles
- Enhanced electrical performance grounded version (GIGA) available for high speed signals
- Recognized under the Component Program of Underwriter Laboratories Inc.,  File No. E28476

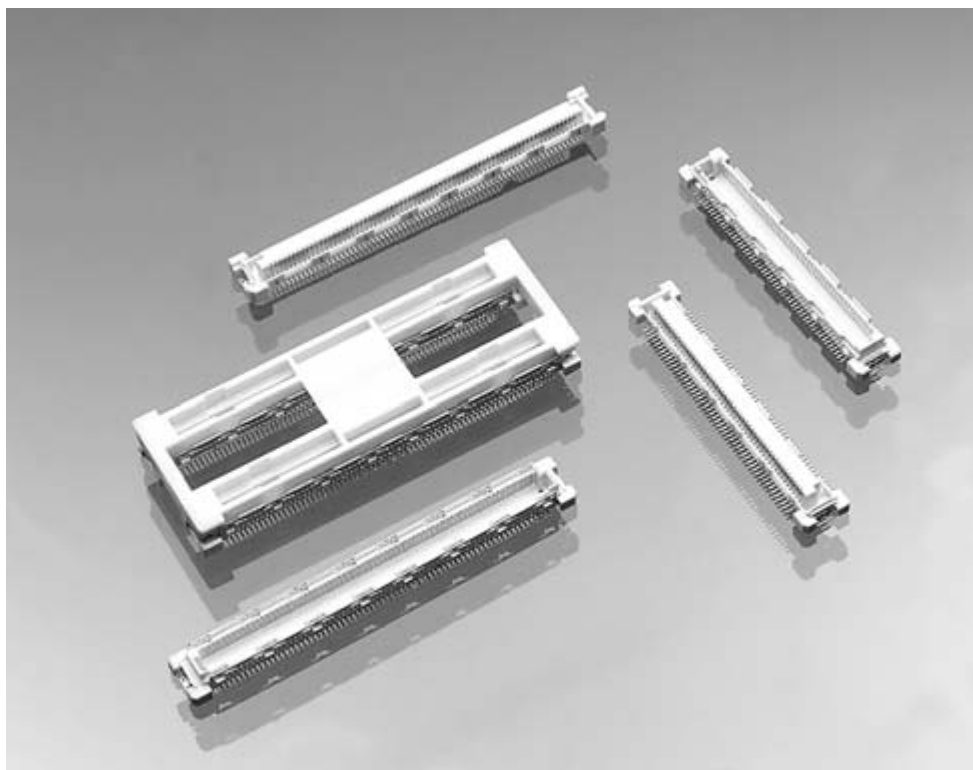

Tyco Electronics 0.6mm Free Height (FH) and GIGA connectors are designed for use in the parallel stacking of printed circuit boards. These 0.6 [.024] fine pitch connectors provide the capability of varying the spacing between parallel boards, depending upon the components to be packaged or equipment designs. They are best suited for applications where miniaturization is essential, such as notebook PCs, sub-notebook PCs, pen pads, cellular phones and communication equipment.

This connector family consists of vertical board-mount receptacles and plug assemblies. By using various combinations of plug and receptacle heights, it is possible to alter the spacing of parallel boards between 4 [.157] and 16 [.630].

The enhanced electrical performance version (GIGA) includes receptacles loaded with contacts for grounding circuits at every 9 or 10 signal circuits. These ground contacts mate with grounding plates on both sides of the plug assemblies.

0.6mm FH and GIGA connectors are packaged in trays or on "tape-and-reel" for high volume production. Each connector half features surface areas to accommodate "pick-and-place" vacuum nozzles without secondary covers. Some connector sizes are available packaged in a unique "bridge" to facilitate the aligning of dual connectors on PC boards during placement and SMT processing.

### Performance Characteristics

**Voltage Rating** — 50 VAC












**Current Rating** — 0.5 ampere

**Overall Resistance** —  
less than 30 milliohms

**Dielectric Withstanding Voltage** —  
0.2 kVAC


**Operating Temperature** —  
-40°C to +85°C

**Board-to-Board Stacking Height Selection Guide (By Receptacle/Plug Combinations)**

| Plugs | Receptacles                                                                                                                          |                                                                                                                   |                                                                                                                                   |
|-------|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
|       | 4H                                                                                                                                   | 8H                                                                                                                | 12H                                                                                                                               |
| 4H    | <p>Pages 30, 34</p>  <p>Pages 32, 33 &amp; 35</p>   | N/A                                                                                                               | <p>Page 31</p>  <p>Pages 32, 33 &amp; 35</p>   |
| 5H    | <p>Page 30</p>  <p>Pages 32, 33</p>                 | N/A                                                                                                               | N/A                                                                                                                               |
| 6H    | <p>Pages 30, 34</p>  <p>Pages 32, 33 &amp; 35</p>  | <p>Page 31</p>  <p>Page 33</p>  | <p>Page 31</p>  <p>Pages 32, 33 &amp; 35</p>  |
| 7H    | <p>Page 30</p>  <p>Page 33</p>                    | <p>Page 31</p>  <p>Page 33</p> | <p>Page 31</p>  <p>Page 33</p>               |
| 8H    | <p>Pages 30, 34</p>  <p>Pages 32, 33 &amp; 35</p> | N/A                                                                                                               | <p>Page 31</p>  <p>Pages 32, 33 &amp; 35</p> |

**Plug/Receptacle Mating  
Cross-Sections**


**0.6mm Free Height (FH) and GIGA Connectors (Continued)**

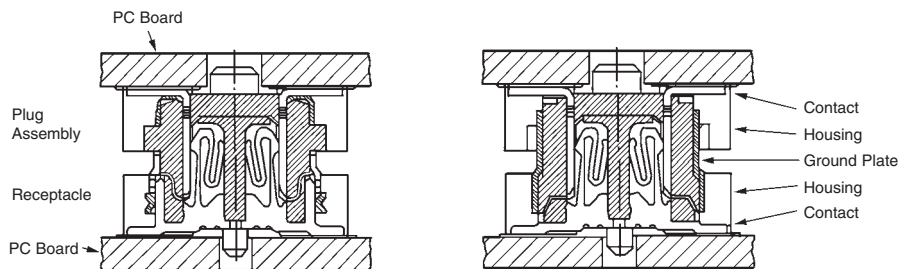

Cross-Section of Grounding Position

Cross-Section of Signal Position

Typical Example of 4H Receptacle with Common Ground Contacts  
and 4H GIGA Plug with Ground Plates

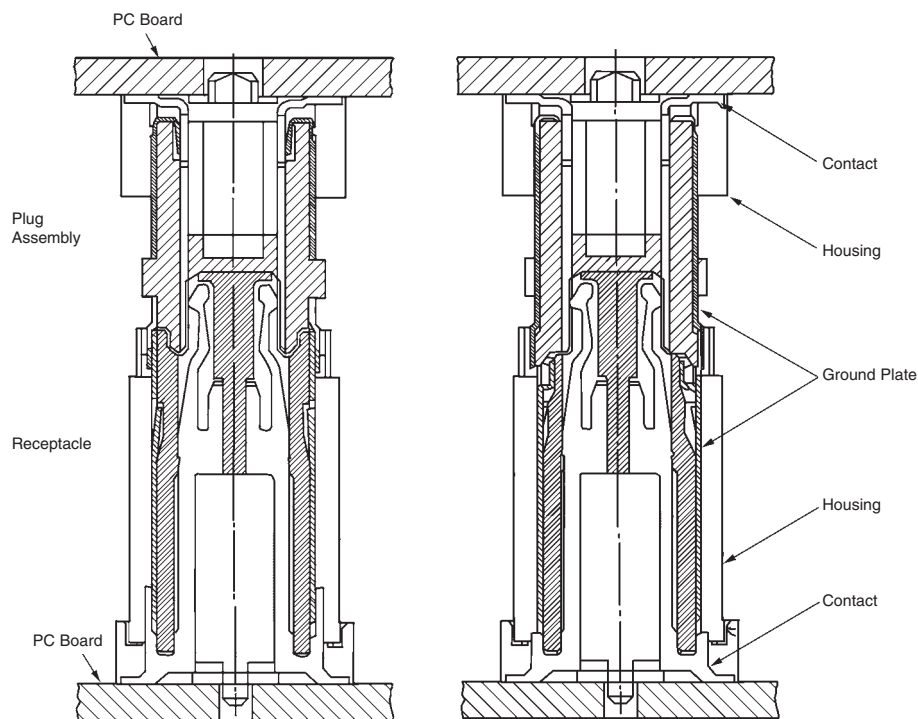

Cross-Section of Grounding Position

Cross-Section of Signal Position

Typical Example of 8H and 12H Receptacle and Plug;  
both with Ground Plates

**0.6mm Free Height Receptacles, 0.6 [ .024] Pitch**

**4H (4mm)**

**Note:** All receptacles include common ground contacts that mate with standard plug assemblies or GIGA plug assemblies with ground plates.

**Material and Finish**

**Housing** — High temperature thermoplastic, 94V-0 rated

**Signal Contacts** — Copper alloy; duplex plated 0.00020 [ .000008] min. gold on contact area, 0.00005 [ .000002] min. gold on solder area, with entire contact underplated 0.00130 [ .000051] min. nickel

**Ground Contacts** — Copper alloy; duplex plated 0.00020 [ .000008] min. gold on contact area, 0.00100 [ .000039] min. tin on solder area, with entire contact underplated 0.00130 [ .000051] min. nickel

**Related Product Data**

**Performance Characteristics** — page 27



**Stacking Height Combinations** — page 28

**Mating Plugs** — pages 32, 33 & 35

**PC Board Layout** — pages 36 & 37

**Technical Documents** (page 113)

**Product Specification**  
108-5468

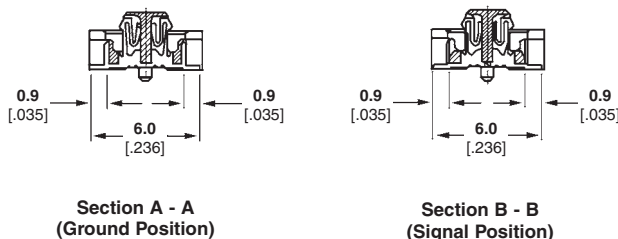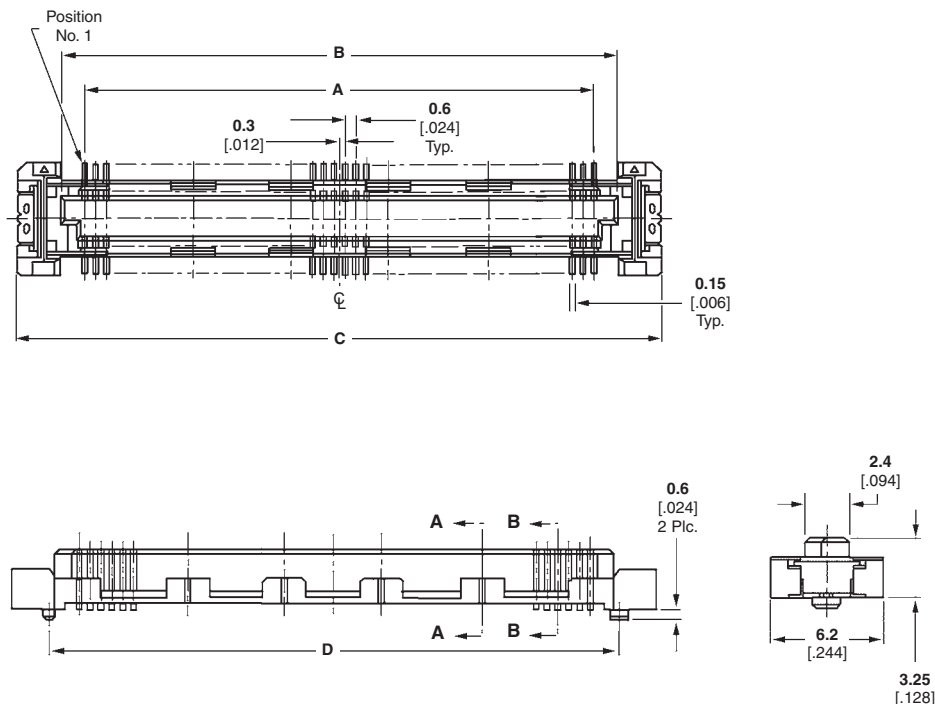

| Stacking Height | No. of Positions | Dimensions    |               |               |               | Part Numbers  |               |
|-----------------|------------------|---------------|---------------|---------------|---------------|---------------|---------------|
|                 |                  | A             | B             | C             | D             | Tray Packaged | Tape Packaged |
| 4H              | 50               | 14.4<br>.567  | 17.0<br>.669  | 21.7<br>.854  | 17.6<br>.693  | 5316077-3     | 5353190-3     |
|                 | 70               | 20.4<br>.803  | 23.0<br>.906  | 27.7<br>1.091 | 23.6<br>.929  | —             | 5-5353190-5   |
|                 | 80               | 23.4<br>.921  | 26.0<br>1.024 | 30.7<br>1.208 | 26.6<br>1.047 | 5316560-6     | 5353190-6     |
|                 | 100              | 29.4<br>1.158 | 32.0<br>1.260 | 36.7<br>1.445 | 32.6<br>1.284 | —             | 5353190-8     |
|                 | 140              | 41.4<br>1.630 | 44.0<br>1.732 | 48.7<br>1.917 | 44.6<br>1.756 | 1-5316077-0   | 1-5353190-0   |
|                 | 160              | 47.4<br>1.866 | 50.0<br>1.969 | 54.7<br>2.154 | 50.6<br>1.992 | 1-5316560-1   | —             |

**Note:** Free Height (FH) receptacles for 8H (8mm) and 12H (12mm) stacking height are shown on page 31. Part Numbers are RoHS compliant.

**0.6mm Free Height Receptacles, 0.6 [ .024] Pitch** (Continued)

**8H (8mm) and 12H (12mm)**

**Note:** All receptacles include common ground contacts that mate with standard plug assemblies or GIGA plug assemblies with ground plates.

**Material and Finish**

**Housing** — High temperature thermoplastic, 94V-0 rated

**Signal Contacts** — Copper alloy; duplex plated 0.00020 [ .000008] min. gold on contact area, 0.00005 [ .000002] min. gold on solder area, with entire contact underplated 0.00130 [ .000051] min. nickel

**Ground Contacts** — Copper alloy; duplex plated 0.00020 [ .000008] min. gold on contact area, 0.00100 [ .000039] min. tin on solder area, with entire contact underplated 0.00130 [ .000051] min. nickel

**Related Product Data**

**Performance Characteristics** — page 27





**Stacking Height Combinations** — page 28

**Mating Plugs** — pages 32 & 33


**PC Board Layout** — pages 36 & 37

**Technical Documents** (page 113)

**Product Specification**  
108-5468

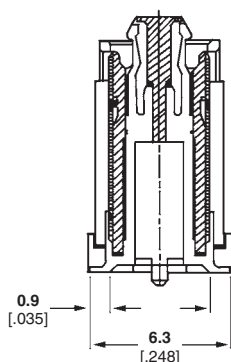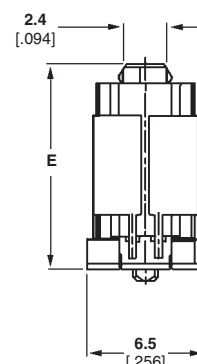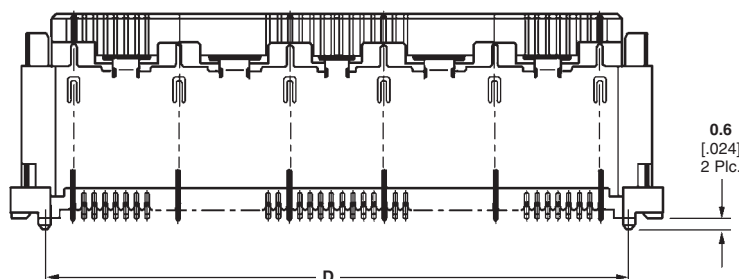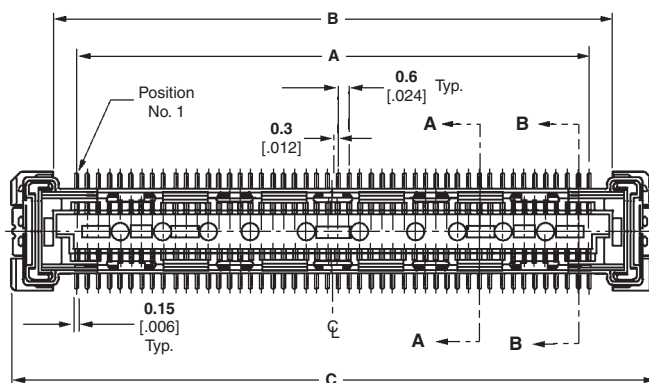

**Section A - A**  
(Ground Position)

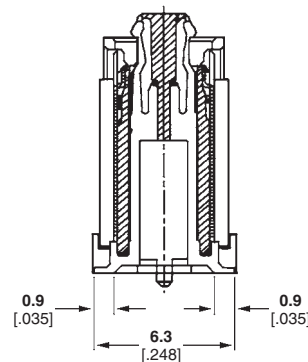

**Section B - B**  
(Signal Position)

| Stacking Height | No. of Positions | Dimensions    |               |               |               |               | Part Numbers (Tray Packaged) |
|-----------------|------------------|---------------|---------------|---------------|---------------|---------------|------------------------------|
|                 |                  | A             | B             | C             | D             | E             |                              |
| 8H              | 80               | 23.4<br>.921  | 26.0<br>1.024 | 30.7<br>2.087 | 26.6<br>1.047 | 7.25<br>.285  | 5316317-6                    |
|                 | 50               | 14.4<br>.567  | 17.0<br>.670  | 21.7<br>.854  | 17.6<br>.693  | 11.25<br>.443 | 6318029-3                    |
| 12H             | 140              | 41.4<br>1.630 | 44.0<br>1.732 | 48.7<br>1.917 | 44.6<br>1.756 | 11.25<br>.443 | 1-5316318-0                  |
|                 | 160              | 47.4<br>1.866 | 50.0<br>1.969 | 54.7<br>2.154 | 50.6<br>1.992 | 11.25<br>.443 | 1-5316318-1                  |

**Note:** Free Height (FH) receptacles for 4H (4mm) stacking height are shown on page 30. Part Numbers are RoHS compliant.

0.6mm Free Height (FH) and  
GIGA Connectors

4H (4mm), 5H (5mm)  
6H (6mm), 8H (8mm)  
and 12H (12mm)

#### Material and Finish

**Housing** — High temperature thermoplastic, 94V-0 rated

**Contacts** — Copper alloy; duplex plated 0.00020 [0.00008] min. gold on contact area, 0.00100 [0.00039] min. tin on solder area, with entire contact underplated 0.00130 [0.00051] min. nickel

#### Related Product Data

**Performance Characteristics** — page 27

**Stacking Height Combinations** — page 28




**Mating Receptacles** — pages 30, 31 & 34

**PC Board Layout** — pages 38 & 39

#### Technical Documents (page 113)

**Product Specification**  
108-5468

## 0.6mm Free Height Standard Plugs, 0.6 [0.024] Pitch

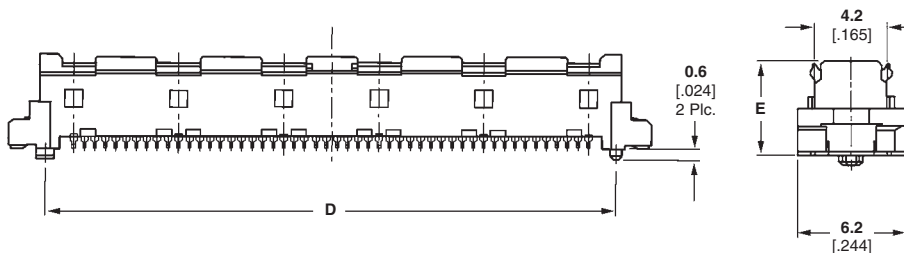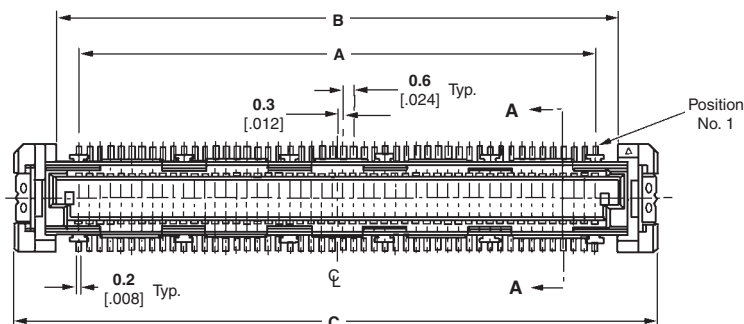

Section A - A

| Stacking Height | No. of Positions | Dimensions    |               |               |               |               | Part Numbers  |               |
|-----------------|------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
|                 |                  | A             | B             | C             | D             | E             | Tray Packaged | Tape Packaged |
| 4H              | 50               | 14.4<br>.567  | 17.0<br>.669  | 21.7<br>.854  | 17.6<br>.693  | 3.45<br>.136  | 5316135-3     | 5353183-3     |
|                 | 70               | 20.4<br>.803  | 23.0<br>.906  | 27.7<br>1.091 | 23.6<br>.929  | 3.45<br>.136  | 5316135-5     | —             |
|                 | 100              | 29.4<br>1.158 | 32.0<br>1.260 | 36.7<br>1.445 | 32.6<br>1.284 | 3.45<br>.136  | —             | 5353183-8     |
|                 | 140              | 41.4<br>1.630 | 44.0<br>1.732 | 48.7<br>1.917 | 44.6<br>1.756 | 3.45<br>.136  | 1-5316135-0   | 1-5353183-0   |
|                 | 160              | 47.4<br>1.866 | 50.0<br>1.969 | 54.7<br>2.154 | 50.6<br>1.992 | 3.45<br>.136  | 1-5316135-1   | —             |
| 5H              | 50               | 14.4<br>.567  | 17.0<br>.669  | 21.7<br>.854  | 17.6<br>.693  | 4.45<br>.175  | —             | 5-5353692-3   |
| 6H              | 100              | 29.4<br>1.158 | 32.0<br>1.260 | 36.7<br>1.445 | 32.6<br>1.284 | 5.45<br>.215  | —             | 5353185-8     |
|                 | 140              | 41.4<br>1.630 | 44.0<br>1.732 | 48.7<br>1.917 | 44.6<br>1.756 | 5.45<br>.215  | —             | 1-5353185-0   |
| 8H              | 140              | 41.4<br>1.630 | 44.0<br>1.732 | 48.7<br>1.917 | 44.6<br>1.756 | 7.45<br>.293  | —             | 1-5353187-0   |
|                 | 160              | 47.4<br>1.866 | 50.0<br>1.969 | 54.7<br>2.154 | 50.6<br>1.992 | 7.45<br>.293  | —             | 1-5353187-1   |
| 12H             | 50               | 14.4<br>.567  | 17.0<br>.669  | 21.7<br>.854  | 17.6<br>.693  | 11.25<br>.443 | 6318026-3     | —             |

**Note:** Part Numbers are RoHS compliant

**0.6mm Free Height GIGA Plugs, 0.6 [.024] Pitch**

**4H (4mm), 5H (5mm),  
6H (6mm), 7H (7mm),  
8H (8mm) and 12H (12mm)**

**Note:** All GIGA plugs include ground plates that mate with receptacles with common ground contacts..

**Material and Finish**

**Housing** — High temperature thermoplastic, 94V-0 rated

**Contacts** — Copper alloy; duplex plated 0.00020 [.000008] min. gold on contact area, 0.00100 [.000039] min. tin on solder area, with entire contact underplated 0.00130 [.000051] min. nickel

**Ground Plates** — Phosphor bronze, plated 0.00300-0.00500 [.000120-.000200] tin over 0.00050 [.000020] copper

**Related Product Data**

**Performance Characteristics** — page 27




**Stacking Height Combinations** — page 28

**Mating Receptacles** — pages 30, 31, & 34


**PC Board Layout** — pages 23 & 24

**Technical Documents** (page 113)

**Product Specification**  
108-5468

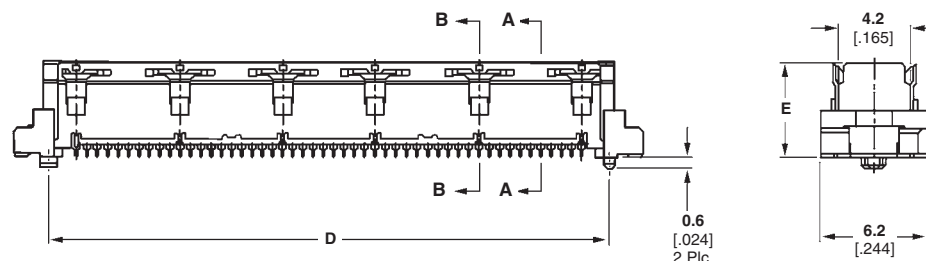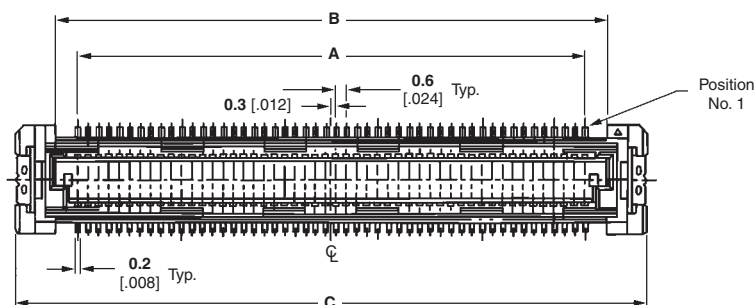

**Section A - A  
(Signal Position)**



**Section B - B  
(Ground Position)**

| Stacking Height | No. of Positions | Dimensions    |               |               |               |               | Part Numbers  |               |
|-----------------|------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
|                 |                  | A             | B             | C             | D             | E             | Tray Packaged | Tape Packaged |
| 4H              | 50               | 14.4<br>.567  | 17.0<br>.669  | 21.7<br>.854  | 17.6<br>.693  | 3.45<br>.136  | 5316076-3     | —             |
|                 | 70               | 20.4<br>.803  | 23.0<br>.906  | 27.7<br>1.091 | 23.6<br>.929  | 3.45<br>.136  | —             | 5-5353184-5   |
|                 | 140              | 41.4<br>1.630 | 44.0<br>1.732 | 48.7<br>1.917 | 44.6<br>1.756 | 3.45<br>.136  | 1-5316076-0   | 1-5353184-0   |
|                 | 160              | 47.4<br>1.866 | 50.0<br>1.969 | 54.7<br>2.154 | 50.6<br>1.992 | 3.45<br>.136  | 1-5316559-1   | —             |
| 5H              | 160              | 47.4<br>1.866 | 50.0<br>1.969 | 54.7<br>2.154 | 50.6<br>1.992 | 4.45<br>.175  | 1-5353471-1   | —             |
| 6H              | 80               | 23.4<br>.921  | 26.0<br>1.024 | 30.7<br>1.209 | 26.6<br>1.047 | 5.45<br>.215  | —             | 5353186-6     |
|                 | 140              | 41.4<br>1.630 | 44.0<br>1.732 | 48.7<br>1.917 | 44.6<br>1.756 | 5.45<br>.215  | —             | 1-5353186-0   |
| 7H              | 80               | 23.4<br>.921  | 26.0<br>1.024 | 30.7<br>1.209 | 26.6<br>1.047 | 6.45<br>.254  | —             | 5353831-6     |
|                 | 140              | 41.4<br>1.630 | 44.0<br>1.732 | 48.7<br>1.917 | 44.6<br>1.756 | 6.45<br>.254  | —             | 1-5353831-0   |
| 8H              | 140              | 41.4<br>1.630 | 44.0<br>1.732 | 48.7<br>1.917 | 44.6<br>1.756 | 7.45<br>.293  | —             | 1-5353188-0   |
|                 | 160              | 47.4<br>1.866 | 50.0<br>1.969 | 54.7<br>2.154 | 50.6<br>1.992 | 7.45<br>.293  | 1-5316562-1   | 1-5353188-1   |
| 12H             | 140              | 41.4<br>1.630 | 44.0<br>1.732 | 48.7<br>1.917 | 44.6<br>1.756 | 11.25<br>.443 | 6473225-1     | —             |

**Note:** Part Numbers are RoHS compliant.

**0.6mm Free Height Bridged Receptacle, 0.6 [.024] Pitch**

**4H and 12H Dual-Row**

**Note:** Receptacle includes common ground contacts that mate with standard plug assemblies or GIGA plug assemblies with ground plates.

**Material and Finish**

**Housing** — High temperature thermoplastic, 94V-0 rated

**Signal Contacts** — Copper alloy; duplex plated 0.00020 [.000008] min. gold on contact area, 0.00005 [.000002] min. gold on solder area, with entire contact underplated 0.00130 [.000051] min. nickel

**Ground Contacts** — Copper alloy; duplex plated 0.00020 [.000008] min. gold on contact area, 0.00100 [.000039] min. tin on solder area, with entire contact underplated 0.00130 [.000051] min. nickel

**Related Product Data**

**Performance Characteristics** — page 27

**Stacking Height Combinations** — page 28


**Mating Plugs** — pages 32, 33 & 35

**PC Board Layout** — page 37

**Technical Documents** (page 113)

**Product Specification**

108-5468

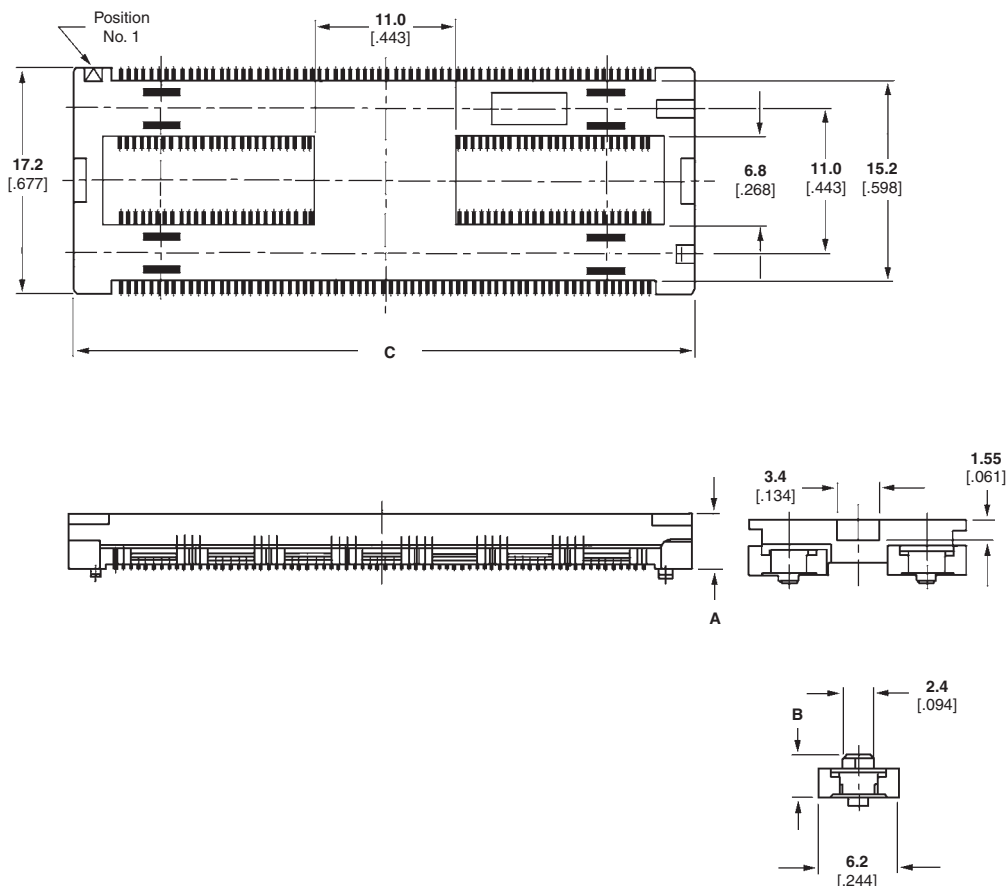

| Dimensions    |               |                | Ground Plate | Packaging | Positions | Height | Part Number |
|---------------|---------------|----------------|--------------|-----------|-----------|--------|-------------|
| A             | B             | C              |              |           |           |        |             |
| 4.25<br>.167  | 3.25<br>.128  | 48.70<br>1.917 | Yes          | Tape      | 280       | 4H     | 1-5353206-0 |
| 4.25<br>.167  | 3.25<br>.128  | 48.70<br>1.917 | Yes          | Tray      | 280       | 4H     | 1-5353729-0 |
| 12.25<br>.482 | 11.25<br>.443 | 48.70<br>1.917 | Yes          | Tray      | 280       | 12H    | 1-5353800-0 |
| 4.25<br>.167  | 3.25<br>.128  | 54.70<br>2.154 | Yes          | Tray      | 320       | 4H     | 6-6318157-1 |

**Note:** Part Numbers are RoHS compliant.

**0.6mm Free Height Bridged Plugs, 0.6 [0.024] Pitch**

**4H, 6H, 8H and 12H  
Dual-Row**

**Material and Finish**

**Housing** — High temperature thermoplastic, 94V-0 rated

**Contacts** — Copper alloy; duplex plated 0.00020 [0.00008] min. gold on contact area, 0.00100 [0.00039] min. tin on solder area, with entire contact underplated 0.00130 [0.00051] min. nickel

**Related Product Data**

**Performance Characteristics** —  
page 27





**Stacking Height Combinations** —  
page 28

**Mating Receptacles** —  
pages 30 & 34

**PC Board Layout** — page 39

**Technical Documents** (page 113)

**Product Specification**  
108-5468

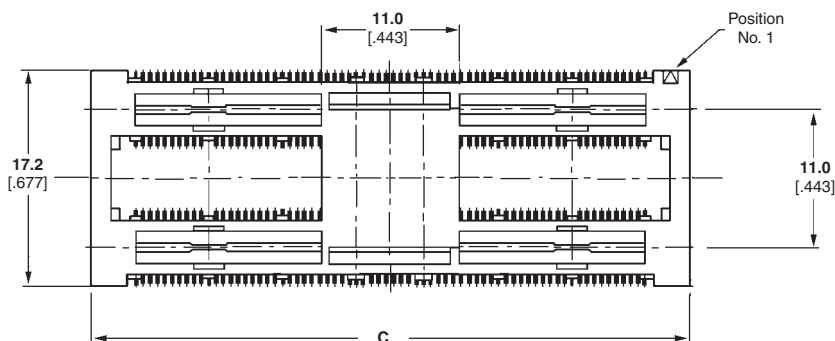


| Dimensions    |               |                | Ground Plate | Packaging | Positions | Height | Part Number |
|---------------|---------------|----------------|--------------|-----------|-----------|--------|-------------|
| A             | B             | C              |              |           |           |        |             |
| 5.45<br>.215  | 3.45<br>.136  | 48.70<br>1.917 | Yes          | Tape      | 280       | 4H     | 1-5353231-0 |
| 5.45<br>.215  | 3.45<br>.136  | 48.70<br>1.917 | No           | Tape      | 280       | 4H     | 1-5353284-0 |
| 5.45<br>.215  | 3.45<br>.136  | 48.70<br>1.917 | Yes          | Tray      | 280       | 4H     | 1-5353720-0 |
| 7.45<br>.293  | 5.45<br>.215  | 48.70<br>1.917 | Yes          | Tape      | 280       | 6H     | 1-5353232-0 |
| 7.45<br>.293  | 5.45<br>.215  | 48.70<br>1.917 | Yes          | Tray      | 280       | 6H     | 1-6123086-0 |
| 7.45<br>.293  | 5.45<br>.215  | 48.70<br>1.917 | No           | Tape      | 280       | 6H     | 1-5353134-0 |
| 9.45<br>.372  | 7.45<br>.293  | 48.70<br>1.917 | No           | Tape      | 280       | 8H     | 1-5353135-0 |
| 9.45<br>.372  | 7.45<br>.293  | 48.70<br>1.917 | Yes          | Tape      | 280       | 8H     | 1-5353233-0 |
| 9.45<br>.372  | 7.45<br>.293  | 48.70<br>1.917 | Yes          | Tray      | 280       | 8H     | 1-5353727-0 |
| 13.45<br>.530 | 11.45<br>.451 | 48.70<br>1.917 | Yes          | Tray      | 280       | 12H    | 1-6123098-0 |
| 5.45<br>.215  | 3.45<br>.136  | 54.70<br>2.154 | Yes          | Tray      | 320       | 4H     | 6-6318151-1 |
| 9.45<br>.372  | 7.45<br>.293  | 54.70<br>2.154 | Yes          | Tray      | 320       | 8H     | 6-6318154-1 |

**Note:** Part Numbers are RoHS compliant.


**Recommended PC Board Layouts and Grounding Circuit Positions**

**For 50-, 70-, 80- and  
100-Position Receptacles**


| Stacking Height | Dimensions   |             |
|-----------------|--------------|-------------|
|                 | A            | B           |
| 4H              | 1.5<br>.059  | 3.6<br>.142 |
| 8H              | 1.75<br>.069 | 3.8<br>.150 |
| 12H             | 1.75<br>.069 | 3.8<br>.150 |

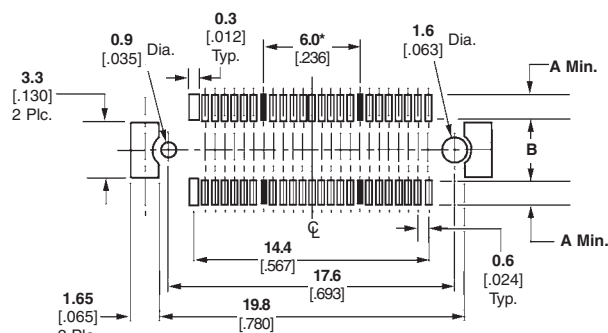


**For 50-Position Receptacles**  
**\*Spacing between grounding circuits**

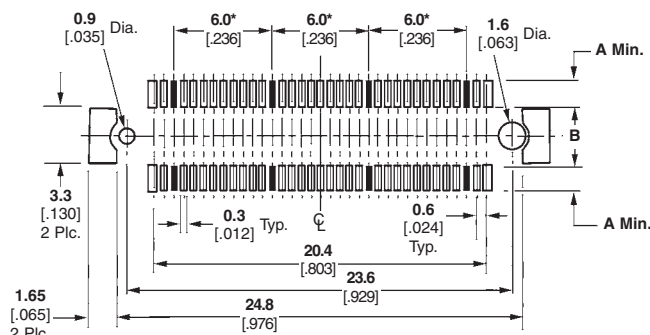

**For 70-Position Receptacles**  
**\*Spacing between grounding circuits**

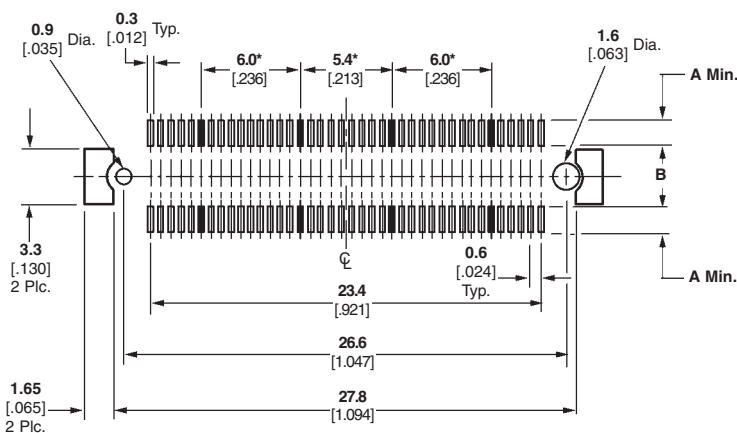

**For 80-Position Receptacles**  
**\*Spacing between grounding circuits**

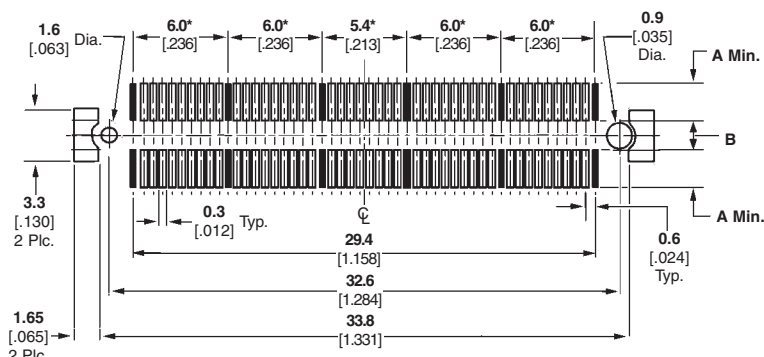


**For 100-Position Standard Receptacles**  
**\*Spacing between grounding circuits**


**Recommended PC Board Layouts and Grounding Circuit Positions (Continued)**

**For 140-, 160-Position  
Receptacles and 280-  
Position Bridge Receptacle**


| Stacking<br>Height | Dimensions   |             |
|--------------------|--------------|-------------|
|                    | A            | B           |
| 4H                 | 1.5<br>.059  | 3.6<br>.142 |
| 12H                | 1.75<br>.069 | 3.8<br>.150 |

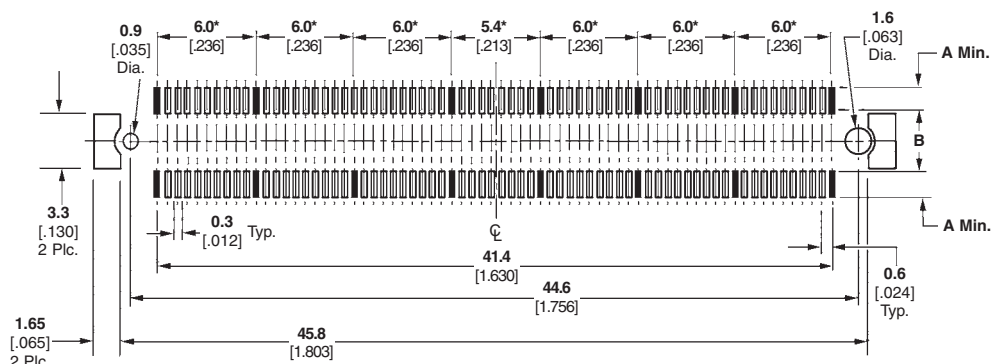

**For 140-Position Receptacles**  
\*Spacing between grounding circuits

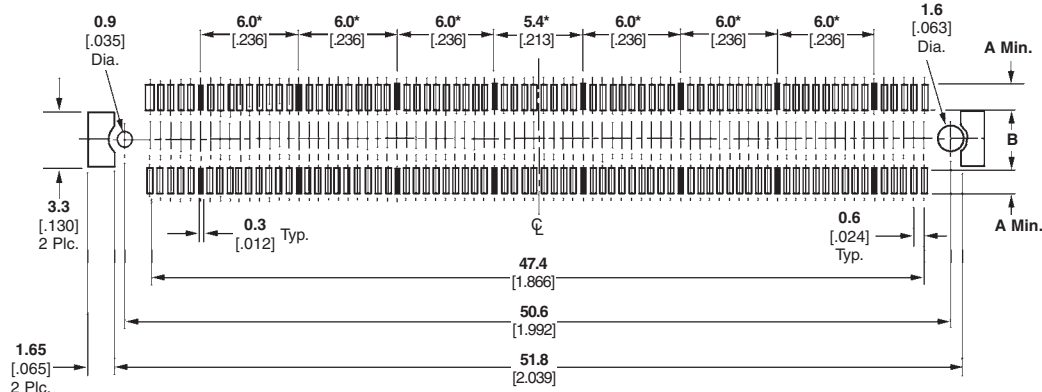

**For 160-Position Receptacles**  
\*Spacing between grounding circuits

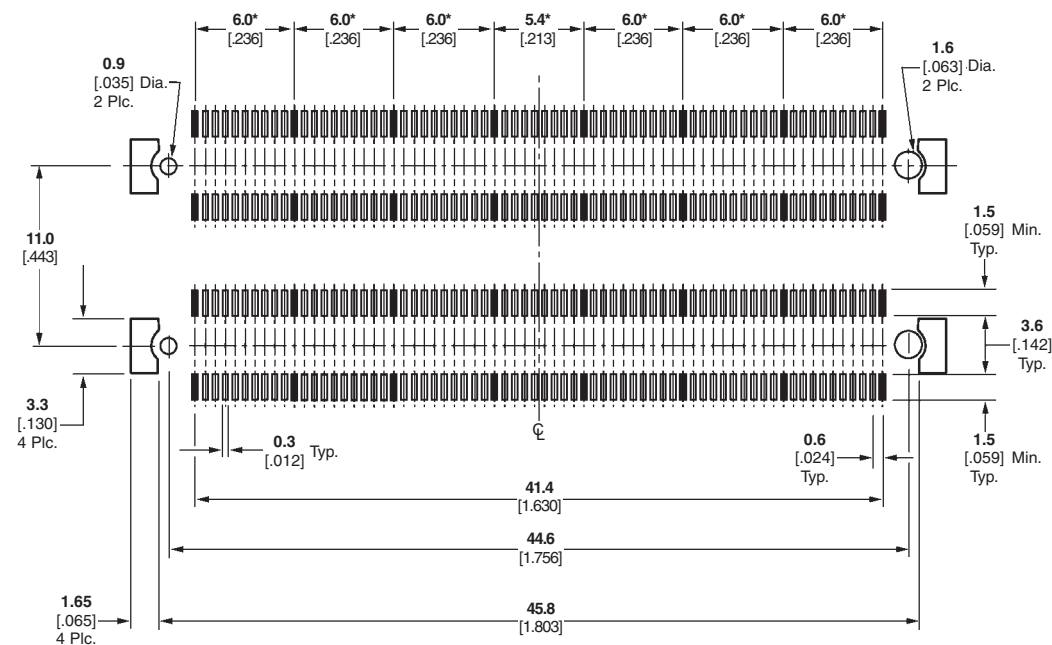


**For 280-Position Bridge Receptacle**  
\*Spacing between grounding circuits


**Recommended PC Board Layouts and Grounding Circuit Positions (Continued)**

For 50-, 70-, 100- and  
140-Position Standard Plugs


| Stacking Height | Dimensions   |             |
|-----------------|--------------|-------------|
|                 | A            | B           |
| 4H              | 2.35<br>.093 | 1.9<br>.075 |
| 5H              | 1.8<br>.071  | 3.4<br>.134 |
| 6H              | 1.8<br>.071  | 3.4<br>.134 |
| 8H              | 1.8<br>.071  | 3.4<br>.134 |

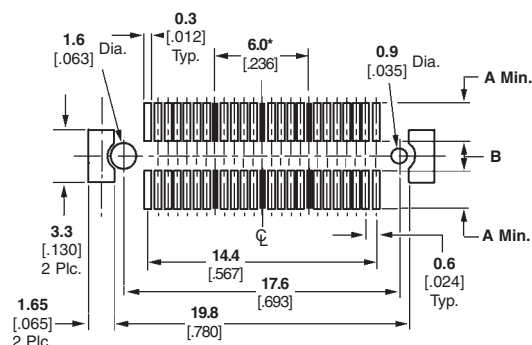


For 50-Position Standard Plugs  
\*Spacing between grounding circuits

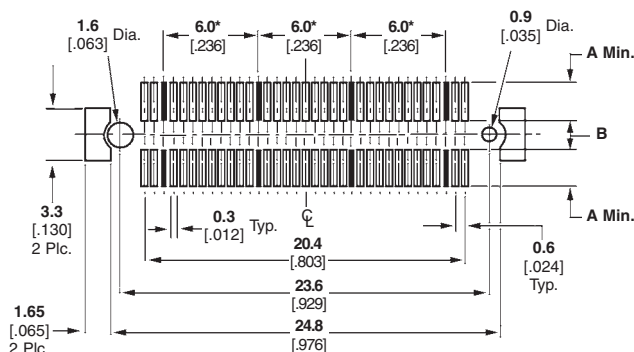

For 70-Position Standard Plugs  
\*Spacing between grounding circuits

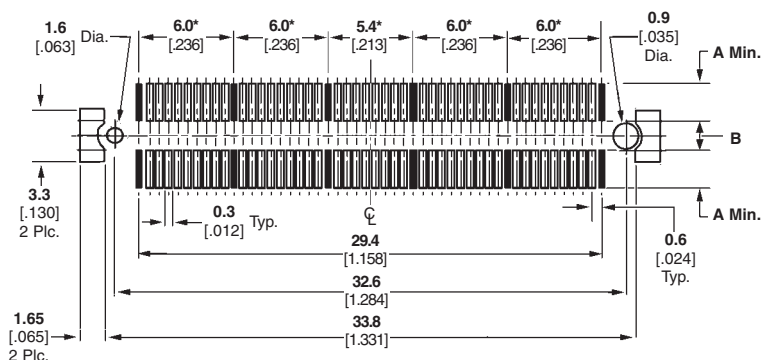


For 100-Position Standard Plugs  
\*Spacing between grounding circuits

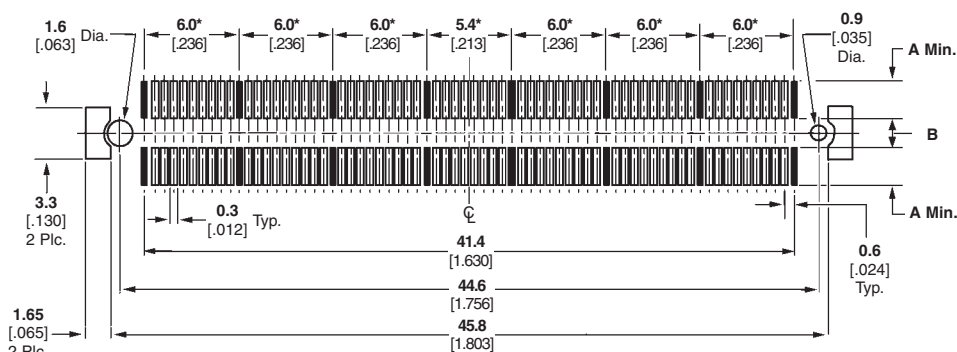


For 140-Position Standard Plugs  
\*Spacing between grounding circuits

**For 160-Position Standard  
Plugs and 280-Position  
Standard Bridge Plugs**

| Stacking<br>Height | Dimensions   |             |
|--------------------|--------------|-------------|
|                    | A            | B           |
| 4H                 | 2.35<br>.093 | 1.9<br>.075 |
| 6H                 | 1.8<br>.071  | 3.4<br>.134 |
| 8H                 | 1.8<br>.071  | 3.4<br>.134 |

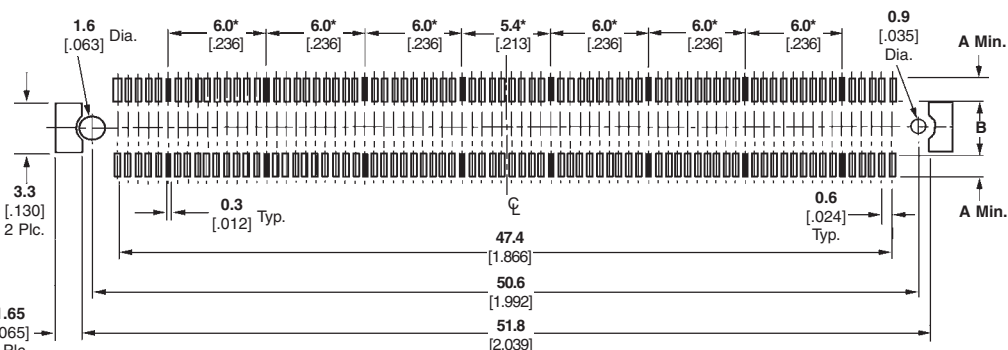


**For 160-Position Standard Plugs**  
\*Spacing between grounding circuits

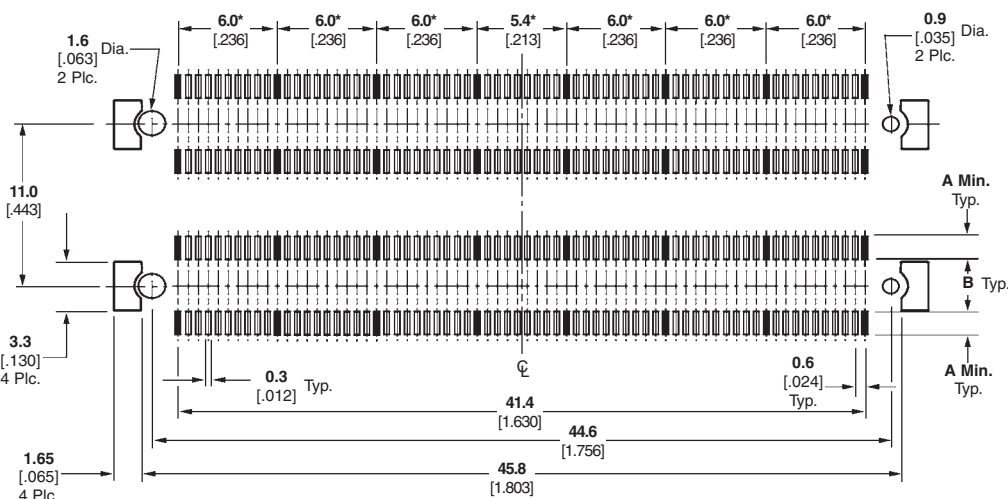


**For 280-Position Standard Bridge Plugs**  
\*Spacing between grounding circuits

**For 50-, 70- and  
80-Position GIGA Plugs**


| Stacking<br>Height | Dimensions   |             |
|--------------------|--------------|-------------|
|                    | A            | B           |
| 4H                 | 2.35<br>.093 | 1.9<br>.075 |
| 6H                 | 1.8<br>.071  | 3.4<br>.134 |
| 7H                 | 1.8<br>.071  | 3.4<br>.134 |

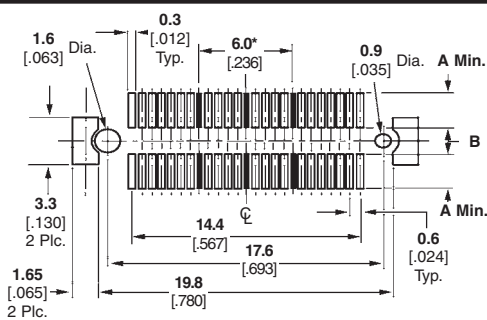

**For 50-Position GIGA Plugs**  
\*Spacing between grounding circuits

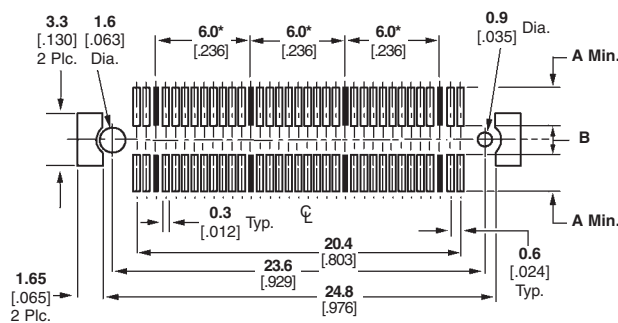

**For 70-Position GIGA Plugs**  
\*Spacing between grounding circuits

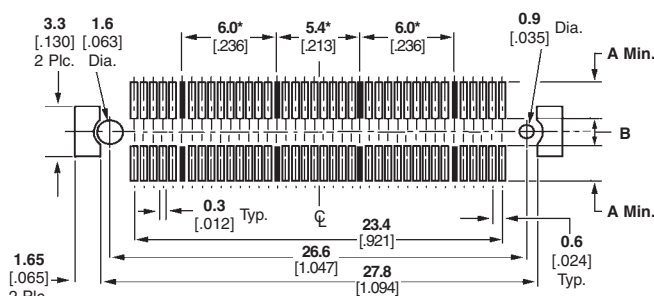


**For 80-Position GIGA Plugs**  
\*Spacing between grounding circuits


**For 140- and 160-position  
GIGA Plugs and 280-Position  
GIGA Bridge Plugs**

| Stacking Height | Dimensions   |             |
|-----------------|--------------|-------------|
|                 | A            | B           |
| 4H              | 2.35<br>.093 | 1.9<br>.075 |
| 5H              | 1.8<br>.071  | 3.4<br>.134 |
| 6H              | 1.8<br>.071  | 3.4<br>.134 |
| 7H              | 1.8<br>.071  | 3.4<br>.134 |
| 8H              | 1.8<br>.071  | 3.4<br>.134 |


**Recommended PC Board Layouts and Grounding Circuit Positions (Continued)**

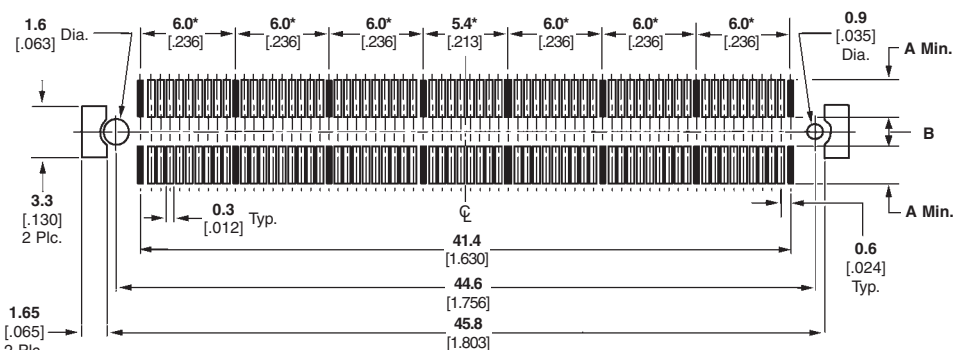

**For 140-Position GIGA Plugs**  
\*Spacing between grounding circuits

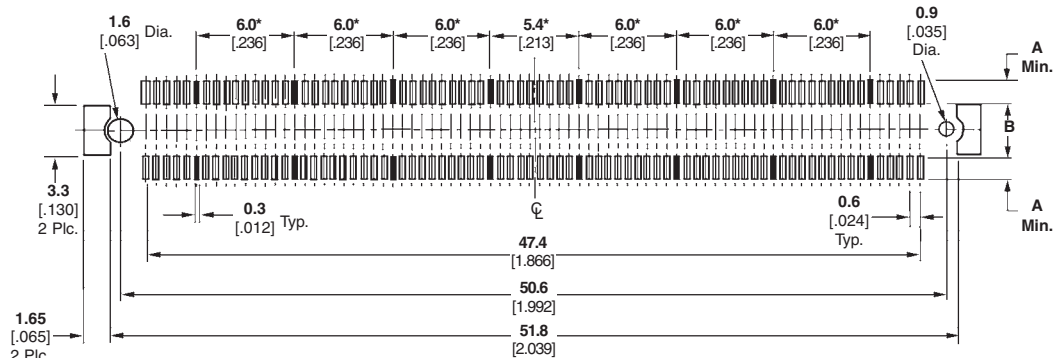

**For 160-Position GIGA Plugs**  
\*Spacing between grounding circuits

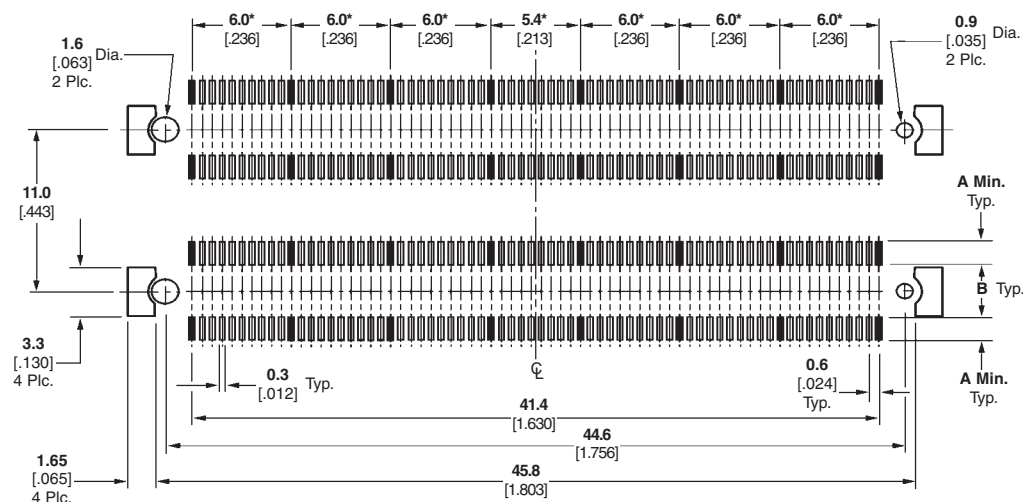

**For 280-Position GIGA Bridge Plugs**  
\*Spacing between grounding circuits

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А