

Compact and good operational feel, suitable for mixing console faders



Typical Specifications



| Items | Specifications |
|-----------------------------|--|
| Total resistance tolerance | ±20% |
| Maximum operating voltage | 200V AC, 10V DC (Single-unit) 150V AC, 10V DC (Dual-unit) |
| Operating force | 0.5 $\begin{smallmatrix} +1.0 \\ -0.4 \end{smallmatrix}$ N |
| Operating life | 30,000 cycles |
| Operating temperature range | -10°C to +60°C |

Product Line

| Number of resistor elements | Travel (mm) | Lever type | Length of lever (mm) | Total resistance (kΩ) | Resistance taper | Minimum order unit (pcs.) | | Products No. |
|-----------------------------|-------------|------------|----------------------|-----------------------|------------------|---------------------------|--------|---------------------|
| | | | | | | Japan | Export | |
| Single-unit | 60 | 6 | 15 | 10 | 1B | 900 | 900 | RS6011SP6003 |
| | | | | 20 | | | | RS6011SP6004 |
| Dual-unit | | | | 10 | 15A | | | RS6011DP6002 |
| | | | | 20 | | | | RS6011DP6003 |

Note

Other varieties are also available. Refer to "Other Specifications" (P.409).

Packing Specifications

Tray

| Number of packages (pcs.) | | Export package measurements (mm) |
|---------------------------|------------------------|----------------------------------|
| 1 case /Japan | 1 case /export packing | |
| 900 | 900 | 529×373×273 |

Dimensions

| Style | PC board mounting hole dimensions (Viewed from mounting side) |
|-------|--|
| | <p>The RS6011SP uses lug terminals for terminals 1' 2' 3'.</p> |

Refer to P.409 for other specifications.
 Refer to P.409 for details of lever types.
 Refer to P.410 for ordering products not listed.
 Refer to P.417 for soldering conditions.

Rotary Potentiometers
 Slide Potentiometers
 General-use
 Mixer

In addition to the products listed, we can accommodate the follow specifications.

Total Resistance Variety

| | | | |
|------------------------|----|----|----|
| Total resistance (k Ω) | 10 | 20 | 50 |
|------------------------|----|----|----|

Resistance Taper


| | | | |
|------------------|-----|----|-----|
| Resistance taper | 15A | 1B | 10A |
|------------------|-----|----|-----|

Lever Types

Unit:mm

| | |
|-----------------------|--------------------|
| Configuration code | 6 (Metal lever) |
| Dimensions | <p>t=1.2</p> |
| Length L ₁ | 15 |

Terminal Layout / Circuit Diagram (Viewed from Mounting Side)

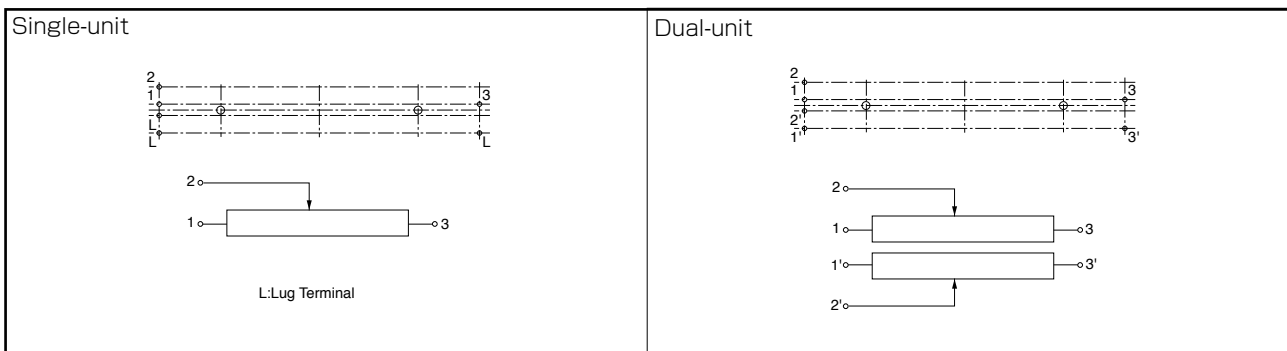

Corresponding Specifications

| | |
|------------|-----------|
| Dust cover | Available |
|------------|-----------|

Notes

- Marked are specifications recommended by Alps Alpine.
- A variety of operational feels are available, so please inquire if you have a request.

When ordering product varieties that are not listed, specify referring to the examples below.

■ Sample Part Number


R S 6 0 1 1 S P — **B 1 0 3**

Number of resistor elements

| | |
|-------------|---|
| Single-unit | S |
| Dual-unit | D |

Resistance taper



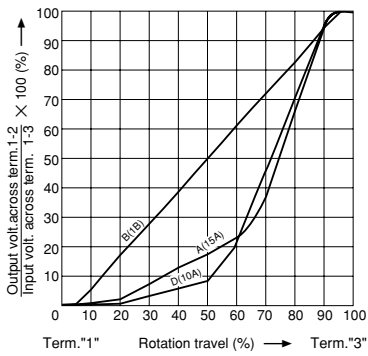







| Code | Resistance taper |
|------|------------------|
| A | 15A |
| B | 1B |
| D | 10A |



Total resistance

| Code | Total resistance (k Ω) |
|------|------------------------|
| 103 | 10 |
| 203 | 20 |
| 503 | 50 |

Rotary Potentiometers
 Slide Potentiometers
 General-use
 Mixer

| Type | | Low-profile Master Type | | Motor-driven Master Type | | |
|------------------------------|-----------------------------------|---|---|--|---|---|
| Series | | Slim Type | Super P Fader | Motor N Fader | Motor K Fader | Motor V Fader |
| | | RS □□ N1S | RS6011 □ P | RS □□ N1 □ M | RSA0K1 □ V | RSA0V11M |
| | | Single-unit | Single-unit/Dual-unit | Single-unit/Dual-unit | Single-unit/Dual-unit | Single-unit |
| Photo | |  |  |  |  |  |
| Travel (mm) | | 60, 100 | 60 | 60, 100 | 100 | |
| Direction of lever | | Vertical | | | | |
| Lever material | | Metal | | | | Resin |
| Operating temperature range | | -10°C to +60°C | | | | |
| Operating life | | 30,000 cycles | | | 300,000 cycles | 100,000 cycles |
| Available for automotive use | | — | — | — | — | — |
| Life cycle | |  |  |  |  |  |
| Electrical performance | Total resistance (k Ω) | 10, 50, 100, 250 | 10, 20, 50 | 10, 50, 100, 250 | 10 | |
| | Resistance taper | 15A, 1B, 10A | | Single-unit: 1B Dual-unit: Servo 1B Audio 15A, 1B, 10A | 1B | |
| | Rated Power | 0.2W (RS60N11S) 0.5W (RSA0N11S) | 0.2W (Single-unit) 0.1W (Dual-unit) | 0.2W (RS60N1□M) 0.5W (RSA0N1□M) | 0.5W | |
| | Insulation resistance | 100MΩ min. 250V DC | | | | |
| | Voltage proof | 250V AC for 1 minute | | | | |
| | Center-taps | Without | | | | |
| Mechanical performance | Operating force | 0.3 ^{+0.5} _{-0.25} N | 0.5 ^{+1.0} _{-0.4} N | 0.8±0.5N | Single-unit: 0.4±0.25N Dual-unit: 0.25 to 0.9N | — |
| | Center detent | Without | | | | |
| | Stopper strength | 100N | | | | 10N |
| | Lever push-pull strength | 50N | | | | 20N |
| | Lever wobble (mm) * Both sides | $\frac{2(2 \times L)}{25}$ | | | | |
| | Lever deviation (mm) | 0.5 max. (One side) | | | | |
| Terminal style | | Insertion | | Lead, Insertion | Connector (Fader) Lead (Motor) | Connector |
| Page | | 405 | 408 | 411 | | |

| | |
|---|-----|
| Slide Potentiometers Soldering Conditions | 417 |
| Potentiometer Cautions | 418 |
| Potentiometers Measurement and Test Methods | 420 |
| Potentiometers Resistance Taper | 422 |

Notes

- Attenuation is specified for residual resistance.
- "L" in the "Lever Wobble" column of the above table indicates the length of lever.

Reference for Manual Soldering


| Series | Tip temperature | Duration of Soldering time | No. of solders |
|--|-----------------|----------------------------|----------------|
| RS□□1, RS08U, RS□□K (Standard), RS□□N, RS□□N11S, RS6011□P, RS□□N1□M, RSA0K1□V (Motor terminal) | 350°C max. | 3s max. | 1 time |

Reference for Dip Soldering

| Series | Preheating | | Dip soldering | | Number of soldering |
|--|-------------------------------|--------------|-----------------------|----------------|---------------------|
| | Soldering surface temperature | Heating time | Soldering temperature | Soldering time | |
| RS□□1, RS□□N, RS□□N11S, RS6011□P, RS□□N1□M | 100°C max. | 1 min. max. | 260°C | 5s max. | 1 time |

Example of Reflow Soldering Condition

Temperature profile

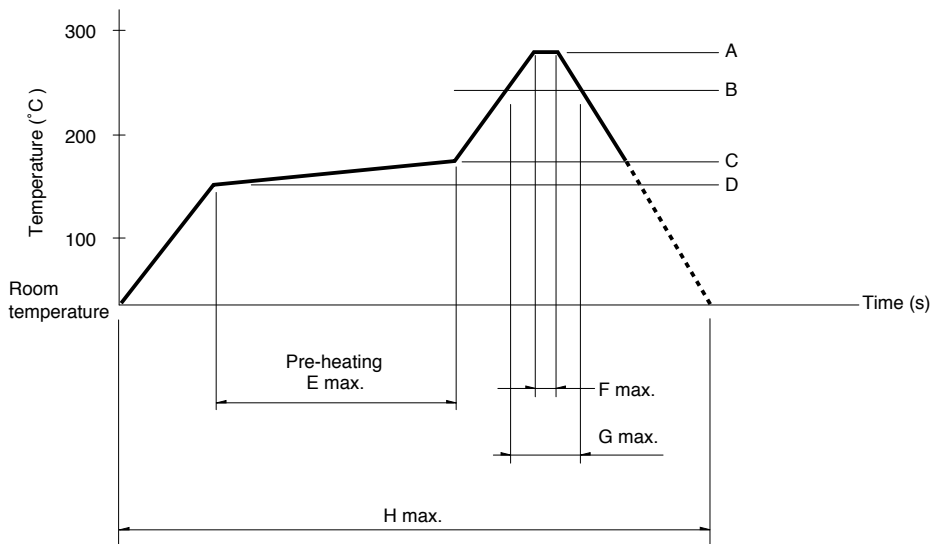

| Series | A | B | C | D | E | F | G | H | No. of reflows |
|--------|-------|-------|-------|-------|--------|----|-----|--------|----------------|
| RS08U | 250°C | 200°C | 150°C | 150°C | 2 min. | 3s | 40s | 4 min. | 1 time |

Notes

1. When using an infrared reflow oven, solder may sometimes not be applied. Be sure to use a hot air reflow oven or a type that uses infrared rays in combination with hot air.
2. The temperatures given above are the maximum temperatures at the terminals of the products when employing a hot air reflow method. The temperature of the PC board and the surface temperature of the products may vary greatly depending on the PC board material, its size and thickness. Ensure that the surface temperature of the products does not rise to 250°C or greater.
3. Conditions vary to some extent depending on the type of reflow bath used. Be sure to give due consideration to this prior to use.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А