

## FEATURES AND BENEFITS\*

- 16V DC working voltage
- Resistive cell balancing
- Compact, light weight package
- Screw terminals

## TYPICAL APPLICATIONS

- Wind turbine pitch control
- Small UPS systems



## PRODUCT SPECIFICATIONS

### ELECTRICAL

BMOD0058 E016 B02

|                                                                 |         |
|-----------------------------------------------------------------|---------|
| Rated Capacitance <sup>1</sup>                                  | 58 F    |
| Minimum Capacitance, initial <sup>1</sup>                       | 58 F    |
| Maximum Capacitance, initial <sup>1</sup>                       | 70 F    |
| Maximum ESR <sub>DC</sub> , initial <sup>1</sup>                | 22 mΩ   |
| Test Current for Capacitance and ESR <sub>DC</sub> <sup>1</sup> | 35 A    |
| Rated Voltage                                                   | 16 V    |
| Absolute Maximum Voltage <sup>2</sup>                           | 17 V    |
| Absolute Maximum Current                                        | 170 A   |
| Leakage Current at 25°C, maximum <sup>3</sup>                   | 25 mA   |
| Maximum Series Voltage                                          | 750 V   |
| Capacitance of Individual Cells <sup>9</sup>                    | 350 F   |
| Maximum Stored Energy, Individual Cell <sup>9</sup>             | 0.35 Wh |
| Number of Cells                                                 | 6       |

### TEMPERATURE

|                                               |       |
|-----------------------------------------------|-------|
| Operating Temperature (Cell Case Temperature) |       |
| Minimum                                       | -40°C |
| Maximum                                       | 65°C  |
| Storage Temperature (Stored Uncharged)        |       |
| Minimum                                       | -40°C |
| Maximum                                       | 70°C  |

\*Results may vary. Additional terms and conditions, including the limited warranty, apply at the time of purchase. See the warranty details for applicable operating and use requirements.

## PRODUCT SPECIFICATIONS (Cont'd)

## PHYSICAL

BMOD0058 E016 B02

|                               |                    |
|-------------------------------|--------------------|
| Mass, typical                 | 0.63 kg            |
| Power Terminals               | M5 Thread          |
| Recommended Torque - Terminal | 4 Nm               |
| Vibration Specification       | IEC60068-2-6       |
| Shock Specification           | IEC60068-2-27, -29 |
| Environmental Protection      | IP54               |
| Cooling                       | Natural Convection |

## MONITORING / CELL VOLTAGE MANAGEMENT

|                             |         |
|-----------------------------|---------|
| Internal Temperature Sensor | N/A     |
| Temperature Interface       | N/A     |
| Cell Voltage Monitoring     | N/A     |
| Connector                   | N/A     |
| Cell Voltage Management     | Passive |

## POWER &amp; ENERGY

|                                             |            |
|---------------------------------------------|------------|
| Usable Specific Power, $P_d^4$              | 2,200 W/kg |
| Impedance Match Specific Power, $P_{max}^5$ | 4,600 W/kg |
| Specific Energy, $E_{max}^6$                | 3.3 Wh/kg  |
| Stored Energy, $E_{stored}^{7,9}$           | 2.1 Wh     |

## SAFETY

|                                                                                                                                    |                          |
|------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| Short Circuit Current, typical<br>(Current possible with short circuit from rated voltage.<br>Do not use as an operating current.) | 730 A                    |
| Certifications                                                                                                                     | RoHS, UL810a (640 Volts) |
| High-Pot Capability <sup>10</sup>                                                                                                  | 5,600 VDC                |

## TYPICAL CHARACTERISTICS

### THERMAL CHARACTERISTICS


BMOD0058 E016 B02

|                                                                                  |                     |
|----------------------------------------------------------------------------------|---------------------|
| Thermal Resistance ( $R_{ca}$ , All Cell Cases to Ambient), typical <sup>8</sup> | 4.8°C/W             |
| Thermal Capacitance ( $C_{th}$ ), typical                                        | 420 J/°C            |
| Maximum Continuous Current ( $\Delta T = 15^\circ\text{C}$ ) <sup>8</sup>        | 12 A <sub>RMS</sub> |
| Maximum Continuous Current ( $\Delta T = 40^\circ\text{C}$ ) <sup>8</sup>        | 19 A <sub>RMS</sub> |

### LIFE


|                                                                                                                    |             |
|--------------------------------------------------------------------------------------------------------------------|-------------|
| DC Life at High Temperature <sup>1</sup><br>(held continuously at Rated Voltage and Maximum Operating Temperature) | 1,500 hours |
| Capacitance Change<br>(% decrease from minimum initial value)                                                      | 20%         |
| ESR Change<br>(% increase from maximum initial value)                                                              | 100%        |
| Projected DC Life at 25°C <sup>1</sup><br>(held continuously at Rated Voltage)                                     | 10 years    |
| Capacitance Change<br>(% decrease from minimum initial value)                                                      | 20%         |
| ESR Change<br>(% increase from maximum initial value)                                                              | 100%        |
| Shelf Life<br>(Stored uncharged at 25°C)                                                                           | 4 years     |

### ESR AND CAPACITANCE VS TEMPERATURE

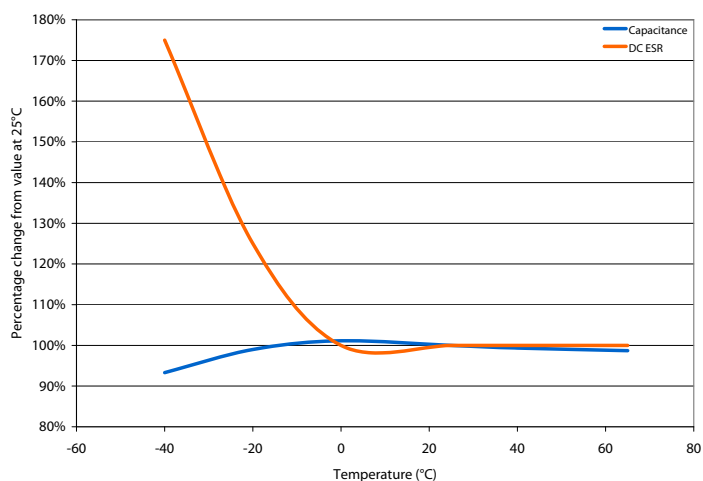

## NOTES

1. Capacitance and  $ESR_{DC}$  measured at 25°C using specified test current per waveform below.
2. Absolute maximum voltage, non-repeated. Not to exceed 1 second.
3. After 72 hours at rated voltage. Initial leakage current can be higher.
4. Per IEC 62391-2,  $P_d = \frac{0.12V^2}{ESR_{DC} \times \text{mass}}$
5.  $P_{\text{max}} = \frac{V^2}{4 \times ESR_{DC} \times \text{mass}}$
6.  $E_{\text{max}} = \frac{\frac{1}{2} CV^2}{3,600 \times \text{mass}}$
7.  $E_{\text{stored}} = \frac{\frac{1}{2} CV^2}{3,600}$
8.  $\Delta T = I_{\text{RMS}}^2 \times ESR \times R_{ca}$
9. Per United Nations material classification UN3499, all Maxwell ultracapacitors have less than 10 Wh capacity to meet the requirements of Special Provisions 361. Both individual ultracapacitors and modules composed of those ultracapacitors shipped by Maxwell can be transported without being treated as dangerous goods (hazardous materials) under transportation regulations.
10. Duration = 60 seconds. Not intended as an operating parameter.

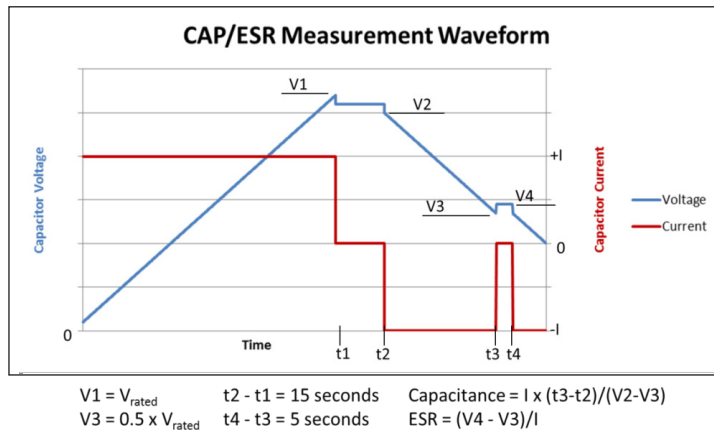


## MOUNTING RECOMMENDATIONS

Recommended mounting screw M4. Maximum torque on mounting screws 4 Nm. All 6 mounting locations must be utilized to meet vibration specifications.

## MARKINGS

Products are marked with the following information: Rated capacitance, rated voltage, product number, name of manufacturer, positive and negative terminal, and serial number.

## BMOD0058 E016 B02

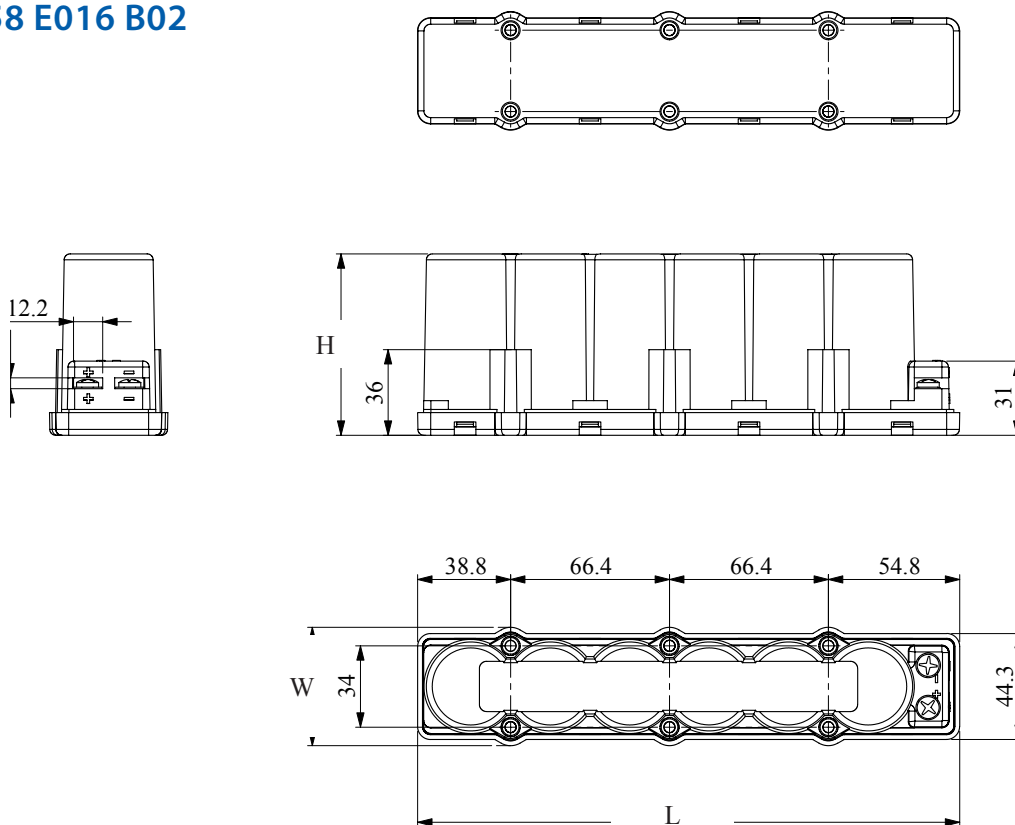

| Part Description  | Dimensions (mm) |            |            | Package Quantity |
|-------------------|-----------------|------------|------------|------------------|
|                   | L (±0.5mm)      | W (±0.5mm) | H (±0.5mm) |                  |
| BMOD0058 E016 B02 | 226.5           | 49.5       | 76.0       | 10               |

Product dimensions are for reference only unless otherwise identified. Product dimensions and specifications may change without notice.

Please contact Maxwell Technologies directly for any technical specifications critical to application. All products featured on this datasheet are covered by the following U.S. patents and their respective foreign counterparts: 6643119, 7295423, 7342770, 7352558, 7384433, 7492571, 7508651, 7791860, 7791861, 7883553, 7935155, 8072734, 8279580, and patents pending.



**Maxwell Technologies, Inc.**  
**Global Headquarters**  
 3888 Calle Fortunada  
 San Diego, CA 92123  
 USA  
 Tel: +1 858 503 3300  
 Fax: +1 858 503 3301



**Maxwell Technologies SA**  
 Route de Montena 65  
 CH-1728 Rossens  
 Switzerland  
 Tel: +41 (0)26 411 85 00  
 Fax: +41 (0)26 411 85 05



**Maxwell Technologies, GmbH**  
 Leopoldstrasse 244  
 80807 München  
 Germany  
 Tel: +49 (0)89 / 4161403 0  
 Fax: +49 (0)89 / 4161403 99



**Maxwell Technologies, Inc.**  
**Shanghai Trading Co. Ltd.**  
 Unit A2,C 12th Floor  
 Huarun Times Square  
 500 Zhangyang Road,  
 Pudong New Area  
 Shanghai 200122,  
 P.R. China  
 Phone: +86 21 3852 4000  
 Fax: +86 21 3852 4099



**Maxwell Technologies Korea Co., Ltd.**  
 Room 1524, D-Cube City  
 Office Tower, 15F #662  
 Gyeongin-Ro, Guro-Gu,  
 Seoul, 152-706  
 South Korea  
 Phone: +82 10 4518 9829

MAXWELL TECHNOLOGIES, MAXWELL, MAXWELL CERTIFIED INTEGRATOR, ENABLING ENERGY'S FUTURE, BOOSTCAP, C CELL, D CELL and their respective designs and/or logos are either trademarks or registered trademarks of Maxwell Technologies, Inc. and may not be copied, imitated or used, in whole or in part, without the prior written permission Maxwell Technologies, Inc. All contents copyright © 2014 Maxwell Technologies, Inc. All rights reserved. No portion of these materials may be reproduced in any form, or by any means, without prior written permission from Maxwell Technologies, Inc.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А