

Power relay F4



**Description**


**Features**

- Limiting continuous currents 60/40 A at the NO / NC contacts
- Dimensional characteristics and the functional allocations of the plug-in terminals to ISO 7588
- Standardized dimensions
- 24 V versions with contact gap > 0.8 mm
- Plug-in or PCB terminals

**Typical applications**

- Ignition lock
- Lamp load (headlights)
- Cooling fan
- ABS
- Exhaust emission control
- Cross carline up to 60 A
- Fuel pump
- Engine cooling fan
- A/C blower
- A/C compressor clutch
- Also available for 42 V applications

Please contact Tyco Electronics for relay application support.

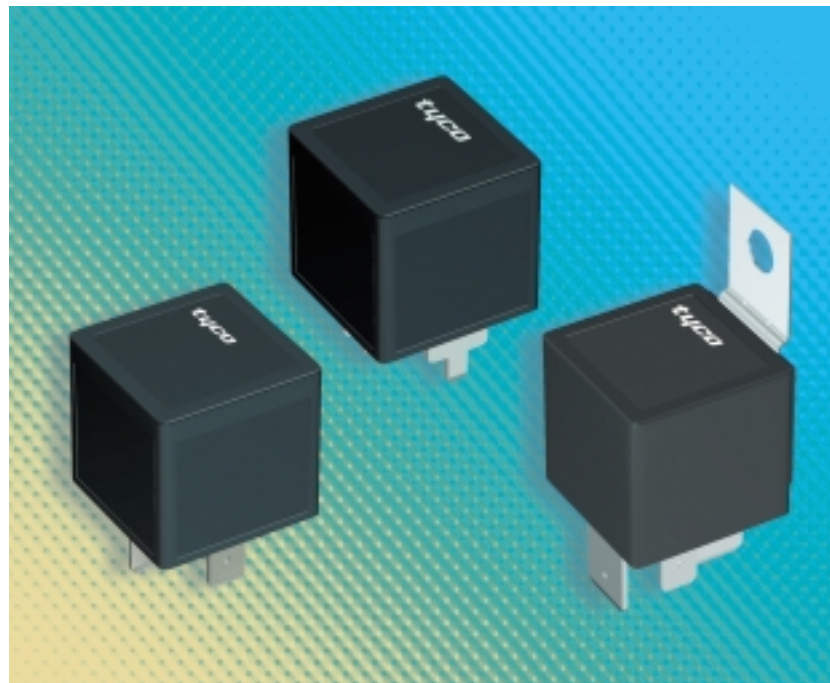

134\_kop1

**Design**

Dustproof; protection class IP 54 to IEC 529 (EN 60 529); with either mounting bracket or mounting clip

**Options**

Shrouded and weatherproof covers

**Weight**

Approx. 1.2 oz. (35 g)

**Nominal voltage**

12 V or 24 V; other nominal voltages available on request

**Terminals**

Quick connect terminals similar to ISO 8092-1 coil and load 6.3 x 0.8 mm; surfaces tin-plated or PCB terminals

**Accessories**

Connectors see page 188

**Special models on request**

- Integrated components: resistor, varistor, diode
- Special labels
- Special cover shapes

**Conditions**

All parametric, environmental and endurance tests are performed according to EIA Standard RS-407-A at standard test conditions unless otherwise noted: 23 °C ambient temperature, 20-50% RH, 29.5 ± 1.0" Hg (998.9 ± 33.9 hPa). Please also refer to the Application Recommendations in this catalog for general precautions.

**Disclaimer**

All technical performance data apply to the relay as such, specific conditions of the individual application are not considered. Please always check the suitability of the relay for your intended purpose. We do not assume any responsibility or liability for not complying herewith. We recommend to complete our questionnaire and to request our technical service. Any responsibility for the application of the product remains with the customer only. All specifications are subject to change without notification. All rights of Tyco are reserved.



Power relay F4

**Contact data**

Contact configuration	Make contact/ Form A or Form A (2x87)		Double make contact/ Form U		Changeover contact/ Form C		
Circuit symbol (see also Pin assignment)							
Rated voltage	12 V	24 V	12 V	24 V	12 V	24 V	24 V <sup>3)</sup>
Rated current at 85 °C	40 A	20 A	2 x 25 A	2 x 15 A	30/40 A	15/20 A	20/30 A
Contact material	AgNi0.15		AgNi0.15		AgNi0.15		AgSnO <sub>2</sub>
Max. switching voltage/power	See load limit curve						
Max. switching current <sup>1)</sup>					NC/NO	NC/NO	NC/NO
On <sup>2)</sup>	120 A	120 A	2 x 100 A	2 x 100 A	45/120A	45/120A	45/120A
Off	60 A	20 A	2 x 40 A	2 x 15 A	40/60A	15/20A	20/30A
Min. recommended load <sup>4)</sup>	1 A at 5 V						
Voltage drop at 10 A (initial)	NO contact NC contact		NO contact NC contact		NO contact NC contact		NO contact NC contact
	Typ. 15 mV, 200 mV max.		Typ. 2 x 15 mV, 200 mV max.		Typ. 15 mV, 200 mV max.		Typ. 20 mV, 250 mV max.
Mechanical endurance (without load)	> 10 <sup>7</sup> operations						
Electrical endurance (example of resistive load)	> 2 x 10 <sup>5</sup> operations 40 A, 14 V	> 1 x 10 <sup>5</sup> operations 20 A, 28 V	> 2 x 10 <sup>5</sup> operations 2 x 25 A, 14 V	> 1 x 10 <sup>5</sup> operations 2 x 15 A, 28 V	> 2 x 10 <sup>5</sup> operations 40 A, 14 V (NO contact)	> 1 x 10 <sup>5</sup> operations 20 A, 28 V (NO contact)	> 1 x 10 <sup>5</sup> operations 30 A, 28 V (NO contact)  > 5 x 10 <sup>5</sup> operations 10 A, 28 V (NC contact)
Max switching rate at nominal load	6 operations per minute (0.1 Hz)						


<sup>1)</sup> The values apply to a resistive or inductive load with suitable spark suppression and at maximum 13.5 V for 12 V or 27 V for 24 V load voltages.

<sup>2)</sup> For a load current duration of maximum 3 s for a make/break ratio of 1:10.

<sup>3)</sup> Special high performance 24 V version with contact gap > 0.8 mm, part number V23134-A0056-X432/-X433 (see ordering information).

<sup>4)</sup> See chapter Diagnostics in our Application Recommendations on page 18.


**Load limit curve**

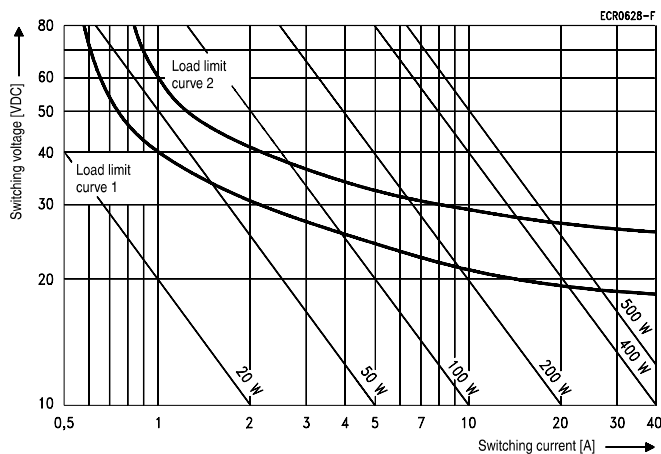

Load limit curve 1 ≙ arc extinguishes during transit time (changeover contact)  
Load limit curve 2 ≙ safe shutdown, no stationary arc (make contact)


**Pin assignment**

1 make contact/  
1 form A




\*) Models with resistor or diode in parallel to the coil on request.

Power relay F4 only  
1 double make contact/  
1 form U




\*) Models with resistor or diode in parallel to the coil on request.

Power relay F4 only  
1 make contact (2 x pin 87)/  
1 form A (2 x pin 87)



\*) Models with resistor or diode in parallel to the coil on request.

1 changeover contact/  
1 form C



\*) Models with resistor or diode in parallel to the coil on request.

Power relay F4


**Coil data**

Available for nominal voltages	12, 24 V
Nominal power consumption of the unsuppressed coil at nominal voltage	1.6 W
Nominal power consumption at nominal voltage with suppression resistor	1.8/2.1 W (standard/high performance 24 V)
Test voltage winding/contact	500 VAC <sub>rms</sub>
Ambient temperature range	- 40 to + 125 °C
Operate time at nominal voltage	Typ. 7 ms
Release time at nominal voltage <sup>1)</sup>	Typ. 2 ms

<sup>1)</sup> For unsuppressed relay coil  
N.B.


A low resistive suppression device in parallel to the relay coil increases the release time and reduces the lifetime caused by increased erosion and/or higher risk of contact tack welding.

**Operating voltage range**

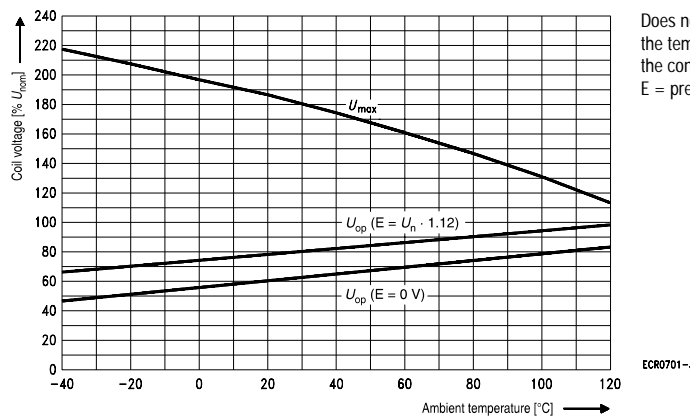

Does not take into account the temperature rise due to the contact current  
E = pre-energization

**Ambient temperature vs. coil voltage for continuous duty**

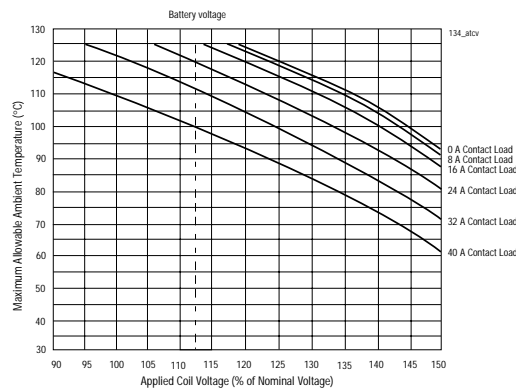

**Mechanical data**

Cover retention	
Axial force	150 N (33.8 lbs)
Pull force	200 N (45 lbs)
Push force	200 N (45 lbs)
Terminals	
Pull force	100 N (22.5 lbs)
Push force	100 N (22.5 lbs)
Resistance to bending, force applied to front	10 N (2.25 lbs) <sup>1)</sup>
Resistance to bending, force applied to side	10 N (2.25 lbs) <sup>1)</sup>
Torsion	0.3 Nm
Enclosures	
Dust cover	Protects relay from dust. For use in passenger compartment or enclosures
Shrouded dust cover	Protects relay and relay connector (order separately) from dust and splash
Weatherproof cover	Mates with a connector (order separately) to seal relay from salt spray etc. Recommended for under hood application

<sup>1)</sup> Values apply 2 mm from the end of the terminal. When the force is removed, the terminal must not have moved by more than 0.3 mm.

Power relay F4

Operating conditions				
Temperature range, storage	-40 °C to 155 °C			
Test	Relevant standard	Testing as per	Dimension	Comments
Climatic cycling with condensation	EN ISO 6988		6 cycles	Storage 8/16 h
Temperature cycling	IEC 68-2-14	Nb	10 cycles	- 40/+ 85 °C (5 °C per min.)
Damp heat				
cyclic	IEC 68-2-30	Db, Variant 1	6 cycles	Upper air temperature 55 °C
constant	IEC 68-2-3	Ca	56 days	
Corrosive gas	IEC 68-2-42	10 ± 2 cm <sup>3</sup> /m <sup>3</sup> SO <sub>2</sub>	10 days	
	IEC 68-2-43	1 ± 0.3 cm <sup>3</sup> /m <sup>3</sup> H <sub>2</sub> S	10 days	
Vibration resistance	IEC 68-2-6 (sine sweep)		10-500 Hz min. 5 g	No change in the switching state > 10 µs Valid for NC contacts, NO contact values significantly higher
Shock resistance	IEC 68-2-27 (half sine pulse form)		min. 20 g 11 ms	
Load dump	ISO 7637-1 (12 V) ISO 7637-2 (24 V)	Test pulse 5 Test pulse 5	Vs =+ 86.5 V Vs =+ 200 V	
Jump start	24 V for 5 minutes conducting nominal current at 23 °C			
Drop test	Capable of meeting specifications after 1.0 m (3.28 foot) drop onto concrete			
Flammability	UL94-HB or better (meets FMVSS 302) <sup>1)</sup>			
Overload current <sup>2)</sup>	54 A, 1800 s 80 A, 5 s 140 A, 0.5 s 240 A, 0.1 s			

<sup>1)</sup> FMVSS: Federal Motor Vehicle Safety Standard.

<sup>2)</sup> Current and time are compatible with circuit protection by a typical 40 A automotive fuse. Relay will make, carry and break the specified current.

Ordering information (Production in Europe, Asia and South America)

Part numbers (see table below for coil data)		Contact arrangement	Contact material	Enclosure	Special features
Relay part number	Tyco order number				
<b>12 V plug-in relays</b>					
V23134-A0052-C643	2-1393302-2	1 Form C	AgNi0.15	Dust cover	
V23134-A0052-X205	3-1393302-6	1 Form C	AgNi0.15	Dust cover	Diode
V23134-A0052-X278	4-1393302-1	1 Form C	AgNi0.15	Dust cover	Resistor 560 Ω
V23134-A1052-C643	5-1393302-8	1 Form C	AgNi0.15	Dust cover	Bracket
V23134-A1052-X828 <sup>1)</sup>	7-1393305-5	1 Form C	AgNi0.15	Sealed	Bracket, resistor 680 Ω
V23134-B0052-C642	7-1393302-5	1 Form A	AgNi0.15	Dust cover	
V23134-B1052-C642	3-1393303-4	1 Form A	AgNi0.15	Dust cover	Bracket
V23134-B1052-X824 <sup>1)</sup>	6-1393305-9	1 Form A	AgNi0.15	Dust cover	Bracket, resistor 680 Ω
V23134-C0052-C642	3-1393303-9	1 Form A (2 pins 87)	AgNi0.15	Dust cover	
V23134-C1052-C642	4-1393303-7	1 Form A (2 pins 87)	AgNi0.15	Dust cover	Bracket
V23134-M0052-C642	5-1393304-6	1 Form U	AgNi0.15	Dust cover	
V23134-M1052-C642	7-1393304-1	1 Form U	AgNi0.15	Dust cover	Bracket
<b>24 V plug-in relays</b>					
V23134-A0053-C643	5-1393302-1	1 Form C	AgNi0.15	Dust cover	
V23134-A0056-X432	1-1414167-0	1 Form C	AgSnO2	Dust cover	Contact gap > 0.8mm, diode
V23134-A0056-X433	1-1414168-0	1 Form C	AgSnO2	Dust cover	Contact gap > 0.8mm, resistor 1.2 KΩ
V23134-A0064-X816 <sup>1)</sup>	5-1393305-3	1 Form C	AgNi0.15	Sealed	Resistor 2.7 KΩ
V23134-A1053-C643	6-1393302-3	1 Form C	AgNi0.15	Dust cover	Bracket
V23134-A1064-X829 <sup>1)</sup>	1432219-1	1 Form C	AgNi0.15	Sealed	Bracket, resistor 2.7 KΩ
V23134-A1064-X830 <sup>1)</sup>	8-1393305-4	1 Form C	AgNi0.15	Dust cover	Bracket, diode
V23134-B0053-C642	1393303-9	1 Form A	AgNi0.15	Dust cover	
V23134-B1053-C642	3-1393303-7	1 Form A	AgNi0.15	Dust cover	Bracket
V23134-C0053-C642	4-1393303-4	1 Form A (2 pins 87)	AgNi0.15	Dust cover	
V23134-C1053-C642	5-1393303-0	1 Form A (2 pins 87)	AgNi0.15	Dust cover	Bracket
V23134-M0053-C642	6-1393304-7	1 Form U	AgNi0.15	Dust cover	
V23134-M1053-C642	7-1393304-4	1 Form U	AgNi0.15	Dust cover	Bracket

<sup>1)</sup> Marking according to VF4 schematic.

Power relay F4

Ordering information (Production in Europe, Asia and South America)

Part numbers (see table below for coil data) Relay part number   Tyco order number		Contact arrangement	Contact material	Enclosure	Special features
<b>12 V pcb relays</b>					
V23134-A0052-G243	2-1393302-3	1 Form C	AgNiO.15	Dust cover	
V23134-A0052-X812 <sup>1)</sup>	4-1393305-5	1 Form C	AgNiO.15	Sealed	
V23134-A0052-X813 <sup>1)</sup>	4-1393305-7	1 Form C	AgNiO.15	Sealed	Resistor 680 Ω
V23134-B0052-G242	7-1393302-7	1 Form A	AgNiO.15	Dust cover	
V23134-B0052-X802 <sup>1)</sup>	2-1393305-2	1 Form A	AgNiO.15	Sealed	
V23134-C0052-G242	4-1393303-0	1 Form A (2 pins 87)	AgNiO.15	Dust cover	
V23134-M0052-G242	5-1393304-7	1 Form U	AgNiO.15	Dust cover	
<b>24 V pcb relays</b>					
V23134-A0053-G243	5-1393302-2	1 Form C	AgNiO.15	Dust cover	
V23134-A0064-X820 <sup>1)</sup>	5-1393305-9	1 Form C	AgNiO.15	Sealed	
V23134-B0053-G242	1-1393303-0	1 Form A	AgNiO.15	Dust cover	
V23134-C0053-G242	4-1393303-5	1 Form A (2 pins 87)	AgNiO.15	Dust cover	
V23134-M0053-G242	6-1393304-8	1 Form U	AgNiO.15	Dust cover	

<sup>1)</sup> Marking according to VF4 schematic.

**Coil versions**

Coil data for Power relay F4	Rated coil voltage (V)	Coil resistance +/- 10% (Ω)	Must operate voltage (V)	Must release voltage (V)	Allowable overdrive <sup>1)</sup> voltage (V)	
					at 23 °C	at 85 °C
V23134-**052-****	12	91	7.2	1.6	23	18
V23134-**053-****	24	332	14.4	3.2	44	34
V23134-**056-****	24	275	16.0	4.0	38	30
V23134-**064-****	24	345	14.4	2.4	40.5	31.5

<sup>1)</sup> Allowable overdrive is stated with no load applied and minimum coil resistance.

**Standard delivery packs** (orders in multiples of delivery pack)

Power relay F4	Quick connect version:	315 pieces
	Quick connect with bracket:	200 pieces
	PCB version:	200 pieces

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А