

### 72R Series



#### Description

The 72R Series is designed to provide overcurrent protection to 72Vdc maximum voltage with a maximum 40A short circuit rating.

#### Features

- 72Vdc max voltage w/max 40A short circuit rating
- RoHS compliant, Lead-Free and Halogen Free\*
- Resettable feature
- Ideal for a broad range of general electronics using a low voltage power supply

#### Applications

- Load protection on wide range of low voltage power supplies
- Computers
- Computer peripherals
- General electronics

#### Agency Approvals

| AGENCY  | AGENCY FILE NUMBER |
|---|--------------------|
|  | E183209            |
|  | R50119318          |

#### Electrical Characteristics

| Part Number | I <sub>hold</sub> (A) | I <sub>trip</sub> (A) | V <sub>max</sub> (Vdc) | I <sub>max</sub> (A) | P <sub>d</sub> typ. (W) | Maximum Time To Trip |             | Resistance           |                       | Agency Approvals  |   |
|-------------|-----------------------|-----------------------|------------------------|----------------------|-------------------------|----------------------|-------------|----------------------|-----------------------|---|---|
|             |                       |                       |                        |                      |                         | Current (A)          | Time (Sec.) | R <sub>min</sub> (Ω) | R <sub>1max</sub> (Ω) |  |  |
| 72R020X     | 0.20                  | 0.40                  | 72                     | 40                   | 0.41                    | 1.00                 | 2.20        | 1.830                | 4.400                 | X   | X   |
| 72R025X     | 0.25                  | 0.50                  | 72                     | 40                   | 0.45                    | 1.25                 | 2.50        | 1.250                | 3.000                 | X   | X   |
| 72R030X     | 0.30                  | 0.60                  | 72                     | 40                   | 0.49                    | 1.50                 | 3.00        | 0.880                | 2.100                 | X   | X   |
| 72R040X     | 0.40                  | 0.80                  | 72                     | 40                   | 0.56                    | 2.00                 | 3.80        | 0.550                | 1.290                 | X   | X   |
| 72R050X     | 0.50                  | 1.00                  | 72                     | 40                   | 0.77                    | 2.50                 | 4.00        | 0.500                | 1.170                 | X   | X   |
| 72R065X     | 0.65                  | 1.30                  | 72                     | 40                   | 0.88                    | 3.25                 | 5.30        | 0.310                | 0.720                 | X   | X   |
| 72R075X     | 0.75                  | 1.50                  | 72                     | 40                   | 0.92                    | 3.75                 | 6.30        | 0.250                | 0.600                 | X   | X   |
| 72R090X     | 0.90                  | 1.80                  | 72                     | 40                   | 0.99                    | 4.50                 | 7.20        | 0.200                | 0.470                 | X   | X   |
| 72R110X     | 1.10                  | 2.20                  | 72                     | 40                   | 1.50                    | 5.50                 | 8.20        | 0.150                | 0.380                 | X   | X   |
| 72R135X     | 1.35                  | 2.70                  | 72                     | 40                   | 1.70                    | 6.75                 | 9.60        | 0.120                | 0.300                 | X   | X   |
| 72R160X     | 1.60                  | 3.20                  | 72                     | 40                   | 1.90                    | 8.00                 | 11.40       | 0.090                | 0.220                 | X   | X   |
| 72R185X     | 1.85                  | 3.70                  | 72                     | 40                   | 2.10                    | 9.25                 | 12.60       | 0.080                | 0.190                 | X   | X   |
| 72R250X     | 2.50                  | 5.00                  | 72                     | 40                   | 2.50                    | 12.50                | 15.60       | 0.050                | 0.130                 | X   | X   |
| 72R300X     | 3.00                  | 6.00                  | 72                     | 40                   | 2.80                    | 15.00                | 19.80       | 0.040                | 0.100                 | X   | X   |
| 72R375X     | 3.75                  | 7.50                  | 72                     | 40                   | 3.20                    | 18.75                | 24.00       | 0.030                | 0.080                 | X   | X   |

I<sub>hold</sub> = Hold current: maximum current device will pass without tripping in 20°C still air.

I<sub>trip</sub> = Trip current: minimum current at which the device will trip in 20°C still air.

V<sub>max</sub> = Maximum voltage device can withstand without damage at rated current (I<sub>max</sub>)

I<sub>max</sub> = Maximum fault current device can withstand without damage at rated voltage (V<sub>max</sub>)

P<sub>d</sub> = Power dissipated from device when in the tripped state at 20°C still air.

R<sub>min</sub> = Minimum resistance of device in initial (un-soldered) state.

R<sub>1max</sub> = Maximum resistance of device at 20°C measured one hour after tripping or reflow soldering of 260°C for 20 sec.

**Caution:** Operation beyond the specified rating may result in damage and possible arcing and flame.

\* Effective January 1, 2010, all 72R PTC products will be manufactured Halogen Free (HF). Existing Non-Halogen Free 72R PTC products may continue to be sold, until supplies are depleted.

### Temperature Derating

| Part Number | Ambient Operation Temperature |       |      |      |      |      |      |      |      |
|-------------|-------------------------------|-------|------|------|------|------|------|------|------|
|             | -40°C                         | -20°C | 0°C  | 20°C | 40°C | 50°C | 60°C | 70°C | 85°C |
| 72R020X     | 0.31                          | 0.27  | 0.24 | 0.20 | 0.16 | 0.14 | 0.13 | 0.11 | 0.08 |
| 72R025X     | 0.39                          | 0.34  | 0.30 | 0.25 | 0.20 | 0.18 | 0.16 | 0.14 | 0.10 |
| 72R030X     | 0.47                          | 0.41  | 0.36 | 0.30 | 0.24 | 0.22 | 0.19 | 0.16 | 0.12 |
| 72R040X     | 0.62                          | 0.54  | 0.48 | 0.40 | 0.32 | 0.29 | 0.25 | 0.22 | 0.16 |
| 72R050X     | 0.78                          | 0.68  | 0.60 | 0.50 | 0.41 | 0.36 | 0.32 | 0.27 | 0.20 |
| 72R065X     | 1.01                          | 0.88  | 0.77 | 0.65 | 0.53 | 0.47 | 0.41 | 0.35 | 0.26 |
| 72R075X     | 1.16                          | 1.02  | 0.89 | 0.75 | 0.61 | 0.54 | 0.47 | 0.41 | 0.30 |
| 72R090X     | 1.40                          | 1.22  | 1.07 | 0.90 | 0.73 | 0.65 | 0.57 | 0.49 | 0.36 |
| 72R110X     | 1.71                          | 1.50  | 1.31 | 1.10 | 0.89 | 0.79 | 0.69 | 0.59 | 0.44 |
| 72R135X     | 2.09                          | 1.84  | 1.61 | 1.35 | 1.09 | 0.97 | 0.85 | 0.73 | 0.54 |
| 72R160X     | 2.48                          | 2.18  | 1.90 | 1.60 | 1.30 | 1.15 | 1.01 | 0.86 | 0.64 |
| 72R185X     | 2.87                          | 2.52  | 2.20 | 1.85 | 1.50 | 1.33 | 1.17 | 1.00 | 0.74 |
| 72R250X     | 3.88                          | 3.40  | 2.98 | 2.50 | 2.03 | 1.80 | 1.58 | 1.35 | 1.00 |
| 72R300X     | 4.65                          | 4.08  | 3.57 | 3.00 | 2.43 | 2.16 | 1.89 | 1.62 | 1.20 |
| 72R375X     | 5.81                          | 5.10  | 4.46 | 3.75 | 3.04 | 2.70 | 2.36 | 2.03 | 1.50 |

### Average Time Current Curves



The average time current curves and Temperature Derating curve performance is affected by a number of variables, and these curves provided as guidance only. Customer must verify the performance in their application.

### Temperature Derating Curve



Note:  
Typical Temperature derating curve, refer to table for derating data

### Soldering Parameters - Wave Soldering

|                         |   |
|-------------------------|---|
| <b>Pre-Heating Zone</b> | Refer to the condition recommended by the flux manufacturer.<br>Max. ramping rate should not exceed 4°C/Sec.  |
| <b>Soldering Zone</b>   | Max. solder temperature should not exceed 260°C<br>Time within 5°C of actual Max. solder temperature within 3 - 5 seconds<br>Total time from 25°C room to Max. solder temperature within 5 minutes including Pre-Heating time |
| <b>Cooling Zone</b>     | Cooling by natural convection in air.<br>Max. ramping down rate should not exceed 6°C/Sec.  |



### Physical Specifications

|                                  |   |
|----------------------------------|---|
| <b>Lead Material</b>             | 0.20-0.40A: Tin-plated Copper clad steel<br>0.50-3.75A: Tin-plated Copper |
| <b>Soldering Characteristics</b> | Solderability per MIL-STD-202, Method 208                                 |
| <b>Insulating Material</b>       | Cured, flame retardant epoxy polymer meets UL 94V-0 requirements.         |
| <b>Lead Solderability</b>        | Marked with 'LF', voltage, current rating, and date code.                 |

### Environmental Specifications

|  |   |
|--|---|
| <b>Operating/Storage Temperature</b>                       | -40°C to +85°C  |
| <b>Maximum Device Surface Temperature in Tripped State</b> | 125°C   |
| <b>Passive Aging</b>                                       | +85°C, 1000 hours<br>-/+5% typical resistance change          |
| <b>Humidity Aging</b>                                      | +85°C, 85% R.H. 1000 hours<br>-/+5% typical resistance change |
| <b>Thermal Shock</b>                                       | +85°C to -40°C 10 times<br>-/+5% typical resistance change    |
| <b>Solvent Resistance</b>                                  | MIL-STD-202, Method 215                                       |
| <b>Moisture Sensitivity Level</b>                          | Level 1, J-STD-020  |

### Additional Information



**Datasheet**




**Resources**




**Samples**

### Dimensions



### Part Marking System

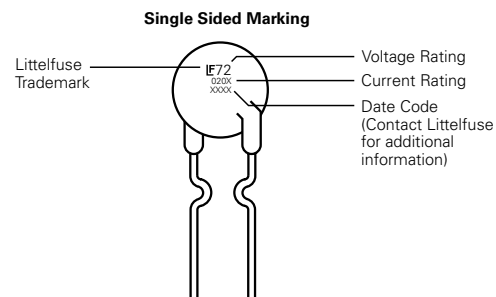

| Part Number | A      |       | B      |      | C      |      | D      |      | E      |      | F      |      | Physical Characteristics |      |          |
|-------------|--------|-------|--------|------|--------|------|--------|------|--------|------|--------|------|--------------------------|------|----------|
|             | Inches | mm    | Inches | mm   | Inches | mm   | Inches | mm   | Inches | mm   | Inches | mm   | Lead (dia)               |      | Material |
|             | Max.   | Max.  | Max.   | Max. | Typ.   | Typ. | Min.   | Min. | Max.   | Max. | Typ.   | Typ. | Inches                   | mm   |          |
| 72R020X     | 0.29   | 7.4   | 0.46   | 11.7 | 0.20   | 5.1  | 0.30   | 7.6  | 0.12   | 3.1  | 0.047  | 1.2  | 0.02                     | 0.51 | Sn/CuFe  |
| 72R025X     | 0.29   | 7.4   | 0.50   | 12.7 | 0.20   | 5.1  | 0.30   | 7.6  | 0.12   | 3.1  | 0.047  | 1.2  | 0.02                     | 0.51 | Sn/CuFe  |
| 72R030X     | 0.29   | 7.4   | 0.50   | 12.7 | 0.20   | 5.1  | 0.30   | 7.6  | 0.12   | 3.1  | 0.047  | 1.2  | 0.02                     | 0.51 | Sn/CuFe  |
| 72R040X     | 0.30   | 7.6   | 0.53   | 13.5 | 0.20   | 5.1  | 0.30   | 7.6  | 0.12   | 3.1  | 0.047  | 1.2  | 0.02                     | 0.51 | Sn/CuFe  |
| 72R050X     | 0.31   | 7.9   | 0.54   | 13.7 | 0.20   | 5.1  | 0.30   | 7.6  | 0.12   | 3.1  | 0.047  | 1.2  | 0.02                     | 0.51 | Sn/Cu    |
| 72R065X     | 0.37   | 9.4   | 0.57   | 14.5 | 0.20   | 5.1  | 0.30   | 7.6  | 0.12   | 3.1  | 0.047  | 1.2  | 0.02                     | 0.51 | Sn/Cu    |
| 72R075X     | 0.40   | 10.2  | 0.60   | 15.2 | 0.20   | 5.1  | 0.30   | 7.6  | 0.12   | 3.1  | 0.047  | 1.2  | 0.02                     | 0.51 | Sn/Cu    |
| 72R090X     | 0.44   | 11.2  | 0.62   | 15.8 | 0.20   | 5.1  | 0.30   | 7.6  | 0.12   | 3.1  | 0.047  | 1.2  | 0.02                     | 0.51 | Sn/Cu    |
| 72R110X     | 0.51   | 13.0  | 0.72   | 18.2 | 0.20   | 5.1  | 0.30   | 7.6  | 0.12   | 3.1  | 0.055  | 1.4  | 0.03                     | 0.81 | Sn/Cu    |
| 72R135X     | 0.53   | 13.58 | 0.78   | 19.8 | 0.20   | 5.1  | 0.30   | 7.6  | 0.12   | 3.1  | 0.055  | 1.4  | 0.03                     | 0.81 | Sn/Cu    |
| 72R160X     | 0.60   | 15.36 | 0.85   | 21.6 | 0.20   | 5.1  | 0.30   | 7.6  | 0.12   | 3.1  | 0.055  | 1.4  | 0.03                     | 0.81 | Sn/Cu    |
| 72R185X     | 0.66   | 16.76 | 0.91   | 23.0 | 0.20   | 5.1  | 0.30   | 7.6  | 0.12   | 3.1  | 0.055  | 1.4  | 0.03                     | 0.81 | Sn/Cu    |
| 72R250X     | 0.78   | 19.93 | 1.03   | 26.2 | 0.40   | 10.2 | 0.30   | 7.6  | 0.12   | 3.1  | 0.055  | 1.4  | 0.03                     | 0.81 | Sn/Cu    |
| 72R300X     | 0.91   | 23.11 | 1.15   | 29.3 | 0.40   | 10.2 | 0.30   | 7.6  | 0.12   | 3.1  | 0.055  | 1.4  | 0.03                     | 0.81 | Sn/Cu    |
| 72R375X     | 1.04   | 26.3  | 1.22   | 31.1 | 0.40   | 10.2 | 0.30   | 7.6  | 0.12   | 3.1  | 0.055  | 1.4  | 0.03                     | 0.81 | Sn/Cu    |

### Part Ordering Number System



### Packaging

| Part Number | Ordering Part Number | $I_{hold}$ (A) | $I_{hold}$ Code | Packaging Option | Quantity | Quantity & Packaging Codes |
|-------------|----------------------|----------------|-----------------|------------------|----------|----------------------------|
| 72R020X     | 72R020XU             | 0.20           | 020             | Bulk             | 500      | U                          |
|             | 72R020XPR            |                |                 | Tape and Ammo    | 2000     | PR                         |
| 72R025X     | 72R025XU             | 0.25           | 025             | Bulk             | 500      | U                          |
|             | 72R025XPR            |                |                 | Tape and Ammo    | 2000     | PR                         |
| 72R030X     | 72R030XU             | 0.30           | 030             | Bulk             | 500      | U                          |
|             | 72R030XPR            |                |                 | Tape and Ammo    | 2000     | PR                         |
| 72R040X     | 72R040XU             | 0.40           | 040             | Bulk             | 500      | U                          |
|             | 72R040XPR            |                |                 | Tape and Ammo    | 2000     | PR                         |
| 72R050X     | 72R050XU             | 0.50           | 050             | Bulk             | 500      | U                          |
|             | 72R050XPR            |                |                 | Tape and Ammo    | 2000     | PR                         |
| 72R065X     | 72R065XU             | 0.65           | 065             | Bulk             | 500      | U                          |
|             | 72R065XPR            |                |                 | Tape and Ammo    | 2000     | PR                         |
| 72R075X     | 72R075XU             | 0.75           | 075             | Bulk             | 500      | U                          |
|             | 72R075XPR            |                |                 | Tape and Ammo    | 2000     | PR                         |
| 72R090X     | 72R090XU             | 0.90           | 090             | Bulk             | 500      | U                          |
|             | 72R090XPR            |                |                 | Tape and Ammo    | 2000     | PR                         |
| 72R110X     | 72R110XU             | 1.10           | 110             | Bulk             | 500      | U                          |
|             | 72R110XMR            |                |                 | Tape and Ammo    | 1000     | MR                         |
| 72R135X     | 72R135XF             | 1.35           | 135             | Bulk             | 200      | F                          |
|             | 72R135XMR            |                |                 | Tape and Ammo    | 1000     | MR                         |
| 72R160X     | 72R160XF             | 1.60           | 160             | Bulk             | 200      | F                          |
|             | 72R160XMR            |                |                 | Tape and Ammo    | 1000     | MR                         |
| 72R185X     | 72R185XF             | 1.85           | 185             | Bulk             | 200      | F                          |
|             | 72R185XMR            |                |                 | Tape and Ammo    | 1000     | MR                         |
| 72R250X     | 72R250XF             | 2.50           | 250             | Bulk             | 200      | F                          |
|             | 72R250XMR            |                |                 | Tape and Ammo    | 1000     | MR                         |
| 72R300X     | 72R300XF             | 3.00           | 300             | Bulk             | 200      | F                          |
|             | 72R300XMR            |                |                 | Tape and Ammo    | 1000     | MR                         |
| 72R375X     | 72R375XH             | 3.75           | 375             | Bulk             | 100      | H                          |

### Tape and Ammo Specifications

Devices taped using EIA468-B/IE286-2 standards. See table below and Figure 1 for details.

| Dimension   | EIA Mark             | IEC Mark             | Dimensions         |              |
|---|----------------------|----------------------|--------------------|--------------|
|   |                      |                      | Dim. (mm)          | Tol. (mm)    |
| Carrier tape width  | <b>W</b>             | <b>W</b>             | 18                 | -0.5 / +1.0  |
| Hold down tape width                                      | <b>W<sub>4</sub></b> | <b>W<sub>0</sub></b> | 11                 | min.         |
| Top distance between tape edges                           | <b>W<sub>6</sub></b> | <b>W<sub>2</sub></b> | 3                  | max.         |
| Sprocket hole position                                    | <b>W<sub>5</sub></b> | <b>W<sub>1</sub></b> | 9                  | -0.5 / +0.75 |
| Sprocket hole diameter*                                   | <b>D<sub>0</sub></b> | <b>D<sub>0</sub></b> | 4                  | -0.32 / +0.2 |
| Abscissa to plane (straight lead)                         | <b>H</b>             | <b>H</b>             | 18.5               | -/+ 3.0      |
| Abscissa to plane (kinked lead)                           | <b>H<sub>0</sub></b> | <b>H<sub>0</sub></b> | 16                 | -/+ 0.5      |
| Abscissa to top 72R020X-72R090X                           | <b>H<sub>1</sub></b> | <b>H<sub>1</sub></b> | 32.2               | max.         |
| Abscissa to top 72R110X-72R300X                           | <b>H<sub>1</sub></b> |                      | 47.5               | max.         |
| Overall width without lead protrusion:<br>72R020X-72R090X | <b>C<sub>1</sub></b> |                      | 42.5               | max.         |
| Overall width without lead protrusion:<br>72R110X-72R300X |                      |                      | 57                 |              |
| Overall width with lead protrusion:<br>72R020X-72R090X    | <b>C<sub>2</sub></b> |                      | 43.2               | max.         |
| Overall width with lead protrusion:<br>72R110X-72R300X    |                      | <b>58</b>            |                    |              |
| Lead protrusion   | <b>L<sub>1</sub></b> | <b>I<sub>1</sub></b> | 1.0                | max.         |
| Protrusion of cut out                                     | <b>L</b>             | <b>L</b>             | 11                 | max.         |
| Protrusion beyond hold-down tape                          | <b>I<sub>2</sub></b> | <b>I<sub>2</sub></b> | Not specified      |              |
| Sprocket hole pitch: 72R020X-72R090X                      | <b>P<sub>0</sub></b> | <b>P<sub>0</sub></b> | 12.7               | -/+ 0.3      |
| Sprocket hole pitch: 72R110X-72R300X                      | <b>P<sub>0</sub></b> | <b>P<sub>0</sub></b> | 25.4               | -/+ 0.5      |
| Pitch tolerance   |                      |                      | 20<br>consecutive. | -/+ 1        |
| Device pitch: 72R020X-72R090X                             |                      |                      | 12.7               |              |
| Device pitch: 72R110X-72R300X                             |                      |                      | 25.4               |              |
| Tape thickness  | <b>t</b>             | <b>t</b>             | 0.9                | max.         |
| Tape thickness with splice                                | <b>t<sub>1</sub></b> |                      | 2.0                | max.         |
| Splice sprocket hole alignment                            |                      |                      | 0                  | -/+ 0.3      |
| Body lateral deviation                                    | <b>Δh</b>            | <b>Δh</b>            | 0                  | -/+ 1.0      |
| Body tape plane deviation                                 | <b>Δp</b>            | <b>Δp</b>            | 0                  | -/+ 1.3      |
| Ordinate to adjacent component lead*:<br>72R020X-72R090X  | <b>P<sub>1</sub></b> | <b>P<sub>1</sub></b> | 3.81               | -/+ 0.7      |
| Ordinate to adjacent component lead*:<br>72R110X-72R300X  |                      |                      | 7.62               | -/+ 0.7      |
| Lead spacing: 72R020X-72R185X                             | <b>F</b>             | <b>F</b>             | 5.08               | -/+ 0.8      |
| Lead spacing: 72R250X-72R300X                             | <b>F</b>             | <b>F</b>             | 10.18              | -/+ 0.8      |

\*Differs from EIA Specification

**Tape and Ammo Diagram**

**Figure 1**



**WARNING**

- Users shall independently assess the suitability of these devices for each of their applications
- Operation of these devices beyond the stated maximum ratings could result in damage to the devices and lead to electrical arcing and/or fire
- These devices are intended to protect against the effects of temporary over-current or over-temperature conditions and are not intended to perform as protective devices where such conditions are expected to be repetitive or prolonged in duration
- Exposure to silicon-based oils, solvents, electrolytes, acids, and similar materials can adversely affect the performance of these PPTC devices
- These devices undergo thermal expansion under fault conditions, and thus shall be provided with adequate space and be protected against mechanical stresses
- Circuits with inductance may generate a voltage (L di/dt) above the rated voltage of the PPTC device.

**Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).**

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А