


DATASHEET

UF3C120150K4S



Part Number	Package	Marking
UF3C120150K4S	TO-247-4L	UF3C120150K4S

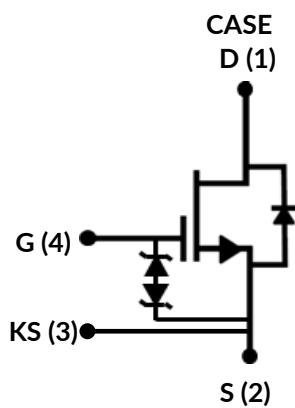

1200V-150mΩ SiC Cascode

Rev. A, April 2019

Description

United Silicon Carbide's cascode products co-package its high-performance F3 SiC fast JFETs with a cascode optimized MOSFET to produce the only standard gate drive SiC device in the market today. This series exhibits very fast switching using a 4-terminal TO-247-package and the best reverse recovery characteristics of any device of similar ratings. These devices are excellent for switching inductive loads, and any application requiring standard gate drive.

Features

- ◆ Typical on-resistance $R_{DS(on),typ}$ of 150mΩ
- ◆ Maximum operating temperature of 175°C
- ◆ Excellent reverse recovery
- ◆ Low gate charge
- ◆ Low intrinsic capacitance
- ◆ ESD protected, HBM class 2
- ◆ TO-247-4L package for faster switching, clean gate waveforms

Typical applications

- ◆ EV charging
- ◆ PV inverters
- ◆ Switch mode power supplies
- ◆ Power factor correction modules
- ◆ Motor drives
- ◆ Induction heating

Maximum Ratings

Parameter	Symbol	Test Conditions	Value	Units
Drain-source voltage	V_{DS}		1200	V
Gate-source voltage	V_{GS}	DC	-25 to +25	V
Continuous drain current ¹	I_D	$T_C = 25^\circ C$	18.4	A
		$T_C = 100^\circ C$	13.8	A
Pulsed drain current ²	I_{DM}	$T_C = 25^\circ C$	38	A
Single pulsed avalanche energy ³	E_{AS}	$L=15mH, I_{AS} = 2A$	30	mJ
Power dissipation	P_{tot}	$T_C = 25^\circ C$	166.7	W
Maximum junction temperature	$T_{J,max}$		175	$^\circ C$
Operating and storage temperature	T_J, T_{STG}		-55 to 175	$^\circ C$
Max. lead temperature for soldering, 1/8" from case for 5 seconds	T_L		250	$^\circ C$

1. Limited by $T_{J,max}$
2. Pulse width t_p limited by $T_{J,max}$
3. Starting $T_J = 25^\circ C$

Thermal Characteristics

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Thermal resistance, junction-to-case	R_{\thetaJC}			0.7	0.9	$^\circ C/W$

Electrical Characteristics ($T_J = +25^\circ\text{C}$ unless otherwise specified)

Typical Performance - Static

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Drain-source breakdown voltage	BV_{DS}	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_D=1\text{mA}$	1200			V
Total drain leakage current	I_{DSS}	$\text{V}_{\text{DS}}=1200\text{V}, \text{V}_{\text{GS}}=0\text{V}, T_J=25^\circ\text{C}$		2	50	μA
		$\text{V}_{\text{DS}}=1200\text{V}, \text{V}_{\text{GS}}=0\text{V}, T_J=175^\circ\text{C}$		17		
Total gate leakage current	I_{GSS}	$\text{V}_{\text{DS}}=0\text{V}, T_J=25^\circ\text{C}, \text{V}_{\text{GS}}=-20\text{V} / +20\text{V}$		4	620	μA
Drain-source on-resistance	$\text{R}_{\text{DS(on)}}$	$\text{V}_{\text{GS}}=12\text{V}, \text{I}_D=5\text{A}, T_J=25^\circ\text{C}$		150	180	$\text{m}\Omega$
		$\text{V}_{\text{GS}}=12\text{V}, \text{I}_D=5\text{A}, T_J=175^\circ\text{C}$		330		
Gate threshold voltage	$\text{V}_{\text{G(th)}}$	$\text{V}_{\text{DS}}=5\text{V}, \text{I}_D=10\text{mA}$	3.5	4.4	5.5	V
Gate resistance	R_G	f=1MHz, open drain		4.6		Ω

Typical Performance - Reverse Diode

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Diode continuous forward current ¹	I_S	$T_C=25^\circ\text{C}$			18.4	A
Diode pulse current ²	$\text{I}_{\text{S,pulse}}$	$T_C=25^\circ\text{C}$			38	A
Forward voltage	V_{FSD}	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_F=5\text{A}, T_J=25^\circ\text{C}$		1.46	2	V
		$\text{V}_{\text{GS}}=0\text{V}, \text{I}_F=5\text{A}, T_J=175^\circ\text{C}$		2		
Reverse recovery charge	Q_{rr}	$\text{V}_R=800\text{V}, \text{I}_F=13\text{A}, \text{V}_{\text{GS}}=-5\text{V}, \text{R}_{\text{G,EXT}}=22\Omega$ $\text{di}/\text{dt}=1700\text{A}/\mu\text{s}, T_J=25^\circ\text{C}$		67		nC
Reverse recovery time	t_{rr}			24		ns
Reverse recovery charge	Q_{rr}	$\text{V}_R=800\text{V}, \text{I}_F=13\text{A}, \text{V}_{\text{GS}}=-5\text{V}, \text{R}_{\text{G,EXT}}=22\Omega$ $\text{di}/\text{dt}=1700\text{A}/\mu\text{s}, T_J=150^\circ\text{C}$		64		nC
Reverse recovery time	t_{rr}			24		ns

Typical Performance - Dynamic

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Input capacitance	C_{iss}	$V_{DS}=100V, V_{GS}=0V$ $f=100kHz$		738		pF
Output capacitance	C_{oss}			58		
Reverse transfer capacitance	C_{rss}			1.8		
Effective output capacitance, energy related	$C_{oss(er)}$	$V_{DS}=0V$ to $800V$, $V_{GS}=0V$		34		pF
Effective output capacitance, time related	$C_{oss(tr)}$	$V_{DS}=0V$ to $800V$, $V_{GS}=0V$		68		pF
C_{oss} stored energy	E_{oss}	$V_{DS}=800V, V_{GS}=0V$		10.8		μJ
Total gate charge	Q_G	$V_{DS}=800V, I_D=13A$, $V_{GS} = -5V$ to $12V$		25.7		nC
Gate-drain charge	Q_{GD}			6		
Gate-source charge	Q_{GS}			10		
Turn-on delay time	$t_{d(on)}$	$V_{DS}=800V, I_D=13A$, Gate Driver $=-5V$ to $+12V$, Turn-on $R_{G,EXT}=8.5\Omega$, Turn-off $R_{G,EXT}=22\Omega$ Inductive Load, FWD: same device with $V_{GS}=-5V, R_G=22\Omega$, $T_J=25^\circ C$		21		ns
Rise time	t_r			8		
Turn-off delay time	$t_{d(off)}$			26		
Fall time	t_f			8		
Turn-on energy	E_{ON}			170		μJ
Turn-off energy	E_{OFF}			26		
Total switching energy	E_{TOTAL}			196		
Turn-on delay time	$t_{d(on)}$			18		
Rise time	t_r	$V_{DS}=800V, I_D=13A$, Gate Driver $=-5V$ to $+12V$, Turn-on $R_{G,EXT}=8.5\Omega$, Turn-off $R_{G,EXT}=22\Omega$ Inductive Load, FWD: same device with $V_{GS}=-5V, R_G=22\Omega$, $T_J=150^\circ C$		6		ns
Turn-off delay time	$t_{d(off)}$			26		
Fall time	t_f			7		
Turn-on energy	E_{ON}			152		
Turn-off energy	E_{OFF}			26		
Total switching energy	E_{TOTAL}			178		

Typical Performance Diagrams

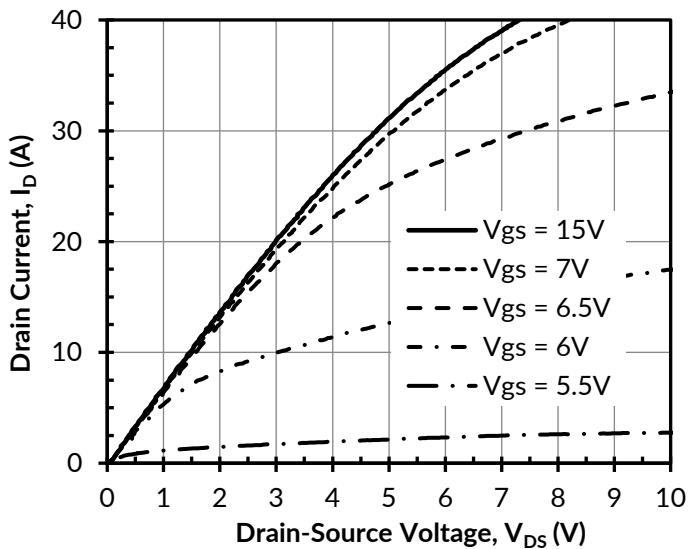


Figure 1. Typical output characteristics at $T_J = -55^\circ\text{C}$, $t_p < 250\mu\text{s}$

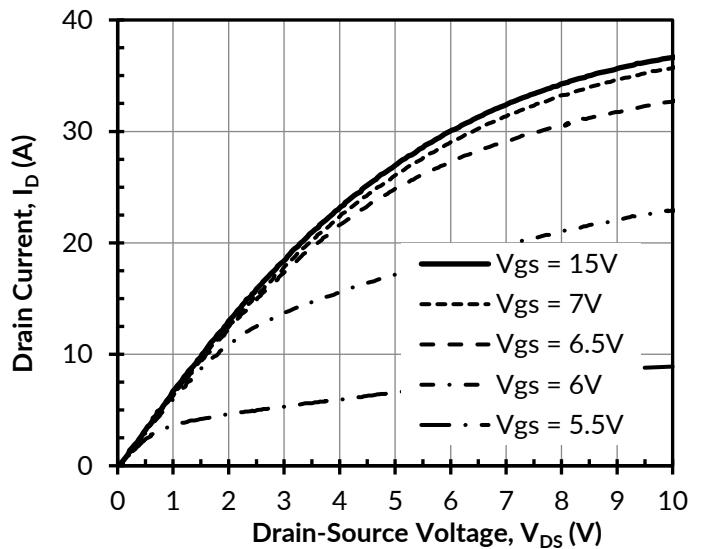


Figure 2. Typical output characteristics at $T_J = 25^\circ\text{C}$, $t_p < 250\mu\text{s}$

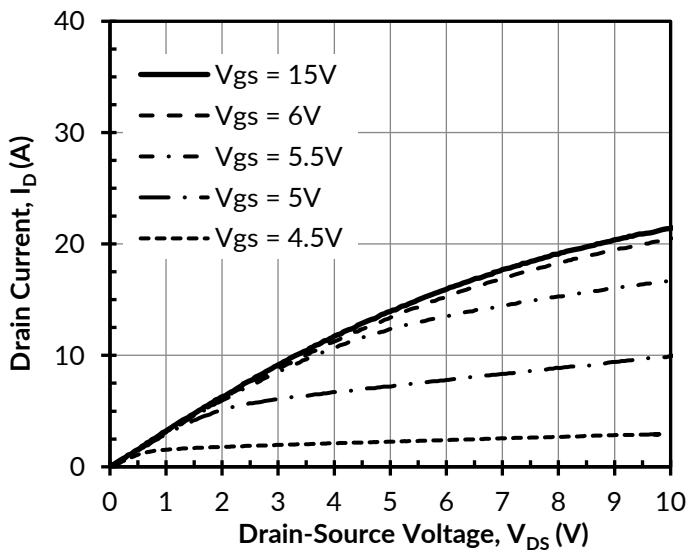


Figure 3. Typical output characteristics at $T_J = 175^\circ\text{C}$, $t_p < 250\mu\text{s}$

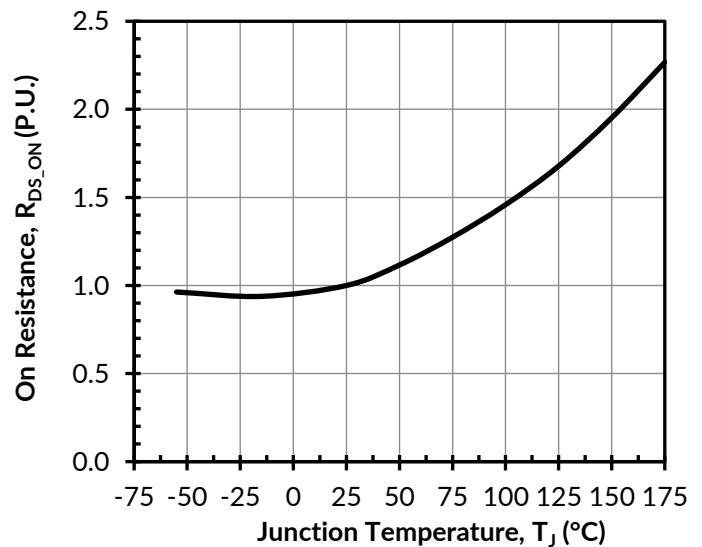


Figure 4. Normalized on-resistance vs. temperature at $V_{GS} = 12V$ and $I_D = 5A$

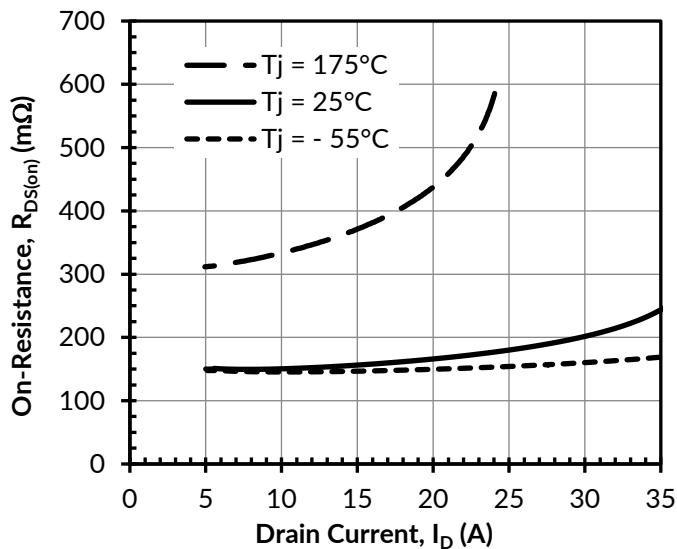


Figure 5. Typical drain-source on-resistances at $V_{GS} = 12V$

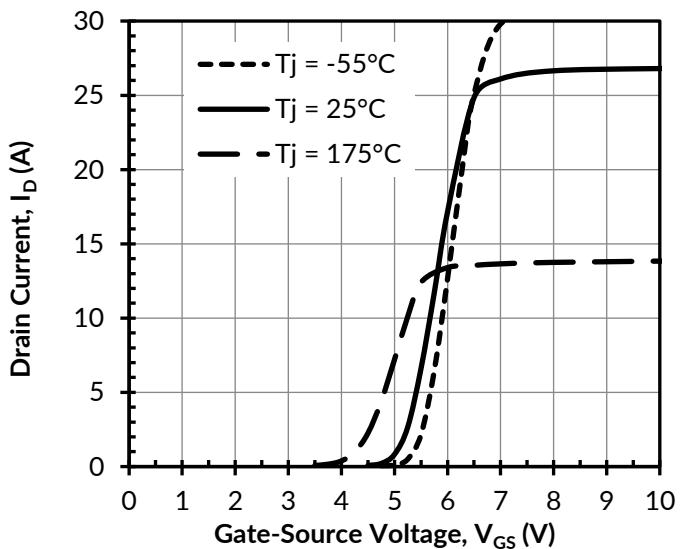


Figure 6. Typical transfer characteristics at $V_{DS} = 5V$

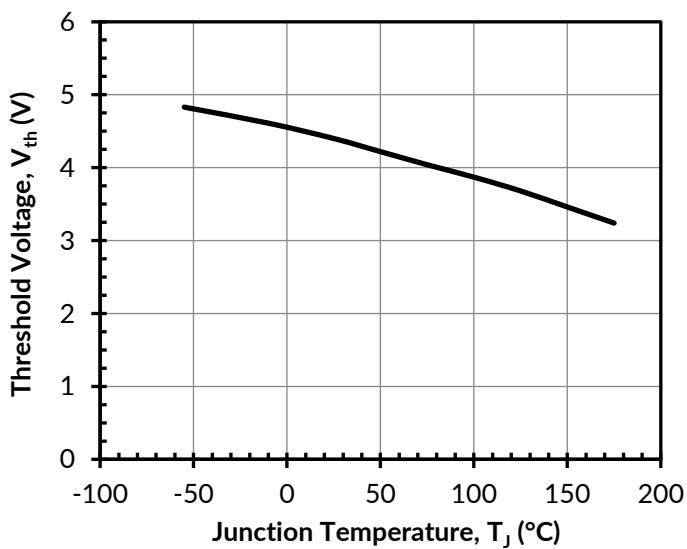


Figure 7. Threshold voltage vs. junction temperature at $V_{DS} = 5V$ and $I_D = 10mA$

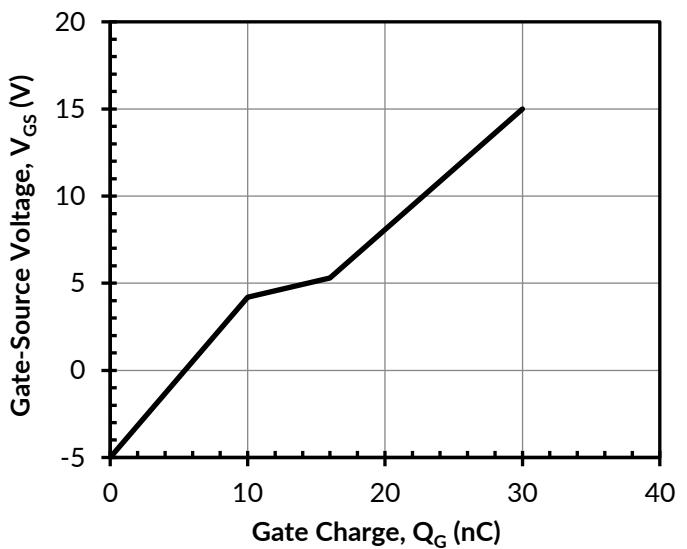


Figure 8. Typical gate charge at $V_{DS} = 800V$ and $I_D = 13A$

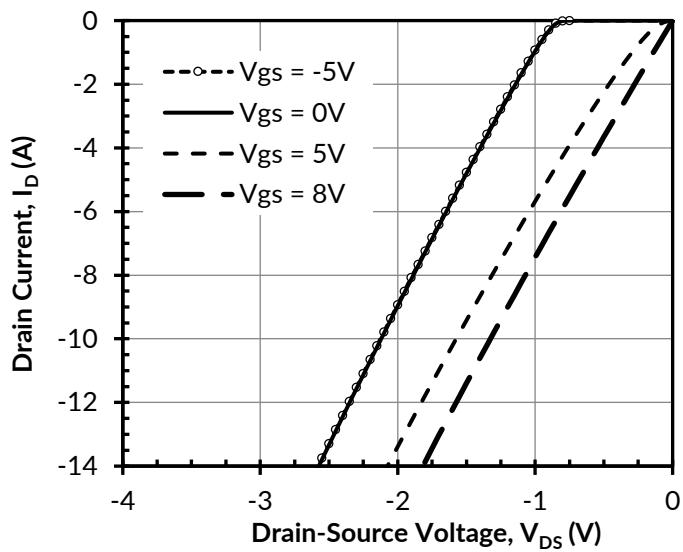


Figure 9. 3rd quadrant characteristics at $T_J = -55^\circ\text{C}$

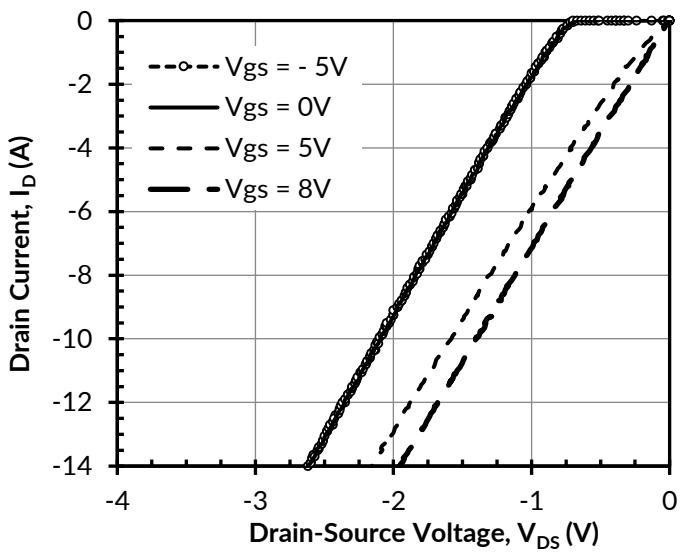


Figure 10. 3rd quadrant characteristics at $T_J = 25^\circ\text{C}$

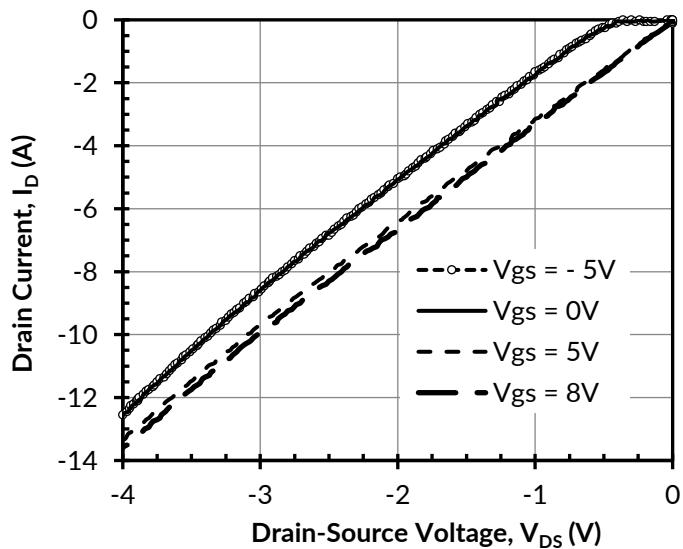


Figure 11. 3rd quadrant characteristics at $T_J = 175^\circ\text{C}$

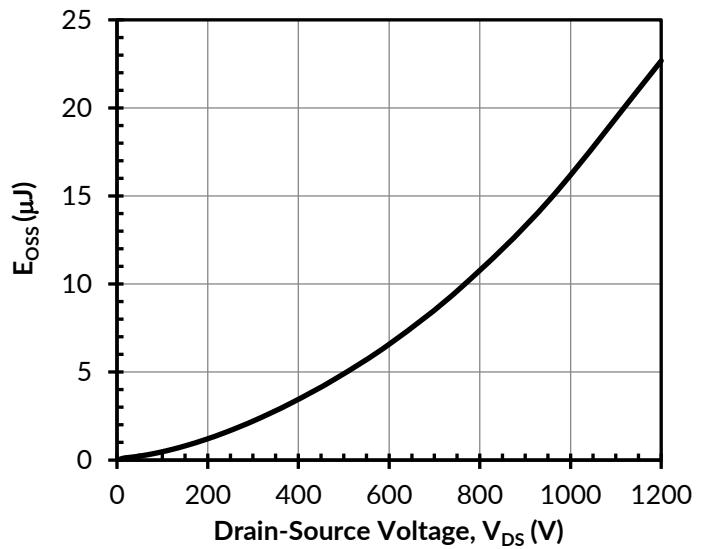


Figure 12. Typical stored energy in C_{OSS} at $V_{GS} = 0\text{V}$

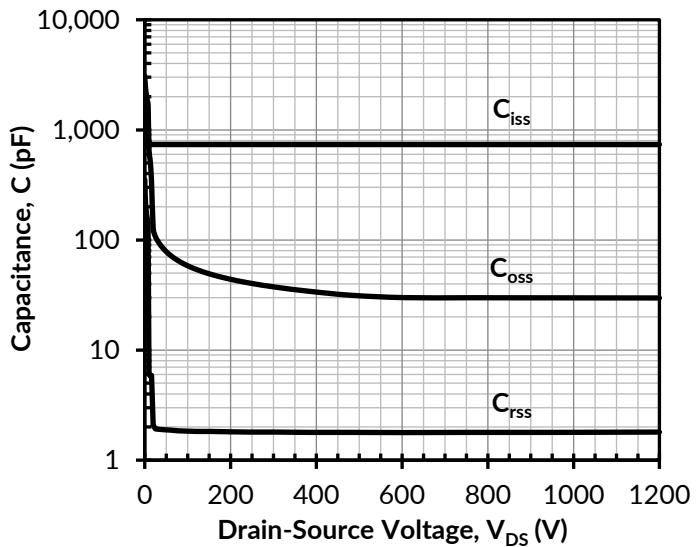


Figure 13. Typical capacitances at $f = 100\text{kHz}$ and $V_{GS} = 0\text{V}$

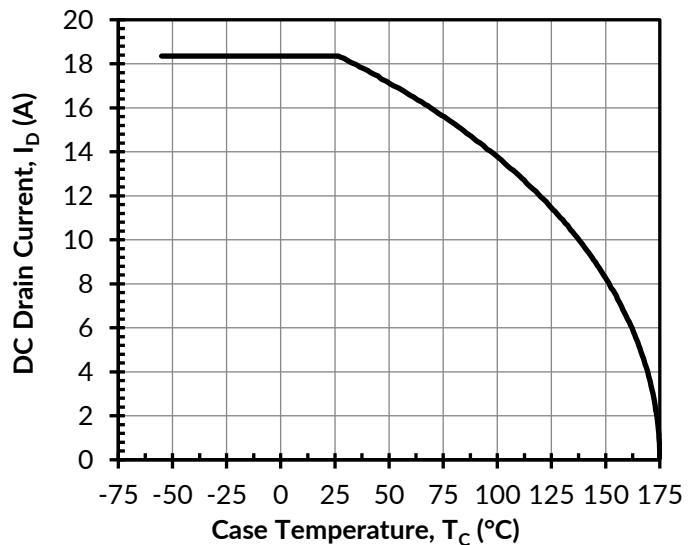


Figure 14. DC drain current derating

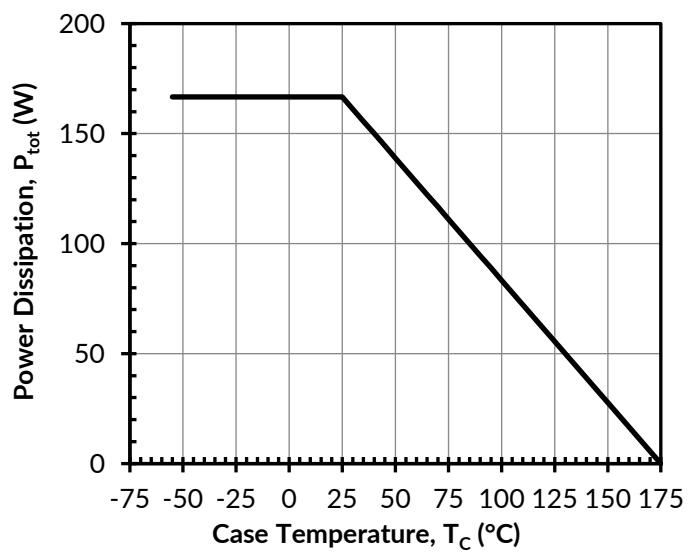


Figure 15. Total power dissipation

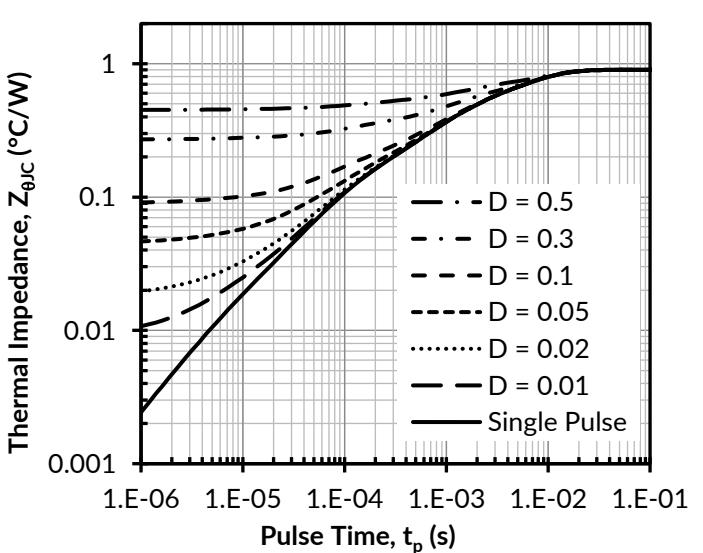


Figure 16. Maximum transient thermal impedance

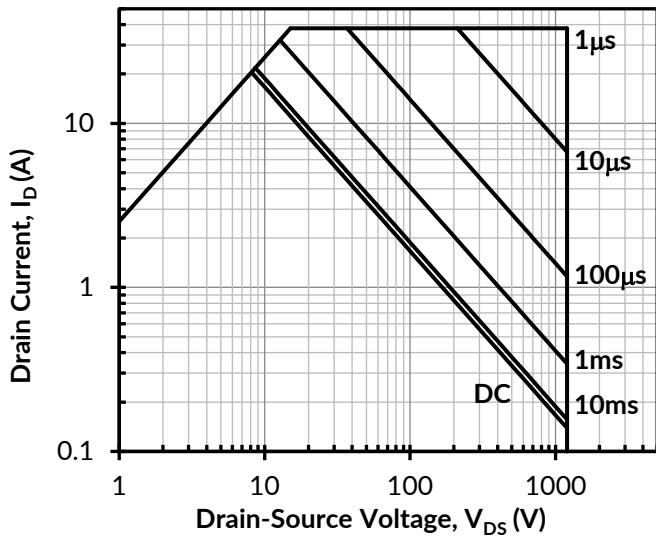


Figure 17. Safe operation area at $T_C = 25^\circ C$, $D = 0$, Parameter t_p

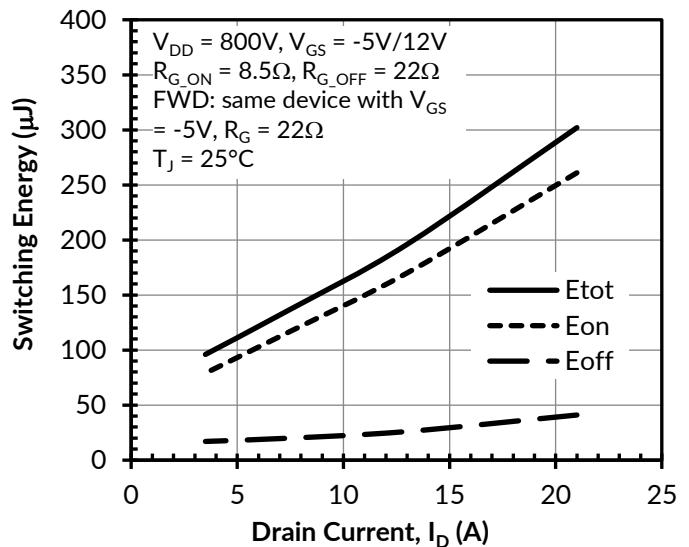


Figure 18. Clamped inductive switching energy vs. drain current at $T_J = 25^\circ C$

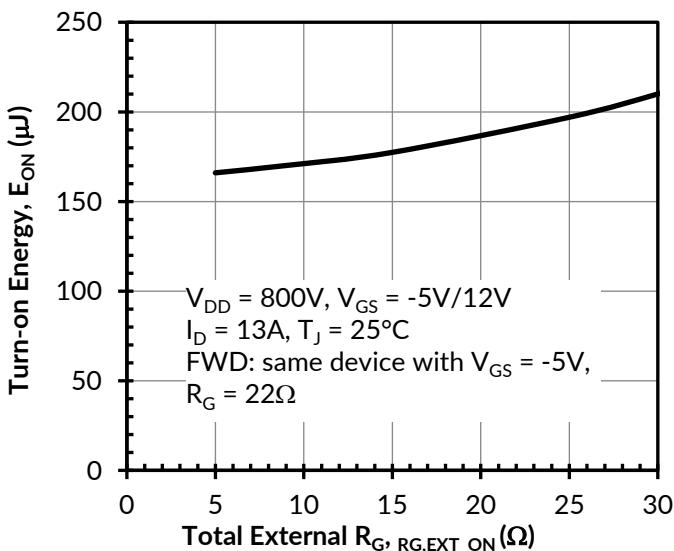


Figure 19. Clamped inductive switching turn-on energy vs. R_{G,EXT_ON}

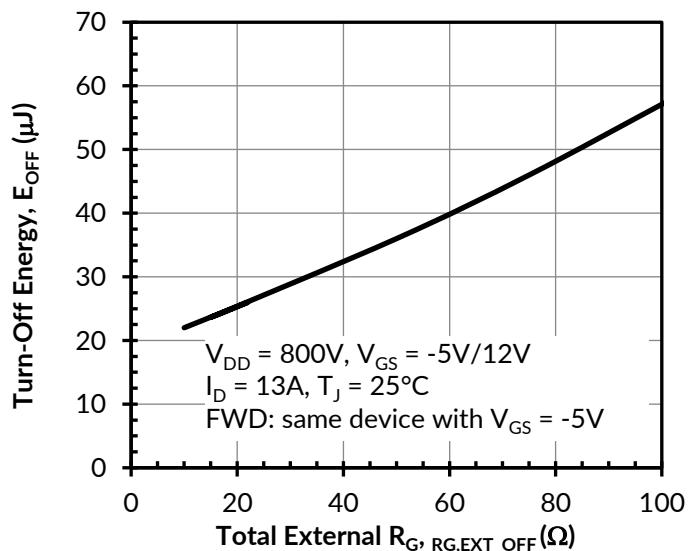


Figure 20. Clamped inductive switching turn-off energy vs. R_{G,EXT_OFF}

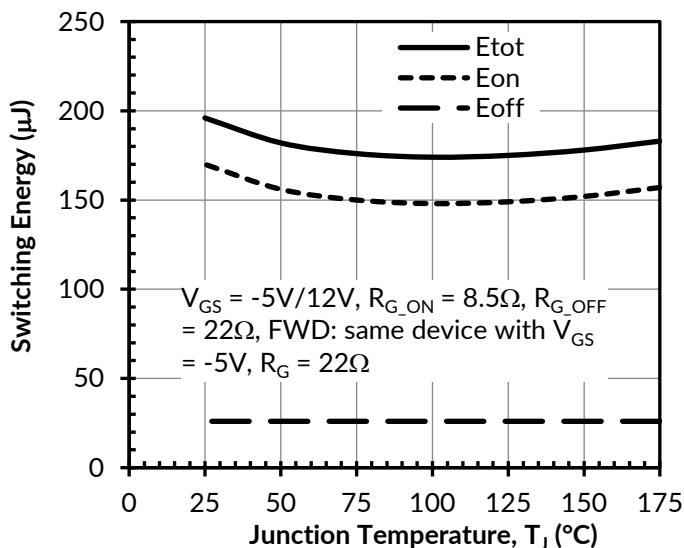


Figure 21. Clamped inductive switching energy vs. junction temperature at $V_{DS} = 800V$ and $I_D = 13A$

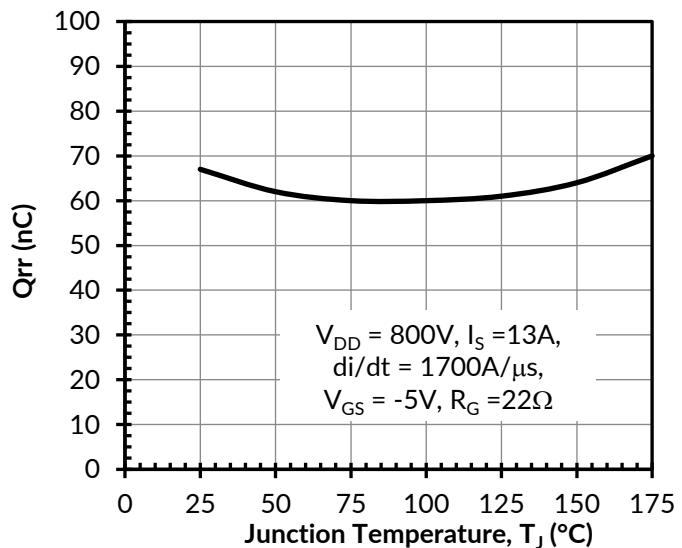


Figure 22. Reverse recovery charge Q_{rr} vs. junction temperature

Applications Information

SiC cascodes are enhancement-mode power switches formed by a high-voltage SiC depletion-mode JFET and a low-voltage silicon MOSFET connected in series. The silicon MOSFET serves as the control unit while the SiC JFET provides high voltage blocking in the off state. This combination of devices in a single package provides compatibility with standard gate drivers and offers superior performance in terms of low on-resistance ($R_{DS(on)}$), output capacitance (C_{oss}), gate charge (Q_G), and reverse recovery charge (Q_{rr}) leading to low conduction and switching losses. The SiC cascodes also provide excellent reverse conduction capability eliminating the need for an external anti-parallel diode.

Like other high performance power switches, proper PCB layout design to minimize circuit parasitics is strongly recommended due to the high dv/dt and di/dt rates. An external gate resistor is recommended when the cascode is working in the diode mode in order to achieve the optimum reverse recovery performance. For more information on cascode operation, see www.unitedsic.com.

Disclaimer

United Silicon Carbide, Inc. reserves the right to change or modify any of the products and their inherent physical and technical specifications without prior notice. United Silicon Carbide, Inc. assumes no responsibility or liability for any errors or inaccuracies within.

Information on all products and contained herein is intended for description only. No license, express or implied, to any intellectual property rights is granted within this document.

United Silicon Carbide, Inc. assumes no liability whatsoever relating to the choice, selection or use of the United Silicon Carbide, Inc. products and services described herein.



OCEAN CHIPS

Океан Электроники

Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибутором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибутором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А