



3 V, SUPER MINIMOLD 900 MHz Si MMIC AMPLIFIER


UPC2747TB UPC2748TB

FEATURES

- **HIGH DENSITY SURFACE MOUNTING:**
6 pin super minimold or SOT-363 package
- **GAIN:**
UPC2747TB: $G_s = 12$ dB TYP
UPC2748TB: $G_s = 19$ dB TYP
- **NOISE FIGURE:**
UPC2747TB: NF = 3.3 dB TYP
UPC2748TB: NF = 2.8 dB TYP
- **SUPPLY VOLTAGE:**
 $V_{CC} = 2.7$ to 3.3 V

DESCRIPTION

NEC's UPC2747TB and UPC2748TB are Silicon RFIC's which are manufactured using the NESAT III process. These devices are suitable as buffer amplifiers for cellular radio and other communication receivers. The UPC2747TB/48TB are pin compatible and have comparable performance as the larger UPC2747T/48T, so they are suitable for use as a replacement to help reduce system size. The IC's are housed in a 6 pin super minimold or SOT-363 package. NEC's stringent quality assurance and test procedures ensure the highest reliability and performance.

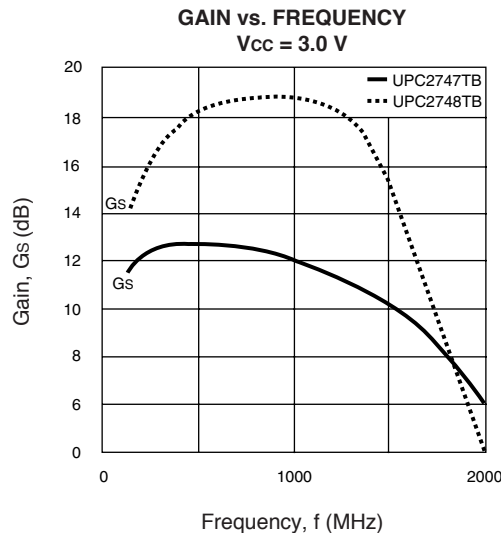

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$, $Z_L = Z_S = 50 \Omega$)

| PART NUMBER PACKAGE OUTLINE | | | UPC2747TB SO6 | | | UPC2748TB SO6 | | |
|--------------------------------|--|---------------------------|------------------|------------|-----|------------------|-------------|-----|
| SYMBOLS | PARAMETERS AND CONDITIONS | UNITS | MIN | TYP | MAX | MIN | TYP | MAX |
| I_{CC} | Circuit Current (no signal) $V_{CC} = 3.0$ V $V_{CC} = 1.8$ V | mA mA | 3.8 | 5.0 3.0 | 7.0 | 4.5 | 6.0 3.5 | 8.0 |
| G_s | Small Signal Gain, $f = 900$ MHz, $V_{CC} = 3.0$ V $f = 900$ MHz, $V_{CC} = 1.8$ V | dB dB | 9 | 12 5.5 | 14 | 16 | 19 11.5 | 21 |
| f_{L1} | Lower Limit Operating Frequency, $V_{CC} = 3.0$ V $V_{CC} = 1.8$ V | GHz GHz | | | | | 0.2 0.2 | 0.4 |
| f_{U2} | Upper Limit Operating Frequency, $V_{CC} = 3.0$ V $V_{CC} = 1.8$ V | GHz GHz | 1.5 | 1.8 1.8 | | 1.2 | 1.5 1.5 | |
| P_{SAT} | Saturated Output Power, $f = 900$ MHz, $V_{CC} = 3.0$ V $f = 900$ MHz, $V_{CC} = 1.8$ V | dBm dBm | -9.5 | -7 -14 | | -6 | -3.5 -10 | |
| NF | Noise Figure, $f = 900$ MHz, $V_{CC} = 3.0$ V $f = 900$ MHz, $V_{CC} = 1.8$ V | dB dB | | 3.3 5.2 | 4.5 | | 2.8 4.5 | 4.0 |
| RLIN | Input Return Loss, $f = 900$ MHz, $V_{CC} = 3.0$ V $f = 900$ MHz, $V_{CC} = 1.8$ V | dB dB | 11 | 14 11 | | 8.5 | 11.5 10 | |
| RLOUT | Output Return Loss, $f = 900$ MHz, $V_{CC} = 3.0$ V $f = 900$ MHz, $V_{CC} = 1.8$ V | dB dB | 7 | 10 13 | | 5.5 | 8.5 12 | |
| ISOL | Isolation, $f = 900$ MHz, $V_{CC} = 3.0$ V $f = 900$ MHz, $V_{CC} = 1.8$ V | dB dB | 35 | 40 34 | | 35 | 40 34 | |
| OIP3 | SSB Output Third Order Intercept, $P_{OUT} = -20$ dBm $f_1 = 900$ MHz, $f_2 = 902$ MHz, $V_{CC} = 3.0$ V $f_1 = 900$ MHz, $f_2 = 902$ MHz, $V_{CC} = 1.8$ V | dBm dBm | | -3 -10 | | | -1 -6 | |
| RTH (J-A) | Thermal Resistance (Junction to Ambient) Mounted on a 50 x 50 x 1.6 mm epoxy glass PWB | $^\circ\text{C}/\text{W}$ | | | 325 | | | 325 |

Note:

1. The gain at f_L is 3 dB down from the gain at 900 MHz.
2. The gain at f_U is 3 dB down from the gain at 900 MHz.

UPC2747TB, UPC2748TB

ABSOLUTE MAXIMUM RATINGS¹ (T_A = 25°C)

| SYMBOLS | PARAMETERS | UNITS | RATINGS |
|------------------|--------------------------------------|-------|-------------|
| V _{CC} | Supply Voltage | V | 4.0 |
| I _{CC} | Total Supply Current | mA | 15 |
| P _{IN} | Input Power | dBm | 0 |
| P _T | Total Power Dissipation ² | mW | 200 |
| T _{OP} | Operating Temperature | °C | -40 to +85 |
| T _{STG} | Storage Temperature | °C | -55 to +150 |


Notes:

1. Operation in excess of any one of these parameters may result in permanent damage.
2. Mounted on a 50 x 50 x 1.6 mm epoxy glass PWB (T_A = 85°C).

RECOMMENDED OPERATING CONDITIONS


| SYMBOLS | PARAMETERS | UNITS | MIN | TYP | MAX |
|-----------------|-----------------------|-------|-----|-----|-----|
| V _{CC} | Supply Voltage | V | 2.7 | 3 | 3.3 |
| T _{OP} | Operating Temperature | °C | -40 | 25 | 85 |

TEST CIRCUIT

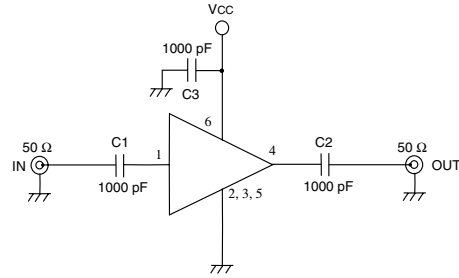


TYPICAL PERFORMANCE CURVES (T_A = 25°C)


CURRENT vs. SUPPLY VOLTAGE

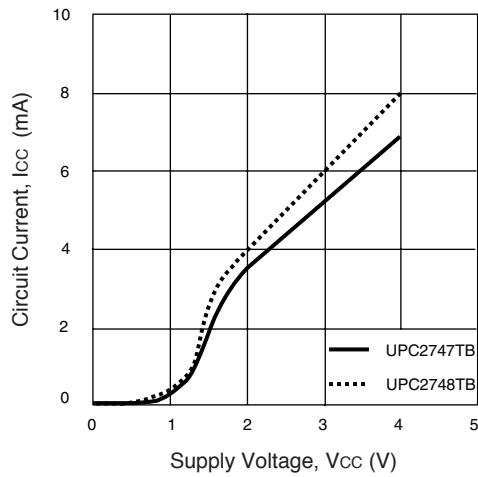


CURRENT vs. OPERATING TEMPERATURE

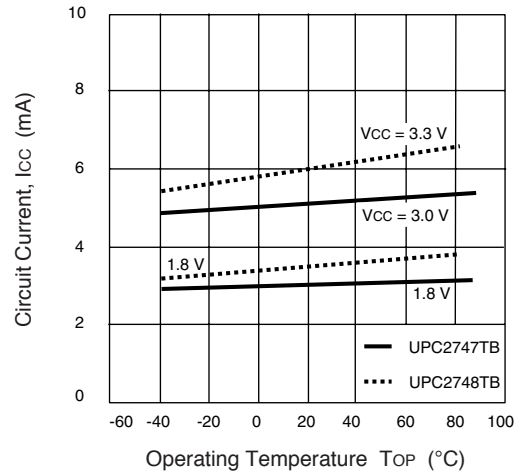







UPC2747TB GAIN vs. FREQUENCY AND TEMPERATURE

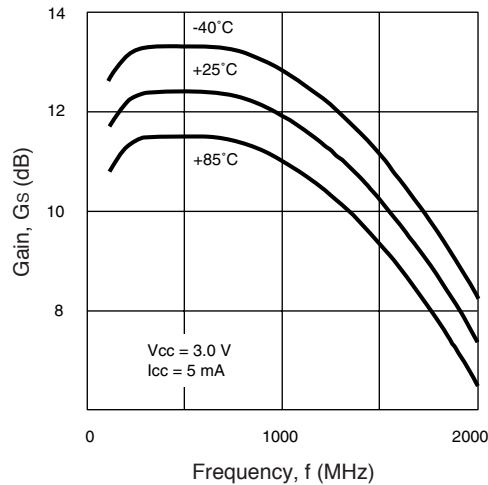

UPC2747TB GAIN AND NOISE FIGURE vs. FREQUENCY

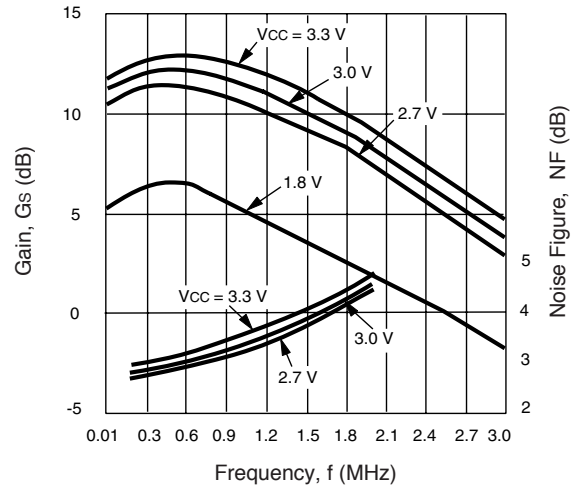


TYPICAL PERFORMANCE CURVES (TA = 25°C)

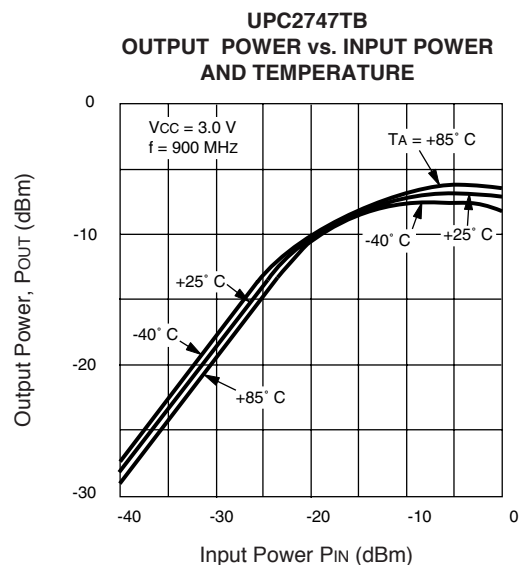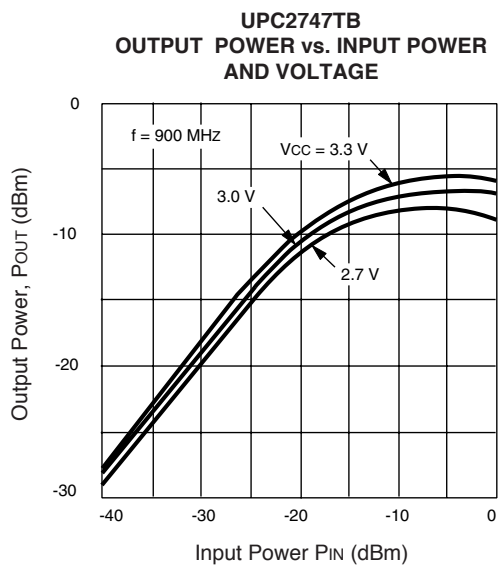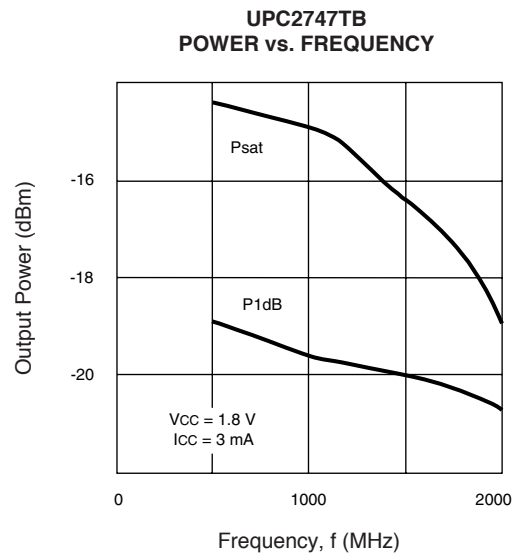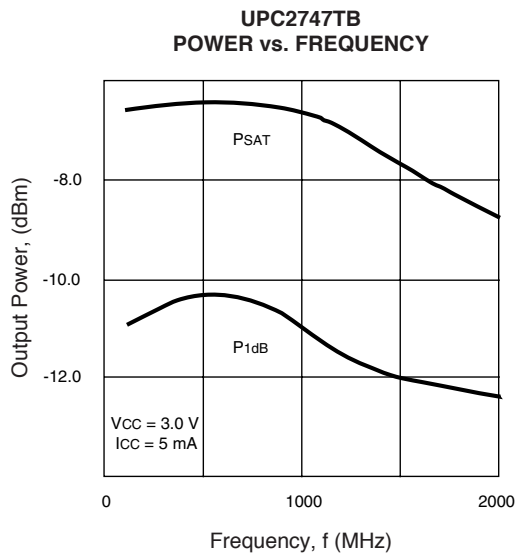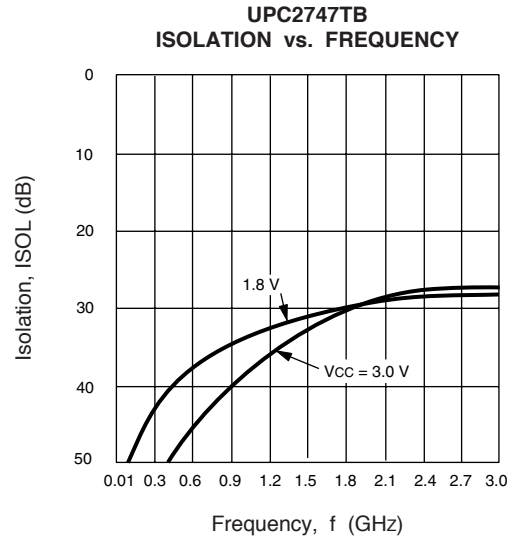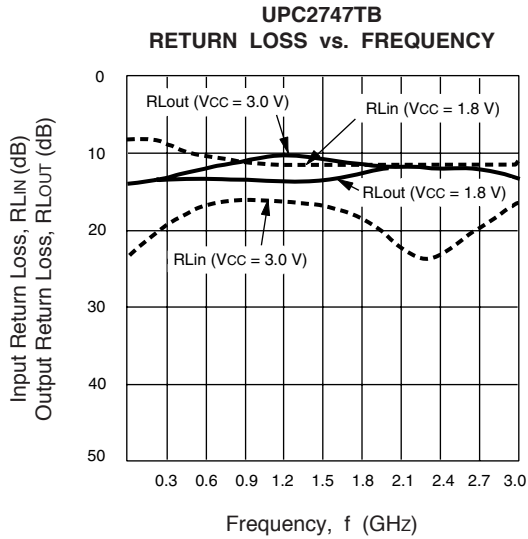


TYPICAL PERFORMANCE CURVES (TA = 25°C)


UPC2748TB
GAIN vs. FREQUENCY
AND TEMPERATURE

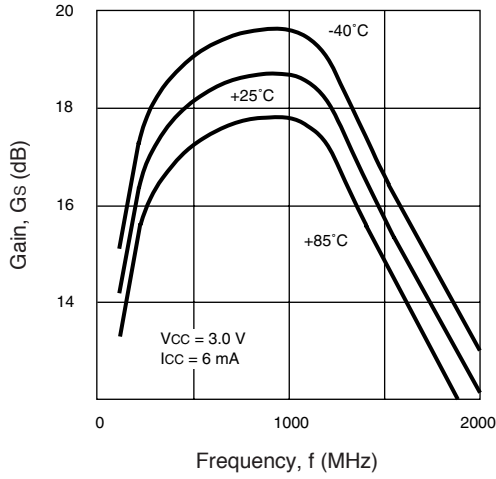


UPC2748TB
GAIN and NOISE FIGURE
vs. FREQUENCY

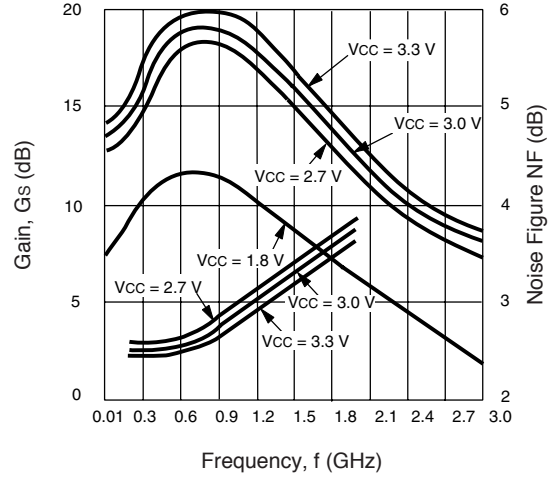


UPC2748TB
ISOLATION vs. FREQUENCY

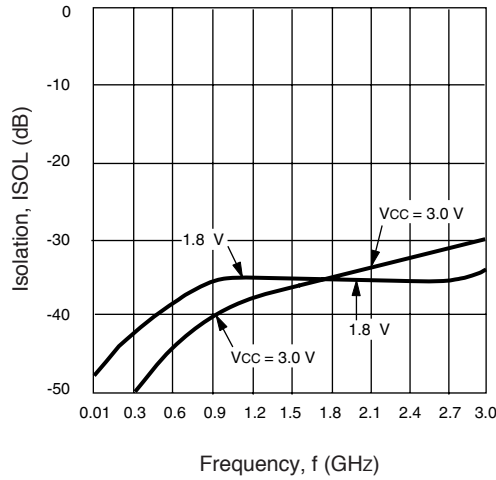


UPC2748TB
RETURN LOSS vs. FREQUENCY

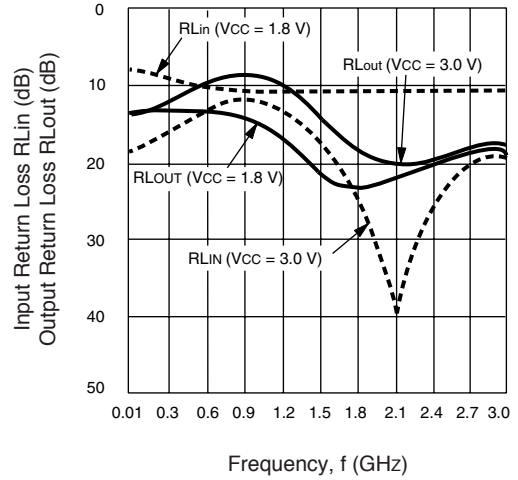



UPC2748TB
POWER vs. FREQUENCY

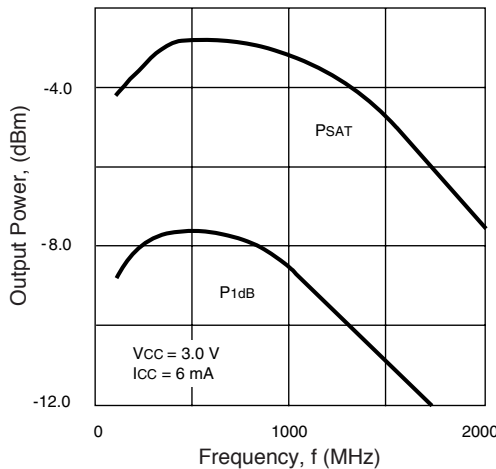

UPC2748TB
POWER vs. FREQUENCY

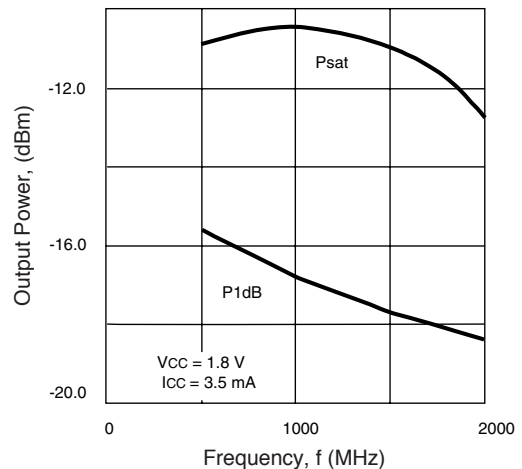

TYPICAL PERFORMANCE CURVES ($T_A = 25^\circ\text{C}$)

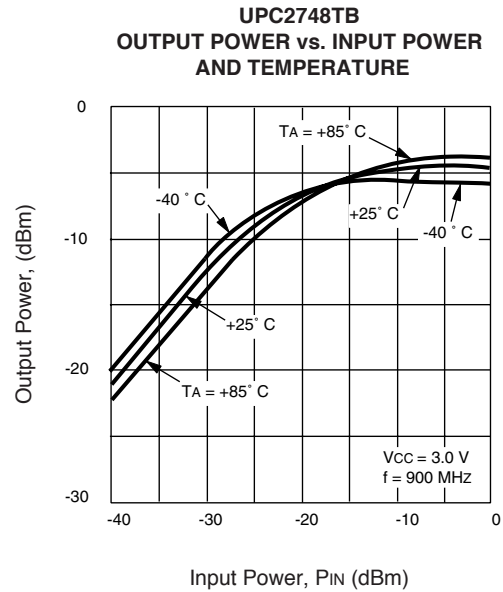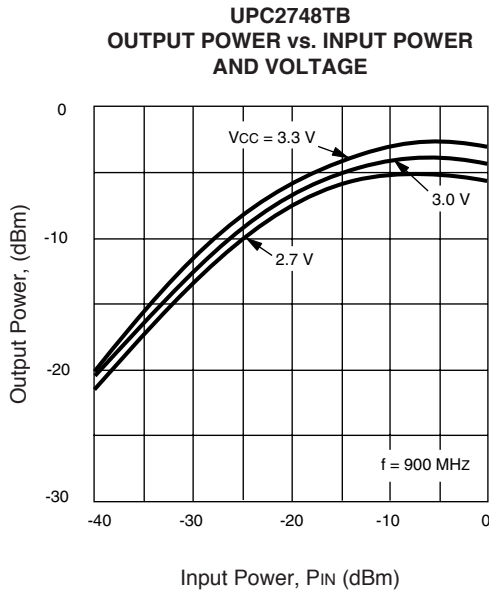


PIN DESCRIPTION

| Pin No. | Pin Name | Applied Voltage (V) | Description | Internal Equivalent Circuit |
|-------------|----------|--|--|-----------------------------|
| 1 | Input | 0.8 ¹ 0.8 ² | Signal input pin. An internal matching circuit, configured with resistors, enables 50 Ω connection over a wide bandwidth. A multi-feedback circuit is designed to cancel the deviations of h_{FE} and resistance. This pin must be coupled to the signal source with a blocking capacitor. | |
| 4 | Output | 2.79 ¹ 2.72 ² | Signal output pin. An internal matching circuit, configured with resistors, enables 50 Ω connection over a wide bandwidth. This pin must be coupled to the output load with a blocking capacitor. | |
| 6 | Vcc | 2.7 to 3.3 | Power supply pin. This pin should be externally equipped with a bypass capacitor to minimize ground impedance. | |
| 2 3 5 | GND | 0 | Ground pin. This pin should be connected to system ground with minimum inductance. Ground pattern on the board should be formed as wide as possible. All the ground pins must be connected together with wide ground pattern to minimize impedance difference. | |

The above diagram is for the UPC2747TB. The resistor marked with a star does not exist in the UPC 2748TB.


- Notes:
 1. UPC2747TB.
 2. UPC2748TB.

TYPICAL SCATTERING PARAMETERS (TA = 25°C)

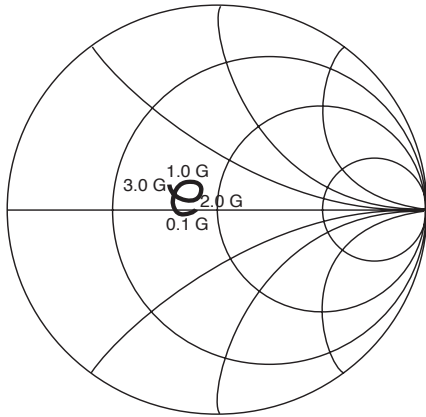

S11

UPC2747TB
Coordinates in Ohms
Frequency in GHz
Vcc = Vout = 3.0 V

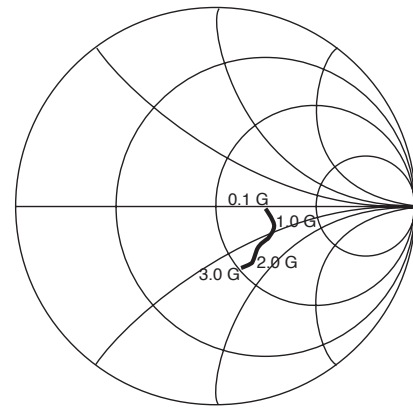


S22


Vcc = Vout = 3.0 V, Icc = 5.0 mA

| FREQUENCY GHz | S11 | | S21 | | S12 | | S22 | | K |
|------------------|-------|--------|-------|--------|-------|-------|-------|-------|-------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG | |
| 0.1 | 0.091 | -178.3 | 3.732 | -3.9 | 0.001 | 28.0 | 0.290 | -3.7 | 98.96 |
| 0.2 | 0.105 | -161.2 | 3.997 | -13.3 | 0.002 | 103.2 | 0.294 | -4.3 | 64.71 |
| 0.3 | 0.136 | -166.8 | 4.075 | -23.4 | 0.002 | 76.0 | 0.292 | -3.9 | 46.80 |
| 0.4 | 0.165 | -172.9 | 4.105 | -32.9 | 0.004 | 90.4 | 0.286 | -5.6 | 29.99 |
| 0.5 | 0.179 | 177.8 | 4.141 | -41.2 | 0.004 | 89.4 | 0.298 | -6.9 | 25.94 |
| 0.6 | 0.185 | 170.1 | 4.098 | -49.5 | 0.005 | 90.7 | 0.302 | -8.4 | 20.69 |
| 0.7 | 0.189 | 162.5 | 4.124 | -57.9 | 0.006 | 96.6 | 0.307 | -10.2 | 17.38 |
| 0.8 | 0.189 | 155.1 | 4.104 | -66.3 | 0.008 | 101.3 | 0.309 | -12.2 | 12.59 |
| 0.9 | 0.182 | 148.8 | 4.061 | -74.5 | 0.009 | 99.2 | 0.313 | -14.4 | 12.26 |
| 1.0 | 0.180 | 142.6 | 4.016 | -83.0 | 0.012 | 99.9 | 0.316 | -16.9 | 9.45 |
| 1.1 | 0.174 | 137.1 | 3.977 | -91.8 | 0.013 | 100.3 | 0.318 | -19.7 | 8.22 |
| 1.2 | 0.160 | 131.5 | 3.948 | -99.5 | 0.015 | 105.5 | 0.318 | -22.6 | 7.49 |
| 1.3 | 0.148 | 127.4 | 3.799 | -108.4 | 0.016 | 96.6 | 0.318 | -24.9 | 7.42 |
| 1.4 | 0.134 | 124.4 | 3.736 | -115.9 | 0.019 | 93.8 | 0.313 | -27.4 | 6.36 |
| 1.5 | 0.124 | 121.0 | 3.582 | -124.0 | 0.022 | 93.8 | 0.311 | -30.1 | 5.83 |
| 1.6 | 0.110 | 121.0 | 3.506 | -131.7 | 0.023 | 88.1 | 0.312 | -31.8 | 5.55 |
| 1.7 | 0.099 | 122.9 | 3.317 | -138.8 | 0.025 | 88.6 | 0.308 | -33.3 | 5.37 |
| 1.8 | 0.089 | 126.8 | 3.190 | -145.7 | 0.028 | 88.3 | 0.305 | -35.1 | 5.05 |
| 1.9 | 0.084 | 134.8 | 3.040 | -152.8 | 0.030 | 80.2 | 0.305 | -37.2 | 4.98 |
| 2.0 | 0.085 | 141.7 | 2.901 | -159.0 | 0.032 | 78.7 | 0.303 | -38.8 | 4.97 |
| 2.1 | 0.087 | 148.1 | 2.736 | -164.8 | 0.034 | 77.6 | 0.299 | -40.9 | 4.99 |
| 2.2 | 0.092 | 152.1 | 2.645 | -170.8 | 0.035 | 73.0 | 0.304 | -41.5 | 4.97 |
| 2.3 | 0.102 | 156.6 | 2.507 | -176.3 | 0.037 | 72.5 | 0.304 | -42.2 | 4.93 |
| 2.4 | 0.114 | 158.7 | 2.395 | -177.8 | 0.038 | 68.5 | 0.305 | -44.7 | 5.01 |
| 2.5 | 0.126 | 161.4 | 2.312 | 172.9 | 0.041 | 66.2 | 0.317 | -45.8 | 4.76 |
| 2.6 | 0.136 | 160.6 | 2.218 | 168.1 | 0.042 | 64.0 | 0.319 | -47.8 | 4.78 |
| 2.7 | 0.154 | 161.3 | 2.136 | 162.1 | 0.042 | 60.4 | 0.323 | -50.8 | 4.88 |
| 2.8 | 0.168 | 160.4 | 2.036 | 157.8 | 0.044 | 54.8 | 0.331 | -54.1 | 4.88 |
| 2.9 | 0.180 | 157.9 | 1.952 | 151.6 | 0.044 | 53.0 | 0.330 | -57.5 | 5.07 |
| 3.0 | 0.196 | 155.2 | 1.847 | 147.6 | 0.043 | 47.2 | 0.332 | -60.9 | 5.45 |
| 3.1 | 0.208 | 152.5 | 1.757 | 141.6 | 0.045 | 44.0 | 0.331 | -65.5 | 5.49 |

TYPICAL SCATTERING PARAMETERS (TA = 25°C)

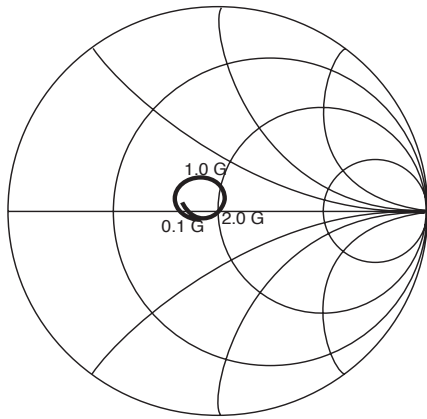

S11

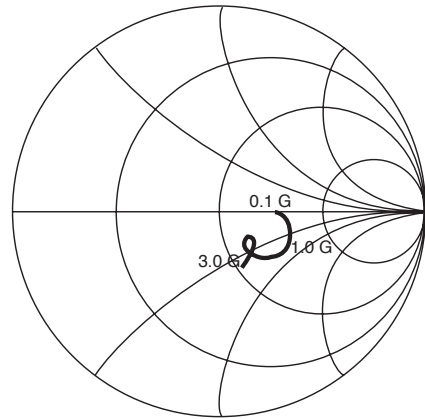


S22

UPC2748TB
Coordinates in Ohms
Frequency in GHz
Vcc = Vout = 3.0 V


Vcc = Vout = 3.0 V, Icc = 6.0 mA

| FREQUENCY GHz | S11 | | S21 | | S12 | | S22 | | K |
|------------------|-------|--------|-------|--------|-------|-------|-------|-------|--------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG | |
| 0.1 | 0.120 | -177.2 | 4.730 | 5.3 | 0.000 | -30.4 | 0.280 | -2.2 | 352.73 |
| 0.2 | 0.136 | -167.3 | 5.430 | -0.2 | 0.001 | 19.3 | 0.285 | -2.4 | 72.83 |
| 0.3 | 0.166 | -174.2 | 5.930 | -9.2 | 0.001 | 97.8 | 0.286 | -0.9 | 52.47 |
| 0.4 | 0.194 | 179.6 | 6.314 | -18.8 | 0.003 | 125.4 | 0.291 | -2.7 | 24.77 |
| 0.5 | 0.210 | 169.6 | 6.701 | -28.2 | 0.004 | 108.7 | 0.306 | -3.7 | 16.82 |
| 0.6 | 0.213 | 160.0 | 6.876 | -38.8 | 0.005 | 107.4 | 0.319 | -5.4 | 12.40 |
| 0.7 | 0.213 | 150.2 | 7.203 | -49.3 | 0.006 | 98.7 | 0.337 | -8.4 | 10.09 |
| 0.8 | 0.211 | 140.8 | 7.310 | -60.6 | 0.009 | 114.1 | 0.349 | -12.3 | 6.68 |
| 0.9 | 0.203 | 131.1 | 7.354 | -71.5 | 0.010 | 107.6 | 0.360 | -17.4 | 5.68 |
| 1.0 | 0.193 | 121.1 | 7.371 | -81.9 | 0.012 | 98.3 | 0.371 | -22.7 | 4.71 |
| 1.1 | 0.180 | 110.8 | 7.346 | -92.8 | 0.014 | 99.1 | 0.366 | -28.9 | 3.98 |
| 1.2 | 0.159 | 100.6 | 7.334 | -102.4 | 0.015 | 97.5 | 0.359 | -35.3 | 4.01 |
| 1.3 | 0.136 | 90.6 | 7.001 | -112.6 | 0.016 | 91.4 | 0.342 | -40.7 | 3.95 |
| 1.4 | 0.115 | 79.2 | 6.834 | -121.3 | 0.018 | 84.1 | 0.320 | -46.0 | 3.71 |
| 1.5 | 0.096 | 70.4 | 6.437 | -130.1 | 0.019 | 84.8 | 0.296 | -50.5 | 3.77 |
| 1.6 | 0.072 | 60.9 | 6.181 | -138.2 | 0.020 | 82.4 | 0.271 | -53.0 | 3.81 |
| 1.7 | 0.049 | 47.5 | 5.710 | -145.4 | 0.020 | 78.9 | 0.247 | -55.1 | 4.13 |
| 1.8 | 0.024 | 36.5 | 5.372 | -152.5 | 0.021 | 73.5 | 0.228 | -55.7 | 4.22 |
| 1.9 | 0.007 | -6.0 | 5.014 | -158.6 | 0.021 | 74.1 | 0.208 | -55.7 | 4.57 |
| 2.0 | 0.014 | -126.0 | 4.724 | -164.1 | 0.024 | 74.9 | 0.198 | -52.8 | 4.37 |
| 2.1 | 0.034 | -141.3 | 4.405 | -169.7 | 0.024 | 71.5 | 0.188 | -52.1 | 4.70 |
| 2.2 | 0.047 | -147.7 | 4.175 | -174.7 | 0.026 | 73.6 | 0.190 | -47.8 | 4.44 |
| 2.3 | 0.063 | -156.9 | 3.933 | -179.5 | 0.026 | 71.2 | 0.185 | -45.3 | 4.81 |
| 2.4 | 0.079 | -161.1 | 3.738 | 175.3 | 0.028 | 69.1 | 0.192 | -44.7 | 4.58 |
| 2.5 | 0.094 | -165.5 | 3.579 | 171.2 | 0.030 | 63.8 | 0.202 | -43.2 | 4.48 |
| 2.6 | 0.108 | -169.0 | 3.411 | 166.5 | 0.030 | 64.7 | 0.214 | -43.6 | 4.59 |
| 2.7 | 0.123 | -174.7 | 3.283 | 161.4 | 0.032 | 64.6 | 0.222 | -45.7 | 4.54 |
| 2.8 | 0.139 | -178.9 | 3.107 | 157.3 | 0.031 | 58.9 | 0.238 | -47.6 | 4.83 |
| 2.9 | 0.151 | 175.9 | 2.989 | 151.4 | 0.032 | 53.2 | 0.240 | -52.4 | 4.84 |
| 3.0 | 0.164 | 170.5 | 2.814 | 147.3 | 0.033 | 51.6 | 0.251 | -55.8 | 4.99 |
| 3.1 | 0.178 | 166.0 | 2.680 | 141.5 | 0.034 | 47.3 | 0.254 | -61.4 | 5-07 |

OUTLINE DIMENSIONS (Units in mm)

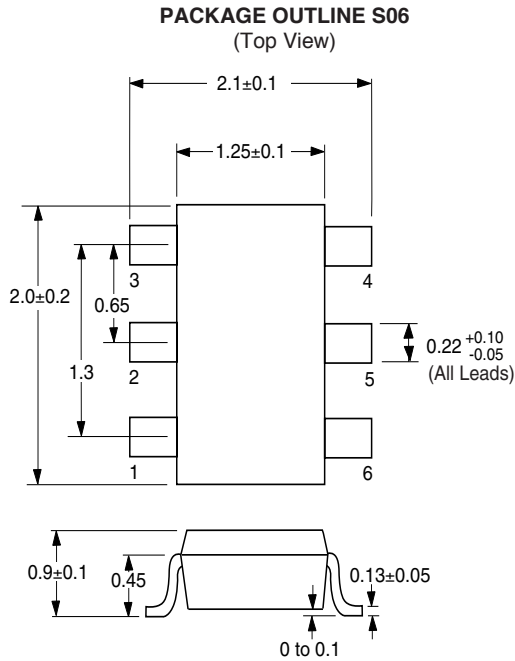

PIN CONNECTIONS

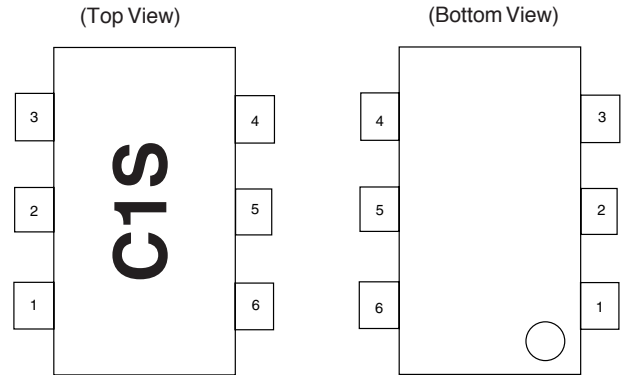


*Marking is an example of UPC2747TB

1. INPUT
2. GND
3. GND
4. OUTPUT
5. GND
6. VCC

SYSTEM APPLICATION EXAMPLE

DIGITAL CELLULAR SYSTEM BLOCK DIAGRAM

Example of 900 MHz Band Digital Cellular Phone

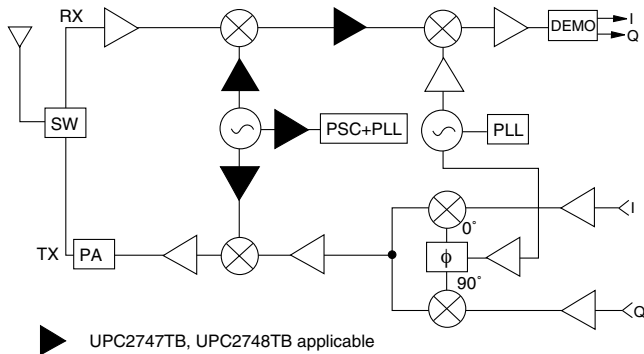

ORDERING INFORMATION

| PART NUMBER | MARKING | QTY |
|----------------|---------|---------|
| UPC2747TB-E3-A | C1S | 3K/Reel |
| UPC2748TB-E3-A | C1T | 3K/Reel |

Note:

Embossed Tape, 8 mm wide. Pins 1, 2 and 3 face perforated side of tape.

Life Support Applications

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

EXCLUSIVE NORTH AMERICAN AGENT FOR **NEC** RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS
CEL CALIFORNIA EASTERN LABORATORIES • Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • Telex 34-6393 • FAX (408) 988-0279
 24-Hour Fax-On-Demand: 800-390-3232 (U.S. and Canada only) • Internet: <http://WWW.CEL.COM>

DATA SUBJECT TO CHANGE WITHOUT NOTICE

05/11/2000

Subject: Compliance with EU Directives

CEL certifies, to its knowledge, that semiconductor and laser products detailed below are compliant with the requirements of European Union (EU) Directive 2002/95/EC Restriction on Use of Hazardous Substances in electrical and electronic equipment (RoHS) and the requirements of EU Directive 2003/11/EC Restriction on Penta and Octa BDE.

CEL Pb-free products have the same base part number with a suffix added. The suffix –A indicates that the device is Pb-free. The –AZ suffix is used to designate devices containing Pb which are exempted from the requirement of RoHS directive (*). In all cases the devices have Pb-free terminals. All devices with these suffixes meet the requirements of the RoHS directive.

This status is based on CEL’s understanding of the EU Directives and knowledge of the materials that go into its products as of the date of disclosure of this information.

| Restricted Substance per RoHS | Concentration Limit per RoHS (values are not yet fixed) | Concentration contained in CEL devices | |
|-------------------------------|---|--|-----|
| | | -A | -AZ |
| Lead (Pb) | < 1000 PPM | Not Detected | (*) |
| Mercury | < 1000 PPM | Not Detected | |
| Cadmium | < 100 PPM | Not Detected | |
| Hexavalent Chromium | < 1000 PPM | Not Detected | |
| PBB | < 1000 PPM | Not Detected | |
| PBDE | < 1000 PPM | Not Detected | |

If you should have any additional questions regarding our devices and compliance to environmental standards, please do not hesitate to contact your local representative.

Important Information and Disclaimer: Information provided by CEL on its website or in other communications concerning the substance content of its products represents knowledge and belief as of the date that it is provided. CEL bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. CEL has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. CEL and CEL suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall CEL’s liability arising out of such information exceed the total purchase price of the CEL part(s) at issue sold by CEL to customer on an annual basis.

See CEL Terms and Conditions for additional clarification of warranties and liability.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А