

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0857591003](#)
Status: **Active**
Description: PoE PLUS PSE ICM 1x1 LEDs: GREEN - GREEN/ ORANGE

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Modular Jacks/Plugs
Series	85759
Component Type	PCB Jack
Magnetic	Yes
Performance Category	5e
Power over Ethernet (PoE)	PoE+
Product Name	HyperJack™PoE

Physical

Durability (mating cycles max)	750
Inverted / Top Latch	Yes
Keying to Mating Part	Yes
Lightpipes/LEDs	LEDs
Orientation	Right Angle (Side Entry)
PCB Retention	None
Packaging Type	Tray
Panel Mount	No
Ports	1
Positions / Loaded Contacts	8/8
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40°C to +80°C
Termination Interface: Style	Through Hole
Wire/Cable Type	N/A

Electrical

Current - Maximum per Contact	1.5A
Grounding to PCB	Yes
Shielded	Yes
Voltage - Maximum	57V

Material Info

Reference - Drawing Numbers

Sales Drawing	SD-85759-001
---------------	--------------




image - Reference only

Series

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Not Reviewed**
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**




Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
85759Series



PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

GIGABIT SINGLE PORT MAGNETIC JACK WITH LEDs AND
INTEGRATED POWER OVER ETHERNET PLUS CONTROL CIRCUITRY
ACCORDING TO IEEE802.3at

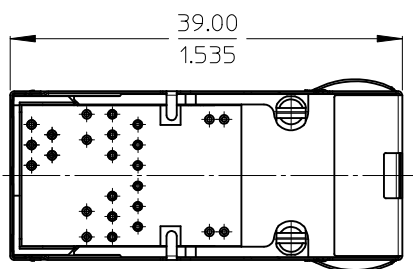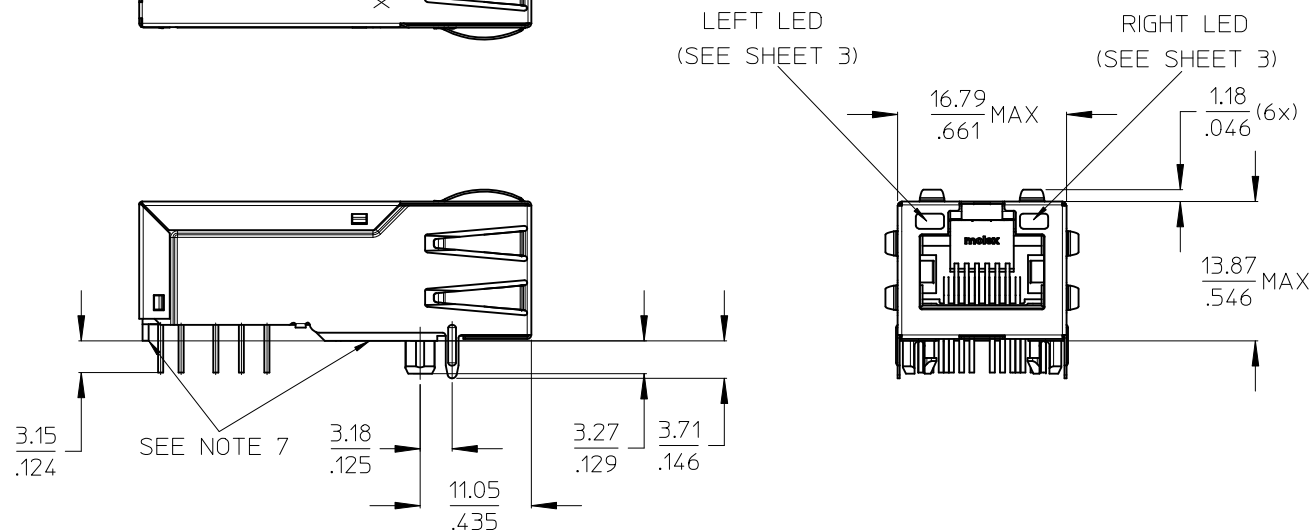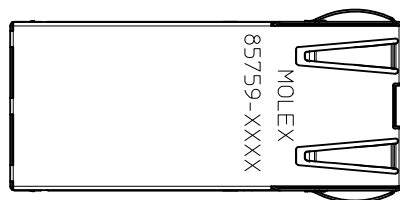



NOTES:

- 1 - SHIELD MATERIAL: STAINLESS STEEL
(GROUND PINS ARE SOLDER DIPPED)
- 2 - PLASTIC MATERIAL: PBT, BLACK, UL 94V-0
- 3 - TERMINALS MATERIAL: PHOSPHOR BRONZE CuSn8
RJ45 CONTACT PLATING: 1.27μm GOLD
OVER 1.9μm Ni ON MATING AREA
SOLDER TERMINALS: 3μm Sn
- 4 - JACK TO BE MATED WITH FCC 68.5 PLUGS /
IEC 60603-7 PLUGS
- 5 - PRODUCT SPECIFICATION: PS-85759-001
- 6 - PACKAGING SPECIFICATION: PK-85759-001
- 7 - STAND OFF TO SYSTEM BOARD





SCALE 1:1

ENTER DESCRIPTION EC NO: MG2010-0092 DRWN:JBADER 2010/03/29 CHKD:MMANGARUDOV 2010/01/08 APPR:SSTEINKE 2010/05/25		DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
						MM ONLY		2:1	METRIC				
						DRAWN BY DATE		TITLE HYPERJACK POE PLUS PSE ICM 1X1					
						JBADER 2009/11/13							
						CHECKED BY DATE		MOLEX INCORPORATED					
						MMANGARUDOV 2010/01/08							
						APPROVED BY DATE		SD-85759-001					
						SSTEINKE 2010/03/09							
						MATERIAL NO.		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
						SEE SHEET 3							
		SIZE A3											
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											

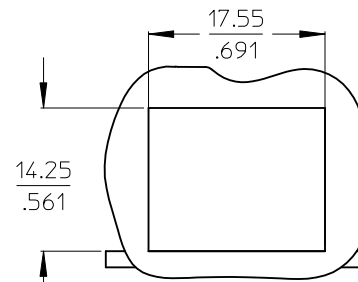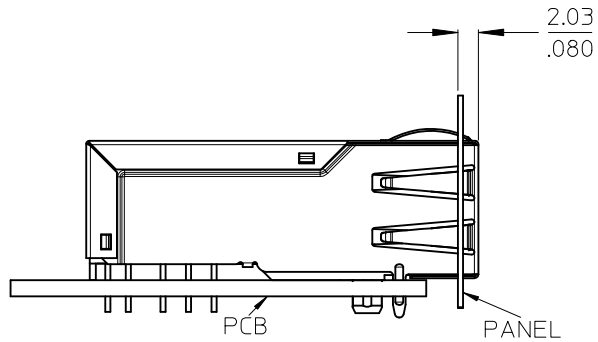

SUGGESTED PANEL CUTOUT

SUGGESTED BOARD LAYOUT - COMPONENT SIDE

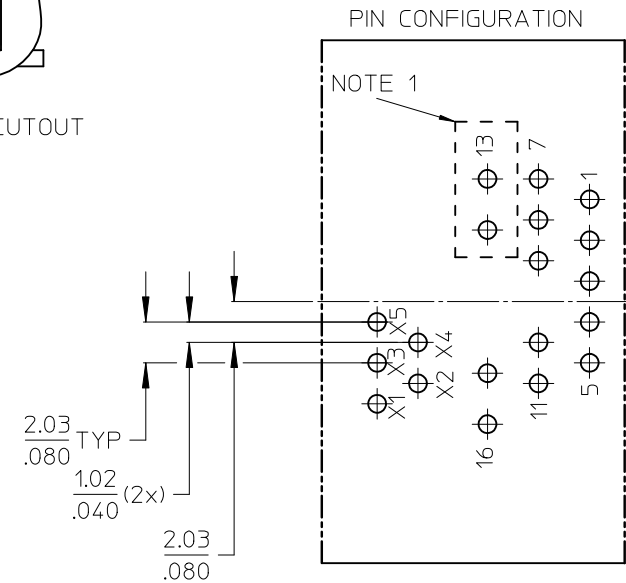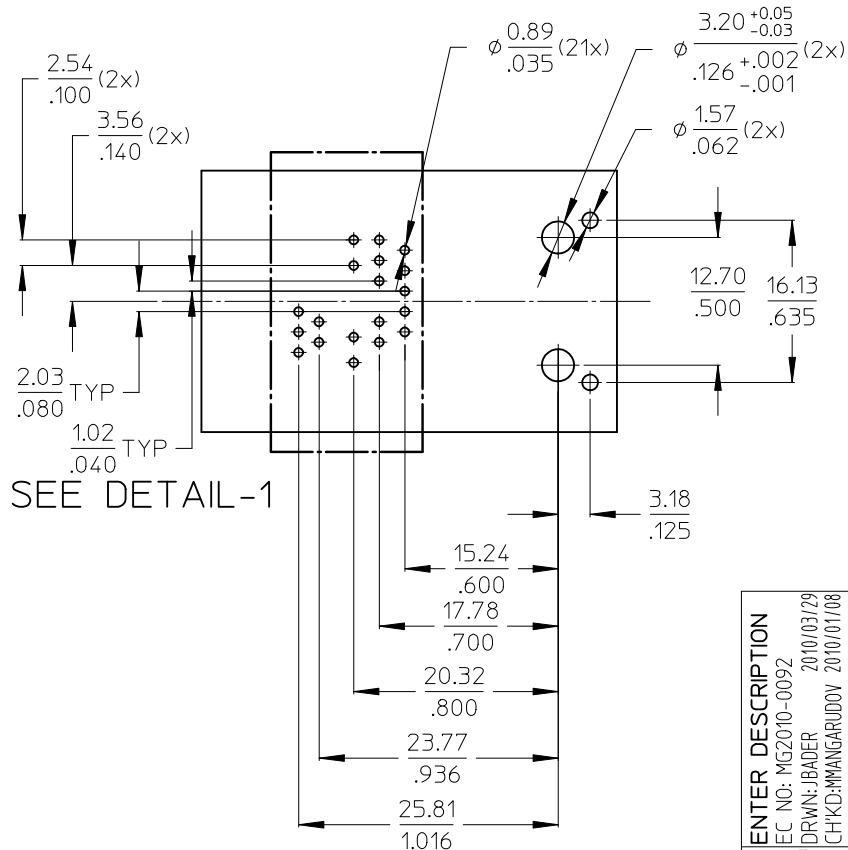


DETAIL-1
SCALE 4:1

NOTE:
1 - PINS 13 AND 14 NOT PRESENT ON VERSION
WITH INTEGRATED POWER INDICATION LED

ENTER DESCRIPTION EC NO: MG2010-0092 DRWN:JBADER 2010/03/29 CHKD:MMANGARUDOV 2010/01/08 APPR:SSTEINKE 2010/05/25		DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION ⊙ ◻	
				mm INCH		DRAWN BY DATE		TITLE HYPERJACK POE PLUS PSE ICM 1X1			
				4 PLACES ± --- ± ---		JBADER 2009/11/13					
				3 PLACES ± --- ± ---		CHECKED BY DATE		MOLEX INCORPORATED			
				2 PLACES ± 0.05 ± ---		MMANGARUDOV 2010/01/08					
				1 PLACE ± 0.10 ± ---		APPROVED BY DATE		DOCUMENT NO. SD-85759-001			
				ANGULAR ± .5 °		SSTEINKE 2010/03/09					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		SHEET NO. 2 OF 3			
						SEE SHEET 3					
						SIZE A3					
REV		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

Electrical Specifications @25°C		
Operating temperature (0°C to +70°C)		
Description	Value	
OCL POE+TRANSF. 24mA bias (0°C to +70°C)	350mH min.	
OCL NONPOE TRANSF. 8mA bias (0°C to +70°C)	350mH min.	
Turns Ratio	1CT:1CT	
Insertion Loss		
Frequency (MHz)	Limits (dB max.)	Typical Values (dB max.)
1.0-9.9 MHz	0.4+0.1*log(F)	0.5 @ 10MHz
10-49.9 MHz	0.5+0.3*log(F/10)	0.7 @ 50MHz
50-79.9 MHz	1+1.4*log(F/80)	1.0 @ 80MHz
80-100 MHz	1.3+3*log(F/100)	1.3 @ 100MHz
Return Loss		
Frequency (MHz)	Limits (dB min.)	TYPICAL Values (dB min.)
1-9.9 MHz	27dB min.	27 @ 10MHz
10-100 MHz	27-17*log(F/10)	10 @ 100MHz
CMR		
Frequency (MHz)	Limits (dB min.)	TYPICAL Values (dB min.)
1-9.9 MHz	34dB min.	34 @ 10MHz
10-79.9 MHz	27dB min.	27 @ 80MHz
80-199.9 MHz	27-14.5*log(F/80)	21.5 @ 200MHz
200-399.9 MHz	21.5-39*log(F/200)	10 @ 400MHz
400-1000 MHz	10	10 @ 1000MHz
NEXT		
Frequency (MHz)	Limits (dB min.)	TYPICAL Values (dB min.)
1-5.9 MHz	50	50 @ 6MHz
6-49.9 MHz	45-16*log(F/10)	34 @ 50MHz
50-100 MHz	25-30*log(F/100)	25 @ 100MHz
Isolation PHY to Wire side	2.25kVDC/60sec	

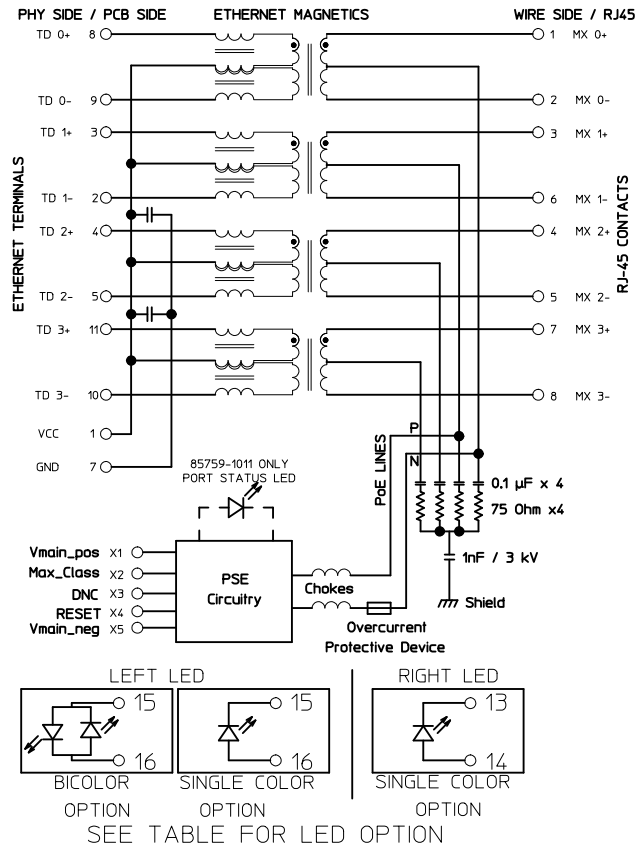

PART NUMBER	LEFT LED			RIGHT LED			COLOR 1
	PIN15	PIN16	COLOR	PIN13	PIN14	COLOR	
85759-1001	-	+	GREEN	-	+	GREEN	COLOR 1
85759-1003	-	+	GREEN	-	+	GREEN	COLOR 2
85759-1006	-	+	ORANGE	-	+	GREEN	COLOR 1
85759-1006	-	+	GREEN	-	+	YELLOW	COLOR 2

VERSION WITH INTEGRATED PoE POWER INDICATION LED

PART NUMBER	LEFT LED			RIGHT LED			COLOR 1
	PIN15	PIN16	COLOR	PIN13	PIN14	COLOR	
85759-1011	-	+	GREEN	NOT PRESENT		ORANGE	

ADDITIONAL LED COLORS AND CONFIGURATIONS AVAILABLE ON REQUEST

PIN	NAME	FUNCTION	PARAMETERS
X1	Vmain_pos	Vmain 51 to 56V DC IN	min. 470mA (Class0-3), min. 1000mA (Class 4)
X2	Max_Class / Port Status	INPUT (power up): Set Max Class	To be set by resistors to Vmain_neg
		Class 1 only	10k
		Class 1 or 2 only	20k
		All except class 4	30k
		All classes including class 4	Open
		OUTPUT (powered): Power indication	high if PD is powered up by 1x1 PSE
X3	DNC	reserved	remain floating
X4	Reset	Reset	Reset or to disable PSE
X5	Vmain_neg	Vmain Reference	

ENTER DESCRIPTION EC NO: MG2010-0092 DRWN: JBADER 2010/03/29 CHKD: MMANGARUDOV 2010/01/08 APPR: SSTEINKE 2010/05/25	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY JBADER	DATE 2009/11/13	TITLE HYPERJACK POE PLUS PSE ICM 1X1			
			4 PLACES	± ---	± ---	CHECKED BY	DATE				
			3 PLACES	± ---	± ---	MMANGARUDOV	2010/01/08	MOLEX MOLEX INCORPORATED		SHEET NO. 3 OF 3	
			2 PLACES	± 0.05	± ---	APPROVED BY	DATE				
			1 PLACE	± 0.10	± ---	SSTEINKE	2010/03/09				
			ANGULAR ± .5 °		MATERIAL NO.	DOCUMENT NO.					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE BOM		SD-85759-001			
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А