

DATA SHEET

POSITIVE TEMPERATURE COEFFICIENT AC/DC POWER SUPPLY

SMD0805 series

RoHS compliant & Halogen free



Product specification— November 05, 2018 V.0



Positive Temperature Coefficient (PTC) Data Sheet

Description

The 0805 series provides miniature surface mount resettable overcurrent protection with holding current from 0.1A to 1.1A. This series is suitable for ultra portable applications where space is at a premium and the device current is low.



Features

- RoHS compliant and lead-free
- Halogen-free
- Compact design saves board space
- Low profile
- Fast response to fault current
- Compatible with high temperature solders

Applications

- Mobile phones and PDAs
- Portable MP3 and media player
- Mobile internet Device (MID)
- USB peripherals
- IC VCC protection
- Set-top-box and HDMI
- Game console port protection

Agency Approval and Environmental Compliance

| Agency | File Number |
|--------|---------------|
| UL/CUL | E482628 |
| TUV | B160696048001 |

| Regulation | Standard |
|--------------|---------------|
| RoHS | 2011/65/EU |
| Halogen Free | EN 14582:2007 |

Electrical Characteristics

| Part Number | I_{hold} (A) | I_{trip} (A) | V_{max} (Vdc) | I_{max} (A) | $P_{d\ typ.}$ (W) | Maximum Time To Trip | | Resistance | |
|----------------|----------------|----------------|-----------------|---------------|-------------------|----------------------|-------------|------------------------|-------------------------|
| | | | | | | Time (Sec.) | Current (A) | R_{min} (Ω) | R_{1max} (Ω) |
| SMD0805B010TF | 0.10 | 0.30 | 15 | 100 | 0.5 | 1.50 | 0.50 | 1.000 | 6.000 |
| SMD0805B020TF | 0.20 | 0.50 | 9 | 100 | 0.5 | 0.02 | 8.00 | 0.650 | 3.500 |
| SMD0805B035TF | 0.35 | 0.75 | 6 | 100 | 0.5 | 0.10 | 8.00 | 0.250 | 1.200 |
| SMD0805B050TF | 0.50 | 1.00 | 6 | 100 | 0.5 | 0.10 | 8.00 | 0.150 | 0.850 |
| SMD0805B075TF | 0.75 | 1.50 | 6 | 40 | 0.6 | 0.20 | 8.00 | 0.090 | 0.350 |
| SMD0805B100TFT | 1.00 | 1.95 | 6 | 40 | 0.6 | 0.30 | 8.00 | 0.040 | 0.230 |
| SMD0805B110TF | 1.10 | 2.00 | 6 | 100 | 0.8 | 0.30 | 8.00 | 0.035 | 0.210 |

Note on Electrical Characteristics

■ Vocabulary

- I_{hold} = Hold current: maximum current device will pass without tripping in 23°C still air.
- I_{trip} = Trip current: minimum current at which the device will trip in 23°C still air.
- V_{max} = Maximum voltage device can withstand without damage at rated current (I_{max})
- I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max})
- $P_{d\ typ.}$ = Typical power dissipated from device when in the tripped state at 23°C still air.
- R_{min} = Minimum resistance of device in initial (un-soldered) state.
- R_{1max} = Maximum resistance of device at 23°C measured one hour after tripping or reflow soldering of 260°C for 20 sec.

■ Value specified is determined by using the PWB with 0.020"×1.5oz copper traces.

■ Caution: Operation beyond the specified rating may result in damage and possible arcing and flame.

■ Specifications are subject to change without notice.

Polymeric PTC Selecting Guide

■ Determine the following operating parameters for the circuits:

- Normal operating current (I_{hold})
- Maximum interrupt current (I_{max})
- Maximum circuit voltage (V_{max})
- Normal operating temperature surrounding device (min°C/max°C)

■ Select the device from factor and dimension suitable for the application

■ Compare the maximum rating for V_{max} and I_{max} of the PPTC device with the circuit in application and make sure the circuit's requirement does not exceed the device rating.

■ Check that PPTC device's trip time (time-to-trip) will protect the circuit.

■ Verify that the circuit operating temperature is within the PPTC device's normal operating temperature range.

■ Verify that performance and suitability of the chosen PPTC device in the application.

WARNING

■ Mechanical Stress

- PPTC devices will undergo a thermal expansion during fault condition. If PPTC devices are installed or placed in an application where the space between PPTC devices and the surrounding materials (e.g., covering materials, packaging materials, encapsulate materials and the like) is insufficient, it will cause an inhibiting effect upon the thermal expansion. Pressing, twisting, bending and other kinds of mechanical stress will also adversely affect the performance of the PPTC devices, and shall not be used or applied.

■ Chemical Pollutants

- Silicone-based oils, oils, solvents, gels, electrolytes, fuels, acids, and the like will adversely affect the properties of PPTC devices, and shall not be used or applied.


■ Electronic and Thermal Effect

- PPTC devices are secondary protection devices and are used solely for sporadic, accidental over-current or over-temperature error condition, and shall NOT be used if or when constant or repeated fault conditions (such fault conditions may be caused by, among others, incorrect pin-connection of a connector) or over-extensive trip events may occur.
- PPTC devices are different from fuses and, when a fault condition occurs, will go into high-resistance state and do not open circuit, in which case the voltage at such PPTC devices may reach a hazardous level.
- Operation over the maximum rating or other forms of improper use may cause failure, arcing, flame and/or other damage to the PPTC devices.
- Conductive material contamination, such as metal particle, may induce shortage, flame or arcing.
- Due to the inductance, the operation circuits may generate a circuit voltage (Ldi/dt) above the rated voltage of PPTC devices, which shall not be used under such circumstances.

■ General

- Customers shall evaluate and test the properties of PPTC devices independently to verify and ensure that their individual applications will be met.
- The performance of PPTC devices will be adversely affected if they are improperly used under electronic, thermal and/or mechanical procedures and/or conditions non-conformant to those recommended by manufacturer.
- Customers shall be responsible for determining whether it is necessary to have back-up, failsafe and/or fool-proof protection To avoid or minimize damage that may result from extra-ordinary, irregular function or failure of PPTC devices.
- Any and all responsibilities and liabilities are disclaimed if any item under this notice of warning is not complied with.

Thermal Derating Curve

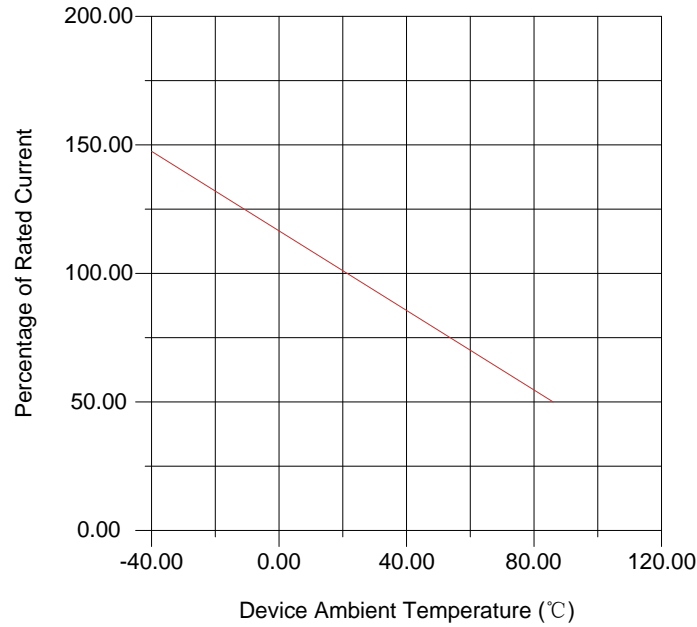


Thermal Derating Chart


Recommended Hold Current (A) at Ambient Temperature (°C)

| Part Number | Ambient Operation Temperature | | | | | | | | |
|----------------|-------------------------------|-------|------|------|------|------|------|------|------|
| | -40°C | -20°C | 0°C | 23°C | 40°C | 50°C | 60°C | 70°C | 85°C |
| SMD0805B010TF | 0.14 | 0.12 | 0.11 | 0.10 | 0.08 | 0.07 | 0.06 | 0.05 | 0.03 |
| SMD0805B020TF | 0.28 | 0.25 | 0.23 | 0.20 | 0.17 | 0.14 | 0.12 | 0.10 | 0.07 |
| SMD0805B035TF | 0.47 | 0.44 | 0.39 | 0.35 | 0.30 | 0.27 | 0.24 | 0.20 | 0.14 |
| SMD0805B050TF | 0.68 | 0.62 | 0.55 | 0.50 | 0.40 | 0.37 | 0.33 | 0.29 | 0.23 |
| SMD0805B075TF | 1.00 | 0.90 | 0.79 | 0.75 | 0.63 | 0.57 | 0.53 | 0.41 | 0.34 |
| SMD0805B100TFT | 1.35 | 1.25 | 1.10 | 1.00 | 0.82 | 0.74 | 0.65 | 0.55 | 0.42 |
| SMD0805B110TF | 1.45 | 1.35 | 1.20 | 1.10 | 0.92 | 0.84 | 0.75 | 0.65 | 0.52 |

Average Time-Current Curve

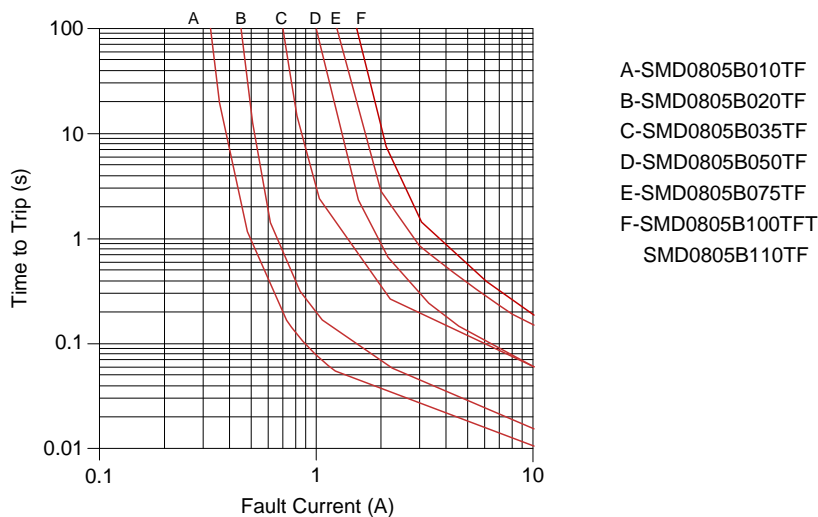

Soldering Parameters

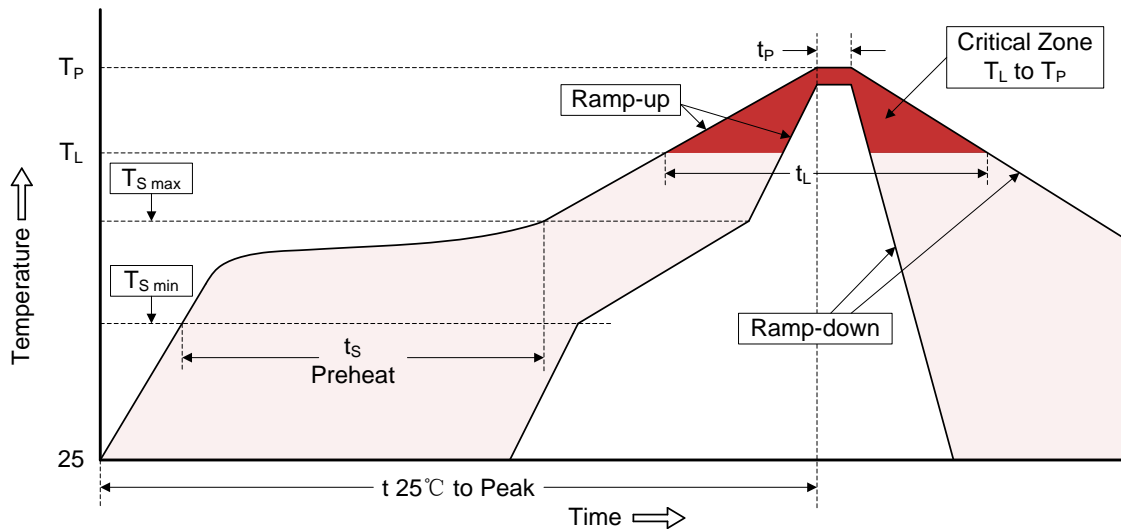


| Profile Feature | Pb-Free Assembly |
|--|----------------------------------|
| Average ramp-up rate ($T_{S\ max}$ to T_P) | 3°C/second max. |
| Preheat -Temperature Min ($T_{S\ min}$) -Temperature Max ($T_{S\ max}$) -Time (min to max) ($T_{S\ min}$ to $T_{S\ max}$) | 150°C 200°C 60-180 seconds |
| Time maintained above: -Temperature (T_L) -Time (t_L) | 217°C 60-150 seconds |
| Peak Temperature (T_P) | 260°C |
| Time within 5°C of actual Peak Temperature (t_p) | 20-40 seconds |
| Ramp-down Rate | 6°C/second max. |
| Time 25°C to Peak Temperature | 8 minutes max. |
| Storage Condition | 0°C~35°C, ≤70%RH |

- Recommended reflow methods: IR, vapor phase oven, hot air oven, N₂ environment for lead-free
- Recommended maximum paste thickness is 0.25mm (0.010 inch)
- Device can be cleaned using standard industry methods and solvents.

Note 1: All temperature refer to topside of the package, measured on the package body surface.

Note 2: If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

Physical Dimensions (mm)

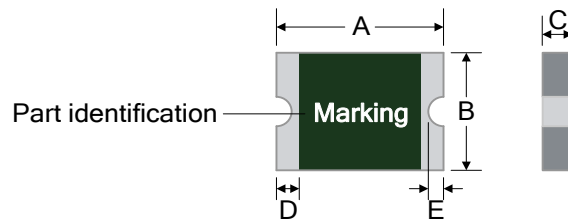


| Part Number | A | | B | | C | | D | | E | |
|----------------|------|------|------|------|------|------|------|------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| SMD0805B010TF | 2.00 | 2.20 | 1.20 | 1.50 | 0.55 | 1.00 | 0.20 | 0.55 | 0.05 | 0.45 |
| SMD0805B020TF | 2.00 | 2.20 | 1.20 | 1.50 | 0.55 | 1.00 | 0.20 | 0.55 | 0.05 | 0.45 |
| SMD0805B035TF | 2.00 | 2.20 | 1.20 | 1.50 | 0.45 | 1.00 | 0.20 | 0.55 | 0.05 | 0.45 |
| SMD0805B050TF | 2.00 | 2.20 | 1.20 | 1.50 | 0.35 | 1.25 | 0.20 | 0.55 | 0.05 | 0.45 |
| SMD0805B075TF | 2.00 | 2.20 | 1.20 | 1.50 | 0.75 | 1.25 | 0.20 | 0.55 | 0.05 | 0.45 |
| SMD0805B100TFT | 2.00 | 2.20 | 1.20 | 1.50 | 0.50 | 1.50 | 0.20 | 0.55 | 0.05 | 0.45 |
| SMD0805B110TF | 2.00 | 2.20 | 1.20 | 1.50 | 0.80 | 1.50 | 0.20 | 0.55 | 0.05 | 0.45 |

Environmental Specifications

| | |
|---|--|
| Operating / Storage temperature | -40°C to +85°C |
| Maximum Device Surface Temperature in Tripped State | 125°C |
| Passive Aging | +85°C, 1000 hours ±50% typical resistance change |
| Humidity Aging | +85°C, 85%R.H. 1000 hours ±50% typical resistance change |
| Thermal Shock | MIL-STD-202, Method 107G +85°C/-40°C 20 times -50% typical resistance change |
| Solvent Resistance | MIL-STD-202, Method 215 No change |
| Vibration | MIL-STD-883C, Method 2007.1, Condition A No change |
| Moisture Level Sensitivity | Level 1, J-STD-020C |

Packaging Quantity and Marking

Recommended Pad Layout (mm)



| Part Number | Marking | Quantity |
|----------------|---------|----------|
| SMD0805B010TF | 1 | 4000 |
| SMD0805B020TF | 2 | 4000 |
| SMD0805B035TF | 3 | 4000 |
| SMD0805B050TF | 5 | 4000 |
| SMD0805B075TF | 7 | 4000 |
| SMD0805B100TFT | I | 3000 |
| SMD0805B110TF | E | 3000 |

© 8mm tape on 7 inch reel per EIA-481 (equivalent to IEC286, part 3)

Physical Specifications

| | |
|--------------------|--|
| Terminal Material | Solder-Plated Copper (Solder Material: Matte Tin (Sn)) |
| Lead Solderability | Meets EIA Specification RS186-9E, ANSI/J-STD-002 Category 3. |

Packaging


| Tape | Symbol | Dimensions (mm) | |
|------|--------|----------------------------|---------------------------------------|
| | | B010TF B020TF B035TF | B050TF B075TF B100TFT B110TF |
| | W | 8.00±0.30 | 8.00±0.30 |
| | F | 3.50±0.05 | 3.50±0.05 |
| | E | 1.75±0.10 | 1.75±0.10 |
| | D0 | 1.55±0.05 | 1.55±0.05 |

POSITIVE TEMPERATURE COEFFICIENT

SMD0805

| | | | |
|-------------|--------------|------------|-----------|
| | D1 | 1.00(MIN) | 1.00±0.10 |
| | P0 | 4.00±0.10 | 4.00±0.10 |
| | P1 | 4.00±0.10 | 4.00±0.10 |
| | P2 | 2.00±0.05 | 2.00±0.05 |
| | A0 | 1.60±0.10 | 1.65±0.10 |
| | B0 | 2.30±0.10 | 2.35±0.10 |
| | T | 0.25±0.10 | 0.25±0.10 |
| | K0 | 0.90±0.10 | 1.50±0.10 |
| | Leader min. | 390 | 390 |
| | Trailer min. | 160 | 160 |
| <p>Reel</p> | C | Φ178.0±1.0 | |
| | D | Φ60.2±0.5 | |
| | H | 11.0±0.5 | |
| | W | 9.0±1.5 | |

Part Number System

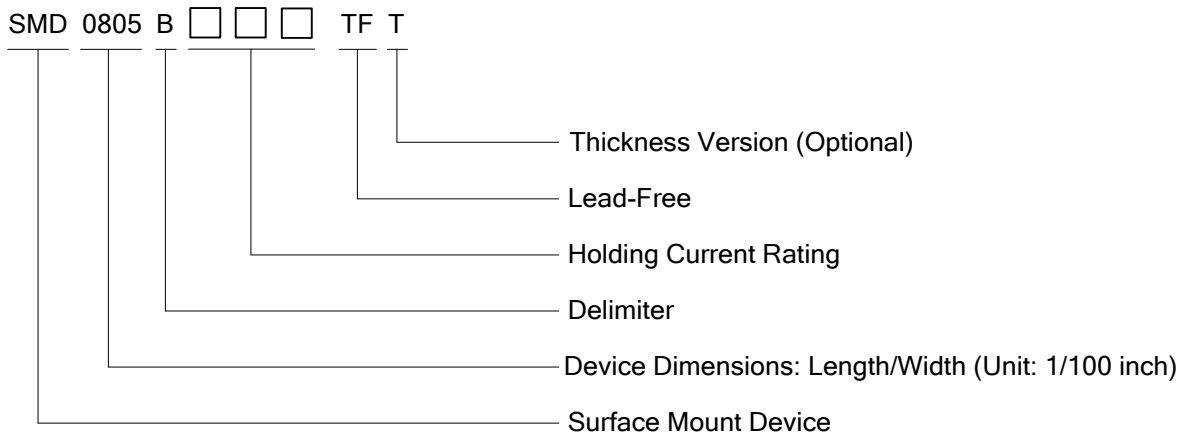

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А