

# Notice for TAIYO YUDEN products

Please read this notice before using the TAIYO YUDEN products.

## ⚠️ REMINDERS

### ■ Product Information in this Catalog

Product information in this catalog is as of October 2019. All of the contents specified herein and production status of the products listed in this catalog are subject to change without notice due to technical improvement of our products, etc. Therefore, please check for the latest information carefully before practical application or use of our products.

Please note that TAIYO YUDEN shall not be in any way responsible for any damages and defects in products or equipment incorporating our products, which are caused under the conditions other than those specified in this catalog or individual product specification sheets.

### ■ Approval of Product Specifications

Please contact TAIYO YUDEN for further details of product specifications as the individual product specification sheets are available. When using our products, please be sure to approve our product specifications or make a written agreement on the product specification with TAIYO YUDEN in advance.

### ■ Pre-Evaluation in the Actual Equipment and Conditions

Please conduct validation and verification of our products in actual conditions of mounting and operating environment before using our products.

### ■ Limited Application

#### 1. Equipment Intended for Use

The products listed in this catalog are intended for general-purpose and standard use in general electronic equipment (e.g., AV equipment, OA equipment, home electric appliances, office equipment, information and communication equipment including, without limitation, mobile phone, and PC) and other equipment specified in this catalog or the individual product specification sheets.

TAIYO YUDEN has the line-up of the products intended for use in automotive electronic equipment, telecommunications infrastructure and industrial equipment, or medical devices classified as GHTF Classes A to C (Japan Classes I to III). Therefore, when using our products for these equipment, please check available applications specified in this catalog or the individual product specification sheets and use the corresponding products.

#### 2. Equipment Requiring Inquiry

Please be sure to contact TAIYO YUDEN for further information before using the products listed in this catalog for the following equipment (excluding intended equipment as specified in this catalog or the individual product specification sheets) which may cause loss of human life, bodily injury, serious property damage and/or serious public impact due to a failure or defect of the products and/or malfunction attributed thereto.

- (1) Transportation equipment (automotive powertrain control system, train control system, and ship control system, etc.)
- (2) Traffic signal equipment
- (3) Disaster prevention equipment, crime prevention equipment
- (4) Medical devices classified as GHTF Class C (Japan Class III)
- (5) Highly public information network equipment, data-processing equipment (telephone exchange, and base station, etc.)
- (6) Any other equipment requiring high levels of quality and/or reliability equal to the equipment listed above

#### 3. Equipment Prohibited for Use

Please do not incorporate our products into the following equipment requiring extremely high levels of safety and/or reliability.

- (1) Aerospace equipment (artificial satellite, rocket, etc.)
- (2) Aviation equipment \*<sup>1</sup>
- (3) Medical devices classified as GHTF Class D (Japan Class IV), implantable medical devices \*<sup>2</sup>

- (4) Power generation control equipment (nuclear power, hydroelectric power, thermal power plant control system, etc.)
- (5) Undersea equipment (submarine repeating equipment, underwater work equipment, etc.)
- (6) Military equipment
- (7) Any other equipment requiring extremely high levels of safety and/or reliability equal to the equipment listed above

\*Notes:

1. There is a possibility that our products can be used only for aviation equipment that does not directly affect the safe operation of aircraft (e.g., in-flight entertainment, cabin light, electric seat, cooking equipment) if such use meets requirements specified separately by TAIYO YUDEN. Please be sure to contact TAIYO YUDEN for further information before using our products for such aviation equipment.
2. Implantable medical devices contain not only internal unit which is implanted in a body, but also external unit which is connected to the internal unit.

#### 4. Limitation of Liability

Please note that unless you obtain prior written consent of TAIYO YUDEN, TAIYO YUDEN shall not be in any way responsible for any damages incurred by you or third parties arising from use of the products listed in this catalog for any equipment that is not intended for use by TAIYO YUDEN, or any equipment requiring inquiry to TAIYO YUDEN or prohibited for use by TAIYO YUDEN as described above.

### ■ Safety Design

When using our products for high safety and/or reliability-required equipment or circuits, please fully perform safety and/or reliability evaluation. In addition, please install (i) systems equipped with a protection circuit and a protection device and/or (ii) systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault for a failsafe design to ensure safety.

### ■ Intellectual Property Rights

Information contained in this catalog is intended to convey examples of typical performances and/or applications of our products and is not intended to make any warranty with respect to the intellectual property rights or any other related rights of TAIYO YUDEN or any third parties nor grant any license under such rights.

### ■ Limited Warranty

Please note that the scope of warranty for our products is limited to the delivered our products themselves and TAIYO YUDEN shall not be in any way responsible for any damages resulting from a failure or defect in our products. Notwithstanding the foregoing, if there is a written agreement (e.g., supply and purchase agreement, quality assurance agreement) signed by TAIYO YUDEN and your company, TAIYO YUDEN will warrant our products in accordance with such agreement.


### ■ TAIYO YUDEN's Official Sales Channel

The contents of this catalog are applicable to our products which are purchased from our sales offices or authorized distributors (hereinafter "TAIYO YUDEN's official sales channel"). Please note that the contents of this catalog are not applicable to our products purchased from any seller other than TAIYO YUDEN's official sales channel.

### ■ Caution for Export

Some of our products listed in this catalog may require specific procedures for export according to "U.S. Export Administration Regulations", "Foreign Exchange and Foreign Trade Control Law" of Japan, and other applicable regulations. Should you have any questions on this matter, please contact our sales staff.

# METAL MULTILAYER CHIP POWER INDUCTORS (MCOIL™ MC SERIES)



REFLOW

■ PARTS NUMBER

\* Operating Temp.: -40~+125°C(Including self-generated heat)

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| M | C | K | K | 2 | 0 | 1 | 2 | T | 1 | R | 0 | M | △ | △ |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ |   |   |   |   |   |   |   |

△=Blank space

①Series name

| Code | Series name                               |
|------|---|
| MC   | Metal base multilayer chip power inductor |

②Thickness

| Code | Thickness [mm] |
|------|----------------|
| EK   | 0.50 max       |
| EE   | 0.55 max       |
| FK   | 0.60 max       |
| FE   | 0.65 max       |
| HK   | 0.80 max       |
| KK   | 1.0 max        |

③Dimensions (L × W)

| Code | Type (inch) | Dimensions (L × W) [mm] |
|------|-------------|-------------------------|
| 1005 | 1005(0402)  | 1.0 × 0.5               |
| 1210 | 1210(0504)  | 1.25 × 1.05             |
| 1608 | 1608(0603)  | 1.6 × 0.8               |
| 2012 | 2012(0805)  | 2.0 × 1.25              |

④Packaging

| Code | Packaging |
|------|-----------|
| T    | Taping    |

⑤Nominal inductance

| Code (example) | Nominal inductance [μH] |
|----------------|-------------------------|
| R24            | 0.24                    |
| R47            | 0.47                    |
| 1R0            | 1.0                     |

※R=Decimal point

⑥Inductance tolerance

| Code | Inductance tolerance |
|------|----------------------|
| M    | ±20%                 |

⑦Special code1


| Code | Special code1            |
|------|--------------------------|
| △    | Standard                 |
| G    | 5 surface terminal       |
| H    | Standard (Internal Code) |
| K    |                          |

⑧Special code2


| Code | Special code2    |
|------|------------------|
| △    | Non Polarity     |
| N    | Polarity Marking |

■ STANDARD EXTERNAL DIMENSIONS / STANDARD QUANTITY


Standard



Polarity Marking



5 surface terminal



| Type               | L                         | W                         | T                       | e                          | Standard quantity [pcs] |               |
|--------------------|---------------------------|---------------------------|-------------------------|----------------------------|-------------------------|---------------|
|                    |                           |                           |                         |                            | Paper tape              | Embossed tape |
| MCEE1005<br>(0402) | 1.0±0.2<br>(0.039±0.008)  | 0.5±0.2<br>(0.020±0.008)  | 0.55 max<br>(0.022 max) | 0.25±0.15<br>(0.010±0.006) | 10000                   |               |
| MCEK1210<br>(0504) | 1.25±0.1<br>(0.049±0.004) | 1.05±0.1<br>(0.041±0.004) | 0.50 max<br>(0.020 max) | 0.30±0.2<br>(0.012±0.008)  | 5000                    | —             |
| MCFK1608<br>(0603) | 1.6±0.2<br>(0.063±0.008)  | 0.8±0.2<br>(0.031±0.008)  | 0.60 max<br>(0.024 max) | 0.3±0.2<br>(0.012±0.008)   | 4000                    | —             |
| MCFE1608<br>(0603) | 1.6±0.2<br>(0.063±0.008)  | 0.8±0.2<br>(0.031±0.008)  | 0.65 max<br>(0.026 max) | 0.3±0.2<br>(0.012±0.008)   | 4000                    | —             |
| MCHK1608<br>(0603) | 1.6±0.2<br>(0.063±0.008)  | 0.8±0.2<br>(0.031±0.008)  | 0.80 max<br>(0.031 max) | 0.4±0.2<br>(0.016±0.008)   | 4000                    | —             |
| MCKK1608<br>(0603) | 1.6±0.2<br>(0.063±0.008)  | 0.8±0.2<br>(0.031±0.008)  | 1.0 max<br>(0.039 max)  | 0.3±0.2<br>(0.012±0.008)   | —                       | 3000          |
| MCHK2012<br>(0805) | 2.0±0.2<br>(0.079±0.008)  | 1.25±0.2<br>(0.049±0.008) | 0.80 max<br>(0.031 max) | 0.5±0.3<br>(0.02±0.012)    | 4000                    | —             |
| MCKK2012<br>(0805) | 2.0±0.2<br>(0.079±0.008)  | 1.25±0.2<br>(0.049±0.008) | 1.0 max<br>(0.039 max)  | 0.5±0.3<br>(0.02±0.012)    | —                       | 3000          |

Unit: mm (inch)

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).

■ PARTS NUMBER

● MC1005

| Parts number    | EHS  | Nominal inductance<br>[ $\mu$ H] | Inductance tolerance | DC Resistance<br>[m $\Omega$ ] |        | Rated current(I <sub>dc1</sub> )<br>[A] (max.) | Rated current(I <sub>dc2</sub> )<br>[A] (max.) | Measuring frequency<br>[MHz] | Thickness<br>[mm] (max.) |
|-----------------|------|----------------------------------|----------------------|--------------------------------|--------|--|--|------------------------------|--------------------------|
|                 |      |                                  |                      | (max.)                         | (typ.) |  |  |                              |                          |
| MCEE1005TR10MHN | RoHS | 0.10                             | ±20%                 | 50                             | 41     | 2.00   | 2.00   | 1                            | 0.55                     |
| MCEE1005TR22MHN | RoHS | 0.22                             | ±20%                 | 80                             | 65     | 1.60   | 1.60   | 1                            | 0.55                     |
| MCEE1005TR47MHN | RoHS | 0.47                             | ±20%                 | 140                            | 114    | 1.20   | 1.20   | 1                            | 0.55                     |
| MCEE1005T1R0MHN | RoHS | 1.0                              | ±20%                 | 300                            | 244    | 1.00   | 0.80   | 1                            | 0.55                     |

● MC1210

| Parts number    | EHS  | Nominal inductance<br>[ $\mu$ H] | Inductance tolerance | DC Resistance<br>[m $\Omega$ ] |        | Rated current(I <sub>dc1</sub> )<br>[A] (max.) | Rated current(I <sub>dc2</sub> )<br>[A] (max.) | Measuring frequency<br>[MHz] | Thickness<br>[mm] (max.) |
|-----------------|------|----------------------------------|----------------------|--------------------------------|--------|--|--|------------------------------|--------------------------|
|                 |      |                                  |                      | (max.)                         | (typ.) |  |  |                              |                          |
| MCEK1210TR47MHN | RoHS | 0.47                             | ±20%                 | 82                             | 70     | 2.30   | 1.60   | 1                            | 0.50                     |
| MCEK1210T1R0MHN | RoHS | 1.0                              | ±20%                 | 179                            | 157    | 1.50   | 1.10   | 1                            | 0.50                     |
| MCEK1210T1R5MHN | RoHS | 1.5                              | ±20%                 | 240                            | 200    | 1.20   | 0.90   | 1                            | 0.50                     |

● MC1608

| Parts number    | EHS  | Nominal inductance<br>[ $\mu$ H] | Inductance tolerance | DC Resistance<br>[m $\Omega$ ] |        | Rated current(I <sub>dc1</sub> )<br>[A] (max.) | Rated current(I <sub>dc2</sub> )<br>[A] (max.) | Measuring frequency<br>[MHz] | Thickness<br>[mm] (max.) |
|-----------------|------|----------------------------------|----------------------|--------------------------------|--------|--|--|------------------------------|--------------------------|
|                 |      |                                  |                      | (max.)                         | (typ.) |  |  |                              |                          |
| MCFK1608TR24M   | RoHS | 0.24                             | ±20%                 | 50                             | 40     | 2.30   | 2.10   | 1                            | 0.60                     |
| MCFK1608TR47M   | RoHS | 0.47                             | ±20%                 | 85                             | 69     | 1.90   | 1.60   | 1                            | 0.60                     |
| MCFK1608T1R0M   | RoHS | 1.0                              | ±20%                 | 224                            | 182    | 1.50   | 0.90   | 1                            | 0.60                     |
| MCFE1608TR24MG  | RoHS | 0.24                             | ±20%                 | 100                            | 75     | 2.60   | 1.50   | 1                            | 0.65                     |
| MCFE1608TR47MG  | RoHS | 0.47                             | ±20%                 | 150                            | 114    | 2.00   | 1.20   | 1                            | 0.65                     |
| MCFE1608T1R0MG  | RoHS | 1.0                              | ±20%                 | 340                            | 270    | 1.40   | 0.80   | 1                            | 0.65                     |
| MCHK1608TR24MKN | RoHS | 0.24                             | ±20%                 | 24                             | 20     | 4.30   | 3.70   | 1                            | 0.80                     |
| MCHK1608TR47MKN | RoHS | 0.47                             | ±20%                 | 43                             | 38     | 3.30   | 2.70   | 1                            | 0.80                     |
| MCHK1608TR56MKN | RoHS | 0.56                             | ±20%                 | 55                             | 45     | 2.70   | 2.60   | 1                            | 0.80                     |
| MCHK1608T1R0MKN | RoHS | 1.0                              | ±20%                 | 110                            | 89     | 2.20   | 1.60   | 1                            | 0.80                     |
| MCHK1608T1R5MKN | RoHS | 1.5                              | ±20%                 | 200                            | 160    | 1.70   | 1.30   | 1                            | 0.80                     |
| MCHK1608TR2MKN  | RoHS | 2.2                              | ±20%                 | 292                            | 237    | 1.50   | 1.20   | 1                            | 0.80                     |
| MCKK1608TR24M N | RoHS | 0.24                             | ±20%                 | 38                             | 35     | 2.80   | 2.60   | 1                            | 1.00                     |
| MCKK1608TR47M N | RoHS | 0.47                             | ±20%                 | 55                             | 44     | 2.40   | 2.00   | 1                            | 1.00                     |
| MCKK1608T1R0M N | RoHS | 1.0                              | ±20%                 | 123                            | 100    | 2.00   | 1.30   | 1                            | 1.00                     |

● MC2012

| Parts number  | EHS  | Nominal inductance<br>[ $\mu$ H] | Inductance tolerance | DC Resistance<br>[m $\Omega$ ] |        | Rated current(I <sub>dc1</sub> )<br>[A] (max.) | Rated current(I <sub>dc2</sub> )<br>[A] (max.) | Measuring frequency<br>[MHz] | Thickness<br>[mm] (max.) |
|---------------|------|----------------------------------|----------------------|--------------------------------|--------|--|--|------------------------------|--------------------------|
|               |      |                                  |                      | (max.)                         | (typ.) |  |  |                              |                          |
| MCHK2012TR24M | RoHS | 0.24                             | ±20%                 | 24                             | 19     | 4.32   | 3.60   | 1                            | 0.80                     |
| MCHK2012TR47M | RoHS | 0.47                             | ±20%                 | 36                             | 30     | 3.21   | 3.15   | 1                            | 0.80                     |
| MCHK2012T1R0M | RoHS | 1.0                              | ±20%                 | 111                            | 90     | 2.26   | 1.47   | 1                            | 0.80                     |
| MCKK2012TR24M | RoHS | 0.24                             | ±20%                 | 25                             | 20     | 6.20   | 4.00   | 1                            | 1.00                     |
| MCKK2012TR47M | RoHS | 0.47                             | ±20%                 | 39                             | 32     | 4.50   | 3.10   | 1                            | 1.00                     |
| MCKK2012T1R0M | RoHS | 1.0                              | ±20%                 | 90                             | 73     | 3.60   | 2.10   | 1                            | 1.00                     |

※I<sub>dc1</sub> is the DC value at which the initial L value is decreased within 30% by the application of DC bias. (at 20°C)

※I<sub>dc2</sub> is the DC value at which the temperature of element is increased within 40°C by the application of DC bias. (at 20°C)

## Multilayer chip inductors

Multilayer chip inductors for high frequency, Multilayer chip bead inductors

Multilayer common mode choke coils (MC series F type)

Metal Multilayer Chip Power Inductors (MCOIL™ MC series)

### PACKAGING

#### ① Minimum Quantity

##### ● Tape & Reel Packaging

| Type           | Thickness<br>mm (inch) | Standard Quantity [pcs] |               |
|----------------|------------------------|-------------------------|---------------|
|                |                        | Paper Tape              | Embossed Tape |
| CK1608(0603)   | 0.8 (0.031)            | 4000                    | —             |
| CK2125(0805)   | 0.85(0.033)            | 4000                    | —             |
|                | 1.25(0.049)            | —                       | 2000          |
| CKS2125(0805)  | 0.85(0.033)            | 4000                    | —             |
|                | 1.25(0.049)            | —                       | 2000          |
| CKP1608(0603)  | 0.8 (0.031)            | 4000                    | —             |
| CKP2012(0805)  | 0.9 (0.035)            | —                       | 3000          |
| CKP2016(0806)  | 0.9 (0.035)            | —                       | 3000          |
| CKP2520(1008)  | 0.7 (0.028)            | —                       | 3000          |
|                | 0.9 (0.035)            | —                       | 3000          |
|                | 1.1 (0.043)            | —                       | 2000          |
| LK1005(0402)   | 0.5 (0.020)            | 10000                   | —             |
| LK1608(0603)   | 0.8 (0.031)            | 4000                    | —             |
| LK2125(0805)   | 0.85(0.033)            | 4000                    | —             |
|                | 1.25(0.049)            | —                       | 2000          |
| HK0603(0201)   | 0.3 (0.012)            | 15000                   | —             |
| HK1005(0402)   | 0.5 (0.020)            | 10000                   | —             |
| HK1608(0603)   | 0.8 (0.031)            | 4000                    | —             |
| HK2125(0805)   | 0.85(0.033)            | —                       | 4000          |
|                | 1.0 (0.039)            | —                       | 3000          |
| HKQ0603S(0201) | 0.3 (0.012)            | 15000                   | —             |
| HKQ0603U(0201) | 0.3 (0.012)            | 15000                   | —             |
| AQ105(0402)    | 0.5 (0.020)            | 10000                   | —             |
| BK0603(0201)   | 0.3 (0.012)            | 15000                   | —             |
| BK1005(0402)   | 0.5 (0.020)            | 10000                   | —             |
| BKH0603(0201)  | 0.3 (0.012)            | 15000                   | —             |
| BKH1005(0402)  | 0.5 (0.020)            | 10000                   | —             |
| BK1608(0603)   | 0.8 (0.031)            | 4000                    | —             |
| BK2125(0805)   | 0.85(0.033)            | 4000                    | —             |
|                | 1.25(0.049)            | —                       | 2000          |
| BK2010(0804)   | 0.45(0.018)            | 4000                    | —             |
| BK3216(1206)   | 0.8 (0.031)            | —                       | 4000          |
| BKP0603(0201)  | 0.3 (0.012)            | 15000                   | —             |
| BKP1005(0402)  | 0.5 (0.020)            | 10000                   | —             |
| BKP1608(0603)  | 0.8 (0.031)            | 4000                    | —             |
| BKP2125(0805)  | 0.85(0.033)            | 4000                    | —             |
| MCF0605(0202)  | 0.3 (0.012)            | 15000                   | —             |
| MCF0806(0302)  | 0.4 (0.016)            | —                       | 10000         |
| MCF1210(0504)  | 0.55(0.022)            | —                       | 5000          |
| MCF2010(0804)  | 0.45(0.018)            | —                       | 4000          |
| MCEE1005(0402) | 0.55(0.022)            | 10000                   | —             |
| MCEK1210(0504) | 0.5 (0.020)            | 5000                    | —             |
| MCFK1608(0603) | 0.6 (0.024)            | 4000                    | —             |
| MCFE1608(0603) | 0.65(0.026)            | 4000                    | —             |
| MCHK1608(0603) | 0.8 (0.031)            | 4000                    | —             |
| MCKK1608(0603) | 1.0 (0.039)            | —                       | 3000          |
| MCHK2012(0806) | 0.8 (0.031)            | 4000                    | —             |
| MCKK2012(0805) | 1.0 (0.039)            | —                       | 3000          |

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

## ② Taping material

### ● Card board carrier tape



|     |      |
|-----|------|
| CK  | 1608 |
| CKP | 1608 |
| CK  | 2125 |
| CKS | 2125 |
| LK  | 1005 |
| LK  | 1608 |
| LK  | 2125 |
| HK  | 0603 |
| HK  | 1005 |
| HK  | 1608 |
| HKQ | 0603 |
| AQ  | 105  |

|     |      |
|-----|------|
| BK  | 0603 |
| BK  | 1005 |
| BK  | 1608 |
| BK  | 2125 |
| BK  | 2010 |
| BKP | 0603 |
| BKP | 1005 |
| BKP | 1608 |
| BKP | 2125 |
| BKH | 0603 |
| BKH | 1005 |
| MCF | 0605 |
| MC  | 1005 |
| MC  | 1210 |
| MC  | 1608 |
| MC  | 2012 |



### ● Embossed Tape



|     |      |
|-----|------|
| CK  | 2125 |
| CKS | 2125 |
| CKP | 2012 |
| CKP | 2016 |
| CKP | 2520 |
| LK  | 2125 |
| HK  | 2125 |

|     |      |
|-----|------|
| BK  | 2125 |
| BK  | 3216 |
| MCF | 0806 |
| MCF | 1210 |
| MCF | 2010 |
| MC  | 1608 |
| MC  | 2012 |



## ③ Taping Dimensions

### ● Paper tape (8mm wide)

Unit: mm (inch)



▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| Type           | Thickness<br>mm (inch) | Chip cavity                |                            | Insertion Pitch           | Tape Thickness        |
|----------------|------------------------|----------------------------|----------------------------|---------------------------|-----------------------|
|                |                        | A                          | B                          | F                         | T                     |
| CK1608(0603)   | 0.8 (0.031)            | 1.0±0.2<br>(0.039±0.008)   | 1.8±0.2<br>(0.071±0.008)   | 4.0±0.1<br>(0.157±0.004)  | 1.1max<br>(0.043max)  |
| CK2125(0805)   | 0.85(0.033)            | 1.5±0.2<br>(0.059±0.008)   | 2.3±0.2<br>(0.091±0.008)   | 4.0±0.1<br>(0.157±0.004)  | 1.1max<br>(0.043max)  |
| CKS2125(0805)  | 0.85(0.033)            | 1.5±0.2<br>(0.059±0.008)   | 2.3±0.2<br>(0.091±0.008)   | 4.0±0.1<br>(0.157±0.004)  | 1.1max<br>(0.043max)  |
| CKP1608(0603)  | 0.8 (0.031)            | 1.0±0.2<br>(0.039±0.008)   | 1.8±0.2<br>(0.071±0.008)   | 4.0±0.1<br>(0.157±0.004)  | 1.1max<br>(0.043max)  |
| LK1005(0402)   | 0.5 (0.020)            | 0.65±0.1<br>(0.026±0.004)  | 1.15±0.1<br>(0.045±0.004)  | 2.0±0.05<br>(0.079±0.002) | 0.8max<br>(0.031max)  |
| LK1608(0603)   | 0.8 (0.031)            | 1.0±0.2<br>(0.039±0.008)   | 1.8±0.2<br>(0.071±0.008)   | 4.0±0.1<br>(0.157±0.004)  | 1.1max<br>(0.043max)  |
| LK2125(0805)   | 0.85(0.033)            | 1.5±0.2<br>(0.059±0.008)   | 2.3±0.2<br>(0.091±0.008)   | 4.0±0.1<br>(0.157±0.004)  | 1.1max<br>(0.043max)  |
| HK0603(0201)   | 0.3 (0.012)            | 0.40±0.06<br>(0.016±0.002) | 0.70±0.06<br>(0.028±0.002) | 2.0±0.05<br>(0.079±0.002) | 0.45max<br>(0.018max) |
| HK1005(0402)   | 0.5 (0.020)            | 0.65±0.1<br>(0.026±0.004)  | 1.15±0.1<br>(0.045±0.004)  | 2.0±0.05<br>(0.079±0.002) | 0.8max<br>(0.031max)  |
| HK1608(0603)   | 0.8 (0.031)            | 1.0±0.2<br>(0.039±0.008)   | 1.8±0.2<br>(0.071±0.008)   | 4.0±0.1<br>(0.157±0.004)  | 1.1max<br>(0.043max)  |
| HKQ0603S(0201) | 0.3 (0.012)            | 0.40±0.06<br>(0.016±0.002) | 0.70±0.06<br>(0.028±0.002) | 2.0±0.05<br>(0.079±0.002) | 0.45max<br>(0.018max) |
| HKQ0603U(0201) | 0.3 (0.012)            | 0.40±0.06<br>(0.016±0.002) | 0.70±0.06<br>(0.028±0.002) | 2.0±0.05<br>(0.079±0.002) | 0.45max<br>(0.018max) |
| AQ105(0402)    | 0.5 (0.020)            | 0.75±0.1<br>(0.030±0.004)  | 1.15±0.1<br>(0.045±0.004)  | 2.0±0.05<br>(0.079±0.002) | 0.8max<br>(0.031max)  |
| BK0603(0201)   | 0.3 (0.012)            | 0.40±0.06<br>(0.016±0.002) | 0.70±0.06<br>(0.028±0.002) | 2.0±0.05<br>(0.079±0.002) | 0.45max<br>(0.018max) |
| BK1005(0402)   | 0.5 (0.020)            | 0.65±0.1<br>(0.026±0.004)  | 1.15±0.1<br>(0.045±0.004)  | 2.0±0.05<br>(0.079±0.002) | 0.8max<br>(0.031max)  |
| BK1608(0603)   | 0.8 (0.031)            | 1.0±0.2<br>(0.039±0.008)   | 1.8±0.2<br>(0.071±0.008)   | 4.0±0.1<br>(0.157±0.004)  | 1.1max<br>(0.043max)  |
| BK2125(0805)   | 0.85(0.033)            | 1.5±0.2<br>(0.059±0.008)   | 2.3±0.2<br>(0.091±0.008)   | 4.0±0.1<br>(0.157±0.004)  | 1.1max<br>(0.043max)  |
| BK2010(0804)   | 0.45(0.018)            | 1.2±0.1<br>(0.047±0.004)   | 2.17±0.1<br>(0.085±0.004)  | 4.0±0.1<br>(0.157±0.004)  | 0.8max<br>(0.031max)  |
| BKP0603(0201)  | 0.3 (0.012)            | 0.40±0.06<br>(0.016±0.002) | 0.70±0.06<br>(0.028±0.002) | 2.0±0.05<br>(0.079±0.002) | 0.45max<br>(0.018max) |
| BKP1005(0402)  | 0.5 (0.020)            | 0.65±0.1<br>(0.026±0.004)  | 1.15±0.1<br>(0.045±0.004)  | 2.0±0.05<br>(0.079±0.002) | 0.8max<br>(0.031max)  |
| BKP1608(0603)  | 0.8 (0.031)            | 1.0±0.2<br>(0.039±0.008)   | 1.8±0.2<br>(0.071±0.008)   | 4.0±0.1<br>(0.157±0.004)  | 1.1max<br>(0.043max)  |
| BKP2125(0805)  | 0.85(0.033)            | 1.5±0.2<br>(0.059±0.008)   | 2.3±0.2<br>(0.091±0.008)   | 4.0±0.1<br>(0.157±0.004)  | 1.1max<br>(0.043max)  |
| BKH0603(0201)  | 0.3 (0.012)            | 0.40±0.06<br>(0.016±0.002) | 0.70±0.06<br>(0.028±0.002) | 2.0±0.05<br>(0.079±0.002) | 0.45max<br>(0.018max) |
| BKH1005(0402)  | 0.5 (0.020)            | 0.65±0.1<br>(0.026±0.004)  | 1.15±0.1<br>(0.045±0.004)  | 2.0±0.05<br>(0.079±0.002) | 0.8max<br>(0.031max)  |
| MCF0605(0202)  | 0.3 (0.012)            | 0.62±0.03<br>(0.024±0.001) | 0.77±0.03<br>(0.030±0.001) | 2.0±0.05<br>(0.079±0.002) | 0.45max<br>(0.018max) |
| MCFK1608(0603) | 0.6 (0.024)            | 1.1±0.05<br>(0.043±0.002)  | 1.9±0.05<br>(0.075±0.002)  | 4.0±0.1<br>(0.157±0.004)  | 0.72max<br>(0.028max) |
| MCEE1005(0402) | 0.55(0.021)            | 0.8±0.05<br>(0.031±0.002)  | 1.3±0.05<br>(0.051±0.002)  | 2.0±0.05<br>(0.079±0.002) | 0.64max<br>(0.025max) |
| MCEK1210(0504) | 0.5 (0.020)            | 1.3±0.1<br>(0.051±0.004)   | 1.55±0.1<br>(0.061±0.004)  | 4.0±0.1<br>(0.157±0.004)  | 0.64max<br>(0.025max) |
| MCFK1608(0603) | 0.6 (0.024)            | 1.1±0.05<br>(0.043±0.002)  | 1.9±0.05<br>(0.075±0.002)  | 4.0±0.1<br>(0.157±0.004)  | 0.72max<br>(0.028max) |
| MCFE1608(0603) | 0.65(0.026)            | 1.1±0.05<br>(0.043±0.002)  | 1.9±0.05<br>(0.075±0.002)  | 4.0±0.1<br>(0.157±0.004)  | 0.72max<br>(0.028max) |
| MCHK1608(0603) | 0.8 (0.031)            | 1.2±0.05<br>(0.047±0.002)  | 2.0±0.05<br>(0.079±0.002)  | 4.0±0.1<br>(0.157±0.004)  | 0.9max<br>(0.035max)  |
| MCHK2012(0805) | 0.8 (0.031)            | 1.65±0.1<br>(0.065±0.004)  | 2.4±0.1<br>(0.094±0.004)   | 4.0±0.1<br>(0.157±0.004)  | 0.9max<br>(0.035max)  |

Unit : mm (inch)

● Embossed Tape (8mm wide)



| Type           | Thickness<br>mm (inch) | Chip cavity                    |                                | Insertion Pitch               | Tape Thickness  |                 |
|----------------|------------------------|--------------------------------|--------------------------------|-------------------------------|-----------------|-----------------|
|                |                        | A                              | B                              | F                             | K               | T               |
| CK2125(0805)   | 1.25 (0.049)           | 1.5 ± 0.2<br>(0.059 ± 0.008)   | 2.3 ± 0.2<br>(0.091 ± 0.008)   | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 2.0<br>(0.079)  | 0.3<br>(0.012)  |
| CKS2125(0805)  | 1.25 (0.049)           | 1.5 ± 0.2<br>(0.059 ± 0.008)   | 2.3 ± 0.2<br>(0.091 ± 0.008)   | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 2.0<br>(0.079)  | 0.3<br>(0.012)  |
| CKP2012(0805)  | 0.9 (0.035)            | 1.55 ± 0.2<br>(0.061 ± 0.008)  | 2.3 ± 0.2<br>(0.091 ± 0.008)   | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 1.3<br>(0.051)  | 0.3<br>(0.012)  |
| CKP2016(0806)  | 0.9 (0.035)            | 1.8 ± 0.1<br>(0.071 ± 0.004)   | 2.2 ± 0.1<br>(0.087 ± 0.004)   | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 1.3<br>(0.051)  | 0.25<br>(0.01)  |
| CKP2520(1008)  | 0.7 (0.028)            | 2.3 ± 0.1<br>(0.091 ± 0.004)   | 2.8 ± 0.1<br>(0.110 ± 0.004)   | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 1.4<br>(0.055)  | 0.3<br>(0.012)  |
|                | 0.9 (0.035)            |                                |                                |                               | 1.4<br>(0.055)  |                 |
|                | 1.1 (0.043)            |                                |                                |                               | 1.7<br>(0.067)  |                 |
|                | 1.1 (0.043)            |                                |                                |                               | 1.7<br>(0.067)  |                 |
| LK2125(0805)   | 1.25 (0.049)           | 1.5 ± 0.2<br>(0.059 ± 0.008)   | 2.3 ± 0.2<br>(0.091 ± 0.008)   | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 2.0<br>(0.079)  | 0.3<br>(0.012)  |
| HK2125(0805)   | 0.85 (0.033)           | 1.5 ± 0.2<br>(0.059 ± 0.008)   | 2.3 ± 0.2<br>(0.091 ± 0.008)   | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 1.5<br>(0.059)  | 0.3<br>(0.012)  |
|                | 1.0 (0.039)            |                                |                                |                               | 2.0<br>(0.079)  |                 |
| BK2125(0805)   | 1.25 (0.049)           | 1.5 ± 0.2<br>(0.059 ± 0.008)   | 2.3 ± 0.2<br>(0.091 ± 0.008)   | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 2.0<br>(0.079)  | 0.3<br>(0.012)  |
| BK3216(1206)   | 0.8 (0.031)            | 1.9 ± 0.1<br>(0.075 ± 0.004)   | 3.5 ± 0.1<br>(0.138 ± 0.004)   | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 1.4<br>(0.055)  | 0.3<br>(0.012)  |
| MCF0806(0302)  | 0.4 (0.016)            | 0.75 ± 0.05<br>(0.030 ± 0.002) | 0.95 ± 0.05<br>(0.037 ± 0.002) | 2.0 ± 0.05<br>(0.079 ± 0.002) | 0.55<br>(0.022) | 0.3<br>(0.012)  |
| MCF1210(0504)  | 0.55 (0.022)           | 1.15 ± 0.05<br>(0.045 ± 0.002) | 1.40 ± 0.05<br>(0.055 ± 0.002) | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 0.65<br>(0.026) | 0.3<br>(0.012)  |
| MCF2010(0804)  | 0.45 (0.018)           | 1.1 ± 0.1<br>(0.043 ± 0.004)   | 2.3 ± 0.1<br>(0.091 ± 0.004)   | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 0.85<br>(0.033) | 0.3<br>(0.012)  |
| MCKK1608(0603) | 1.0 (0.039)            | 1.1 ± 0.1<br>(0.043 ± 0.004)   | 1.95 ± 0.1<br>(± 0.004)        | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 1.4<br>(0.055)  | 0.25<br>(0.01)  |
| MCKK2012(0805) | 1.0 (0.039)            | 1.55 ± 0.1<br>(0.061 ± 0.004)  | 2.35 ± 0.1<br>(0.093 ± 0.004)  | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 1.35<br>(0.053) | 0.25<br>(0.010) |

Unit : mm (inch)

④ LEADER AND BLANK PORTION



▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

⑤ Reel Size



| A                  | B                 | C                   | D                   | E             | R   |
|--------------------|-------------------|---------------------|---------------------|---------------|-----|
| $\phi 178 \pm 2.0$ | $\phi 50$ or more | $\phi 13.0 \pm 0.2$ | $\phi 21.0 \pm 0.8$ | $2.0 \pm 0.5$ | 1.0 |

|                | t       | W            |
|----------------|---------|--------------|
| 4mm width tape | 1.5max. | $5 \pm 1.0$  |
| 8mm width tape | 2.5max. | $10 \pm 1.5$ |

(Unit : mm)

⑥ Top tape strength

The top tape requires a peel-off force of 0.1~0.7N in the direction of the arrow as illustrated below.





## Multilayer chip inductors

Multilayer chip inductors for high frequency, Multilayer chip bead inductors

Multilayer common mode choke coils (MC series F type)

Metal Multilayer Chip Power Inductors (MCOIL™ MC series)

### RELIABILITY DATA

| 1. Operating Temperature Range |                  |   |
|--------------------------------|------------------|---|
| Specified Value                | BK series        | -55 ~ +125°C  |
|                                | BKH series       |   |
|                                | BKP series       |   |
|                                | MCF series       | -40 ~ +85°C   |
|                                | CK series        | -40 ~ +85°C   |
|                                | CKS series       |   |
|                                | CKP series       |   |
|                                | LK series        |   |
|                                | HK0603, HK1005   | -55 ~ +125°C  |
|                                | HK1608, HK2125   | -40 ~ +85°C   |
|                                | HKQ0603          | -55 ~ +125°C  |
|                                | AQ105            |   |
|                                | MCOIL™ MC series | -40 ~ +125°C (Including self-generated heat)  |
| 2. Storage Temperature Range   |                  |   |
| Specified Value                | BK series        | -55 ~ +125°C  |
|                                | BKH series       |   |
|                                | BKP series       |   |
|                                | MCF series       | -40 ~ +85°C   |
|                                | CK series        | -40 ~ +85°C   |
|                                | CKS series       |   |
|                                | CKP series       |   |
|                                | LK series        |   |
|                                | HK0603, HK1005   | -55 ~ +125°C  |
|                                | HK1608, HK2125   | -40 ~ +85°C   |
|                                | HKQ0603          | -55 ~ +125°C  |
|                                | AQ105            |   |
|                                | MCOIL™ MC series | -40 ~ +85°C   |
| 3. Rated Current               |                  |   |
| Specified Value                | BK series        | The temperature of the element is increased within 20°C.  |
|                                | BKH series       |   |
|                                | BKP series       |   |
|                                | MCF series       | Refer to each specification.  |
|                                | CK series        | The temperature of the element is increased within 20°C.  |
|                                | CKS series       |   |
|                                | CKP series       |   |
|                                | LK series        |   |
|                                | HK0603, HK1005   | The decreasing-rate of inductance value is within 5 %   |
|                                | HK1608, HK2125   |   |
|                                | HKQ0603          | The decreasing-rate of inductance value is within 5 %, or the temperature of the element is increased within 20°C             |
|                                | AQ105            |   |
|                                | MCOIL™ MC series | Idc1: The decreasing-rate of inductance value is within 30 %<br>Idc2: The temperature of the element is increased within 40°C |

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| 4. Impedance             |  |                              |
|--------------------------|--|------------------------------|
| Specified Value          | BK series  | Refer to each specification. |
|                          | BKH series   |                              |
|                          | BKP series   |                              |
|                          | MCF series   |                              |
| Test Methods and Remarks | BK0603Series, BKP0603Series, BKH Series<br>Measuring frequency : 100±1MHz<br>Measuring equipment : 4991A (or its equivalent)<br>Measuring jig : 16193A (or its equivalent)   |                              |
|                          | BK1005Series, BKP1005Series, BKH1005Series<br>Measuring frequency : 100±1MHz<br>Measuring equipment : 4291A (or its equivalent)<br>Measuring jig : 16192A ( or its equivalent ) , HW:16193A ( or its equivalent)                   |                              |
|                          | BK1608・2125Series, BKP1608・2125Series<br>Measuring frequency : 100±1MHz<br>Measuring equipment : 4291A (or its equivalent), 4195A (or its equivalent)<br>Measuring jig : 16192A (or its equivalent), HW:16193A (or its equivalent) |                              |
|                          | BK2010・3216Series<br>Measuring frequency : 100±1MHz<br>Measuring equipment : 4291A (or its equivalent), 4195A (or its equivalent)<br>Measuring jig : 16192A (or its equivalent)  |                              |
|                          | MCF Series<br>Measuring frequency : 100±1MHz<br>Measuring equipment : 4291A (or its equivalent)  |                              |

| 5. Inductance            |  |                              |
|--------------------------|--|------------------------------|
| Specified Value          | CK series  | Refer to each specification. |
|                          | CKS series   |                              |
|                          | CKP series   |                              |
|                          | LK series  |                              |
|                          | HK0603, HK1005   |                              |
|                          | HK1608, HK2125   |                              |
|                          | HKQ0603  |                              |
|                          | AQ105  |                              |
| Test Methods and Remarks | MCOIL™ MC series   |                              |
|                          | CK, CKS, LK Series<br>Measuring frequency : Refer to each specification.<br>Measuring equipment /jig : 1608,2125⇒4294A+16092A (or its equivalent)<br>1005⇒4291A+16193A (or its equivalent)<br>Measuring current : 047~4.7 μH ⇒1mArms , 5.6~33 μH ⇒0.1mArms |                              |
|                          | CKP, MCOIL™ MC Series<br>Measuring frequency : 1MHz<br>Measuring equipment : 4285A (or its equivalent)   |                              |
|                          | HK0603, HK1005, AQ Series<br>Measuring frequency : 100MHz<br>Measuring equipment /jig : HK0603⇒ E4991A+16197A (or its equivalent) , AQ105⇒4291A+16197A (or its equivalent)<br>HK1005⇒ 4291A+16193A (or its equivalent)                                     |                              |
|                          | HK1608, HK2125 Series<br>Measuring frequency : ~100nH⇒100MHz , 120nH~⇒50MHz<br>Measuring equipment /jig : 4291A+16092A (or its equivalent)   |                              |
|                          | HKQ Series<br>Measuring frequency : 500MHz<br>Measuring equipment /jig : E4991A+16197A (or its equivalent)   |                              |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| 6. Q                              |   |  |
|-----------------------------------|---|--|
| Specified Value                   | CK series   | —  |
|                                   | CKS series  |  |
|                                   | CKP series  |  |
|                                   | LK series   |  |
|                                   | HK0603, HK1005  |  |
|                                   | HK1608, HK2125  |  |
|                                   | HKQ0603   |  |
|                                   | AQ105   |  |
| MCOIL™ MC series                  | —   |  |
| Test Methods and Remarks          | LK Series<br>Measuring frequency : Refer to each specification.<br>Measuring equipment /jig : 1608,2125⇒4294A+16092A(or its equivalent)<br>1005⇒4291A+16193A(or its equivalent)<br>Measuring current : 047~4.7 μH ⇒1mArms 、 5.6~33 μH ⇒0.1mArms |  |
|                                   | HK0603, HK1005, AQ Series<br>Measuring frequency : 100MHz<br>Measuring equipment /jig : HK0603⇒E4991A+16197A(or its equivalent) , AQ105⇒4291A+16197A(or its equivalent)<br>HK1005⇒4291A+16193A(or its equivalent)                               |  |
|                                   | HK1608, HK2125 Series<br>Measuring frequency : ~100nH⇒100MHz 、 120nH~⇒50MHz<br>Measuring equipment /jig : 4291A+16092A(or its equivalent)   |  |
|                                   | HKQ Series<br>Measuring frequency : 500MHz<br>Measuring equipment /jig : E4991A+16197A(or its equivalent)   |  |
|                                   |   |  |
|                                   |   |  |
|                                   |   |  |
|                                   |   |  |
|                                   |   |  |
|                                   |   |  |
| 7. DC Resistance                  |   |  |
| Specified Value                   | BK series   | Refer to each specification.   |
|                                   | BKH series  |  |
|                                   | BKP series  |  |
|                                   | MCF series  |  |
|                                   | CK series   |  |
|                                   | CKS series  |  |
|                                   | CKP series  |  |
|                                   | LK series   |  |
|                                   | HK0603, HK1005  |  |
|                                   | HK1608, HK2125  |  |
|                                   | HKQ0603   |  |
|                                   | AQ105   |  |
|                                   | MCOIL™ MC series  |  |
|                                   | Test Methods and Remarks  |  |
| 8. Self Resonance Frequency (SRF) |   |  |
| Specified Value                   | BK series   | —  |
|                                   | BKH series  |  |
|                                   | BKP series  |  |
|                                   | MCF series  |  |
|                                   | CK series   | Refer to each specification.   |
|                                   | CKS series  |  |
|                                   | CKP series  | —  |
|                                   | LK series   | Refer to each specification.   |
|                                   | HK0603, HK1005  |  |
|                                   | HK1608, HK2125  |  |
|                                   | HKQ0603   |  |
|                                   | AQ105   |  |
|                                   | MCOIL™ MC series  |  |
|                                   | Test Methods and Remarks  | LK, CK Series :<br>Measuring equipment : 4195A(or its equivalent)<br>Measuring jig : 16092A(or its equivalent)<br>HK, HKQ, AQ Series :<br>Measuring equipment : 8719C(or its equivalent) |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| 9. Resistance to Flexure of Substrate |   |                       |
|---------------------------------------|---|-----------------------|
| Specified Value                       | BK series   | No mechanical damage. |
|                                       | BKH series  |                       |
|                                       | BKP series  |                       |
|                                       | MCF series  |                       |
|                                       | CK series   |                       |
|                                       | CKS series  |                       |
|                                       | CKP series  |                       |
|                                       | LK series   |                       |
|                                       | HK0603, HK1005  |                       |
|                                       | HK1608, HK2125  |                       |
|                                       | HKQ0603   |                       |
|                                       | AQ105   |                       |
|                                       | MCOIL™ MC series  |                       |
| Test Methods and Remarks              | Warp : 2mm (BK Series, BKP, BKH1005, CK, CKS, CKP, LK, HK, HKQ0603S, HKQ0603U, AQ Series, MCF1210, MC Series)<br>: 1mm (BKH0603, MCF Series without 1210 size.) | <p>(Unit: mm)</p>     |
|                                       | Testing board : glass epoxy-resin substrate<br>Thickness : 0.8mm  |                       |

| 10. Solderability        |  |  |
|--------------------------|--|--|
| Specified Value          | BK series  | At least 90% of terminal electrode is covered by new solder. |
|                          | BKH series   |  |
|                          | BKP series   |  |
|                          | MCF series   |  |
|                          | CK series  |  |
|                          | CKS series   |  |
|                          | CKP series   |  |
|                          | LK series  |  |
|                          | HK0603, HK1005   |  |
|                          | HK1608, HK2125   |  |
|                          | HKQ0603  |  |
|                          | AQ105  |  |
|                          | MCOIL™ MC series   |  |
| Test Methods and Remarks | Solder temperature : 230 ± 5°C (JIS Z 3282 H60A or H63A) |  |
|                          | Solder temperature : 245 ± 3°C (Sn/3.0Ag/0.5Cu)          |  |
|                          | Duration : 4 ± 1 sec.                                    |  |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| 11. Resistance to Soldering |  |  |
|-----------------------------|--|--|
| Specified Value             | BK series  | Appearance: No significant abnormality<br>Impedance change: Within $\pm 30\%$  |
|                             | BKH series   |  |
|                             | BKP series   |  |
|                             | MCF series   | Appearance: No significant abnormality<br>Impedance change: Within $\pm 20\%$  |
|                             | CK series  | Appearance: No significant abnormality<br>Inductance change: R10~4R7 $\Rightarrow$ Within $\pm 10\%$ 、6R8~100 $\Rightarrow$ Within $\pm 15\%$                                      |
|                             | CKS series   | Appearance: No significant abnormality<br>Inductance change: Within $\pm 20\%$   |
|                             | CKP series   | Appearance: No significant abnormality<br>Inductance change: Within $\pm 30\%$   |
|                             | LK series  | Appearance: No significant abnormality<br>Inductance change: 1005 $\Rightarrow$ Within $\pm 15\%$<br>1608,2125 $\Rightarrow$ 47N~4R7: Within $\pm 10\%$ 5R6~330: Within $\pm 15\%$ |
|                             | HK0603, HK1005   | Appearance: No significant abnormality<br>Inductance change: Within $\pm 5\%$  |
|                             | HK1608, HK2125   |  |
|                             | HKQ0603  |  |
|                             | AQ105  |  |
| MCOIL™ MC series            | Appearance: No significant abnormality<br>Inductance change: Within $\pm 10\%$   |  |
| Test Methods and Remarks    | Solder temperature : $260\pm 5^{\circ}\text{C}$<br>Duration : $10\pm 0.5$ sec.<br>Preheating temperature : $150$ to $180^{\circ}\text{C}$<br>Preheating time : $3$ min.<br>Flux : Immersion into methanol solution with colophony for 3 to 5 sec.<br>Recovery : 2 to 3 hrs of recovery under the standard condition after the test. (See Note 1) |  |

(Note 1) When there are questions concerning measurement result; measurement shall be made after  $48\pm 2$  hrs of recovery under the standard condition.

| 12. Thermal Shock        |  |  |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
|--------------------------|--|--|------|------------------------------------|-------------|---|---------------------------------------|-----------|---|------------------|-----------|---|---------------------------------------|-----------|---|------------------|-----------|
| Specified Value          | BK series  | Appearance: No significant abnormality<br>Impedance change: Within $\pm 30\%$                              |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
|                          | BKH series   |  |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
|                          | BKP series   |  |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
|                          | MCF series   | Appearance: No significant abnormality<br>Impedance change: Within $\pm 20\%$                              |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
|                          | CK series  | Appearance: No significant abnormality<br>Inductance change: Within $\pm 20\%$                             |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
|                          | CKS series   |  |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
|                          | CKP series   | Appearance: No significant abnormality<br>Inductance change: Within $\pm 30\%$                             |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
|                          | LK series  | Appearance: No significant abnormality<br>Inductance change: Within $\pm 10\%$ Q change: Within $\pm 30\%$ |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
|                          | HK0603, HK1005   | Appearance: No significant abnormality<br>Inductance change: Within $\pm 10\%$ Q change: Within $\pm 20\%$ |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
|                          | HK1608, HK2125   |  |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
|                          | HKQ0603  |  |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
|                          | AQ105  |  |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
| MCOIL™ MC series         | Appearance: No significant abnormality<br>Inductance change: Within $\pm 10\%$   |  |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
| Test Methods and Remarks | Conditions for 1 cycle <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Step</th> <th>temperature (<math>^{\circ}\text{C}</math>)</th> <th>time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Minimum operating temperature <math>+0/-3</math></td> <td><math>30\pm 3</math></td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td><math>2\sim 3</math></td> </tr> <tr> <td>3</td> <td>Maximum operating temperature <math>+3/-0</math></td> <td><math>30\pm 3</math></td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td><math>2\sim 3</math></td> </tr> </tbody> </table> Number of cycles: 5<br>Recovery: 2 to 3 hrs of recovery under the standard condition after the test. (See Note 1) |  | Step | temperature ( $^{\circ}\text{C}$ ) | time (min.) | 1 | Minimum operating temperature $+0/-3$ | $30\pm 3$ | 2 | Room temperature | $2\sim 3$ | 3 | Maximum operating temperature $+3/-0$ | $30\pm 3$ | 4 | Room temperature | $2\sim 3$ |
| Step                     | temperature ( $^{\circ}\text{C}$ )   | time (min.)  |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
| 1                        | Minimum operating temperature $+0/-3$  | $30\pm 3$  |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
| 2                        | Room temperature   | $2\sim 3$  |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
| 3                        | Maximum operating temperature $+3/-0$  | $30\pm 3$  |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |
| 4                        | Room temperature   | $2\sim 3$  |      |                                    |             |   |                                       |           |   |                  |           |   |                                       |           |   |                  |           |

(Note 1) When there are questions concerning measurement result; measurement shall be made after  $48\pm 2$  hrs of recovery under the standard condition.

| 13. Damp Heat ( Steady state) |  |  |
|-------------------------------|--|--|
| Specified Value               | BK series  | Appearance: No significant abnormality<br>Impedance change: Within $\pm 30\%$  |
|                               | BKH series   |  |
|                               | BKP series   |  |
|                               | MCF series   | Appearance: No significant abnormality<br>Impedance change: Within $\pm 20\%$  |
|                               | CK series  | Appearance: No significant abnormality<br>Inductance change: Within $\pm 20\%$   |
|                               | CKS series   |  |
|                               | CKP series   | Appearance: No significant abnormality<br>Inductance change: Within $\pm 30\%$   |
|                               | LK series  | Appearance: No significant abnormality<br>Inductance change: 1005,1608 $\Rightarrow$ Within $\pm 10\%$ 2125 $\Rightarrow$ Within $\pm 20\%$<br>Q change: Within $\pm 30\%$ |
|                               | HK0603, HK1005   | Appearance: No significant abnormality<br>Inductance change: Within $\pm 10\%$ Q change: Within $\pm 20\%$   |
|                               | HK1608, HK2125   |  |
|                               | HKQ0603  |  |
|                               | AQ105  |  |
|                               | MCOIL™ MC series   | Appearance: No significant abnormality<br>Inductance change: Within $\pm 10\%$   |
| Test Methods and Remarks      | BK, BKP, BKH, LK, CK, CKS, CKP, MCF Series:<br>Temperature : $40 \pm 2^\circ\text{C}$<br>Humidity : 90 to 95%RH<br>Duration : 500 +24/-0 hrs<br>Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber. (See Note 1) |  |
|                               | HK, HKQ, AQ, MCOIL™ MC series:<br>Temperature : $60 \pm 2^\circ\text{C}$<br>Humidity : 90 to 95%RH<br>Duration : 500 +24/-0 hrs<br>Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber. (See Note 1)              |  |

(Note 1) When there are questions concerning measurement result; measurement shall be made after  $48 \pm 2$  hrs of recovery under the standard condition.

14. Loading under Damp Heat

|                          |  |   |
|--------------------------|--|---|
| Specified Value          | BK series  | Appearance: No significant abnormality<br>Impedance change: Within $\pm 30\%$   |
|                          | BKH series   |   |
|                          | BKP series   |   |
|                          | MCF series   | —   |
|                          | CK series  | Appearance: No significant abnormality  |
|                          | CKS series   | Inductance change: Within $\pm 20\%$  |
|                          | CKP series   | Appearance: No significant abnormality<br>Inductance change: Within $\pm 30\%$  |
|                          | LK series  | Appearance: No significant abnormality<br>Inductance change: 1005 $\Rightarrow$ Within $\pm 10\%$<br>1608 $\Rightarrow$ 0.047 ~ 12.0 $\mu\text{H}$ : Within $\pm 10\%$ 15.0 ~ 33.0 $\mu\text{H}$ : Within $\pm 15\%$<br>2125 $\Rightarrow$ Within $\pm 20\%$<br>Q change: Within $\pm 30\%$ |
|                          | HK0603, HK1005   | Appearance: No significant abnormality<br>Inductance change: Within $\pm 10\%$ Q change: Within $\pm 20\%$  |
|                          | HK1608, HK2125   |   |
|                          | HKQ0603  |   |
|                          | AQ105  |   |
| MCOIL™ MC series※        | Appearance: No significant abnormality<br>Inductance change: Within $\pm 10\%$   |   |
| Test Methods and Remarks | BK, BKP, BKH, LK, CK, CKS, CKP Series:<br>Temperature : $40 \pm 2^\circ\text{C}$<br>Humidity : 90 to 95%RH<br>Applied current : Rated current<br>Duration : 500 +24/-0 hrs<br>Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber. (See Note 1)<br><br>HK, HKQ, AQ, MCOIL™ MC Series:<br>Temperature : $60 \pm 2^\circ\text{C}$<br>Humidity : 90 to 95%RH<br>Applied current : Rated current ※MC series ; $I_{dc2max}$<br>Duration : 500 +24/-0 hrs<br>Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber. (See Note 1) |   |

Note on standard condition: "standard condition" referred to herein is defined as follows:

5 to 35°C of temperature, 45 to 85% relative humidity, and 86 to 106kPa of air pressure.

When there are questions concerning measurement results:

In order to provide correlation data, the test shall be conducted under condition of  $20 \pm 2^\circ\text{C}$  of temperature, 60 to 70% relative humidity, and 86 to 106kPa of air pressure.

Unless otherwise specified, all the tests are conducted under the "standard condition."

(Note 1) Measurement shall be made after  $48 \pm 2$  hrs of recovery under the standard condition.

| 15. Loading at High Temperature |  |   |
|---------------------------------|--|---|
| Specified Value                 | BK series  | Appearance: No significant abnormality<br>Impedance change: Within $\pm 30\%$   |
|                                 | BKH series   |   |
|                                 | BKP series   |   |
|                                 | MCF series   | Appearance: No significant abnormality<br>Impedance change: Within $\pm 20\%$   |
|                                 | CK series  | Appearance: No significant abnormality<br>Inductance change: Within $\pm 20\%$  |
|                                 | CKS series   |   |
|                                 | CKP series   | Appearance: No significant abnormality<br>Inductance change: Within $\pm 30\%$  |
|                                 | LK series  | Appearance: No significant abnormality<br>Inductance change: 1005 $\Rightarrow$ Within $\pm 10\%$<br>1608 $\Rightarrow$ 0.047 $\sim$ 12.0 $\mu$ H: Within $\pm 10\%$ 15.0 $\sim$ 33.0 $\mu$ H: Within $\pm 15\%$<br>2125 $\Rightarrow$ Within $\pm 20\%$<br>Q change: Within $\pm 30\%$ |
|                                 | HK0603, HK1005   | Appearance: No significant abnormality<br>Inductance change: Within $\pm 10\%$ Q change: Within $\pm 20\%$  |
|                                 | HK1608, HK2125   |   |
|                                 | HKQ0603  |   |
|                                 | AQ105  |   |
|                                 | MCOIL™ MC series※  | Appearance: No significant abnormality<br>Inductance change: Within $\pm 10\%$  |
| Test Methods and Remarks        | Temperature : Maximum operating temperature<br>Applied current : Rated current ※MC series ; Idc2max<br>Duration : 500 +24/-0 hrs<br>Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber. (See Note 1) |   |

Note on standard condition: "standard condition" referred to herein is defined as follows:  
5 to 35°C of temperature, 45 to 85% relative humidity, and 86 to 106kPa of air pressure.

When there are questions concerning measurement results:

In order to provide correlation data, the test shall be conducted under condition of  $20\pm 2^\circ\text{C}$  of temperature, 60 to 70% relative humidity, and 86 to 106kPa of air pressure. Unless otherwise specified, all the tests are conducted under the "standard condition."

(Note 1) Measurement shall be made after  $48\pm 2$  hrs of recovery under the standard condition.



# Metal Multilayer Chip Power Inductors (MCOIL™ MC series)

## PRECAUTIONS

### 1. Circuit Design

- Precautions**
- ◆ Verification of operating environment, electrical rating and performance
    1. A malfunction in medical equipment, spacecraft, nuclear reactors, etc. may cause serious harm to human life or have severe social ramifications. As such, any inductors to be used in such equipment may require higher safety and/or reliability considerations and should be clearly differentiated from components used in general purpose applications.
  - ◆ Operating Current (Verification of Rated current)
    1. The operating current including inrush current for inductors must always be lower than their rated values.
    2. Do not apply current in excess of the rated value because the inductance may be reduced due to the magnetic saturation effect.

### 2. PCB Design

- Precautions**
- ◆ Pattern configurations (Design of Land-patterns)
 

When inductors are mounted on a PCB, the size of land patterns and the amount of solder used (size of fillet) can directly affect inductor performance. Therefore, the following items must be carefully considered in the design of solder land patterns:

    - (1) The amount of solder applied can affect the ability of chips to withstand mechanical stresses which may lead to breaking or cracking. Therefore, when designing land-patterns it is necessary to consider the appropriate size and configuration of the solder pads which in turn determines the amount of solder necessary to form the fillets.
    - (2) When more than one part is jointly soldered onto the same land or pad, the pad must be designed so that each component's soldering point is separated by solder-resist.
  - ◆ Pattern configurations (Inductor layout on panelized [breakaway] PC boards)
 

After inductors have been mounted on the boards, chips can be subjected to mechanical stresses in subsequent manufacturing processes (PCB cutting, board inspection, mounting of additional parts, assembly into the chassis, wave soldering the reflow soldered boards etc.) For this reason, planning pattern configurations and the position of SMD inductors should be carefully performed to minimize stress.


- ◆ Pattern configurations (Design of Land-patterns)
 

The following diagrams and tables show some examples of recommended patterns to prevent excessive solder amounts. Examples of improper pattern designs are also shown.

(1) Recommended land dimensions for a typical chip inductor land patterns for PCBs

(Unit: mm)

| Type | 1005 | 1210 | 1608<br>(Except MCHK) | 1608<br>(MCHK) | 2012 |
|------|------|------|-----------------------|----------------|------|
| A    | 0.4  | 0.45 | 0.45                  | 0.55           | 0.5  |
| B    | 0.5  | 0.6  | 1.0                   | 0.8            | 1.2  |
| C    | 0.7  | 1.15 | 1.0                   | 1.0            | 1.45 |





(2) Examples of good and bad solder application

| Item  | Not recommended | Recommended |
|---|-----------------|-------------|
| Mixed mounting of SMD and leaded components                 |                 |             |
| Component placement close to the chassis                    |                 |             |
| Hand-soldering of leaded components near mounted components |                 |             |
| Horizontal component placement                              |                 |             |

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).


◆Pattern configurations(Inductor layout on panelized[ breakaway] PC boards)

1. The following are examples of good and bad inductor layout; SMD inductors should be located to minimize any possible mechanical stresses from board warp or deflection.

| Item                    | Not recommended   | Recommended  |
|-------------------------|---|--|
| Deflection of the board |  |  Position the component at a right angle to the direction of the mechanical stresses that are anticipated. |

2. To layout the inductors for the breakaway PC board, it should be noted that the amount of mechanical stresses given will vary depending on inductor layout.

An example below should be counted for better design.

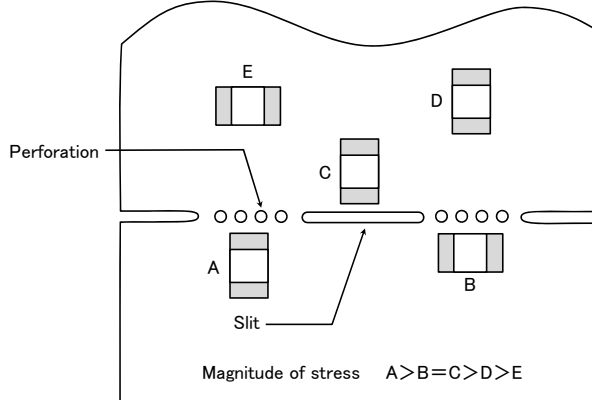

3. When breaking PC boards along their perforations, the amount of mechanical stress on the inductors can vary according to the method used. The following methods are listed in order from least stressful to most stressful: push-back, slit, V-grooving, and perforation. Thus, any ideal SMD inductor layout must also consider the PCB splitting procedure.

3. Considerations for automatic placement

Precautions

◆Adjustment of mounting machine





- Excessive impact load should not be imposed on the inductors when mounting onto the PC boards.
- The maintenance and inspection of the moulder should be conducted periodically.

Technical considerations

◆Adjustment of mounting machine

1. If the lower limit of the pick-up nozzle is low, too much force may be imposed on the inductors, causing damage. To avoid this, the following points should be considered before lowering the pick-up nozzle:

- The lower limit of the pick-up nozzle should be adjusted to the surface level of the PC board after correcting for deflection of the board.
- The pick-up pressure should be adjusted between 1 and 3N static loads.
- To reduce the amount of deflection of the board caused by impact of the pick-up nozzle, supporting pins or back-up pins should be used under the PC board. The following diagrams show some typical examples of good pick-up nozzle placement:
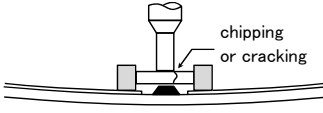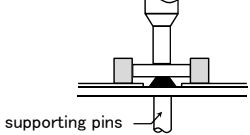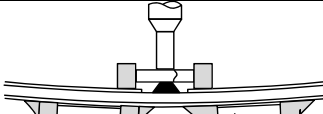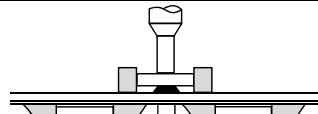
| Item                  | Improper method  | Proper method   |
|-----------------------|--|---|
| Single-sided mounting |  chipping or cracking |  supporting pins or back-up pins |
| Double-sided mounting |  chipping or cracking |  supporting pins or back-up pins |

2. As the alignment pin wears out, adjustment of the nozzle height can cause chipping or cracking of the inductors because of mechanical impact on the inductors. To avoid this, the monitoring of the width between the alignment pin in the stopped position, and maintenance, inspection and replacement of the pin should be conducted periodically.

#### 4. Soldering

|             |  |
|-------------|--|
| Precautions | <ul style="list-style-type: none"> <li>◆Reflow soldering               <ul style="list-style-type: none"> <li>• Please contact any of our offices for a reflow soldering, and refer to the recommended condition specified.</li> <li>• The product shall be used reflow soldering only.</li> <li>• Please do not add any stress to a product until it returns in normal temperature after reflow soldering.</li> </ul> </li> <li>◆Lead free soldering               <ul style="list-style-type: none"> <li>• When using products with lead free soldering, we request to use them after confirming adhesion, temperature of resistance to soldering heat, soldering etc sufficiently.</li> </ul> </li> </ul> |
|-------------|--|

|                          |   |
|--------------------------|---|
| Technical considerations | <ul style="list-style-type: none"> <li>◆Reflow soldering               <ul style="list-style-type: none"> <li>• If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products.</li> </ul> </li> </ul> <p style="text-align: center;">Recommended reflow condition (Pb free solder)</p> <p style="text-align: center;">Temperature [°C]</p> <p style="text-align: center;">Heating Time [sec]</p> |
|--------------------------|---|

#### 5. Cleaning

|                          |  |
|--------------------------|--|
| Precautions              | <ul style="list-style-type: none"> <li>◆Cleaning conditions               <ul style="list-style-type: none"> <li>• Washing by supersonic waves shall be avoided.</li> </ul> </li> </ul>                |
| Technical considerations | <ul style="list-style-type: none"> <li>◆Cleaning conditions               <ul style="list-style-type: none"> <li>• If washed by supersonic waves, the products might be broken.</li> </ul> </li> </ul> |

#### 6. Resin coating and mold

|             |   |
|-------------|---|
| Precautions | <ol style="list-style-type: none"> <li>1. With some type of resins a decomposition gas or chemical reaction vapor may remain inside the resin during the hardening period or while left under normal storage conditions resulting in the deterioration of the inductor's performance.</li> <li>2. Thermal expansion and thermal shrinkage characteristics of resins may lead to the deterioration of inductors' performance.</li> <li>3. When a resin hardening temperature is higher than inductor operating temperature, the stresses generated by the excessive heat may lead to damage in inductors.</li> </ol> |
|-------------|---|

#### 7. Handling

|             |  |
|-------------|--|
| Precautions | <ul style="list-style-type: none"> <li>◆Breakaway PC boards (splitting along perforations)               <ol style="list-style-type: none"> <li>1. When splitting the PC board after mounting inductors and other components, care is required so as not to give any stresses of deflection or twisting to the board.</li> <li>2. Board separation should not be done manually, but by using the appropriate devices.</li> </ol> </li> <li>◆General handling precautions               <ul style="list-style-type: none"> <li>• Always wear static control bands to protect against ESD.</li> <li>• Keep the inductors away from all magnets and magnetic objects.</li> <li>• Use non-magnetic tweezers when handling inductors.</li> <li>• Any devices used with the inductors ( soldering irons, measuring instruments) should be properly grounded.</li> <li>• Keep bare hands and metal products (i.e., metal desk) away from inductor electrodes or conductive areas that lead to chip electrodes.</li> <li>• Keep inductors away from items that generate magnetic fields such as speakers or coils.</li> </ul> </li> <li>◆Mechanical considerations               <ul style="list-style-type: none"> <li>Be careful not to subject the inductors to excessive mechanical shocks.</li> <li>(1) If inductors are dropped on the floor or a hard surface they should not be used.</li> <li>(2) When handling the mounted boards, be careful that the mounted components do not come in contact with or bump against other boards or components.</li> </ul> </li> </ul> |
|-------------|--|

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

## 8. Storage conditions

|                          |   |
|--------------------------|---|
| Precautions              | <p>◆Storage<br/>To maintain the solderability of terminal electrodes and to keep the packaging material in good condition, care must be taken to control temperature and humidity in the storage area. Humidity should especially be kept as low as possible.</p> <ul style="list-style-type: none"><li>•Recommended conditions<br/>Ambient temperature: 30°C or below    Humidity: 70% RH or below</li></ul> <p>The ambient temperature must be kept below 40°C. Even under ideal storage conditions, solderability of inductor is deteriorated as time passes, so inductors should be used within 6 months from the time of delivery.</p> <ul style="list-style-type: none"><li>•Inductor should be kept where no chlorine or sulfur exists in the air.</li></ul> |
| Technical considerations | <p>◆Storage<br/>If the parts are stocked in a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/package materials may take place. For this reason, components should be used within 6 months from the time of delivery. If exceeding the above period, please check solderability before using the inductors.</p>  |

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А