

G3VM-21UR11

MOS FET Relays VSON package with Low Output Capacitance and ON Resistance type (Low C × R)

World's smallest New VSON Package with Low Output Capacitance and Low ON Resistance



NEW

RoHS Compliant




Refer to "Common Precautions".

Note: The actual product is marked differently from the image shown here.

■ Application Examples

- Semiconductor test equipment
- Test & measurement equipment
- Communication equipment
- Data loggers

■ Package (Unit : mm, Average)



■ Model Number Legend

G3VM-□ □ □ □ □
1 2 3 4 5

- | | | |
|------------------------------------|---|---|
| 1. Load Voltage
2: 20V | 3. Package type
U: VSON 4 pin | 5. Other informations
When specifications overlap,
serial code is added in the
recorded order. |
| 2. Contact form
1: 1a (SPST-NO) | 4. Additional functions
R: Low On-resistance | |

■ Ordering Information

Package type	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Packing/Tape cut		Packing/Tape & reel	
					Model	Minimum package quantity	Model	Minimum package quantity
VSON4	1a (SPST-NO)	Surface-mounting Terminals	20V	1,000mA	G3VM-21UR11	–	G3VM-21UR11(TR05)	500

Note: When ordering tape packing, add "(TR05)" to the model number.

Ask your OMRON representative for orders under 500 pcs. We can supply products with the tape already cut.

Tape-cut VSONs are packaged without humidity resistance. Use manual soldering to mount them.

Refer to common precautions.

* The AC peak and DC value are given for the load voltage and continuous load current.

■ Absolute Maximum Ratings (Ta = 25°C)

V
S
O
N

G
3
V
M
I
2
1
U
R
1
1


Item	Symbol	G3VM-21UR11	Unit	Measurement conditions
Input	LED forward current	I _F	30	mA
	LED forward current reduction rate	ΔI _F /°C	-0.3	mA/°C Ta≥25°C
	LED reverse voltage	V _R	5	V
	Connection temperature	T _J	125	°C
Output	Load voltage (AC peak/DC)	V _{OFF}	20	V
	Continuous load current (AC peak/DC)	I _O	1,000	mA
	ON current reduction rate	ΔI _O /°C	-10	mA/°C Ta≥25°C
	Pulse ON current	I _{OP}	3	A t=100ms, Duty=1/10
	Connection temperature	T _J	125	°C
Dielectric strength between I/O (See note 1.)		V _{I-O}	300	Vrms AC for 1 min
Ambient operating temperature		T _a	-40~+85	°C
Ambient storage temperature		T _{Stg}	-40~+125	°C
Soldering temperature		–	260	°C 10s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■Electrical Characteristics (Ta = 25°C)

Item		Symbol	G3VM-21UR11		Unit	Measurement conditions
Input	LED forward voltage	VF	Minimum	1.1	V	I _F =10mA
			Typical	1.27		
			Maximum	1.4		
Reverse current	I _R	Maximum	10	μA	V _R =5V	
Capacity between terminals	C _T	Typical	30	pF	V=0, f=1MHz	
Trigger LED forward current	I _{FT}	Maximum	3.0	mA	I _O =100mA	
Release LED forward current	I _{FC}	Minimum	0.1	mA	I _{OFF} =10μA	
Output	Maximum resistance with output ON	R _{ON}	Typical	0.18	Ω	I _F =5mA, t<1s, I _O =1,000mA
			Maximum	0.22		
Current leakage when the relay is open	I _{LEAK}	Maximum	1	nA	V _{OFF} =20V	
Capacity between terminals	C _{OFF}	Typical	40	pF	V=0, f=100MHz, t<1s	
Capacity between I/O terminals	C _{i-o}	Typical	1	pF	f=1MHz, V _s =0V	
Insulation resistance between I/O terminals	R _{i-o}	Typical	10 ⁸	MΩ	V _{i-o} =500VDC, RoH≤60%	
Turn-ON time	t _{ON}	Maximum	2	ms	I _F =5mA, R _L =200Ω, V _{DD} =10V (See note 2.)	
Turn-OFF time	t _{OFF}	Maximum	1			

Note: 2. Turn-ON and Turn-OFF Times

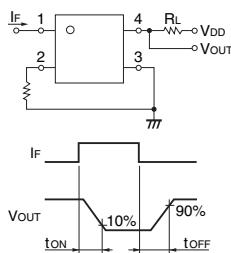

■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol	G3VM-21UR11		Unit
Load voltage (AC peak/DC)	V _{DD}	Maximum	16	V
Operating LED forward current	I _F	Minimum	5	mA
		Typical	7.5	
		Maximum	20	
Continuous load current (AC peak/DC)	I _O	Maximum	1,000	
Ambient operating temperature	Ta	Minimum	-20	°C
		Maximum	65	

V
S
O
N


G
3
V
M
I
2
1
U
R
1
1

■Engineering Data


**LED forward current vs.
Ambient temperature**

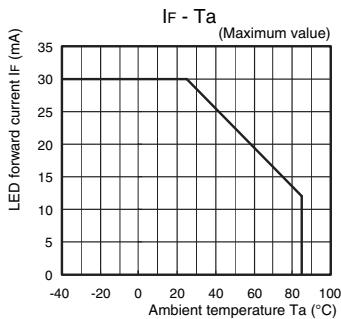


**Continuous load current vs.
On-state voltage**

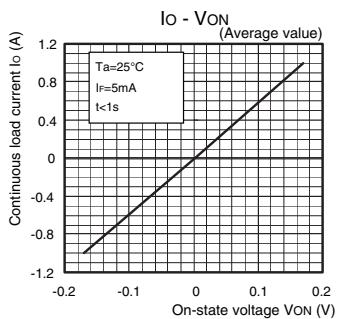


**Turn ON, Turn OFF time vs.
LED forward current**

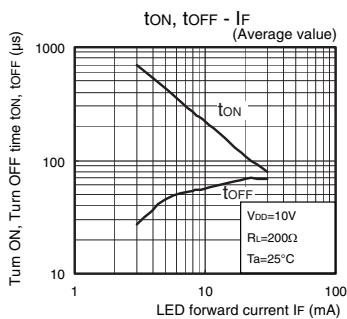


**Current leakage vs. Ambient
temperature**

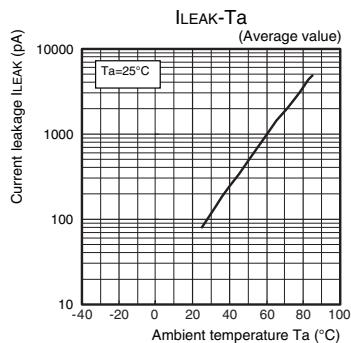


**Continuous load current vs.
Ambient temperature**

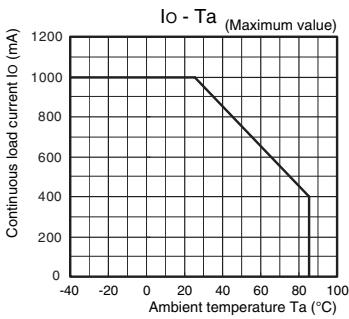


**LED forward current vs.
LED forward voltage**

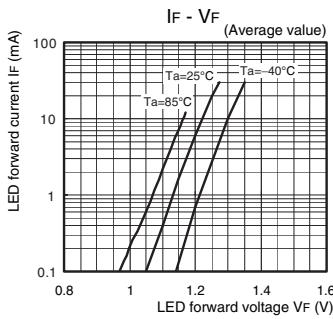


**Trigger LED forward current vs.
Ambient temperature**

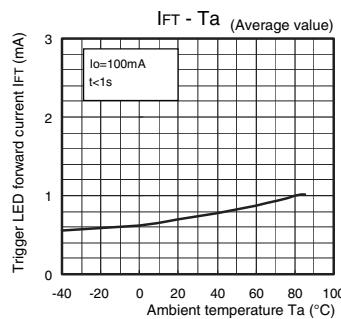


**Current leakage vs.
Load voltage**

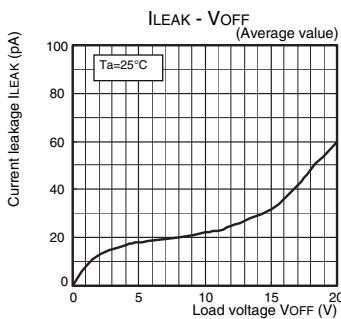

**Turn ON, Turn OFF time vs.
Ambient temperature**

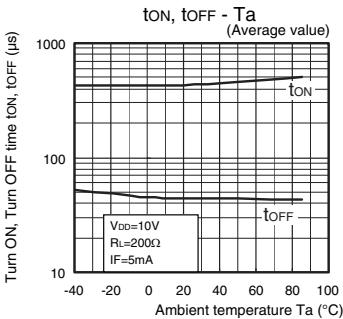

**Output terminal capacitance
vs. Load voltage**

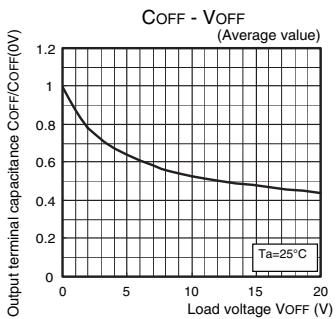

VSON


G
3
V
M
I
2
1
U
R
1
1

■Appearance/Terminal Arrangement/Internal Connections

■Appearance


VSON (Very Small Outline Non-leaded)

VSON4



Note: The actual product is marked differently from the image shown here.

■Terminal Arrangement/Internal Connections (Top View)




■Dimensions

(Unit: mm)




Surface-mounting Terminals

Weight: 0.01g

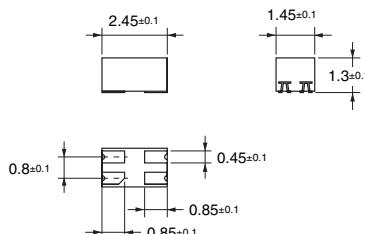

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

■Approved Standards

Applying for UL recognition

■Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

V
S
O
N

G
3
V
M
I
2
1
U
R
1
1

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

Electronic and Mechanical Components Company

Contact: www.omron.com/ecb

Cat. No. K267-E1-01
0814(0814)(O)



OCEAN CHIPS

Океан Электроники

Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибутором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибутором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А