

# A General Specifications

## Electrical Capacity (Resistive Load)

|                              |                                                                                                                                                                  |  |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>Power Level (silver):</b> | 6A @ 125V AC or 3A @ 250V AC or 3A @ 30V DC                                                                                                                      |  |
| <b>Logic Level (gold):</b>   | 0.4VA maximum @ 28V AC/DC maximum<br>(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)<br>Note: Find additional explanation of operating range in Supplement section. |  |

## Other Ratings

|                                 |                                                                                                                            |                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------|--------------------|
| <b>Contact Resistance:</b>      | 10 milliohms maximum for silver; 20 milliohms maximum for gold                                                             |                    |
| <b>Insulation Resistance:</b>   | 1,000 megohms minimum @ 500V DC                                                                                            |                    |
| <b>Dielectric Strength:</b>     | 1,000V AC minimum between contacts for 1 minute minimum;<br>1,500V AC minimum between contacts & case for 1 minute minimum |                    |
| <b>Mechanical Life:</b>         | 50,000 operations minimum                                                                                                  |                    |
| <b>Electrical Life:</b>         | 25,000 operations minimum                                                                                                  |                    |
| <b>Nominal Operating Force:</b> | On-to-On Position                                                                                                          | Off-to-On Position |
|                                 | Single Pole                                                                                                                | 3.19N              |
|                                 | Double Pole                                                                                                                | 4.41N              |
| <b>Angle of Throw:</b>          | 20°                                                                                                                        |                    |

## Materials & Finishes

|                             |                                                                 |
|-----------------------------|-----------------------------------------------------------------|
| <b>Bushing:</b>             | Brass with nickel plating                                       |
| <b>Housing:</b>             | Stainless steel                                                 |
| <b>Mounting Bracket:</b>    | Steel with tin plating                                          |
| <b>Movable Contacts:</b>    | Silver alloy or silver alloy with gold plating                  |
| <b>Stationary Contacts:</b> | Silver with silver plating or copper or brass with gold plating |
| <b>Lamp Contacts:</b>       | Phosphor bronze                                                 |
| <b>Base:</b>                | Diallyl phthalate (UL94V-0)                                     |
| <b>Switch Terminals:</b>    | Copper with silver or gold plating                              |
| <b>Lamp Terminals:</b>      | Brass with silver or gold plating                               |

## Environmental Data

|                              |                                                                                                                                              |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating Temp Range:</b> | -10°C through +55°C (+14°F through +131°F)                                                                                                   |
| <b>Humidity:</b>             | 90 ~ 95% humidity for 96 hours @ 40°C (104°F)                                                                                                |
| <b>Vibration:</b>            | 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours |
| <b>Shock:</b>                | 50G (490m/s <sup>2</sup> ) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)                               |

## Installation

|                                   |                                                                                                                                                                                        |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Mounting Torque:</b>           | 1.47Nm (13 lb•in) for double nut; .67Nm (6 lb•in) for single nut                                                                                                                       |
| <b>Soldering Time &amp; Temp:</b> | Wave Soldering (PC version): See Profile B in Supplement section.<br>Manual Soldering: See Profile B in Supplement section.<br>Note: Lever must be in center position while soldering. |
| <b>Cleaning:</b>                  | PC mountable device is not process sealed. Hand clean locally using alcohol based solution.                                                                                            |

## Standards & Certifications

|                                |                                                                                                                                                                                                                                                            |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Flammability Standards:</b> | UL94V-0 base                                                                                                                                                                                                                                               |
| <b>UL:</b>                     | <b>File No. E44145 - Recognized only when ordered with marking on switch.</b><br>Add "/U" to end of part number to order UL recognized switch.<br>Single pole with synchronous circuits & single color LEDs & solder lug or PC recognized at 6A @ 125V AC. |
| <b>CSA:</b>                    | <b>File No. 023535_0_000 - Certified only when ordered with marking on switch.</b><br>Add "/C" to end of part number to order CSA certified switch.<br>All single pole with synchronous circuits & single color LEDs certified at 6A @ 125V AC.            |

# Distinctive Characteristics

Industry's first LED illumination at tip of toggle switches.

Single color LEDs of red, yellow, and green, plus bicolor red/green, to meet varied design requirements.

LEDs can operate independently from or synchronously with switching operation.

Antijamming feature to protect contacts from damage due to excessive downward force on the toggle.

High torque bushing prevents the bushing from rotating or separating from the metal frame during installation.

Stainless steel frame resists corrosion.

Silver contacts are of specially composed alloy for hardness.


High insulating barriers protect against crossover in double pole devices.

Terminals are molded in and epoxy sealed to lock out flux, dust, and other contaminants.

1,500V dielectric strength between switch contacts and case is accomplished by clinching the frame away from the terminals.



Actual Size

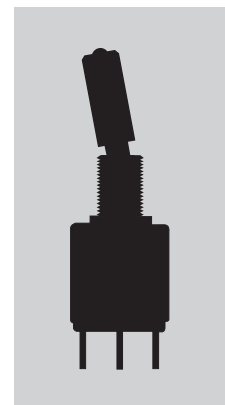

A  
Toggles

Rockers

Pushbuttons

Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch

Indicators

Accessories

Supplement

### TYPICAL SWITCH ORDERING EXAMPLE

**M21**

**1**

**2**

**T**

**C**

**W**

**01**

| Poles                                      |      |
|--------------------------------------------|------|
| 1                                          | SPDT |
| * 2                                        | DPDT |
| * Available only with Terminals 01, 02, 03 |      |

| LED Circuits & Actuator Types |             |
|-------------------------------|-------------|
| L                             | Isolated    |
| T                             | Synchronous |

| Contact Materials & Ratings |                                       |
|-----------------------------|---------------------------------------|
| W                           | Silver; Rated 6A @ 125V AC            |
| G                           | Gold; Rated 0.4VA max @ 28V AC/DC max |

| Threaded Bushings |                      |
|-------------------|----------------------|
| No Code           | 1/4-40 Thread (Inch) |
| /M                | 6mm Thread (Metric)  |

| Circuits |    |      |    |
|----------|----|------|----|
| 2        | ON | NONE | ON |
| 3        | ON | OFF  | ON |

| LED Colors   |           |
|--------------|-----------|
| Single Color |           |
| C            | Red       |
| E            | Yellow    |
| F            | Green     |
| Bicolor      |           |
| CF           | Red/Green |

| Terminals & Mounting Types |                                                                        |
|----------------------------|------------------------------------------------------------------------|
| 01                         | Solder Lug with Threaded Bushing                                       |
| 02                         | Quick Connect with Threaded Bushing                                    |
| 03                         | Straight PC with Threaded Bushing                                      |
| 30                         | Right Angle PC with Smooth Bushing (available with gold contacts only) |


### IMPORTANT:



Switches are supplied without UL & CSA marking unless specified.  
**UL & CSA recognized only when ordered with marking on the switch.**  
Specific models, ratings, & ordering instructions are noted on the General Specifications page.

### DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

**M2112TCW01**

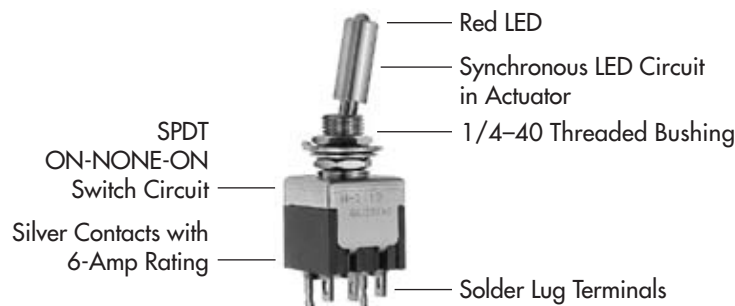

## POLES &amp; CIRCUITS &amp; LED ILLUMINATION

| Model                                   |                                                           | Pole & Throw | Toggle Position & Terminal Numbers                                                                                 |                                                                                             |                                                                                         | Schematics                                                                                        |  |
|-----------------------------------------|-----------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--|
|                                         |                                                           |              | Down<br><small>Keyway</small><br> | Center<br> | Up<br> | Notes: Terminal numbers are not actually on the switch.<br>LEDs require an external power source. |  |
| M2112 SPDT<br>Connected Power Terminals |                                                           |              | ON<br>2-3                                                                                                          | NONE<br>NONE                                                                                | ON<br>2-1                                                                               | Isolated<br>Single Color<br>LED                                                                   |  |
| LED Circuit                             | Isolated LEDs (see schematics)<br>Connected LED Terminals |              | ON<br>4-6                                                                                                          | NONE<br>NONE                                                                                | ON<br>4-6                                                                               | Isolated<br>Bicolor LED                                                                           |  |
|                                         | Synchronous Single Color LED<br>Connected LED Terminals   |              | ON<br>4-6                                                                                                          | NONE<br>NONE                                                                                | OFF<br>OPEN                                                                             |                                                                                                   |  |
|                                         | Synchronous Bicolor LED<br>Connected LED Terminals        |              | Red<br>5-6                                                                                                         | NONE<br>NONE                                                                                | Green<br>5-4                                                                            |                                                                                                   |  |
| M2113 SPDT<br>Connected Power Terminals |                                                           |              | ON<br>2-3                                                                                                          | OFF<br>OPEN                                                                                 | ON<br>2-1                                                                               | Synchronous<br>Single Color<br>LED                                                                |  |
| LED Circuit                             | Isolated LEDs (see schematics)<br>Connected LED Terminals |              | ON<br>4-6                                                                                                          | ON<br>4-6                                                                                   | ON<br>4-6                                                                               | Synchronous<br>Bicolor LED                                                                        |  |
|                                         | Synchronous Single Color LED<br>Connected LED Terminals   |              | ON<br>4-6                                                                                                          | OFF<br>OPEN                                                                                 | ON<br>4-6                                                                               |                                                                                                   |  |
|                                         | Synchronous Bicolor LED<br>Connected LED Terminals        |              | Red<br>5-6                                                                                                         | OFF<br>OPEN                                                                                 | Green<br>5-4                                                                            |                                                                                                   |  |
| M2122 DPDT<br>Connected Power Terminals |                                                           |              | ON<br>2-3 5-6                                                                                                      | NONE<br>NONE                                                                                | ON<br>2-1 5-4                                                                           | Isolated<br>Single Color<br>LED                                                                   |  |
| LED Circuit                             | Isolated LEDs (see schematics)<br>Connected LED Terminals |              | ON<br>7-9                                                                                                          | NONE<br>NONE                                                                                | ON<br>7-9                                                                               | Isolated<br>Bicolor LED                                                                           |  |
|                                         | Synchronous Single Color LED<br>Connected LED Terminals   |              | ON<br>7-9                                                                                                          | NONE<br>NONE                                                                                | OFF<br>OPEN                                                                             |                                                                                                   |  |
|                                         | Synchronous Bicolor LED<br>Connected LED Terminals        |              | Red<br>8-9                                                                                                         | NONE<br>NONE                                                                                | Green<br>8-7                                                                            |                                                                                                   |  |
| M2123 DPDT<br>Connected Power Terminals |                                                           |              | ON<br>2-3 5-6                                                                                                      | OFF<br>OPEN                                                                                 | ON<br>2-1 5-4                                                                           | Synchronous<br>Single Color<br>LED                                                                |  |
| LED Circuit                             | Isolated LEDs (see schematics)<br>Connected LED Terminals |              | ON<br>7-9                                                                                                          | ON<br>7-9                                                                                   | ON<br>7-9                                                                               | Synchronous<br>Bicolor LED                                                                        |  |
|                                         | Synchronous Single Color LED<br>Connected LED Terminals   |              | ON<br>7-9                                                                                                          | OFF<br>OPEN                                                                                 | ON<br>7-9                                                                               |                                                                                                   |  |
|                                         | Synchronous Bicolor LED<br>Connected LED Terminals        |              | Red<br>8-9                                                                                                         | OFF<br>OPEN                                                                                 | Green<br>8-7                                                                            |                                                                                                   |  |

## LED COLORS &amp; SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires an external power source. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in Supplement Section.

| The LED is an integral part of the switch and not available separately.<br>Bicolor LED is translucent white when unlit. |              | Single Color    |                    |                   | Bicolor                |       |
|-------------------------------------------------------------------------------------------------------------------------|--------------|-----------------|--------------------|-------------------|------------------------|-------|
|                                                                                                                         |              | <b>C</b><br>Red | <b>E</b><br>Yellow | <b>F</b><br>Green | <b>CF</b><br>Red/Green | Units |
| Maximum Forward Current                                                                                                 | $I_{FM}$     | 25              | 30                 | 30                | 25                     | mA    |
| Typical Forward Current                                                                                                 | $I_F$        | 20              | 20                 | 20                | 10                     | mA    |
| Forward Voltage                                                                                                         | $V_F$        | 2.1             | 2.1                | 2.1               | 1.7/2.0                | V     |
| Maximum Reverse Voltage                                                                                                 | $V_{RM}$     | 4               | 4                  | 4                 | —                      | V     |
| Current Reduction Rate Above 25°C                                                                                       | $\Delta I_F$ | 0.33            | 0.40               | 0.40              | 0.33/0.33              | mA/°C |
| Ambient Temperature Range                                                                                               |              | -10° ~ +55°C    |                    |                   |                        |       |

### LED CIRCUIT, TOGGLE, & MOUNTING TYPE COMBINATIONS

**L**


Toggle with Isolated LED Circuit

**T**


Toggle with Synchronous LED Circuit

Finish: Brushed aluminum

Standard Hardware: 2 AT513H Hex Nuts, 1 AT507H Locking Ring, 1 AT509 Lockwasher Standard & optional hardware details in Accessories & Hardware section.




Threaded Bushing combines with Terminal codes 01, 02, & 03.




Smooth Bushing combines with Terminal code 30.

Max. Panel Thickness with Standard Hardware .102" (2.6mm)




Max. Panel Thickness without Locking Ring .134" (3.4mm)





### TYPICAL SWITCH DIMENSIONS

#### Solder Lug




#### Single Pole

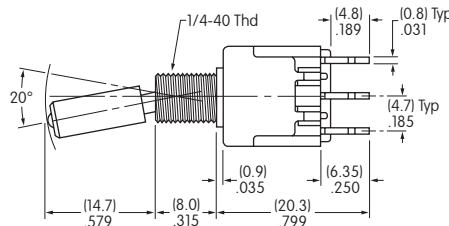



**M2112TCFW01**

Single color LED switch does not have terminal 5.

#### Solder Lug



#### Double Pole



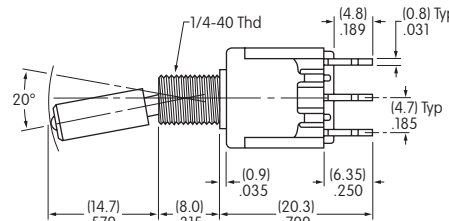


**M2122TCFW01**

Single color LED switch does not have terminal 8.

#### Right Angle PC

#### Single Pole Only

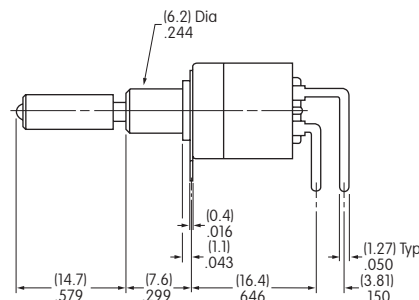

**M2112TCFG30**

Single color LED switch does not have terminal 5.

Gold contact material only

## CONTACT MATERIALS &amp; RATINGS

A  
Toggles

W

Silver over Silver

Power Level

6A @ 125V AC &amp; 3A @ 250V AC

G


Gold over Brass or Copper

Logic Level

0.4VA maximum @ 28V AC/DC maximum


Complete explanation of operating range in Supplement section.

01


Solder Lug with  
Turret LED Terminal

02


Quick Connect




03

Straight PC with  
Turret LED Terminal

Single Pole


Single color LED  
& isolated bicolor  
LED switches do not  
have terminal 5.

Double Pole


Single color LED  
& isolated bicolor  
LED switches do not  
have terminal 8.

30

Right Angle PC

LED terminals  
only available  
in brass with  
silver plating

Single Pole


Single color LED  
& isolated bicolor  
LED switches do not  
have terminal 5.

## STANDARD MOUNTING HARDWARE

AT513H

Hexagon Nuts (2 per switch)


Material: Brass with nickel plating



AT507H

Locking Ring (1 per switch)


Material: Steel with chromate over zinc



AT509

Lockwasher (1 per switch)

Material: Steel with chromate over zinc



Optional Hardware: Knurled nuts, dress nuts, and ON-OFF plates are available; see details in Accessories &amp; Hardware section.

Rockers

Pushbuttons

Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch

Indicators

Accessories

Supplement

## General Specifications

**B Electrical Capacity (Resistive Load)****Power Level (silver):** 6A @ 125V AC or 3A @ 250V AC or 3A @ 30V DC**Logic Level (gold):** 0.4VA maximum @ 28V AC/DC maximum  
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)

Note: Find additional explanation of operating range in Supplement section.

**Other Ratings****Contact Resistance:** 10 milliohms maximum for silver; 20 milliohms maximum for gold**Insulation Resistance:** 1,000 megohms minimum @ 500V DC**Dielectric Strength:** 1,000V AC minimum between contacts for 1 minute minimum;  
1,500V AC minimum between contacts & case for 1 minute minimum**Mechanical Life:** 50,000 operations minimum**Electrical Life:** 25,000 operations minimum

| Nominal Operating Force: |             | On-to-On Position | Off-to-On Position |
|--------------------------|-------------|-------------------|--------------------|
| Paddles                  | Single Pole | 3.19N             | 3.92N              |
|                          | Double Pole | 4.41N             | 7.06N              |
| Rockers                  | Single Pole | 6.37N             | 9.80N              |
|                          | Double Pole | 13.73N            | 17.65N             |

**Angle of Throw:** 20°**Materials & Finishes****Housing:** Stainless steel**Mounting Bracket:** Steel with tin plating**Movable Contacts:** Silver alloy or silver alloy with gold plating**Stationary Contacts:** Silver with silver plating or copper or brass with gold plating**Lamp Contacts:** Phosphor bronze**Base:** Diallyl phthalate (UL94V-0)**Switch Terminals:** Copper with silver or gold plating**Lamp Terminals:** Brass with silver or gold plating**Environmental Data****Operating Temp Range:** -10°C through +55°C (+14°F through +131°F) for rockers  
-25°C through +70°C (-13°F through +158°F) for paddles**Humidity:** 90 ~ 95% humidity for 96 hours @ 40°C (104°F)**Vibration:** 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours**Shock:** 50G (490m/s<sup>2</sup>) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)**Installation****Soldering Time & Temp:** Wave Soldering (PC version): See Profile B in Supplement section.

Manual Soldering: See Profile B in Supplement section.

Note: Lever must be in center position while soldering.

**Cleaning:** PC mountable device is not process sealed. Hand clean locally using alcohol based solution.**Standards & Certifications****Flammability Standards:** UL94V-0 base**UL:** **File No. E44145 - Recognized only when ordered with marking on switch.**

Add "/U" before dash in part number to order UL recognized switch.

Single pole rockers with synchronous circuits &amp; single color LEDs &amp; solder lug or PC recognized at 6A @ 125V AC.

**CSA:** **File No. 023535\_0\_000 - Certified only when ordered with marking on switch.**

Add "/C" before dash in part number to order CSA certified switch.

All single pole rockers with synchronous circuits &amp; single color LEDs certified at 6A @ 125V AC.

TYPICAL SWITCH ORDERING EXAMPLE

M21

1

2

N

CF

W

01

—

Poles

|     |      |
|-----|------|
| 1   | SPDT |
| * 2 | DPDT |

\* Available only with Rockers with Terminals 01, 02, 03

Circuits

|   |    |      |    |
|---|----|------|----|
| 2 | ON | NONE | ON |
| 3 | ON | OFF  | ON |

LED Colors

Single Color

|   |        |
|---|--------|
| C | Red    |
| E | Yellow |
| F | Green  |

Bicolor

|    |           |
|----|-----------|
| CF | Red/Green |
|----|-----------|

Contact Materials & Ratings

|   |                                       |
|---|---------------------------------------|
| W | Silver; Rated 6A @ 125V AC            |
| G | Gold; Rated 0.4VA max @ 28V AC/DC max |

LED Circuits & Actuator Types

Rocker

|   |             |
|---|-------------|
| R | Isolated    |
| N | Synchronous |

Paddle

|   |             |
|---|-------------|
| P | Isolated    |
| J | Synchronous |

Terminals & Mounting Types

|    |                                |
|----|--------------------------------|
| 01 | Solder Lug with Flat Frame     |
| 02 | Quick Connect with Flat Frame  |
| 03 | Straight PC with Flat Frame    |
| 13 | Straight PC with Bracket Mount |

|    |                                  |
|----|----------------------------------|
| 01 | Solder Lug with Snap-in Frame    |
| 02 | Quick Connect with Snap-in Frame |
| 03 | Straight PC with Snap-in Frame   |
| 13 | Straight PC with Bracket Mount   |

Optional Bezel & Colors

For Snap-in Frame

|   |        |
|---|--------|
| A | Black  |
| B | White  |
| E | Yellow |
| F | Green  |
| G | Blue   |
| H | Gray   |


IMPORTANT:

!












Switches are supplied without UL & CSA marking unless specified.  
UL & CSA recognized only when ordered with marking on the switch.  
Specific models, ratings, & ordering instructions are noted on the General Specifications page.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

M21 12NCFW01

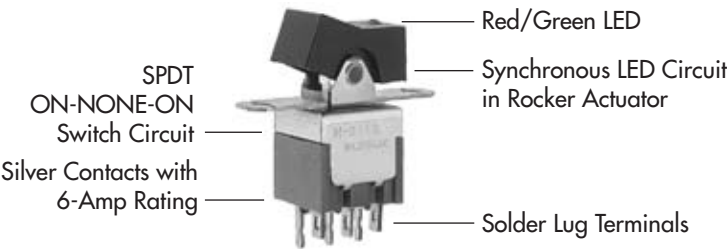

### POLES & CIRCUITS & LED ILLUMINATION

| Model                                     | Pole & Throw                                                     | Toggle Position & Terminal Numbers                                                        |                                                                                             |                                                                                         | Schematics                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------------|------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                           |                                                                  | Down<br> | Center<br> | Up<br> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>M2112</b><br>Connected Power Terminals | <b>SPDT</b>                                                      | ON<br>2-3                                                                                 | NONE<br>NONE                                                                                | ON<br>2-1                                                                               | Notes: Terminal numbers are not actually on the switch.<br>LEDs require an external power source.<br><br>Isolated Single Color LED<br><br><br>Isolated Bicolor LED<br><br><br>Synchronous Single Color LED<br><br><br>Synchronous Bicolor LED<br> |
| <b>LED Circuit</b>                        | <b>Isolated LEDs</b> (see schematics)<br>Connected LED Terminals | ON<br>4-6                                                                                 | NONE<br>NONE                                                                                | ON<br>4-6                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                           | <b>Synchronous Single Color LED</b><br>Connected LED Terminals   | ON<br>4-6                                                                                 | NONE<br>NONE                                                                                | OFF<br>OPEN                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                           | <b>Synchronous Bicolor LED</b><br>Connected LED Terminals        | Red<br>5-6                                                                                | NONE<br>NONE                                                                                | Green<br>5-4                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>M2113</b><br>Connected Power Terminals | <b>SPDT</b>                                                      | ON<br>2-3                                                                                 | OFF<br>OPEN                                                                                 | ON<br>2-1                                                                               | Synchronous Single Color LED<br><br><br>Synchronous Bicolor LED<br>                                                                                                                                                                                                                                                                                                                                                     |
| <b>LED Circuit</b>                        | <b>Isolated LEDs</b> (see schematics)<br>Connected LED Terminals | ON<br>4-6                                                                                 | ON<br>4-6                                                                                   | ON<br>4-6                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                           | <b>Synchronous Single Color LED</b><br>Connected LED Terminals   | ON<br>4-6                                                                                 | OFF<br>OPEN                                                                                 | ON<br>4-6                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                           | <b>Synchronous Bicolor LED</b><br>Connected LED Terminals        | Red<br>5-6                                                                                | OFF<br>OPEN                                                                                 | Green<br>5-4                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>M2122</b><br>Connected Power Terminals | <b>DPDT</b>                                                      | ON<br>2-3 5-6                                                                             | NONE<br>NONE                                                                                | ON<br>2-1 5-4                                                                           | Isolated Single Color LED<br><br><br>Isolated Bicolor LED<br><br><br>Synchronous Single Color LED<br><br><br>Synchronous Bicolor LED<br>                                                                                                   |
| <b>LED Circuit</b>                        | <b>Isolated LEDs</b> (see schematics)<br>Connected LED Terminals | ON<br>7-9                                                                                 | NONE<br>NONE                                                                                | ON<br>7-9                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                           | <b>Synchronous Single Color LED</b><br>Connected LED Terminals   | ON<br>7-9                                                                                 | NONE<br>NONE                                                                                | OFF<br>OPEN                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                           | <b>Synchronous Bicolor LED</b><br>Connected LED Terminals        | Red<br>8-9                                                                                | NONE<br>NONE                                                                                | Green<br>8-7                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>M2123</b><br>Connected Power Terminals | <b>DPDT</b>                                                      | ON<br>2-3 5-6                                                                             | OFF<br>OPEN                                                                                 | ON<br>2-1 5-4                                                                           | Synchronous Single Color LED<br><br><br>Synchronous Bicolor LED<br>                                                                                                                                                                                                                                                                                                                                                 |
| <b>LED Circuit</b>                        | <b>Isolated LEDs</b> (see schematics)<br>Connected LED Terminals | ON<br>7-9                                                                                 | ON<br>7-9                                                                                   | ON<br>7-9                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                           | <b>Synchronous Single Color LED</b><br>Connected LED Terminals   | ON<br>7-9                                                                                 | OFF<br>OPEN                                                                                 | ON<br>7-9                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                           | <b>Synchronous Bicolor LED</b><br>Connected LED Terminals        | Red<br>8-9                                                                                | OFF<br>OPEN                                                                                 | Green<br>8-7                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

### LED COLORS & SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires an external power source. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in Supplement Section. The LED is an integral part of the switch and not available separately. Bicolor LED is translucent white when unlit.

| The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires an external power source. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in Supplement Section. The LED is an integral part of the switch and not available separately.<br>Bicolor LED is translucent white when unlit. |                 | Rockers      |              |              |               | Paddles      |              |              |               | Units |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------------|--------------|--------------|---------------|--------------|--------------|--------------|---------------|-------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 | Single Color |              |              | Bicolor       | Single Color |              |              | Bicolor       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 | <div>C</div> | <div>E</div> | <div>F</div> | <div>CF</div> | <div>C</div> | <div>E</div> | <div>F</div> | <div>CF</div> |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 | Red          | Yellow       | Green        | Red/Green     | Red          | Yellow       | Green        | Red/Green     |       |
| Maximum Forward Current                                                                                                                                                                                                                                                                                                                                                                                                                     | I <sub>FM</sub> | 25           | 30           | 30           | 25            | 25           | 30           | 25           | 30/25         | mA    |
| Typical Forward Current                                                                                                                                                                                                                                                                                                                                                                                                                     | I <sub>F</sub>  | 20           | 20           | 20           | 20            | 20           | 20           | 20           | 20/20         | mA    |
| Forward Voltage                                                                                                                                                                                                                                                                                                                                                                                                                             | V <sub>F</sub>  | 2.1          | 2.1          | 2.1          | 1.7/2.0       | 2.25         | 2.1          | 2.2          | 2.0/2.2       | V     |
| Maximum Reverse Voltage                                                                                                                                                                                                                                                                                                                                                                                                                     | V <sub>RM</sub> | 4            | 4            | 4            | —             | 5            | 5            | 5            | —             | V     |
| Current Reduction Rate Above 25°C                                                                                                                                                                                                                                                                                                                                                                                                           | ΔI <sub>F</sub> | 0.33         | 0.40         | 0.40         | 0.33/0.33     | 0.33         | 0.40         | 0.33         | 0.43/0.38     | mA/°C |
| Ambient Temperature Range                                                                                                                                                                                                                                                                                                                                                                                                                   |                 | -10° ~ +55°C |              |              |               | -25° ~ +70°C |              |              |               |       |


## LED CIRCUIT, ROCKER, & MOUNTING TYPE COMBINATIONS

- R** Rocker with Isolated LED Circuit
- N** Rocker with Synchronous LED Circuit


Material: Polyamide

Finish: Matte

Color: Black




Flat Frame combines with Terminal codes 01, 02, & 03.






Bracket combines with Terminal code 13.

Maximum Panel Thickness  
.126" (3.2mm)



## TYPICAL ROCKER SWITCH DIMENSIONS

### Single Pole

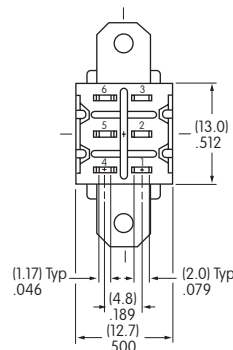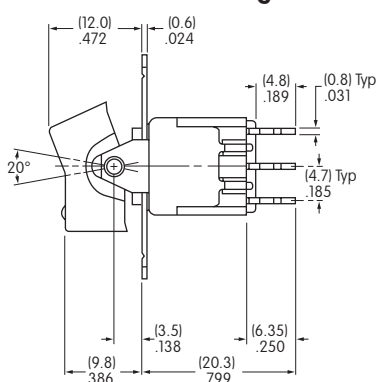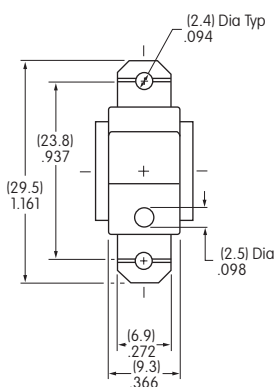




Single color LED switch does not have terminal 5.

### Solder Lug



M2112NCFW01

### Double Pole

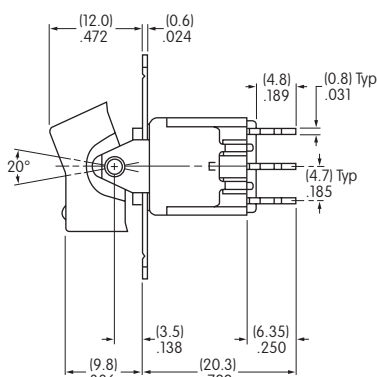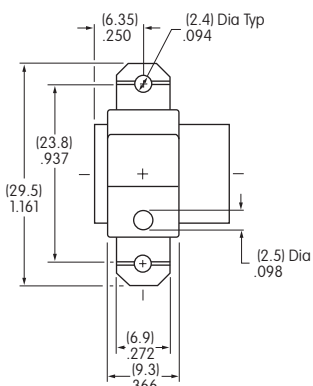





Single color LED switch does not have terminal 8.

### Solder Lug



M2122NCFW01

### Single Pole Only

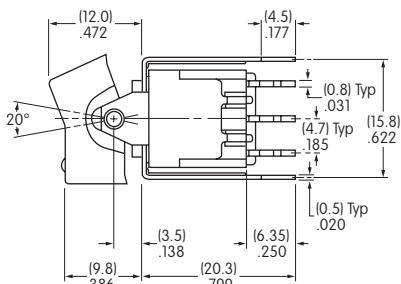

### Straight PC • Bracket



Single color LED switch does not have terminal 5. Silver contact material is standard.

M2112NCFW13

### LED CIRCUIT, PADDLE, & MOUNTING TYPE COMBINATIONS

**P**

Paddle with Isolated LED Circuit





**J**

Paddle with Synchronous LED Circuit

Maximum Panel Thickness  
.039" ~ .126" (1.0 ~ 3.2mm)  
without Bezel  
.039" ~ .098" (1.0 ~ 2.5mm)  
with Bezel

Maximum Panel Thickness  
.126" (3.2mm)

Material: Polyamide  
Finish: Matte  
Color: Black






Snap-in combines with Terminal codes 01, 02, & 03

Bracket combines with Terminal code 13

### TYPICAL PADDLE SWITCH DIMENSIONS

Solder Lug • Snap-in

Single Pole Only


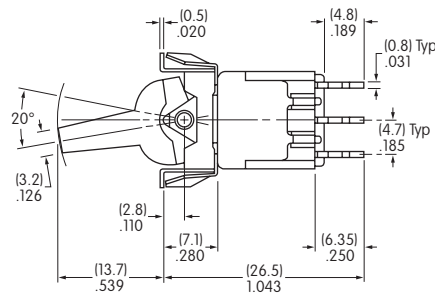



**M2112JCFW01**

Single color LED switch does not have terminal 5.

Straight PC • Bracket

Single Pole Only

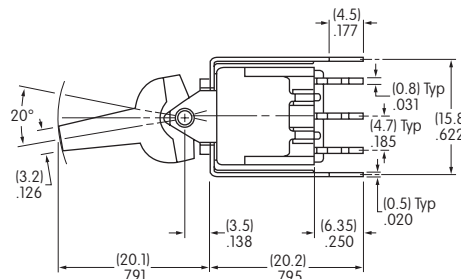

**M2112JCFW13**

Silver contact material is standard. Single color LED switch does not have terminal 5.

## CONTACT MATERIALS &amp; RATINGS

**W**

Silver over Silver

Power Level

6A @ 125V AC &amp; 3A @ 250V AC

**G**




Gold over Brass or Copper

Logic Level


0.4VA maximum @ 28V AC/DC maximum

Complete explanation of operating range in Supplement section.



## TERMINALS

**01****Solder Lug with  
Turret LED Terminal****02****Quick Connect****03****Straight PC with  
Turret LED Terminal**


Single Pole

Single color LED  
& isolated bicolor  
LED switches do not  
have terminal 5.

Double Pole

Single color LED  
& isolated bicolor  
LED switches do not  
have terminal 8.**13****Straight PC with Bracket  
& Turret LED Terminal**

Single Pole



Single color LED  
& isolated bicolor  
LED switches do not  
have terminal 5.

## OPTIONAL BEZEL &amp; COLORS

AT2107 Bezel for Snap-in Panel Frame

Material: Polyamide

Finish: Matte



Colors Available:

**A**

Black

**B**

White

**E**

Yellow

**F**

Green

**G**

Blue

**H**

Gray

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А