




HIGH PERFORMANCE
EMBEDDED DEVICE
SERVERS

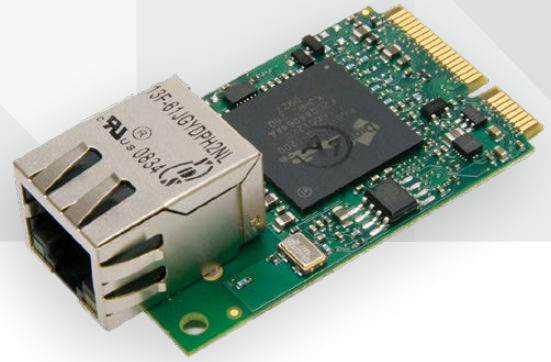

DIGI MINICORE RCM6700 SERIES

An easily scalable cloud-computing infrastructure, extending remote device control and management with tremendous savings in development cost

The ultra-compact MiniCore RCM6700 is ideal for today's smart energy initiatives as well as other applications that require a cost effective web-enabled device server. The RCM6700 series provides up to 6 serial ports, configurable I/O and control features such as PWM. Furthermore, the RCM 6700 series offers a much greater feature set than comparable device servers, while at a lower cost.

The RCM6700 series is fully programmable, taking advantage of processor peripherals. The programming environment, Dynamic C, is an ANSI C compatible development environment that provides a royalty free TCP/IP stack and Wi-Fi support.

Various protocol support such as ZigBee, Modbus and BACnet are also available to help reduce development costs and time-to-market.

In addition to processor and protocol support, Dynamic C supports Digi Remote Manager®. Digi Remote Manager simplifies device deployment by allowing devices to easily pass through firewalls, eliminating server maintenance and costly on-site visits. Digi Remote Manager supports remote firmware updates and data storage for greater device control and monitoring.

BENEFITS

- Rabbit® 6000 running up to 200 MHz
- 10/100 Ethernet and pin-compatible with MiniCore 802.11b/g wireless modules
- 1 MB of internal RAM for program storage
- Up to 4 MB of serial Flash for data logging or web page storage
- Digi Remote Manager provides cost-effective cloud computing for remote device management
- Seamless migration to chip level design
- 5X greater throughput performance

RELATED PRODUCTS



Rabbit MiniCore® RCM6600W



RabbitCore® RCM3000 Series



RabbitCore® RCM3700 Series




Dynamic C®



ConnectCore® 6 SBC

APPLICATION EXAMPLE

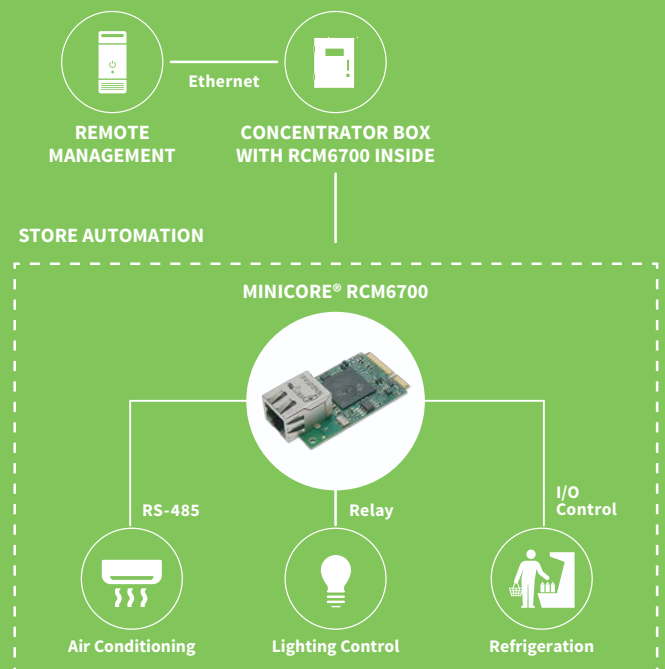

SOFTWARE






The Dynamic C® integrated development environment reduces the time and effort to write real-time software for embedded systems that use a Rabbit microprocessor, enabling easy development of a wide range of applications.

Rabbit products and Dynamic C integrate editing, compiling, linking, loading and debugging into a single development environment as one function. There are no compatibility issues when moving from one stage to another. Once the design is complete, you can debug it on the target hardware and see how your code works. Because it is a dialect of C, the Dynamic C language has all the statements and

constructions of traditional C, plus extensions that make it easier to write reliable, real-time multi-tasking software. The Dynamic C integrated development environment allows for easy hardware migration, moving from a single-board computer to chip level production.

Dynamic C also includes highly useful software components that can add functionality and value to your applications. This functionality includes web server capability, filing system, remote firmware updates, and wired and wireless security. Compatible software components are listed below.

SOFTWARE COMPONENTS

COMPONENT	DESCRIPTION
 RABBITWEB	System of HTML tags used to easily create web interfaces to monitor and control embedded applications
 REMOTE PROGRAM UPDATE (RPU)	Allows for remote firmware updates from anywhere in the world using an Internet connection
 FILE ALLOCATION TABLE (FAT)	Popular network-accessible file system for flashed based memories
 SECURE SOCKETS LAYER (SSL) / TRANSPORT LAYER SECURITY (TLS)	The industry standard for web security in embedded applications
 ADVANCED ENCRYPTION STANDARD (AES)	128-bit encryption for transferring sensitive data

RABBITCORE® RCM6700 DEVELOPMENT KITS



THE RCM6700 STANDARD DEVELOPMENT KIT CONTENTS:

- RCM6700 module
- Interface board with standoffs/connectors
- Prototyping board with standoffs/connectors
- USB cable to program RCM5700 via interface board
- Dynamic C, including product documentation on disk
- Getting Started instructions
- Registration card

THE RCM6700 DELUXE DEVELOPMENT KIT CONTENTS:

Includes everything in the Standard Development Kit, plus the following items:

- Universal AC adapter, 5VDC, 2 A (includes Canada/Japan/ U.S., Australia/N.Z., U.K., and European style plugs)
Development Kits sold in North America may contain an AC adapter with only a North American style plug
- Digital I/O and serial communication accessory boards for use with certain sample programs
- CAT 5/6 Ethernet cable and DB-9 to 10-pin header serial cable
- Rabbit 5000 Processor Easy Reference poster

SPECIFICATIONS	RCM6700		RCM6710		RCM6750		RCM6760	
FEATURES								
MICROPROCESSOR	Rabbit® 6000 up to 200 MHz							
NETWORK INTERFACE	10/100Base-T (Ethernet signals only)	10/100Base-T RJ-45 connector	10/100Base-T (Ethernet signals only)	10/100Base-T RJ-45 connector	10/100Base-T (Ethernet signals only)	10/100Base-T RJ-45 connector	10/100Base-T RJ-45 connector	10/100Base-T RJ-45 connector
FLASH MEMORY (CODE AND FILE SYSTEM)	1 MB serial Flash				4 MB serial Flash			
INTERNAL SRAM (CODE AND DATA)	1 MB							
BATTERY-BACKABLE SRAM	32 KB (Internal)				32 KB (Internal), 1 MB (External)			
FLEXIBLE INTERFACE MODULE(FIM)	400 MHz DRPIC165X CPU 1k program/192 bytes data RAM							
MASS STORAGE	On-board serial Flash							
GENERAL-PURPOSE I/O	Up to 32 parallel digital I/O							
SERIAL PORTS	6 high-speed, CMOS compatible ports, 4 configureable as clocked serial (SPI)							
SERIAL RATE	Maximum asynchronous baud rate = CLK/8							
REAL-TIME CLOCK	Yes							
TIMERS	Ten 8-bit timers (6 cascadable from the first) , one 10-bit timer with 2 match registers							
WATCHDOG/SUPERVISOR	Yes							
PULSE WIDTH MODULATORS	4 channels synchronized PWM with 10-bit counter ; 4 channels variable-phase or synchronized PWM with 16-bit counter							
I²C	1 channel, standard (100 Kbits/s) and (400 Kbits/s) clock modes							
QUADRATURE DECODER	2-channel quadrature decoder accepts inputs from external incremental encoder modules							
INPUT CAPTURE	2-channel input capture can be used to time input signals from various port pins							
POWER - WITH ETHERNET	210 mA @ 3.3V	250 mA @ 3.3V	250 mA @ 3.3V	250 mA @ 3.3V	250 mA @ 3.3V	250 mA @ 3.3V	260 mA @ 3.3V	260 mA @ 3.3V
POWER - WITHOUT ETHERNET	120 mA @ 3.3V	130 mA @ 3.3V	130 mA @ 3.3V	130 mA @ 3.3V	130 mA @ 3.3V	130 mA @ 3.3V	140 mA @ 3.3V	140 mA @ 3.3V
OPERATING TEMPERATURE	-40° C to +85° C							
SUPPORTED PROTOCOLS	HTTP, HTTPS, SSLv3, DHCP, UDP, TCP, SNMP, Telnet, FTP, TFTP, SMTP, POP3							
HUMIDITY	5% to 95%, non-condensing							
CONNECTORS - HEADERS	52-pin Mini PCI Express	52-pin Mini PCI Express RJ-45 10/100Base-T connector	52-pin Mini PCI Express	52-pin Mini PCI Express	52-pin Mini PCI Express	52-pin Mini PCI Express	52-pin Mini PCI Express RJ-45 10/100Base-T connector	52-pin Mini PCI Express RJ-45 10/100Base-T connector
BOARD SIZE	1.20" x 2.00" x 0.12" (30 mm x 51 mm x 3 mm)	1.20" x 2.00" x 0.70" (30 mm x 51 mm x 18 mm)	1.20" x 2.00" x 0.27" (30 mm x 51 mm x 7 mm)	1.20" x 2.00" x 0.27" (30 mm x 51 mm x 7 mm)	1.20" x 2.00" x 0.27" (30 mm x 51 mm x 7 mm)	1.20" x 2.00" x 0.27" (30 mm x 51 mm x 7 mm)	1.20" x 2.00" x 0.73" (30 mm x 51 mm x 19 mm)	1.20" x 2.00" x 0.73" (30 mm x 51 mm x 19 mm)
PRODUCT WARRANTY	3 years							

PART NUMBERS	DESCRIPTION
20-101-1318	RCM6700
20-101-1319	RCM6710
20-101-1320	RCM6750
20-101-1321	RCM6760
101-1326	RCM6700 Deluxe Development Kit
101-1327	RCM6700 Standard Development Kit

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2019 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001616
B5/319

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А