

FAN4040

Precision Micropower Shunt Voltage Reference

Features

- Fixed 2.500V, 3.300V and 5.00V
- Tolerances to $\pm 0.1\%$ (25°C)
- Low output noise
- Low temperature coefficient to 100ppm/°C
- Small package
- Extended operating current range
- Extended temperature range

Applications


- Portable equipment
- Disk drives
- Instrumentation
- Audio equipment
- Data acquisition systems

Description

The FAN4040 series of precision shunt references are ideal for space- and cost-sensitive applications. They are available in three output voltages (2.500V, 3.300V and 5.00V) and with four output voltage tolerances (0.1%, 0.2%, 0.5% and 1%). They also have excellent temperature coefficients, to 100ppm/°C for the tighter tolerance grades. The FAN4040 series has an extended operating current range, sinking as much as 25mA.

The FAN4040 series is available in SOT-23 package.

Connection Diagrams

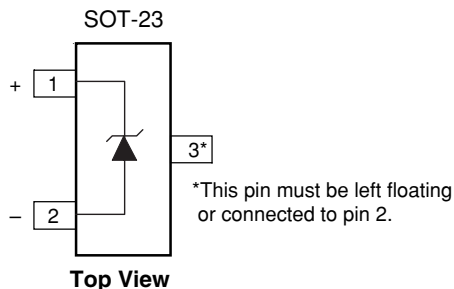

Absolute Maximum Ratings¹

Ratings are over full operating free-air temperature range unless otherwise noted.

Parameter	Min.	Max.	Unit
Continuous cathode current, I _K	-30	30	mA
Power dissipation	See Dissipation Rating Table		
Storage Temperature Range	-65	150	°C
Lead Temperature (Soldering, 10 sec.)		300	°C

Notes:

- 1. Functional operation under these conditions is not implied. Permanent damage may occur if the device is subjected to conditions outside these ratings.

Recommended Operating Conditions

Parameter		Min.	Max.	Unit
Continuous cathode current, I _K		0.025	25	mA
Operating temperature range in free air, T _A	I Grade	-40	85	°C
	E Grade	-40	125	°C


Dissipation Rating Table

Package	Power Rating T _A ≤ 25°C	Derating Factor T _A ≥ 25°C	Power Rating T _A = 70°C
SOT23 ¹	306mW	3.0mW/°C	168mW

Note:

- 1. It is recommended to connect pin 3 to pin 2 to ensure optimal thermal performance.

Equivalent Schematic

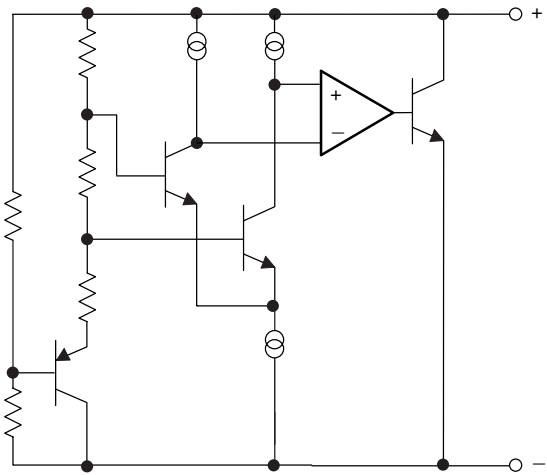

Guaranteed Electrical Characteristics, FAN4040-2.5, Industrial Temperature Range

(T_A = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units
			A	B	C	D	
V _R	Reverse Breakdown Voltage	I _K = 100μA	2.500	2.500	2.500	2.500	V*
TCV _R	Reverse Breakdown Voltage Tolerance	I _K = 100μA	±2.5 • ±19	±5.0 ±21	±12 ±29	±25 ±49	mV mV
I _{RMIN}	Minimum Operating Current		• 65	65	65	70	μA
ΔV _R /ΔT	Reverse Breakdown Voltage Temperature Coefficient	I _K = 1mA	• ±100	±100	±100	±150	ppm/°C
ΔV _R (ΔI _K)	Reverse Breakdown Voltage Change with Operating Current	I _{RMIN} ≤ I _K ≤ 1mA 1mA ≤ I _K ≤ 15mA 1mA ≤ I _K ≤ 25mA	• 1.2 • 8.0 10	1.2 8.0 10	1.2 8.0 10	1.5 10.0 12	mV mV mV*
Z _{KA}	Reverse Dynamic Impedance	I _K =1mA, f=120Hz, I _{AC} =0.1I _K	1.0	1.0	1.0	1.3	Ω*
e _N	Wideband Noise	I _K =100μA, 10Hz ≤ f ≤ 10kHz	35	35	35	35	μV _{RMS} *
ΔV _R	Reverse Breakdown Voltage Long-term Stability	t=1000hrs, T=25°C, I _K =100μA	120	120	120	120	ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-3.3, Industrial Temperature Range

(T_A = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units
			A	B	C	D	
V _R	Reverse Breakdown Voltage	I _K = 100μA	3.300	3.300	3.300	3.300	V*
TCV _R	Reverse Breakdown Voltage Tolerance	I _K = 100μA	±3.3 • ±25	±6.6 ±28	±17 ±38	±33 ±65	mV mV
I _{RMIN}	Minimum Operating Current		• 70	70	70	75	μA
ΔV _R /ΔT	Reverse Breakdown Voltage Temperature Coefficient	I _K = 1mA	• ±100	±100	±100	±150	ppm/°C
ΔV _R (ΔI _K)	Reverse Breakdown Voltage Change with Operating Current	I _{RMIN} ≤ I _K ≤ 1mA 1mA ≤ I _K ≤ 15mA 1mA ≤ I _K ≤ 25mA	• 1.2 • 10 12	1.2 10 12	1.2 10 12	1.5 13 15	mV mV mV*
Z _{KA}	Reverse Dynamic Impedance	I _K =1mA, f=120Hz, I _{AC} =0.1I _K	1.0	1.0	1.0	1.3	Ω*
e _N	Wideband Noise	I _K =100μA, 10Hz ≤ f ≤ 10kHz	70	70	70	70	μV _{RMS} *
ΔV _R	Reverse Breakdown Voltage Long-term Stability	t=1000hrs, T=25°C, I _K =100μA	120	120	120	120	ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-5.0, Industrial Temperature Range

(T_A = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units
			A	B	C	D	
V _R	Reverse Breakdown Voltage	I _K = 100μA	5.00	5.00	5.00	5.00	V*
TCV _R	Reverse Breakdown Voltage Tolerance	I _K = 100μA	±5 • ±40	±10 ±45	±24 ±60	±50 ±100	mV mV
I _{RMIN}	Minimum Operating Current		• 65	65	65	70	μA
ΔV _R /ΔT	Reverse Breakdown Voltage Temperature Coefficient	I _K = 1mA	• ±100	±100	±100	±150	ppm/°C
ΔV _R (ΔI _K)	Reverse Breakdown Voltage Change with Operating Current	I _{RMIN} ≤ I _K ≤ 1mA 1mA ≤ I _K ≤ 15mA 1mA ≤ I _K ≤ 25mA	• 1.2 • 8.0 10	1.2 8.0 10	1.2 8.0 10	1.5 10.0 12	mV mV mV*
Z _{KA}	Reverse Dynamic Impedance	I _K =1mA, f=120Hz, I _{AC} =0.1I _K	1.0	1.0	1.0	1.3	Ω*
e _N	Wideband Noise	I _K =100μA, 10Hz ≤ f ≤ 10kHz	70	70	70	70	μV _{RMS} *
ΔV _R	Reverse Breakdown Voltage Long-term Stability	t=1000hrs, T=25°C, I _K =100μA	120	120	120	120	ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-2.5, Extended Temperature Range

(T_A = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units
			A	B	C	D	
V _R	Reverse Breakdown Voltage	I _K = 100μA	2.500	2.500	2.500	2.500	V*
TCV _R	Reverse Breakdown Voltage Tolerance	I _K = 100μA	±2.5 • ±25	±5.0 ±30	±12 ±35	±25 ±49	mV mV
I _{RMIN}	Minimum Operating Current		• 65	65	65	70	μA
ΔV _R /ΔT	Reverse Breakdown Voltage Temperature Coefficient	I _K = 1mA	• ±100	±100	±100	±150	ppm/°C
ΔV _R (ΔI _K)	Reverse Breakdown Voltage Change with Operating Current	I _{RMIN} ≤ I _K ≤ 1mA 1mA ≤ I _K ≤ 15mA 1mA ≤ I _K ≤ 25mA	• 1.5 • 10.0 10	1.5 10.0 10	1.5 10.0 10	1.5 10.0 12	mV mV mV*
Z _{KA}	Reverse Dynamic Impedance	I _K =1mA, f=120Hz, I _{AC} =0.1I _K	1.0	1.0	1.0	1.3	Ω*
e _N	Wideband Noise	I _K =100μA, 10Hz ≤ f ≤ 10kHz	70	70	70	70	μV _{RMS} *
ΔV _R	Reverse Breakdown Voltage Long-term Stability	t=1000hrs, T=25°C, I _K =100μA	120	120	120	120	ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-3.3, Extended Temperature Range

(T_A = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units
			A	B	C	D	
V _R	Reverse Breakdown Voltage	I _K = 100μA	3.300	3.300	3.300	3.300	V*
TCV _R	Reverse Breakdown Voltage Tolerance	I _K = 100μA	±3.3 • ±30	±6.6 ±35	±17 ±42	±33 ±65	mV mV
I _{RMIN}	Minimum Operating Current		• 70	70	70	75	μA
ΔV _R /ΔT	Reverse Breakdown Voltage Temperature Coefficient	I _K = 1mA	• ±100	±100	±100	±150	ppm/°C
ΔV _R (ΔI _K)	Reverse Breakdown Voltage Change with Operating Current	I _{RMIN} ≤ I _K ≤ 1mA 1mA ≤ I _K ≤ 15mA 1mA ≤ I _K ≤ 25mA	• 1.5 • 10 12	1.5 10 12	1.5 10 12	1.5 13 15	mV mV mV*
Z _{KA}	Reverse Dynamic Impedance	I _K =1mA, f=120Hz, I _{AC} =0.1I _K	1.0	1.0	1.0	1.3	Ω*
e _N	Wideband Noise	I _K =100μA, 10Hz ≤ f ≤ 10kHz	70	70	70	70	μV _{RMS} *
ΔV _R	Reverse Breakdown Voltage Long-term Stability	t=1000hrs, T=25°C, I _K =100μA	120	120	120	120	ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-5.0, Extended Temperature Range

(T_A = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units
			A	B	C	D	
V _R	Reverse Breakdown Voltage	I _K = 100μA	5.00	5.00	5.00	5.00	V*
TCV _R	Reverse Breakdown Voltage Tolerance	I _K = 100μA	±5 • ±50	±10 ±60	±24 ±70	±50 ±100	mV mV
I _{RMIN}	Minimum Operating Current		• 100	100	100	100	μA
ΔV _R /ΔT	Reverse Breakdown Voltage Temperature Coefficient	I _K = 1mA	• ±100	±100	±100	±150	ppm/°C
ΔV _R (ΔI _K)	Reverse Breakdown Voltage Change with Operating Current	I _{RMIN} ≤ I _K ≤ 1mA 1mA ≤ I _K ≤ 15mA 1mA ≤ I _K ≤ 25mA	• 1.5 • 10 10	1.5 10 10	1.5 10 10	1.5 15 12	mV mV mV*
Z _{KA}	Reverse Dynamic Impedance	I _K =1mA, f=120Hz, I _{AC} =0.1I _K	1.0	1.0	1.0	1.3	Ω*
e _N	Wideband Noise	I _K =100μA, 10Hz ≤ f ≤ 10kHz	70	70	70	70	μV _{RMS} *
ΔV _R	Reverse Breakdown Voltage Long-term Stability	t=1000hrs, T=25°C, I _K =100μA	120	120	120	120	ppm*

*Typical.


Mechanical Dimensions

SOT-23 Package

Symbol	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	.035	.044	.89	1.12	
A1	.0004	.004	.01	.10	
B	.012	.020	.30	.50	
c	.003	.008	.08	.20	
D	.110	.120	2.80	3.04	
E	.047	.055	1.20	1.40	
e	.037 BSC		.95 BSC		
e1	.075 BSC		1.90 BSC		
H	.083	.104	2.10	2.64	
L	.021 REF		.54 REF		
S	.016 Nom		.395 Nom		

Notes:

1. Dimensions are inclusive of plating.
2. Dimensions are exclusive of mold flash & metal burr.
3. Comply to JEDEC TO-236.
4. This drawing is for matrix leadframe only.

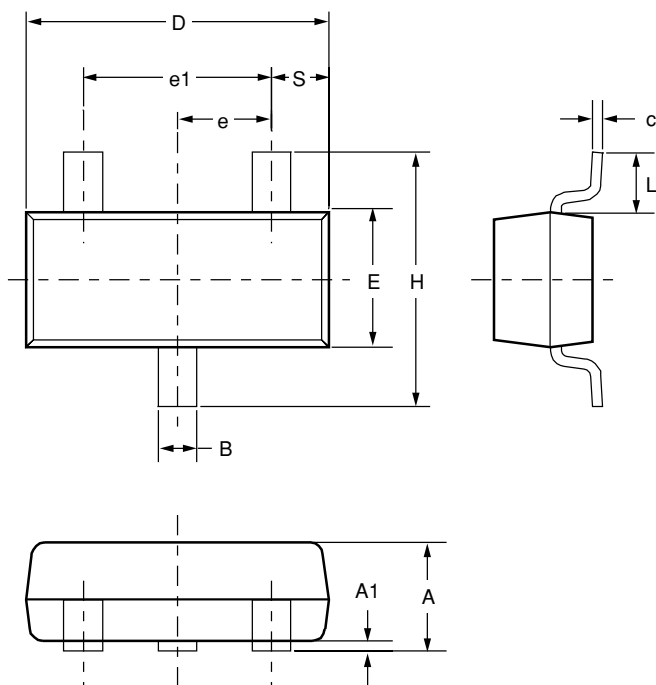

Ordering Information

Example: FAN4040DIS325X ('X' denotes Tape and Reel)

<u>FAN4040</u>	<u>D</u>	<u>I</u>	<u>S3</u>	<u>25</u>
	Grade	Temperature	Package	Voltage
	0.1% = A*	-40°C to 85°C – I	SOT23 = S3	2.5V = 25
	0.2% = B	-40°C to 125°C – E		3.3V = 33
	0.5% = C			5.0V = 5
	1.0% = D			

* 'A' grade is a special order. Please contact factory for availability.

SOT-23 Package Marking Information

Only 3 fields of marking are possible on an SOT-23. This table gives the meaning of these fields.

Example: F2A

<u>F</u>	<u>2</u>	<u>A</u>
	Voltage	Grade
	2.5V = 2	0.1% = A
	3.3V = 3	0.2% = B
	5.0V = 5	0.5% = C
		1.0% = D

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А