

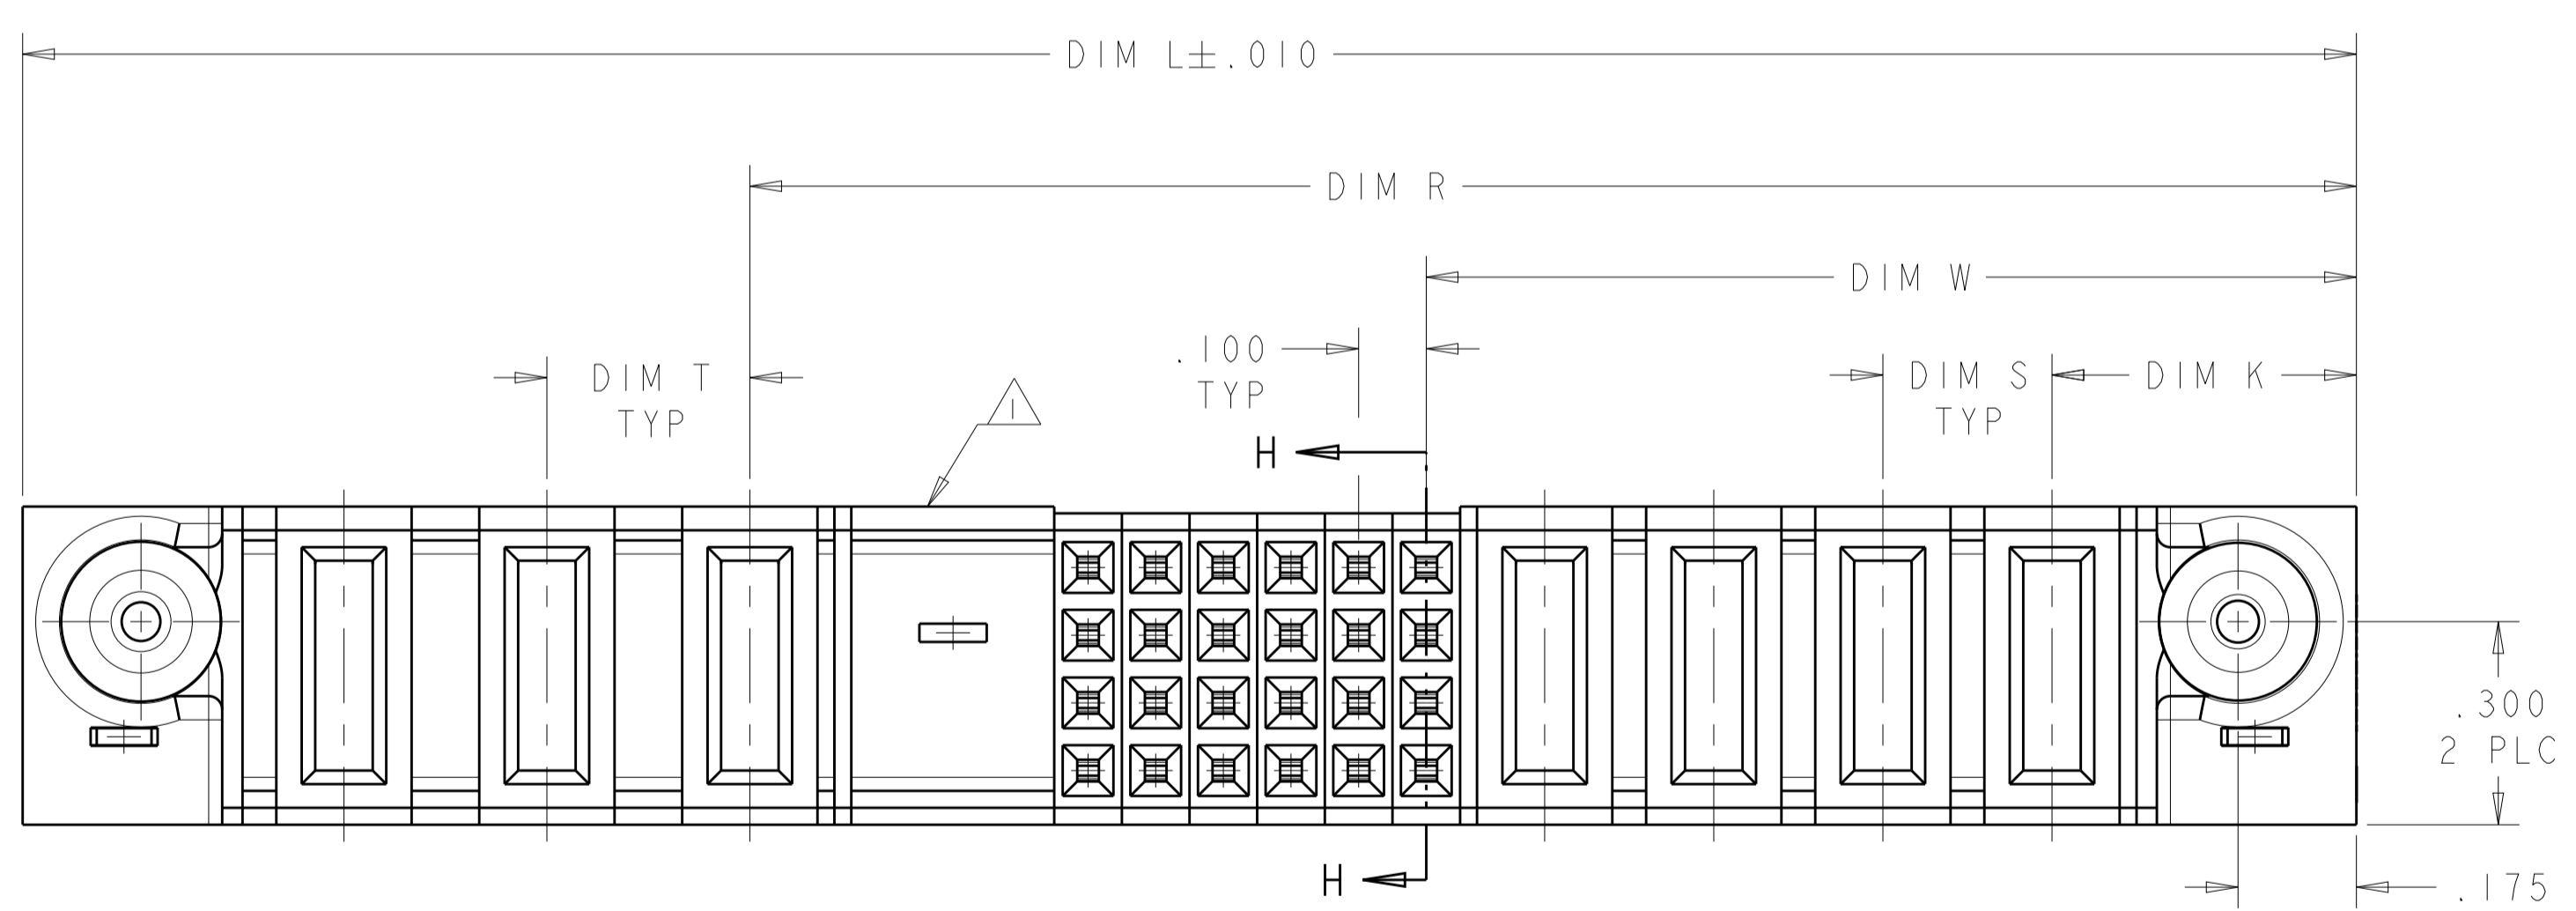
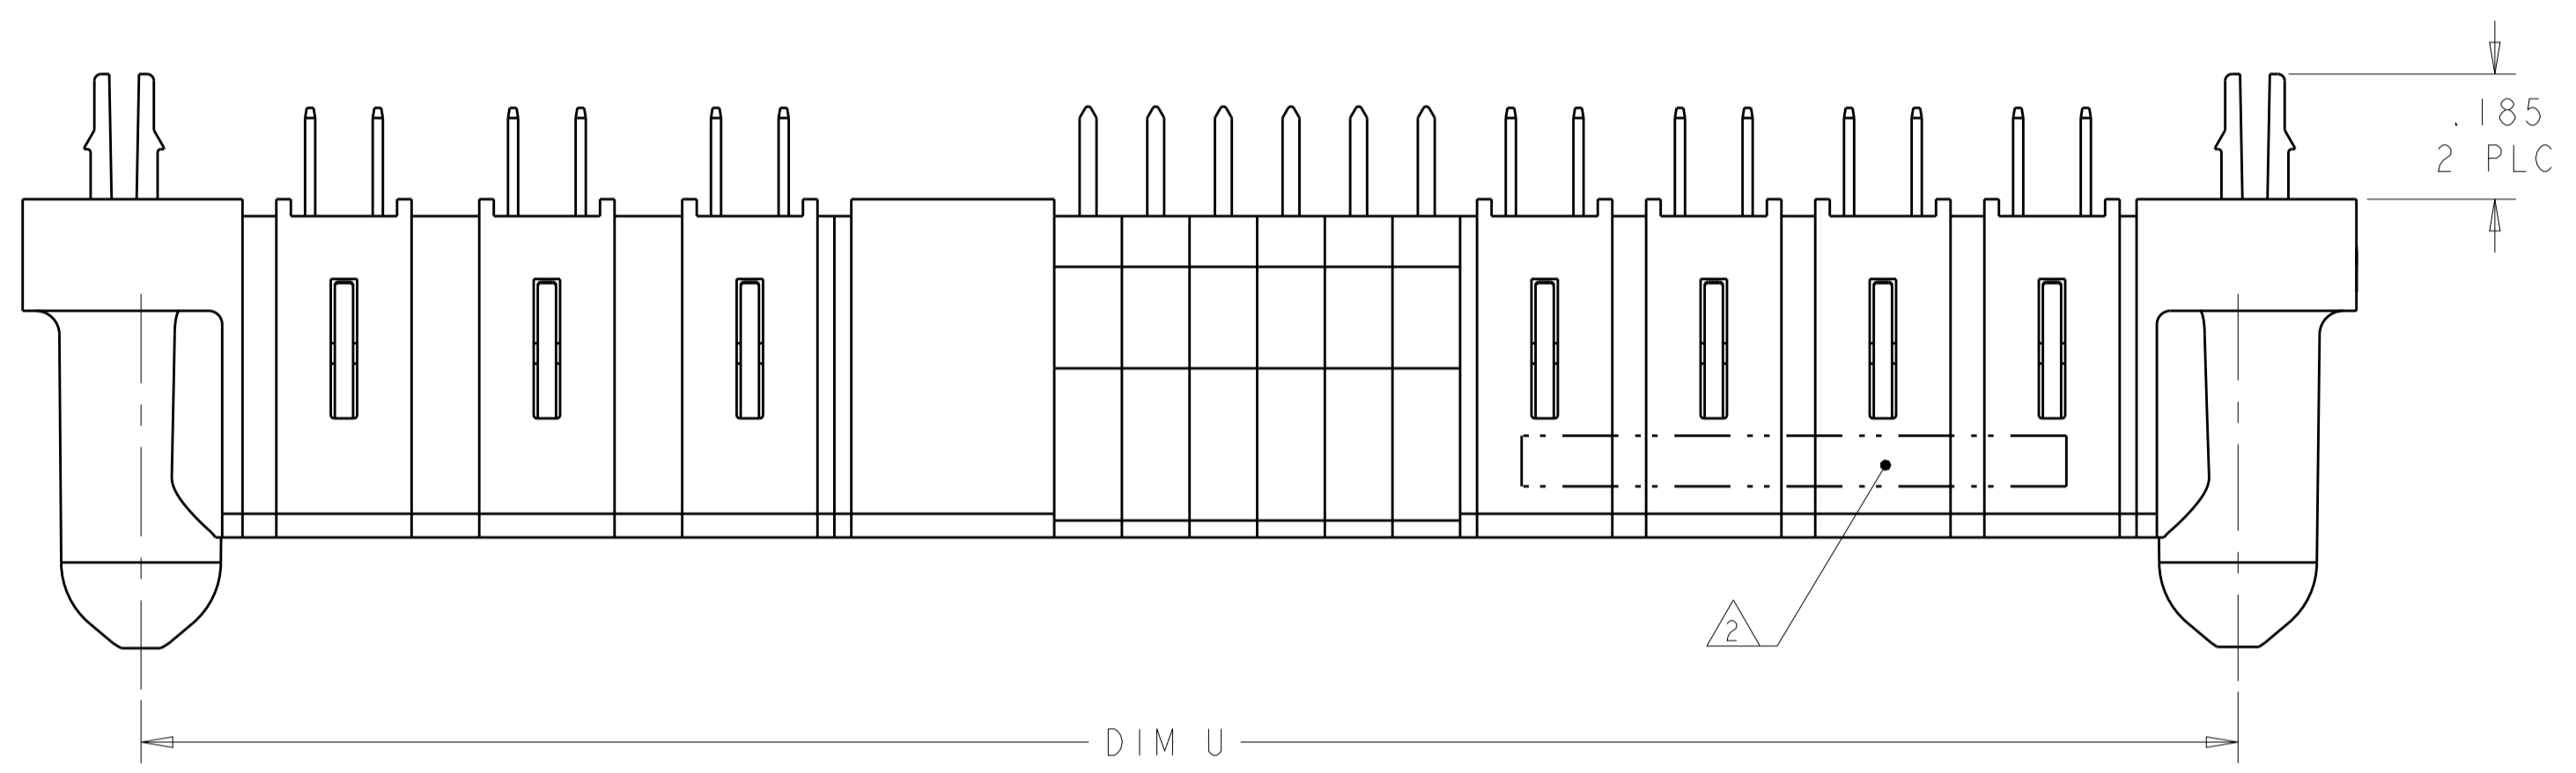
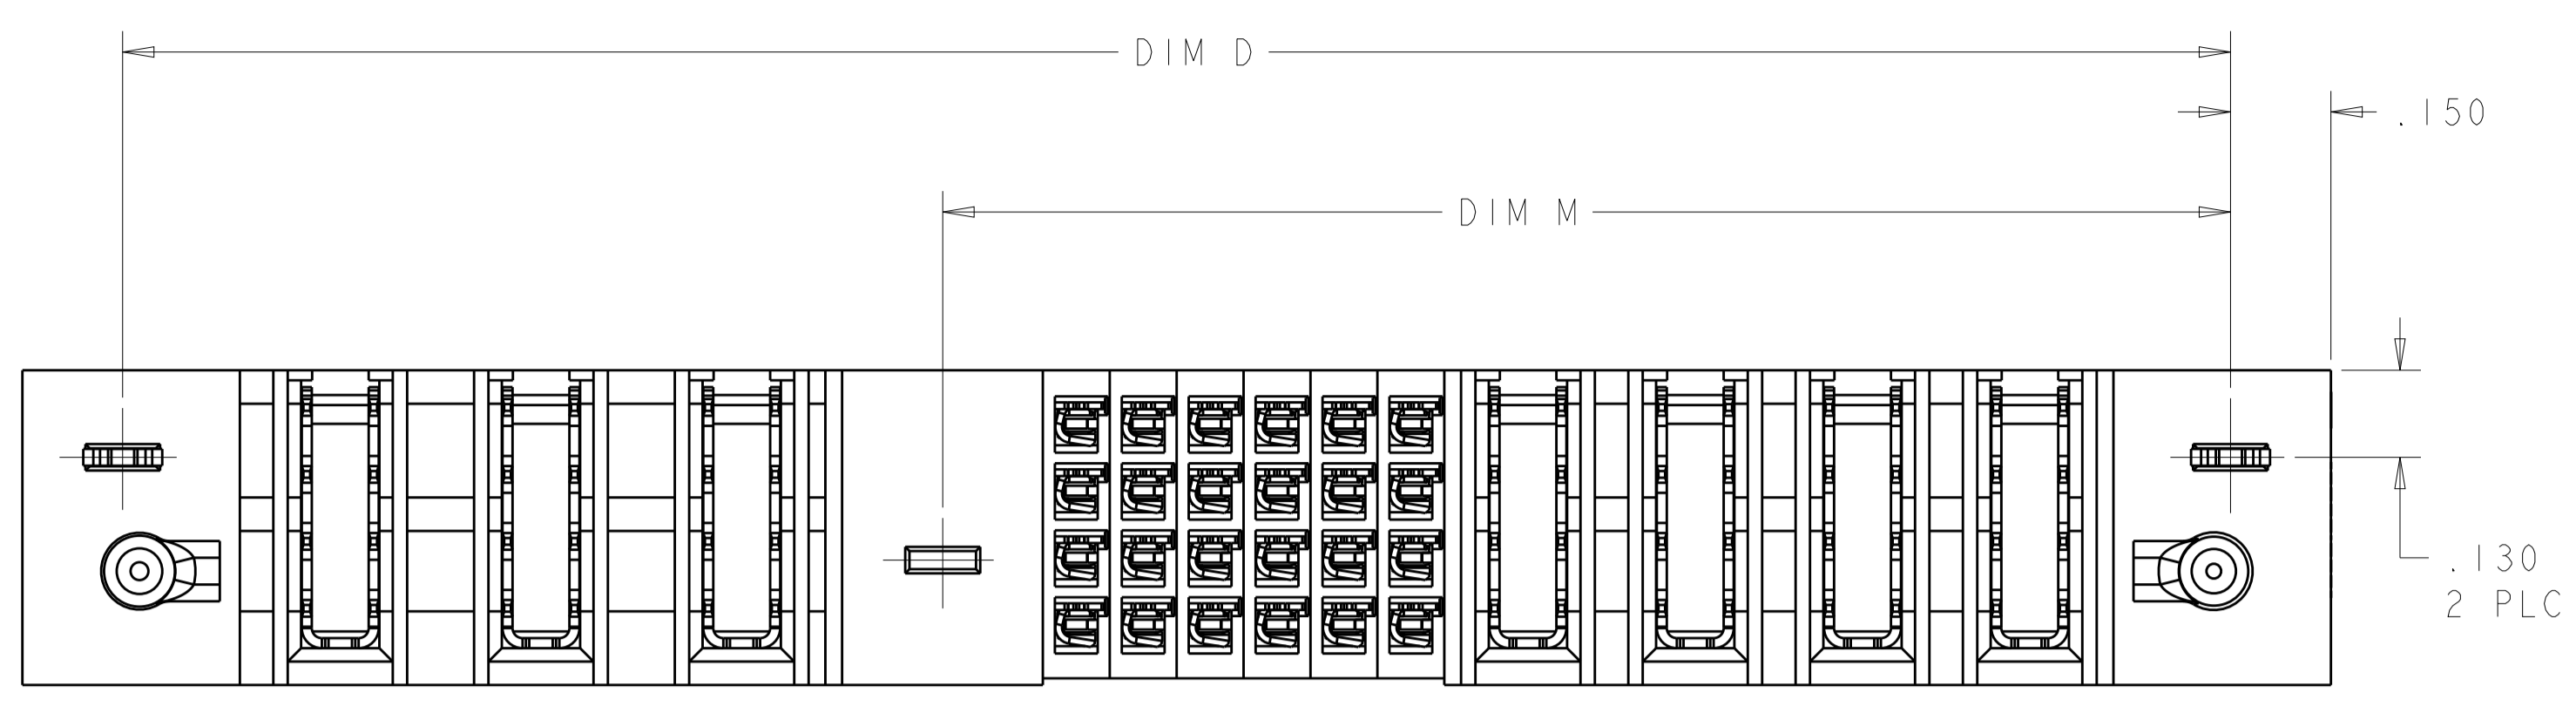


LOC		DIST		REVISIONS			
ES	00	P	LTM	DESCRIPTION	DATE	DWN	APVD
	G2			ADDED THE DASH NO -27	11MAY2011	ML	SZ
	G3			REV PER ECR-13-006828	25APR2013	CZ	SZ
	G4			ADDED NEW DASH NUMBER 2-9	03JUN2013	CZ	SZ

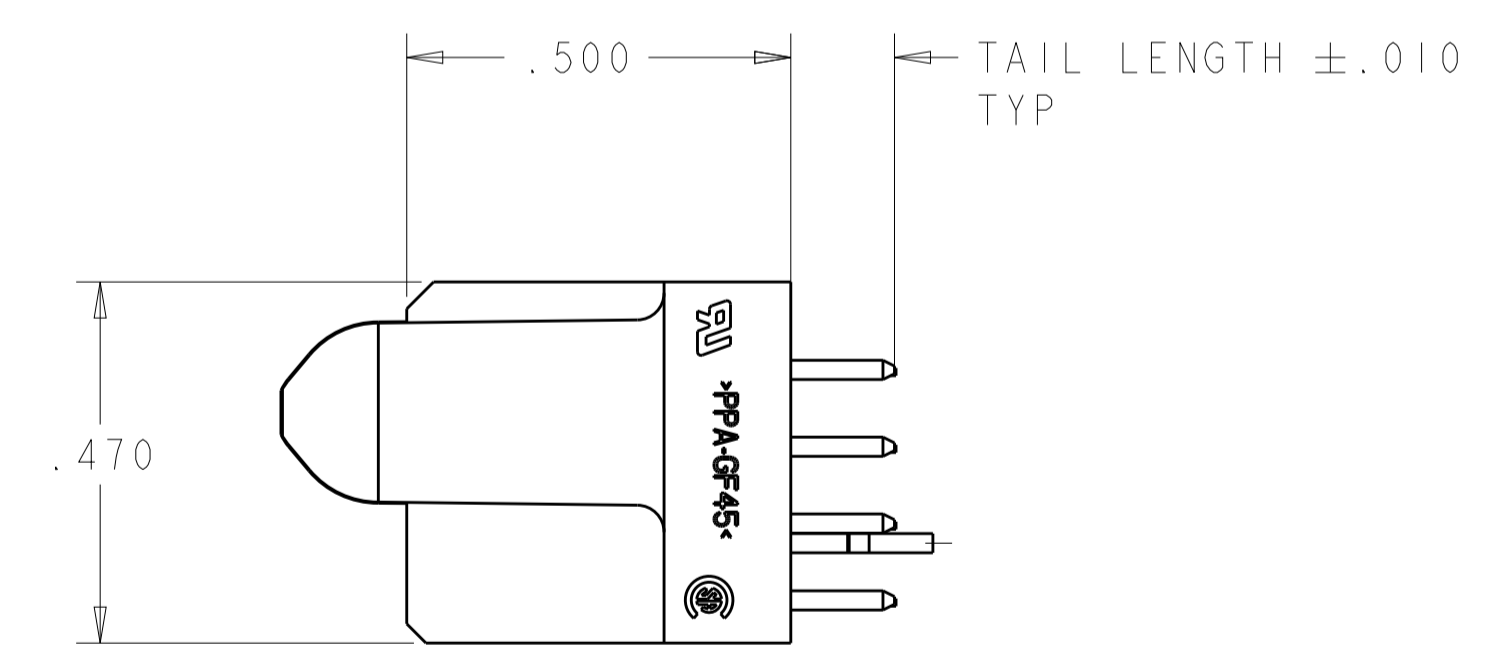

- △ OPTIONAL CENTER MODULE, WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE
- △ "AMP", TRADEMARK, PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- △ MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0  
 SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY  
 POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- △ CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
- △ MECHANICAL CONNECTOR KEEP OUT ZONE
- △ DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- △ PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- △ PCB - .0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 CU PLATING TO ACHIEVE A .040±.003 DIA HOLE
- △ FOR P/N:2-6450150-2.THE VARIABLE DIMENSIONS PLEASE SEE SHEET 7.

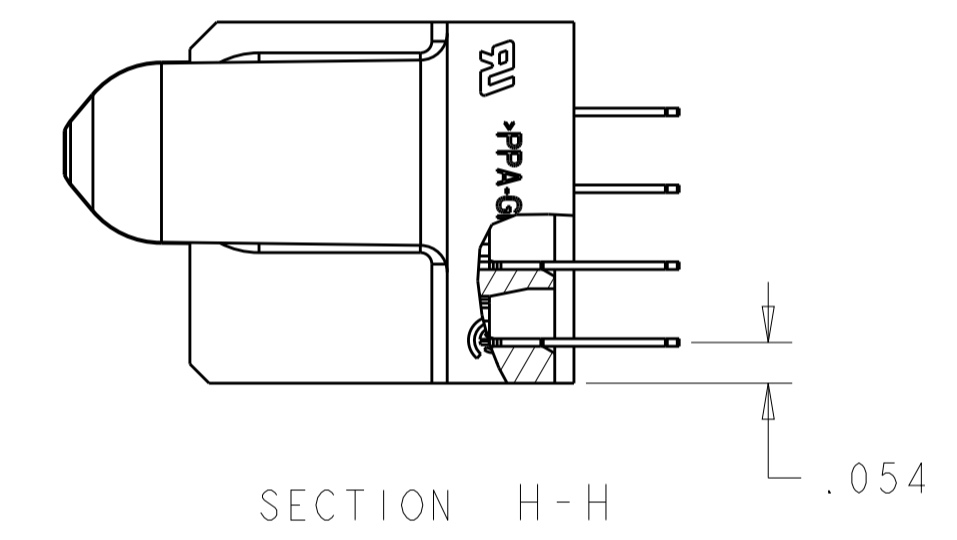


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: R.GRZYBOWSKI 16FEB05	TE Connectivity
DIMENSIONS: INCHES		CHK: M.PERCHEKKE 16FEB05	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: M.PERCHEKKE	NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
0 PLC ±.01	1 PLC ±.01	PRODUCT SPEC: 108-1973	SIZE: A1
2 PLC ±.005	3 PLC ±.005	APPLICATION SPEC: 114-13038	CAGE CODE: 6450150
4 PLC ±.0020	ANGLES ±.7°	WEIGHT: -	RESTRICTED TO: -
MATERIAL: -	FINISH: -	CUSTOMER DRAWING	SCALE: 1:1 SHEET 1 OF 12 REV: G5

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTN	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-



WITH	2.650	.200	.250	1.550	.875	2.700	-	3.000	.450	2P + 24S + 6P	2-6450150-9
WITH	2.300	.250	.300	1.950	1.275	2.350	-	2.650	.475	3ACP + 24S + 2P	2-6450150-8
WITH	5.150	.300	.300	3.550	2.700	5.200	-	5.500	.450	8ACP + 32S + 6ACP	2-6450150-7
WITH	2.800	.300	.250	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	2-6450150-6
WITH	3.800	.300	.250	1.875	1.375	3.850	-	4.150	.450	4P + 16S + 7ACP	2-6450150-5
WITH	2.400	.200	.200	2.100	.825	2.450	-	2.750	.450	2P + 48S + 2P	2-6450150-4
WITH	1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	2-6450150-3
WITHOUT	5.500	.300	.300	3.175	2.525	5.550	-	5.850	.475	7ACP+20S+4ACP+5P	2-6450150-2
WITH	2.900	.250	.250	2.550	.875	2.950	-	3.250	.450	2P + 64S + 2P	2-6450150-1
WITH	3.550	-	.300	2.550	1.275	3.600	-	3.900	.475	3ACP + 48S + 5P	2-6450150-0
WITH	4.000	-	-	-	.375	4.050	-	4.350	-	148S	1-6450150-9
WITH	2.800	.250	.250	1.700	1.125	2.850	-	3.150	.450	3P + 20S + 5P	1-6450150-8
WITH	2.200	.250	.250	1.350	.875	2.250	-	2.550	.450	2P + 16S + 4P	1-6450150-7
WITH	3.500	.300	.250	2.775	2.375	3.550	-	3.850	.450	8P + 12S + 3ACP	1-6450150-3
WITH	2.300	.250	.300	1.950	1.275	2.350	-	2.650	.475	3ACP + 24S + 2P	6450150-9
WITH	1.575	-	-	1.425	.700	1.625	-	1.925	.475	1P + 24S + 1P	6450150-8
WITH	3.000	.250	.250	2.150	1.425	3.050	-	3.350	.450	4P + 24S + 4P	6450150-6
WITH	2.500	.300	.250	1.800	1.125	2.550	-	2.850	.450	3P + 24S + 3ACP	6450150-5
WITH	2.675	.200	.200	2.375	1.650	2.725	-	3.025	.475	5P + 24S + 2P	6450150-4
WITH	2.800	.300	.250	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	6450150-3
WITH	3.550	-	.300	2.550	1.275	3.600	-	3.900	.475	3ACP + 48S + 5P	6450150-2
WITH	4.350	.250	.250	3.500	2.625	4.400	-	4.700	.450	9P + 32S + 4P	6450150-1
HOLD DOWN	U	T	S	R	W	D	M	L	K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN R. GRZYBOWSKI CHK M. PERCHERKE APVD M. PERCHERKE	16FEB05 16FEB05	 TE Connectivity NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.7°	PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038	SIZE A100779	
MATERIAL	FINISH	WEIGHT	SCALE 1:1	RESTRICTED TO C=6450150 SHEET 2 OF 12 REV G5
CUSTOMER DRAWING				


LOC	DIST	REV	DATE	BY	APP'D
ES	00				

PART NUMBER	ROWS	POWER (L)				SIGNAL											POWER (R)														
		P13	P12	P11	P10	8	7	6	5	4	3	2	1	P9	P8	P7	P6	P5	P4	P3	P2	P1									
6450150-1	D C B A	VM	VM	VA	VM	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	VM	VM	VM	VM	VA	VM		
		HD																													
9P + 32S + 4P																															

PART NUMBER	ROWS	POWER (L)				SIGNAL											POWER (R)										
		P8	P7	P6	P5	P4	12	11	10	9	8	7	6	5	4	3	2	1	P3	P2	P1						
6450150-2	D C B A	VM	VM	VM	VM	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	VA	VM	VM	
		HD																									
3ACP + 48S + 5P																											

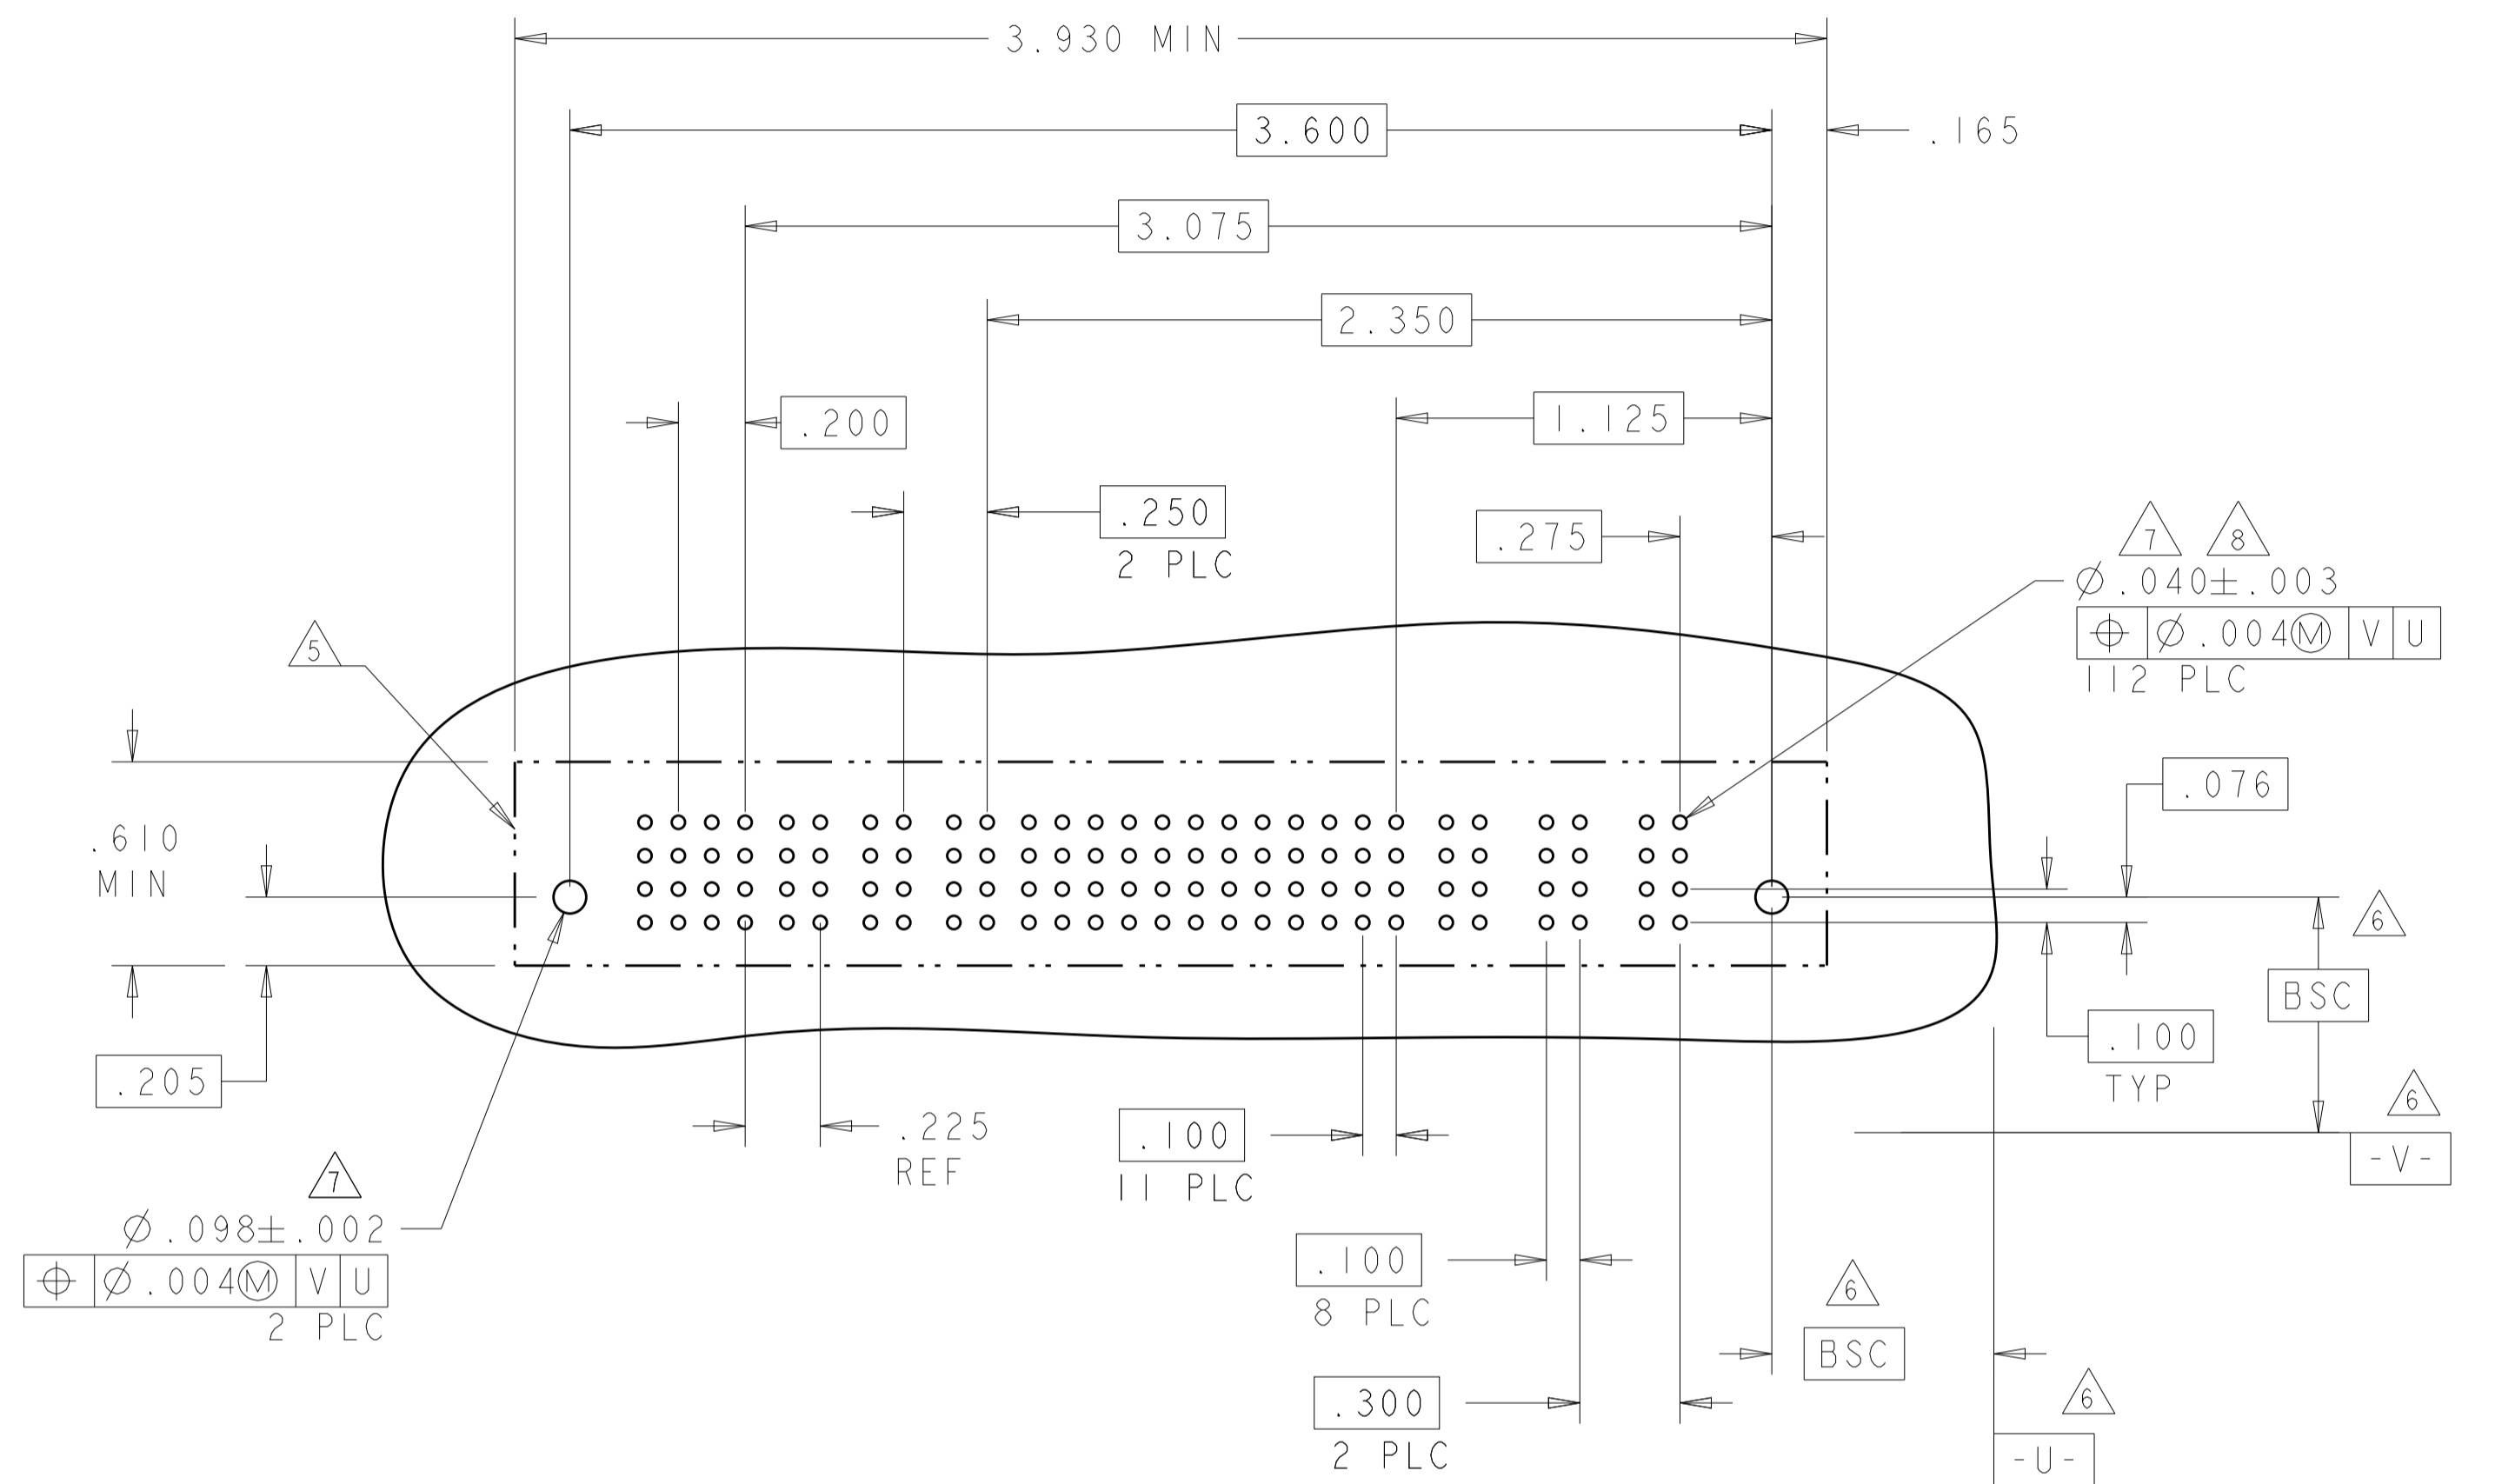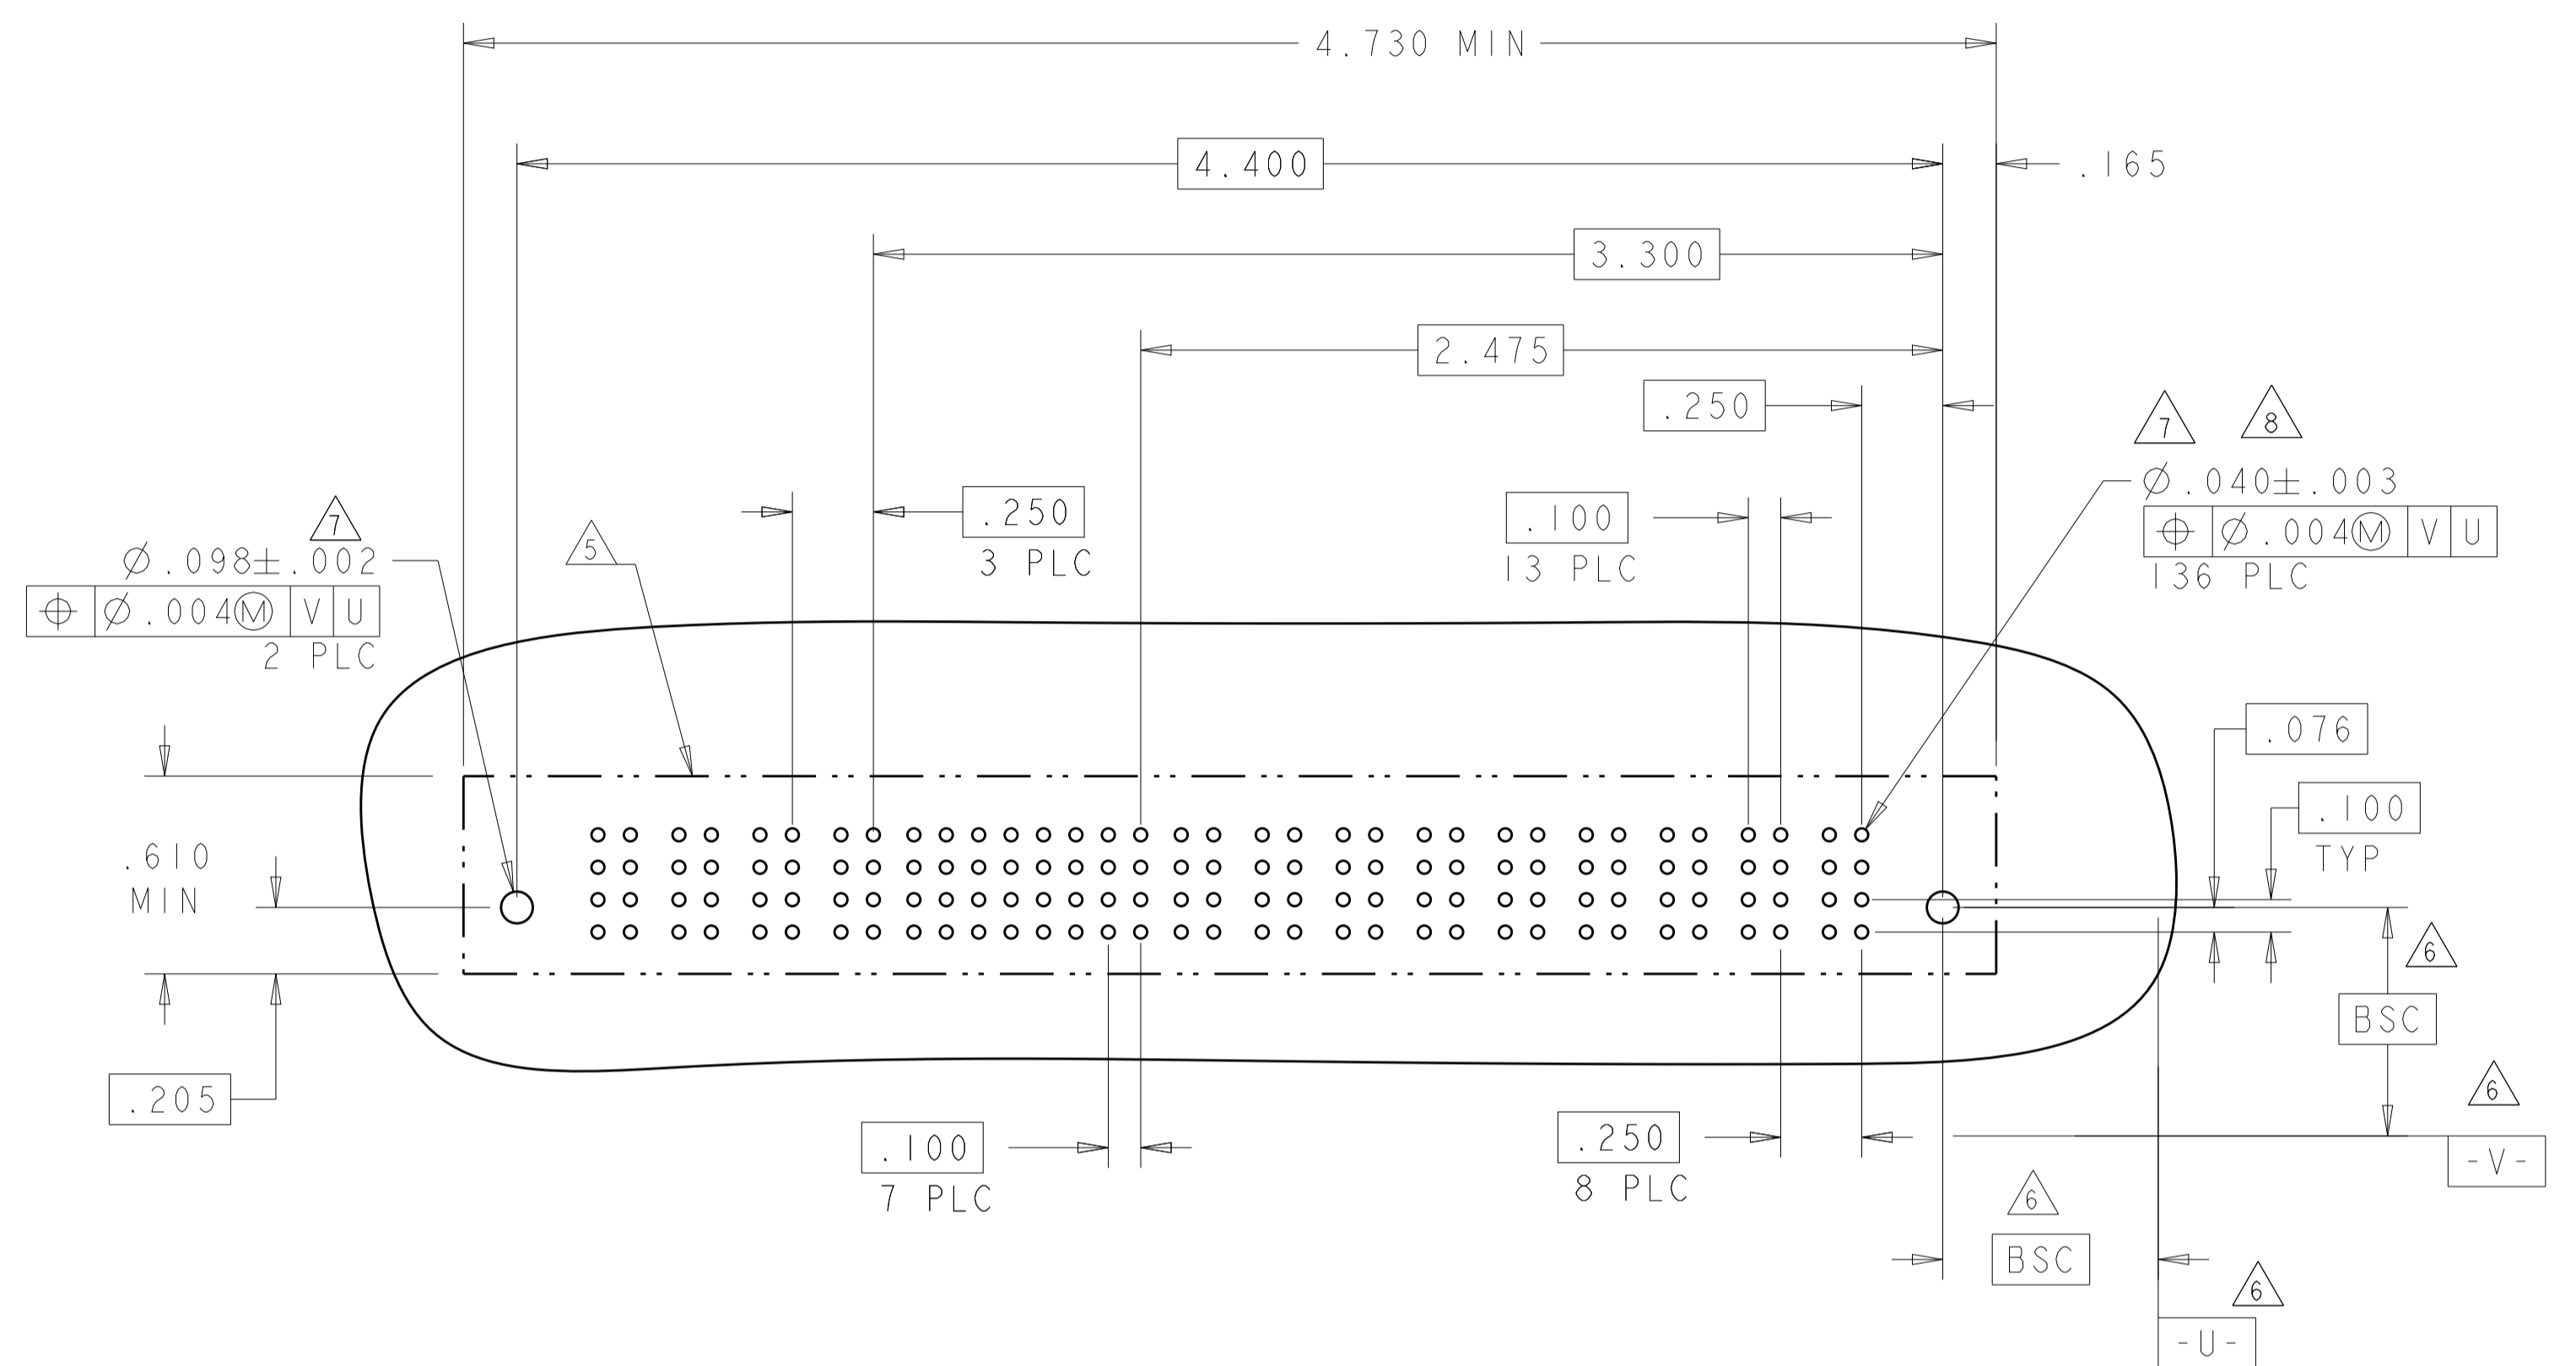

PART NUMBER	ROWS	POWER (L)			SIGNAL							POWER (R)					
		P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1			
6450150-3	D C B A	VM	VM	VA	E	E	E	E	E	E	E	E	E	E	VM	VM	VM
		HD															
4P + 24S + 3ACP																	


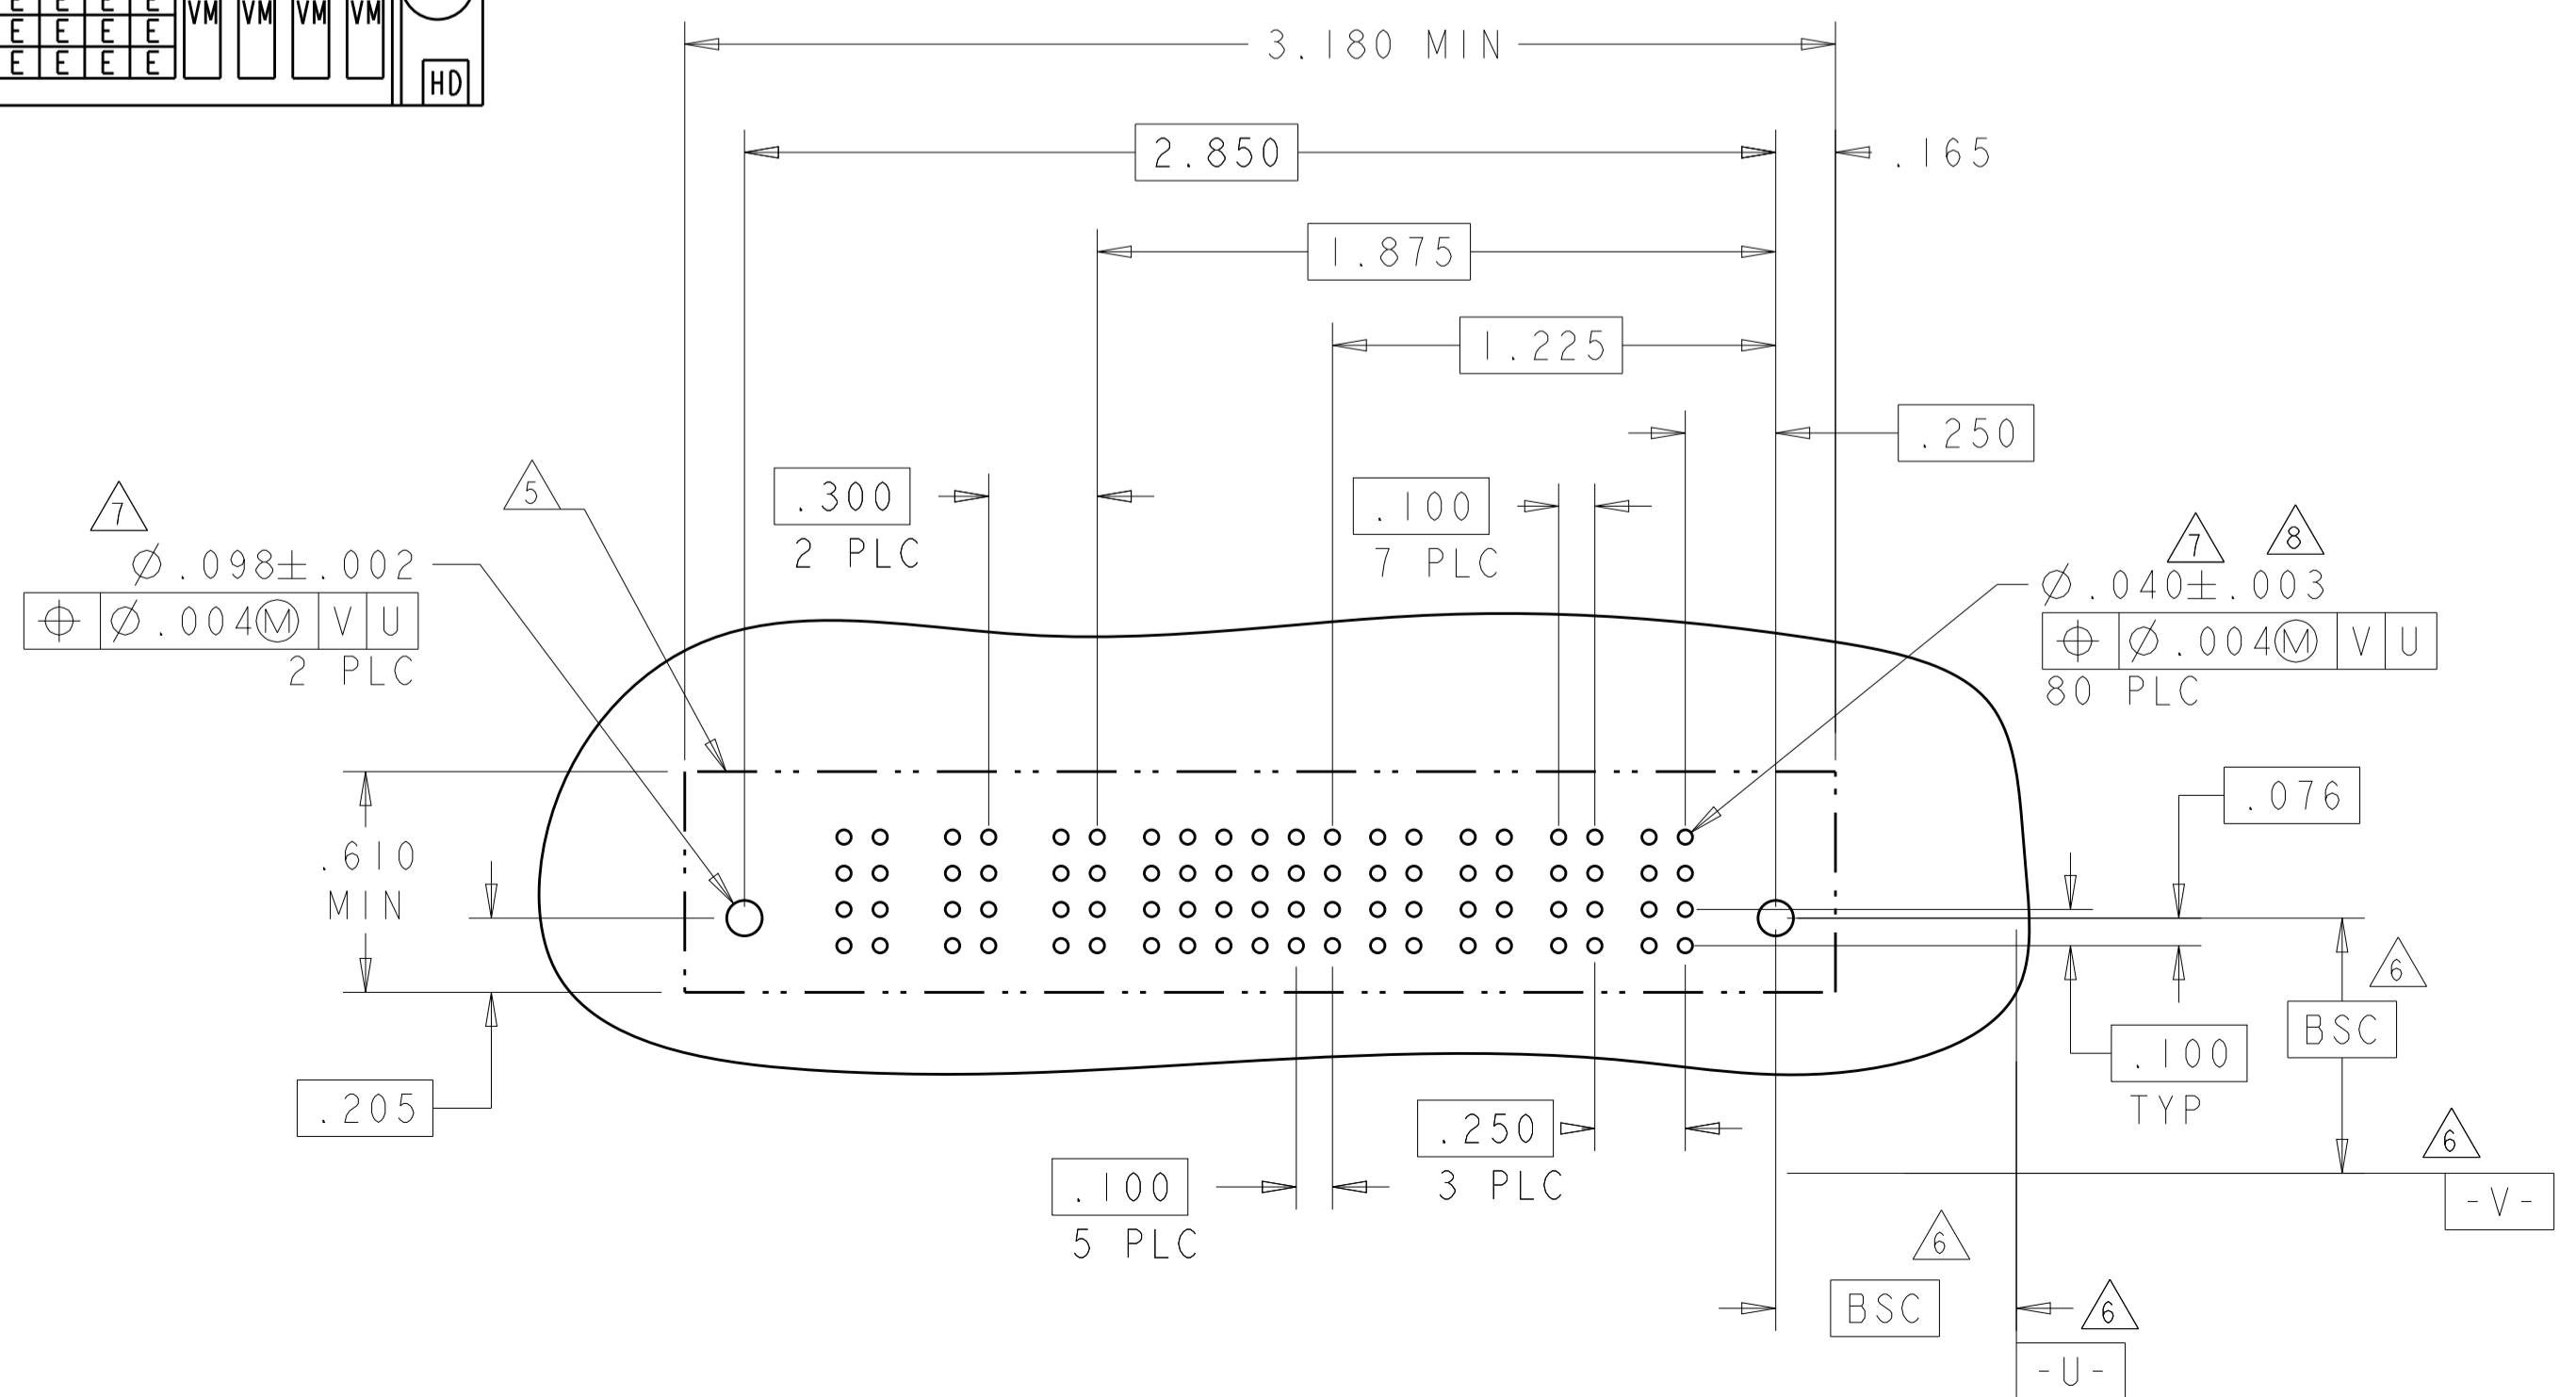


CODE	TAIL LENGTH	DESCRIPTION	CODE	TAIL LENGTH
VN	.090	STD		
VM	.135	STD		
VB	.090	MFBL	J	.090
VA	.135	MFBL	E	.135

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 16FEB05		TE Connectivity <b>VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL</b>		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:				NAME
		0 PLC ±. 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.002 ANGLES ±.2°				PRODUCT SPEC
MATERIAL		FINISH				APPLICATION SPEC
CUSTOMER DRAWING		SCALE 1:1		SIZE	RESTRICTED TO	
				108-1973		
				114-13038		
				WEIGHT		
				A100779C=6450150		
				SHEET 3 OF 12	REV 5	



PART NUMBER	ROWS	POWER (L)						SIGNAL						POWER (R)											
		P7	P6	6	5	4	3	2	1	P5	P4	P3	P2	P1	P1	P2	P3	P4	P5						
6450150-4	D							J	J	J	J	J	J	VN	VN	VN	VN								
	C							J	J	J	J	J	J	VN	VN	VN	VN								
	B							J	J	J	J	J	J	VN	VN	VN	VN								
		HD																						HD	
5P + 24S + 2P																									

PART NUMBER	ROWS	POWER (L)						SIGNAL						POWER (R)											
		P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1										
6450150-6	D							J	J	J	J	J	J	VN	VN	VN	VN								
	C							J	J	J	J	J	J	VN	VN	VN	VN								
	B							J	J	J	J	J	J	VN	VN	VN	VN								
		HD																						HD	
4P + 24S + 4P																									

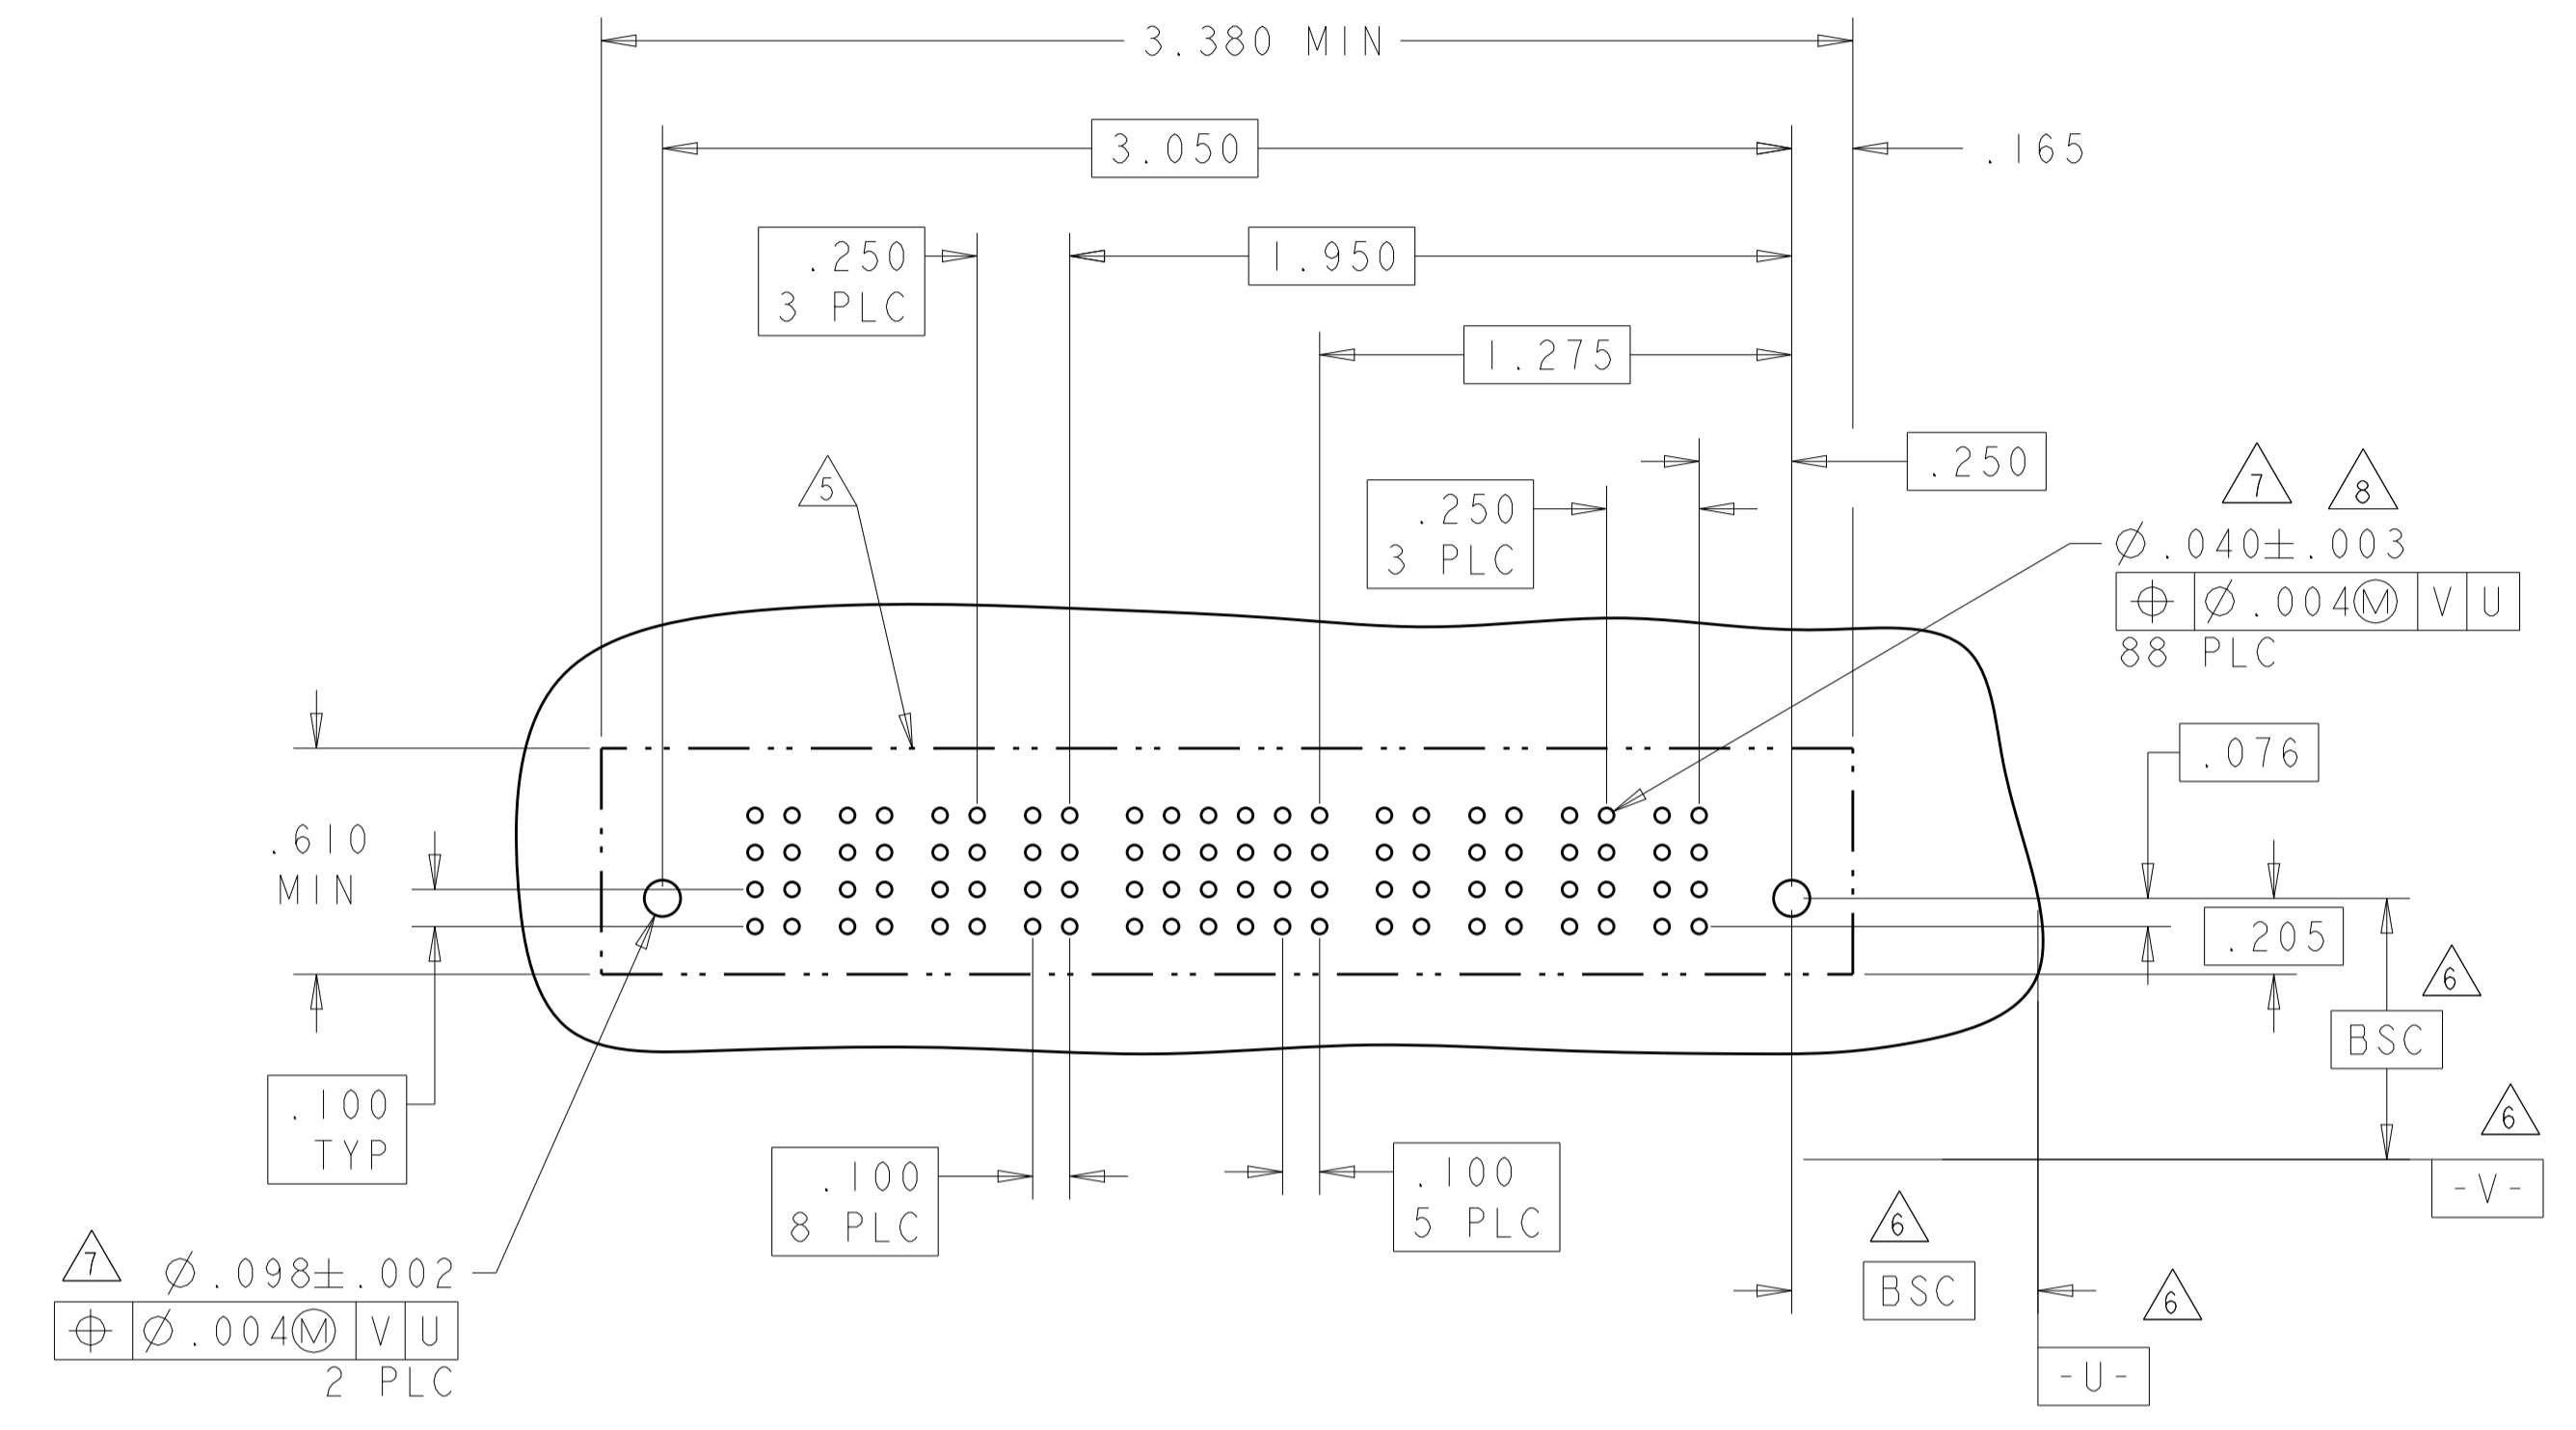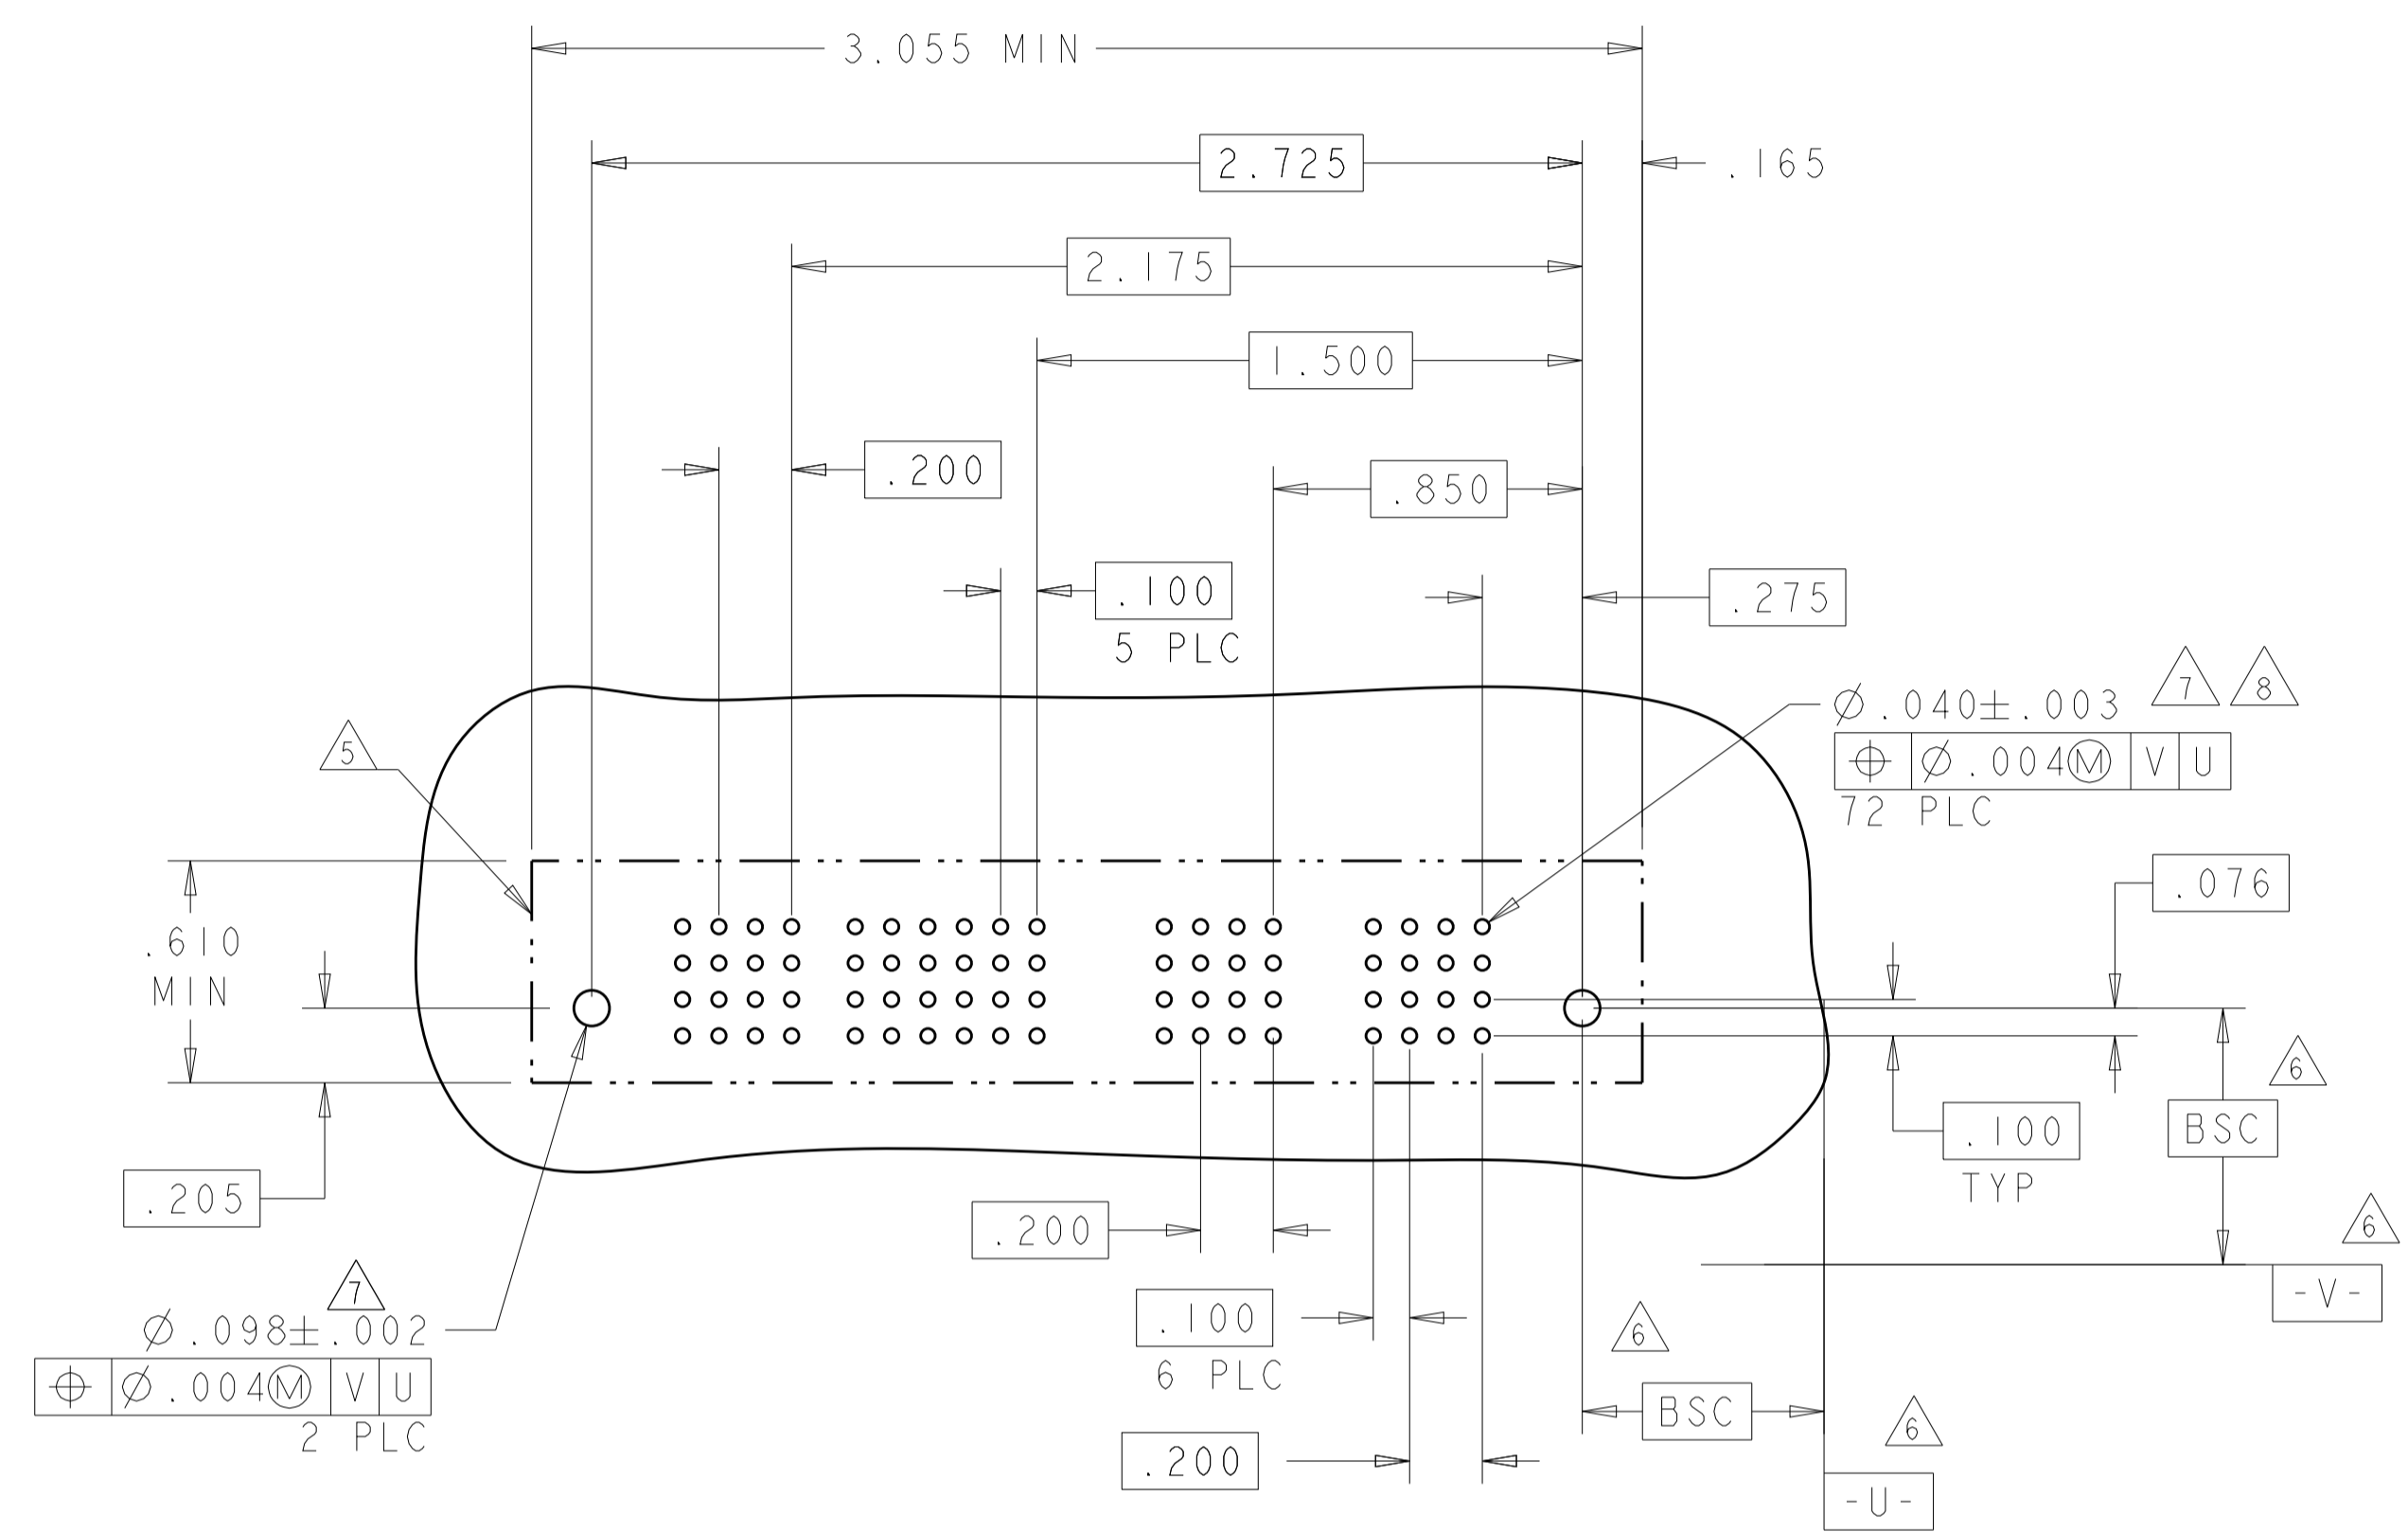

PART NUMBER	ROWS	POWER (L)						SIGNAL						POWER (R)											
		P6	P5	P4	6	5	4	3	2	1	P3	P2	P1	P1	P2	P3	P4								
6450150-5	D							E	E	E	E	E	E	VM	VM	VM	VM								
	C							E	E	E	E	E	E	VM	VM	VM	VM								
	B							E	E	E	E	E	E	VM	VM	VM	VM								
		HD																						HD	
3P + 24S + 3ACP																									

PART NUMBER	ROWS	POWER (L)						SIGNAL						POWER (R)											
		P2	6	5	4	3	2	1	P1	P1	P2	P3	P4												
6450150-8	D							E	E	E	E	E	E	VM	VM	VM	VM								
	C							E	E	E	E	E	E	VM	VM	VM	VM								
	B							E	E	E	E	E	E	VM	VM	VM	VM								
		HD																						HD	
1P + 24S + 1P																									

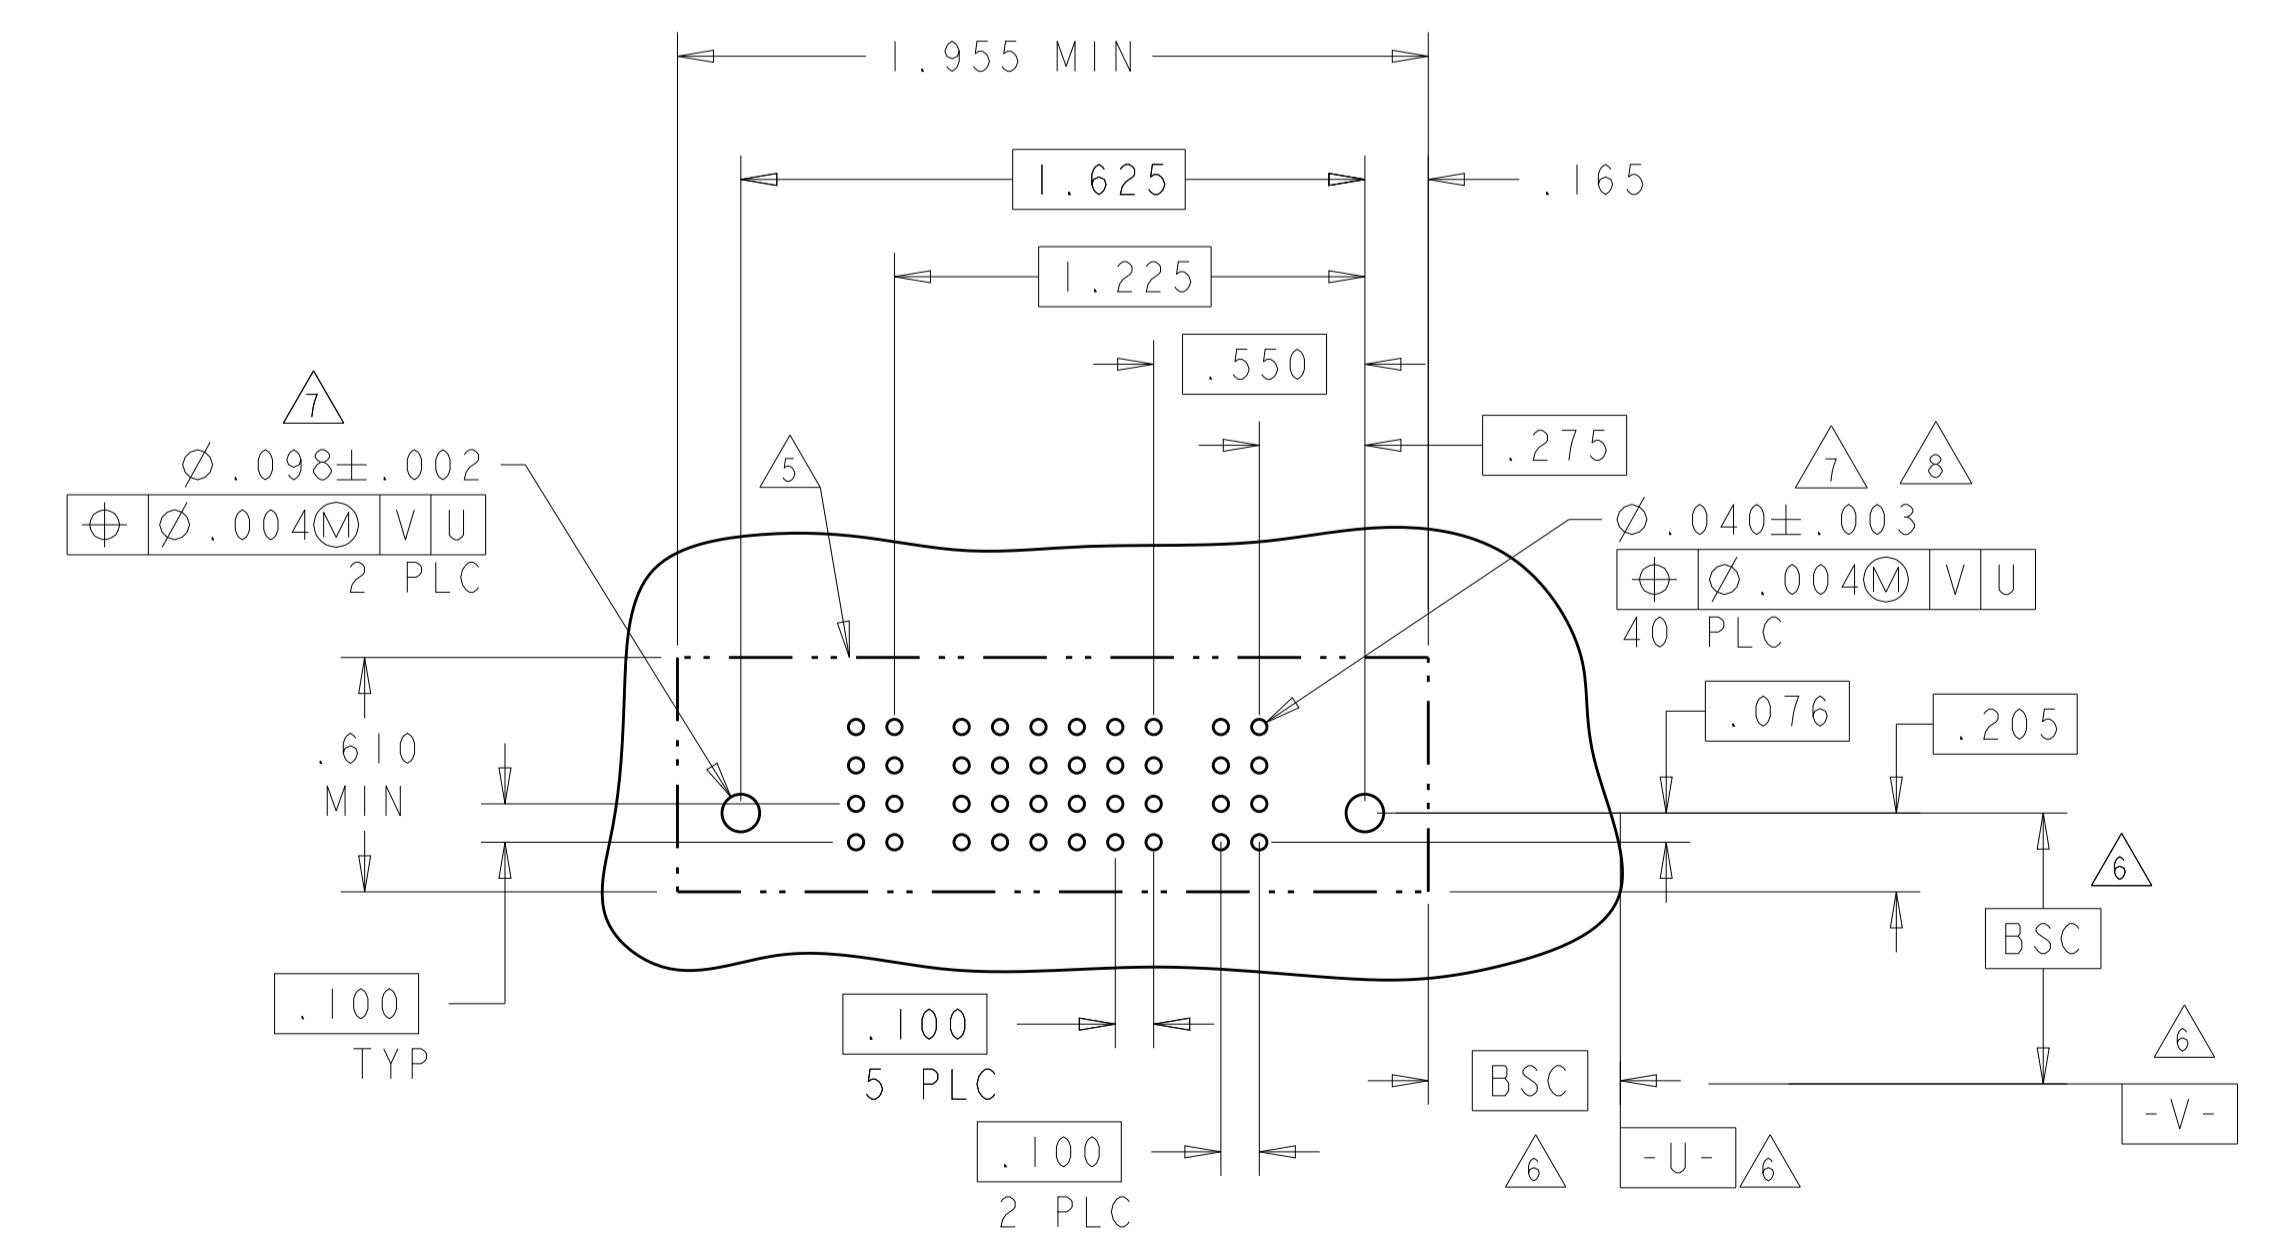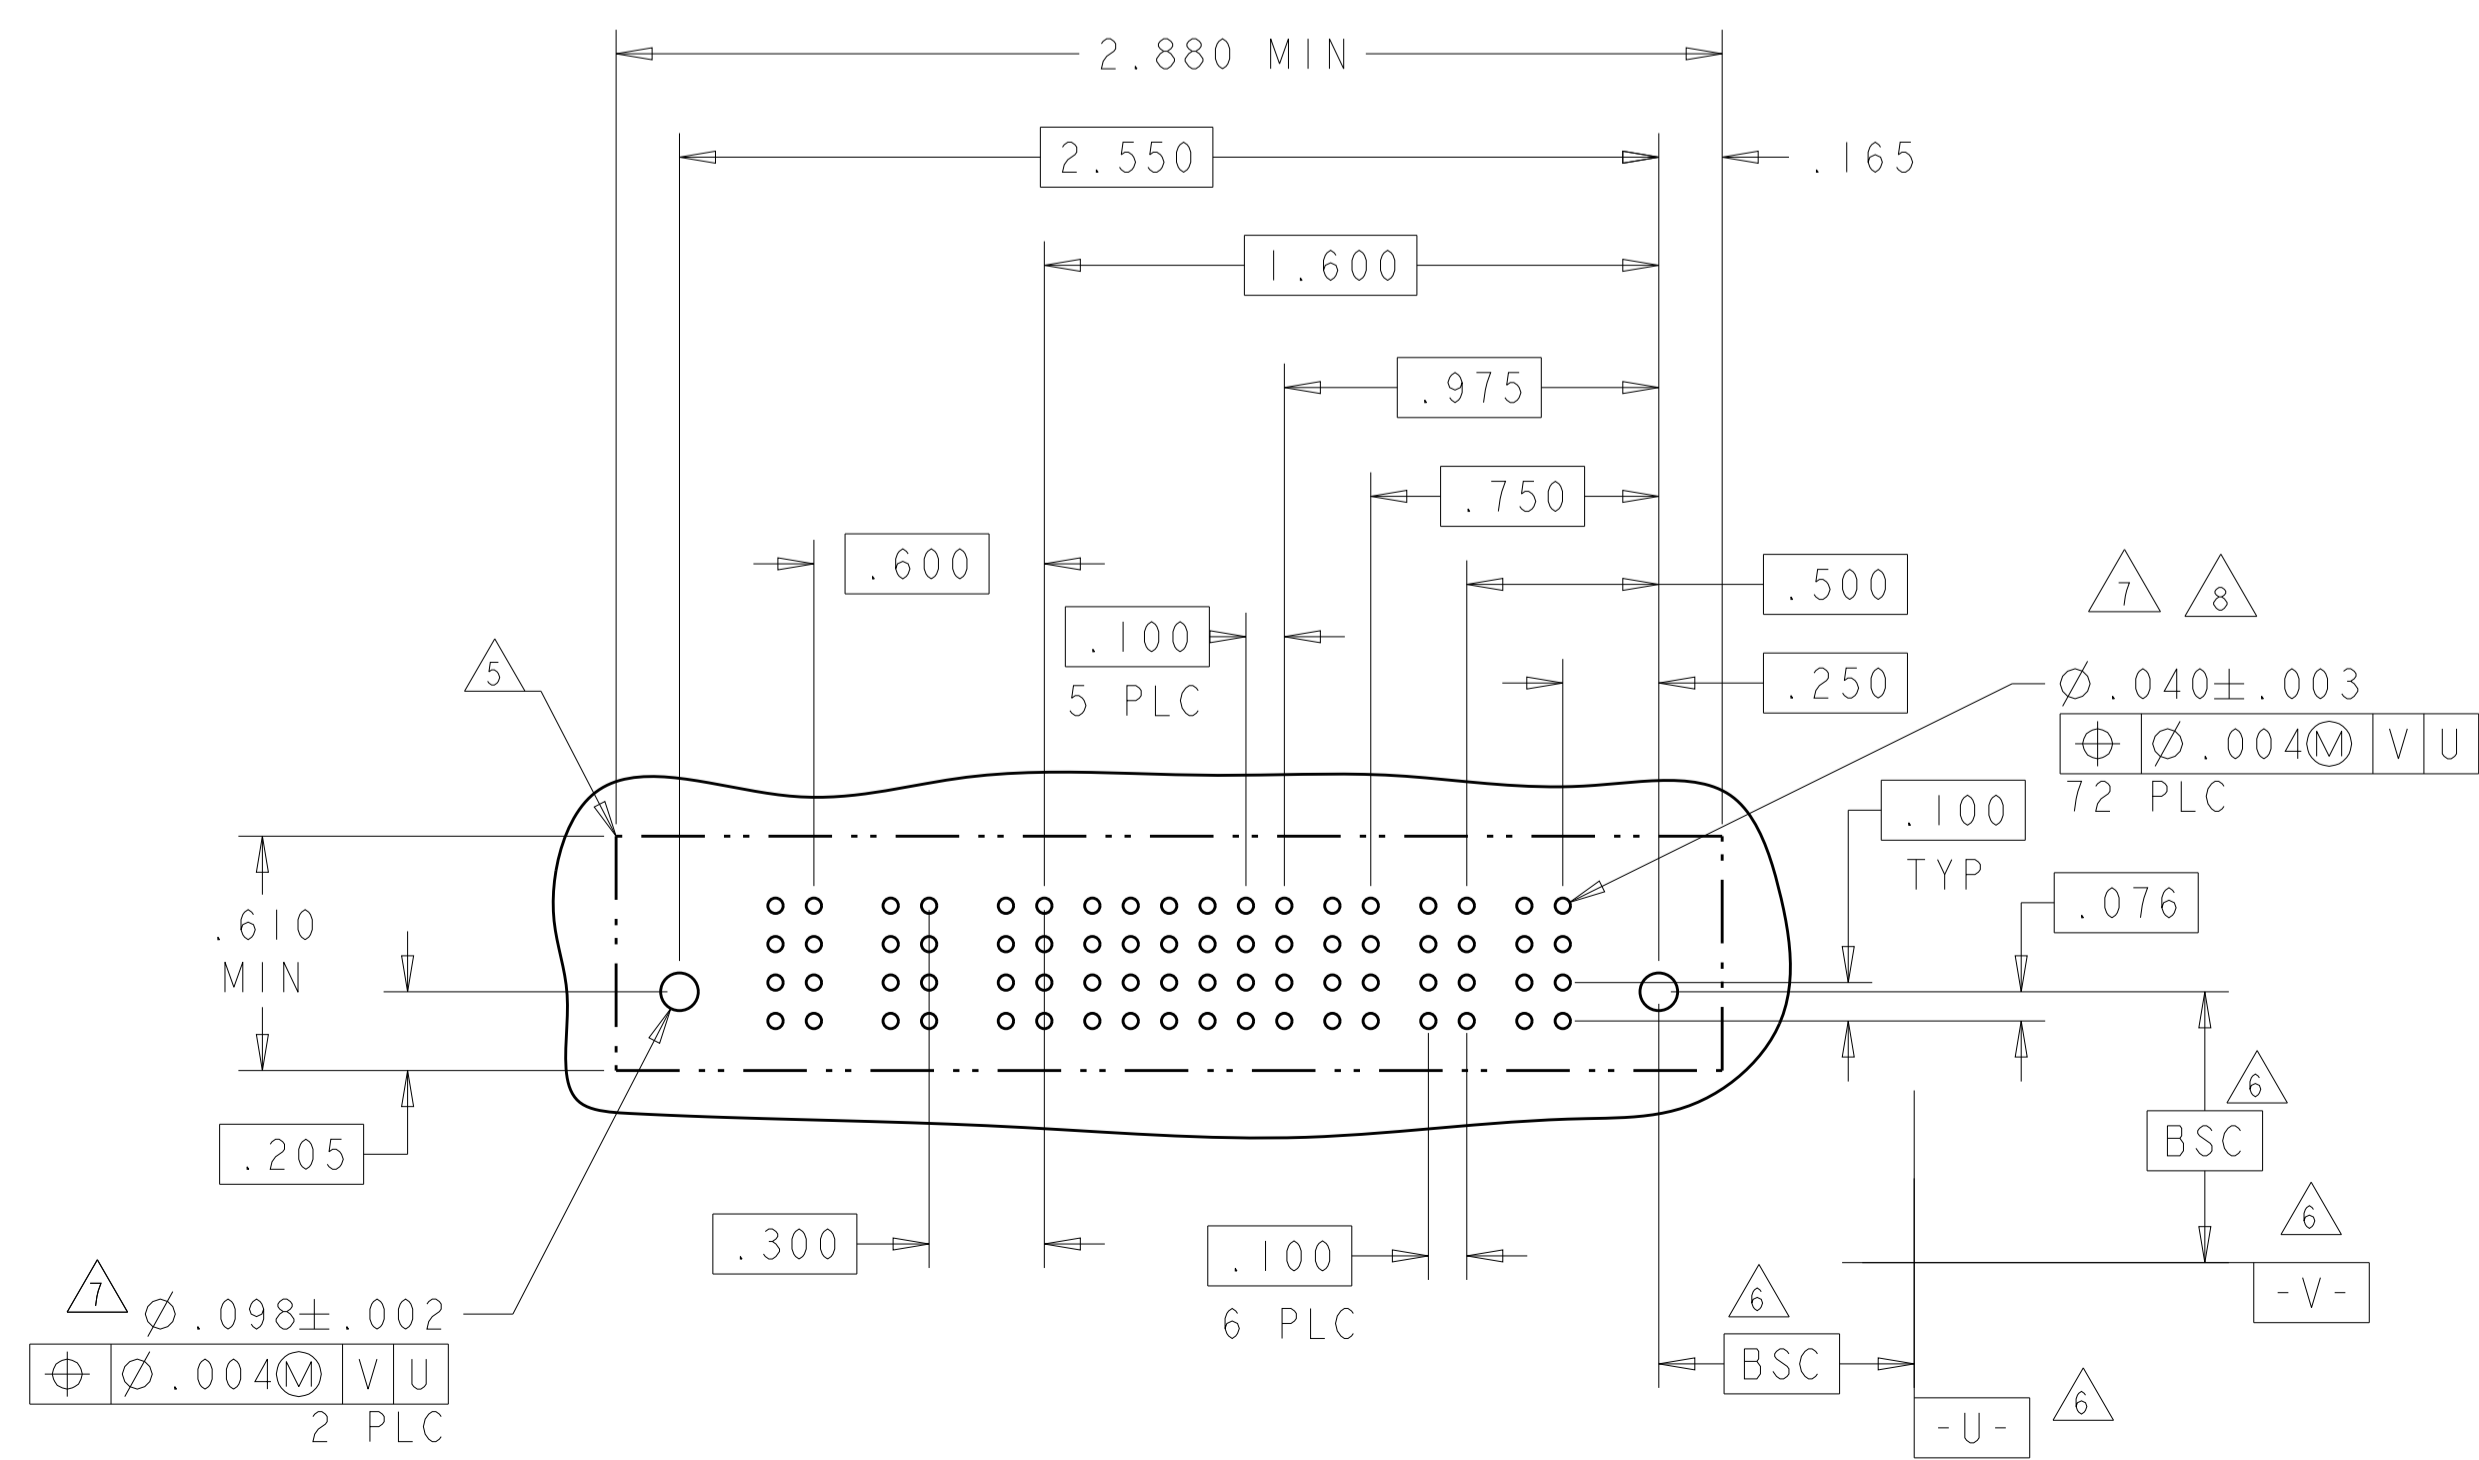

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: R. GRZYBOWSKI 16FEB05		TE Connectivity
DIMENSIONS: INCHES		CHK: M. PERCHERKE 16FEB05		VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: M. PERCHERKE	PRODUCT SPEC	
0 PLC ±.01		PRODUCT SPEC	108-1973	
1 PLC ±.01		APPLICATION SPEC	114-13038	
2 PLC ±.005		WEIGHT	A100779C=6450150	
3 PLC ±.002		SCALE	1:1	
ANGLES ±.002		SHEET	4 OF 12	
MATERIAL		FINISH	REV G5	
CUSTOMER DRAWING				



LOC	DIST	REVISIONS				
ES	00	P	LTH	DATE	DWN	APVD
		-	SEE SHEET 1			

PART NUMBER	ROWS	POWER (L)			SIGNAL								POWER		
		P11	P10	P9	3	2	1	P8	P7	P6	P5	P4	P3	P2	P1
I-6450150-3	D	VM	VM	VA	E	E	E	E	E	E	E	E	E	E	E
	C	VM	VM	VA	E	E	E	E	E	E	E	E	E	E	E
	B	VM	VM	VA	E	E	E	E	E	E	E	E	E	E	E
	A	VM	VM	VA	E	E	E	E	E	E	E	E	E	E	E

8P + 12S + 3ACP


PART NUMBER	ROWS	POWER (L)					SIGNAL					POWER (R)		
		P8	P7	P6	P5	P4	5	4	3	2	1	P3	P2	P1
I-6450150-8	D	VA	VA	VM	VA	E	E	E	E	E	E	VM	VM	
	C	VA	VA	VM	VA	E	E	E	E	E	VM	VM		
	B	VA	VA	VM	VA	E	E	E	E	E	VM	VM		
	A	VA	VA	VM	VA	E	E	E	E	E	VM	VM		

3P + 20S + 5P

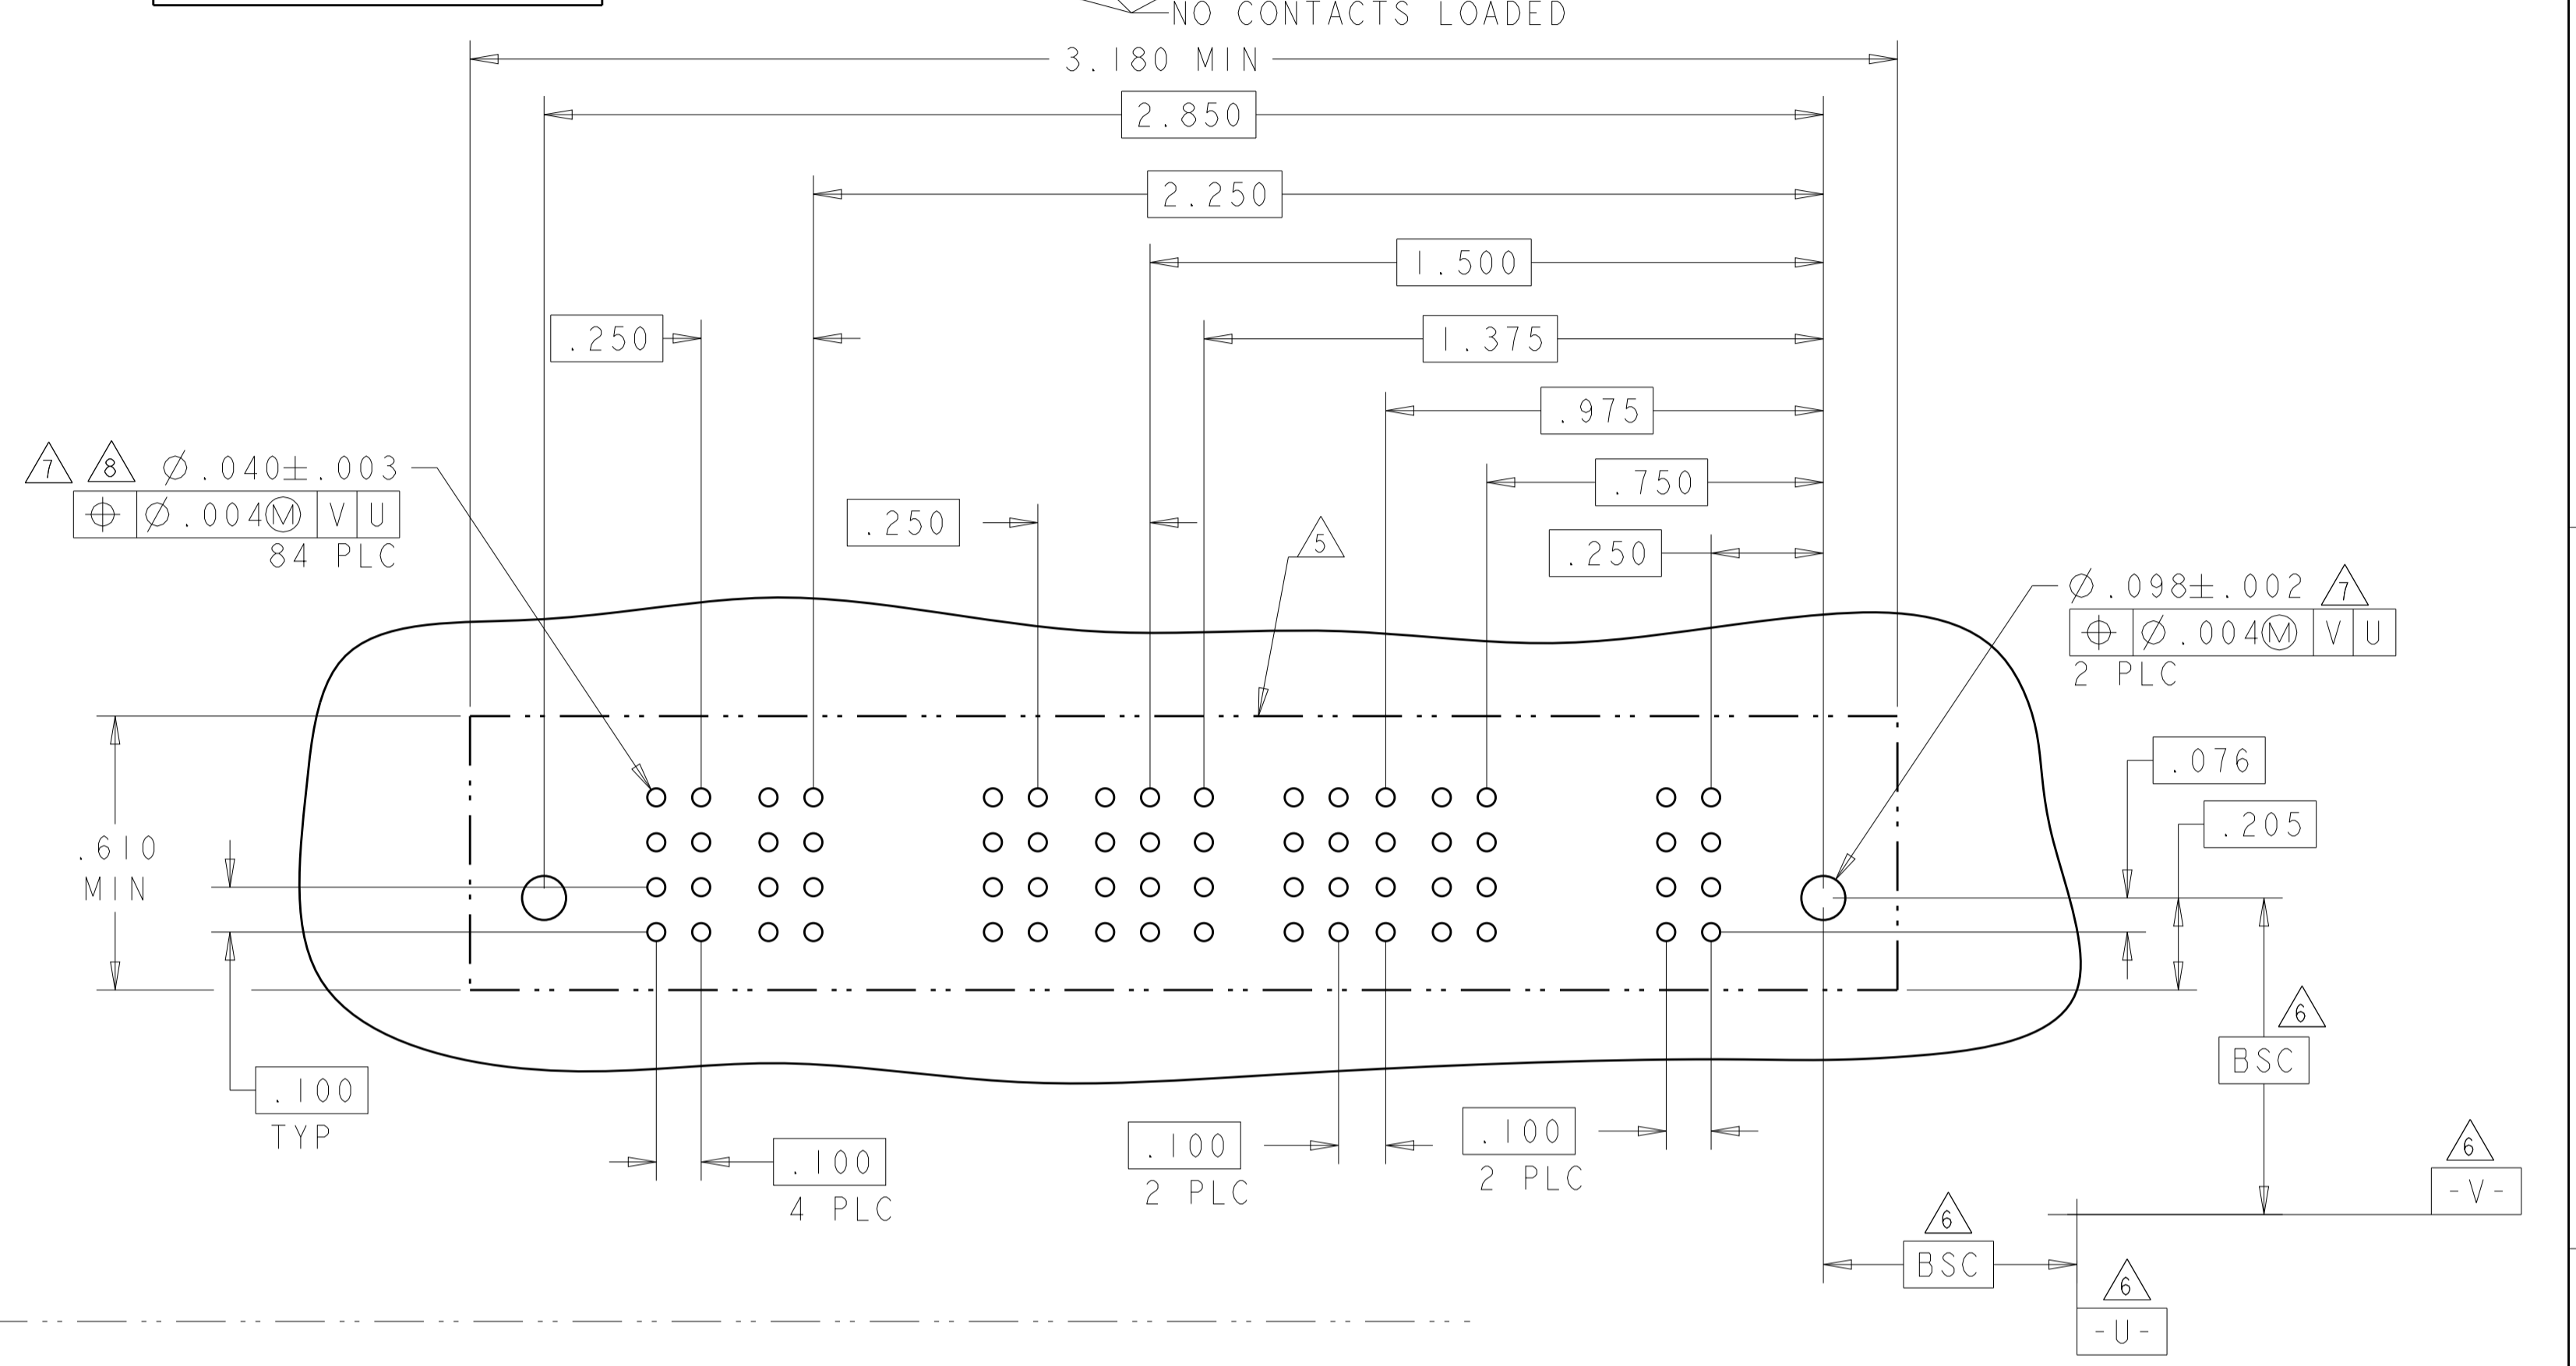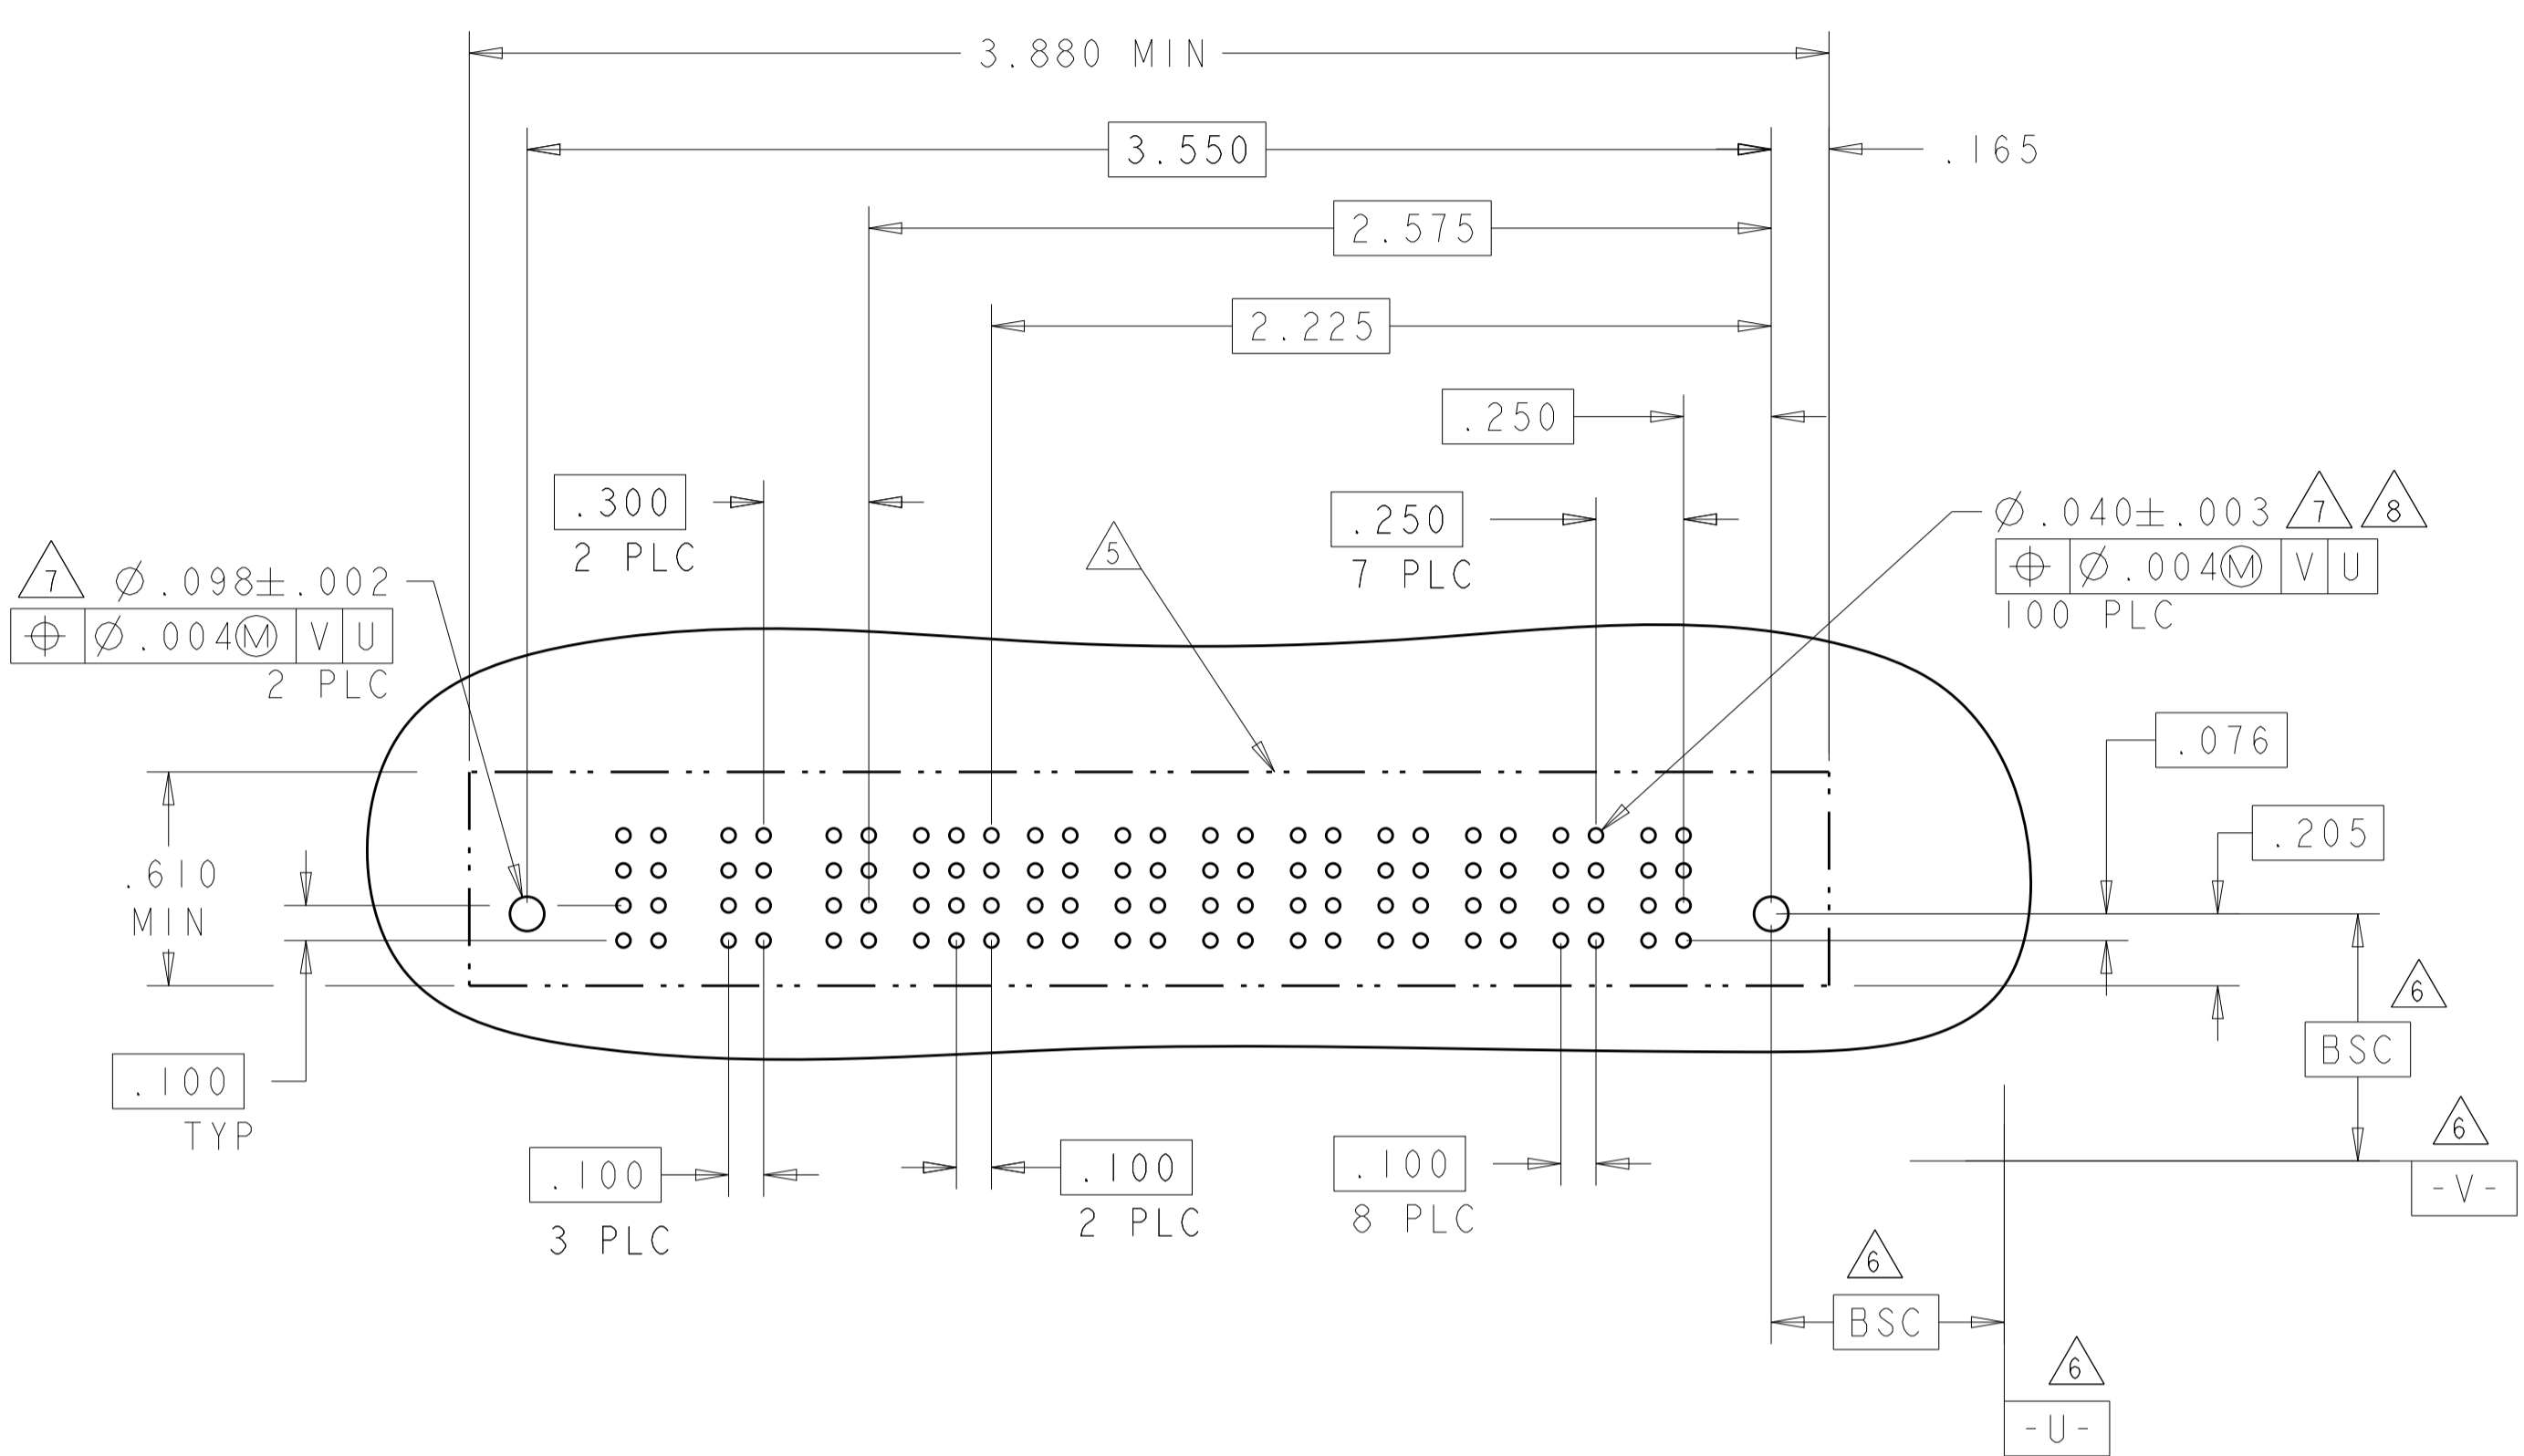


PART NUMBER	ROWS	SIGNAL																																						
		37	36	35	34	33	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1		
I-6450150-9	D	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		
	C	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	
	B	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
	A	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E

148S

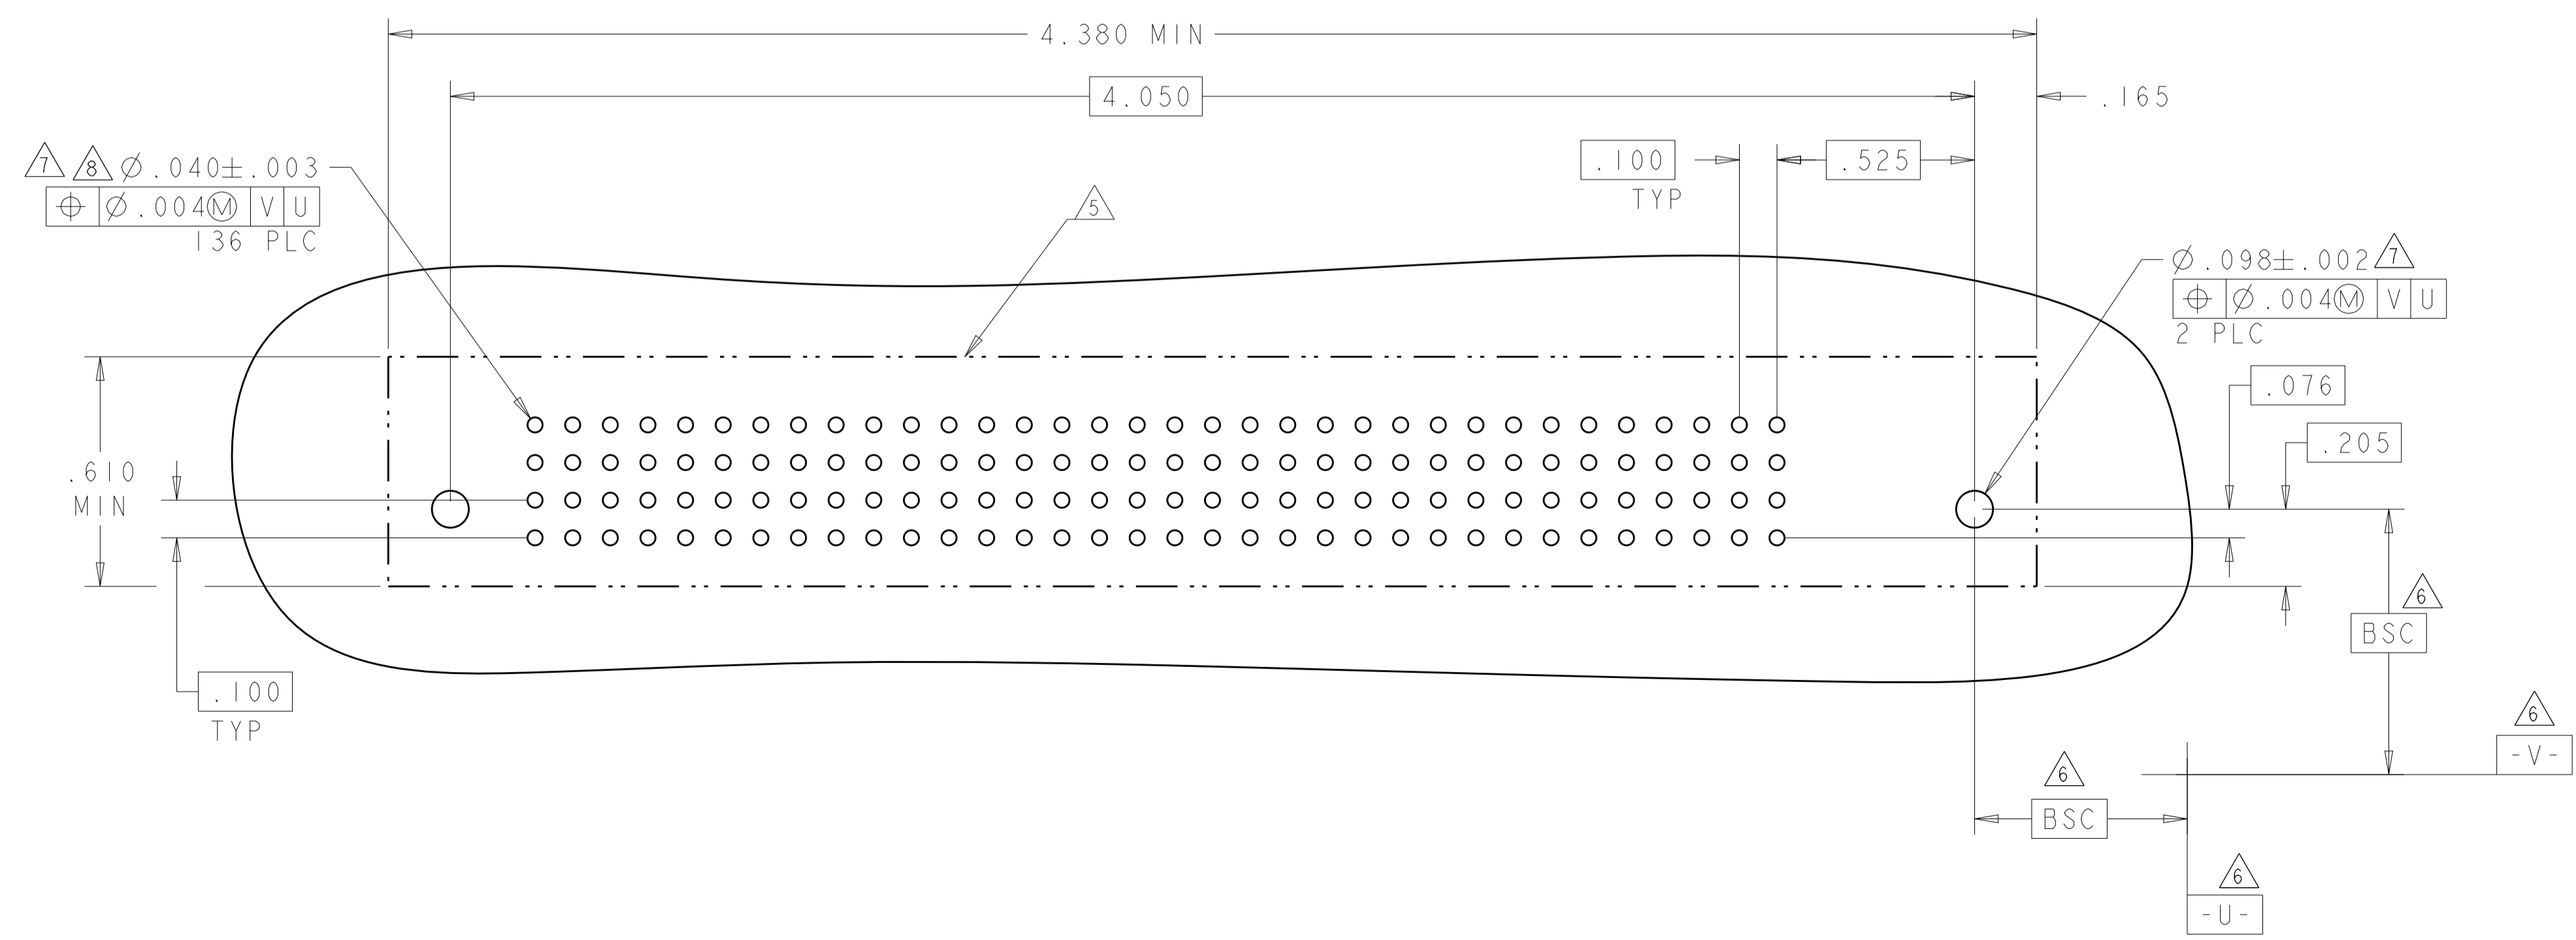


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: R. GRZYBOWSKI 16FEB05		TE Connectivity
DIMENSIONS: INCHES		CHK: M. PERCHERKE 16FEB05		NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: M. PERCHERKE	PRODUCT SPEC: 108-1973	
0 PLC ±.01		PRODUCT SPEC: 114-13038	APPLICATION SPEC: 114-13038	
1 PLC ±.01		SIZE: A1	CAGE CODE: 6450150	
2 PLC ±.01		WEIGHT: -	SCALE: 1:1	
3 PLC ±.005		RESTRICTED TO: -	SHEET 5 OF 12	
4 PLC ±.002		CUSTOMER DRAWING	REV: G5	
ANGLES: .0020				

LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD
ES	00	SEE SHEET 1	-	-	-

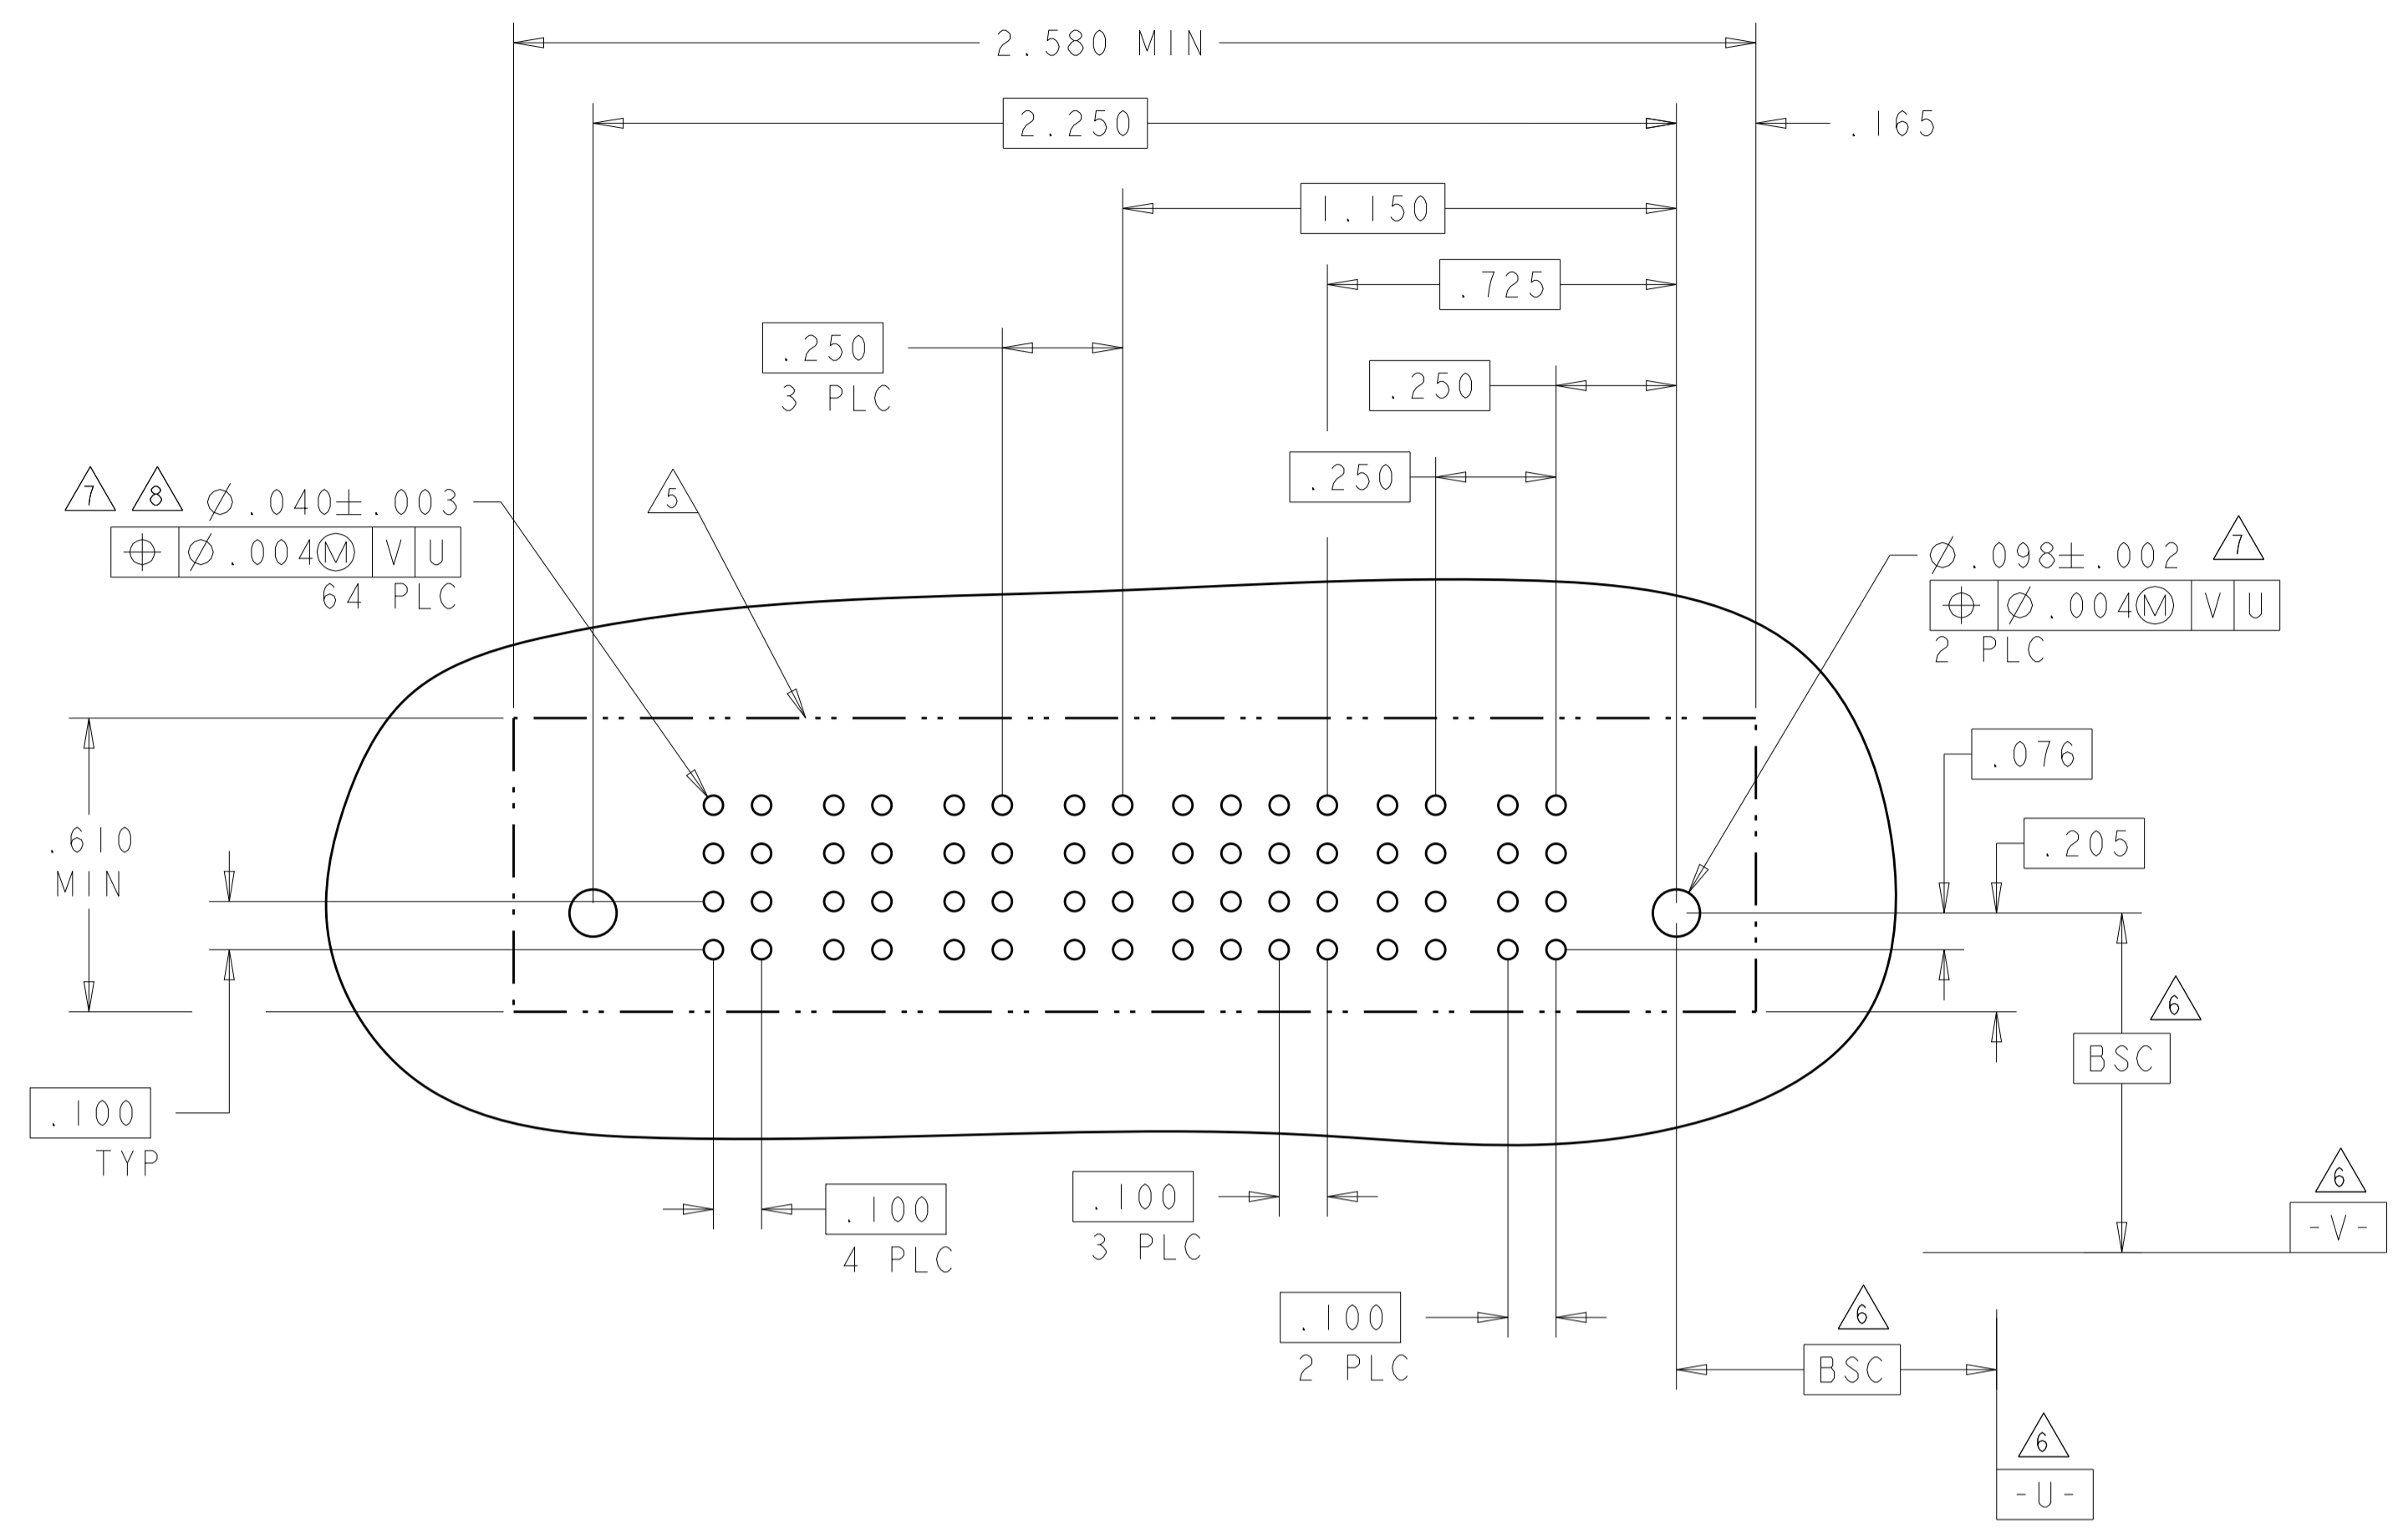

PART NUMBER	ROWS	POWER				SIGNAL				POWER		HD
		P6	P5	P4	P3	4	3	2	1	P2	P1	
1-6450150-7	D	VM	VM	VA	VA	E	E	E	E	VA	VM	HD
	C					E	E	E	E			
	B					E	E	E	E			
2P + 16S + 4P												

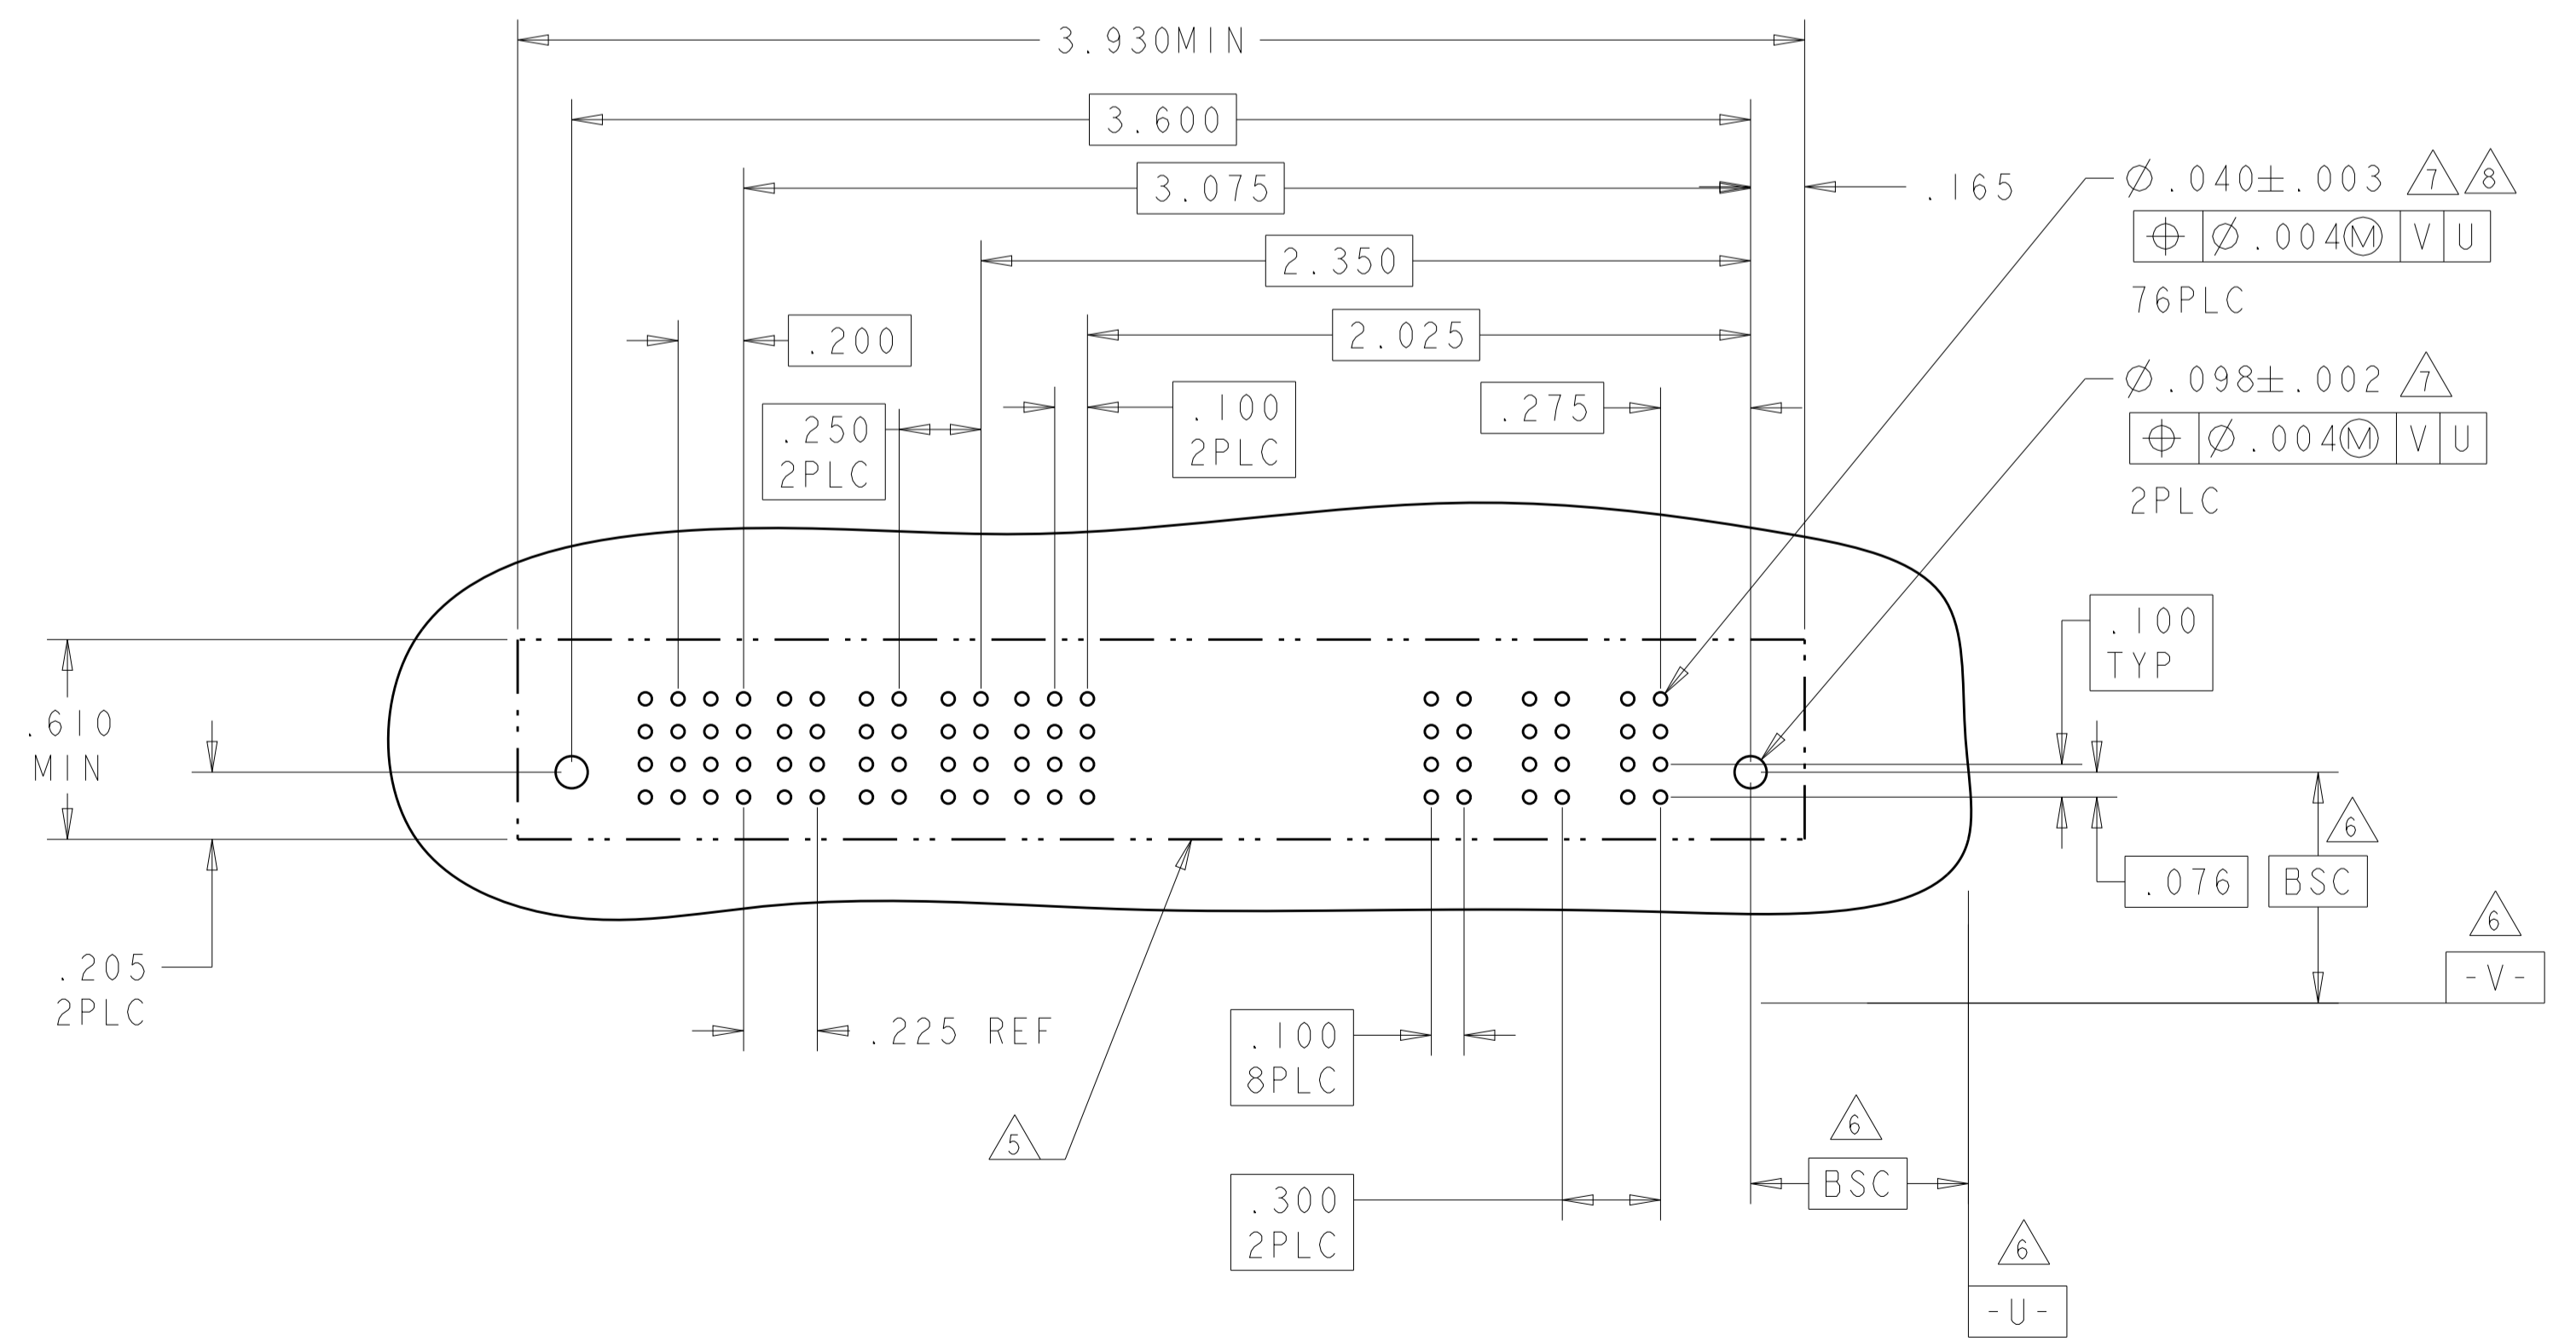

PART NUMBER	ROWS	POWER (L)								SIGNAL								POWER (R)			HD	
		P8	P7	P6	P5	P4	I2	I1	I0	9	8	7	6	5	4	3	2	1	P3	P2		P1
2-6450150-0	D	VM	VM	VM	VM	VM	E	E	E	E	E	E	E	E	E	E	E	E	VA	VM	VM	HD
	C						E	E	E	E	E	E	E	E	E	E	E					
	B						E	E	E	E	E	E	E	E	E	E	E					
3ACP + 48S + 5P																						

NO CONTACTS LOADED

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN: R. GRZYBOWSKI 16FEB05  
 CHK: M. PERCHERKE 16FEB05  
 APVD: M. PERCHERKE

DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 0 PLC ±.01  
 1 PLC ±.01  
 2 PLC ±.01  
 3 PLC ±.005  
 4 PLC ±.002  
 ANGLES ±.020

MATERIAL: FINISH:

WEIGHT: 114-13038

CUSTOMER DRAWING


NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL  
 PRODUCT SPEC: 108-1973  
 APPLICATION SPEC: 114-13038

SIZE: A1  
 CAGE CODE: 00779  
 DRAWING NO: 6450150

RESTRICTED TO: SCALE: 1:1 SHEET 6 OF 12 REV: G5


LOC	DIST	REV	DATE	BY	APPV
ES	00				

PART NUMBER	ROWS	POWER (L)		SIGNAL																POWER (R)					
		P4	P3	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	P2	P1				
2-6450150-1	D	VB	VN	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	VN	VB	
	C			J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J			
	B			J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J			J
	A			J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J			J
2P + 64S + 2P		HD																		HD					

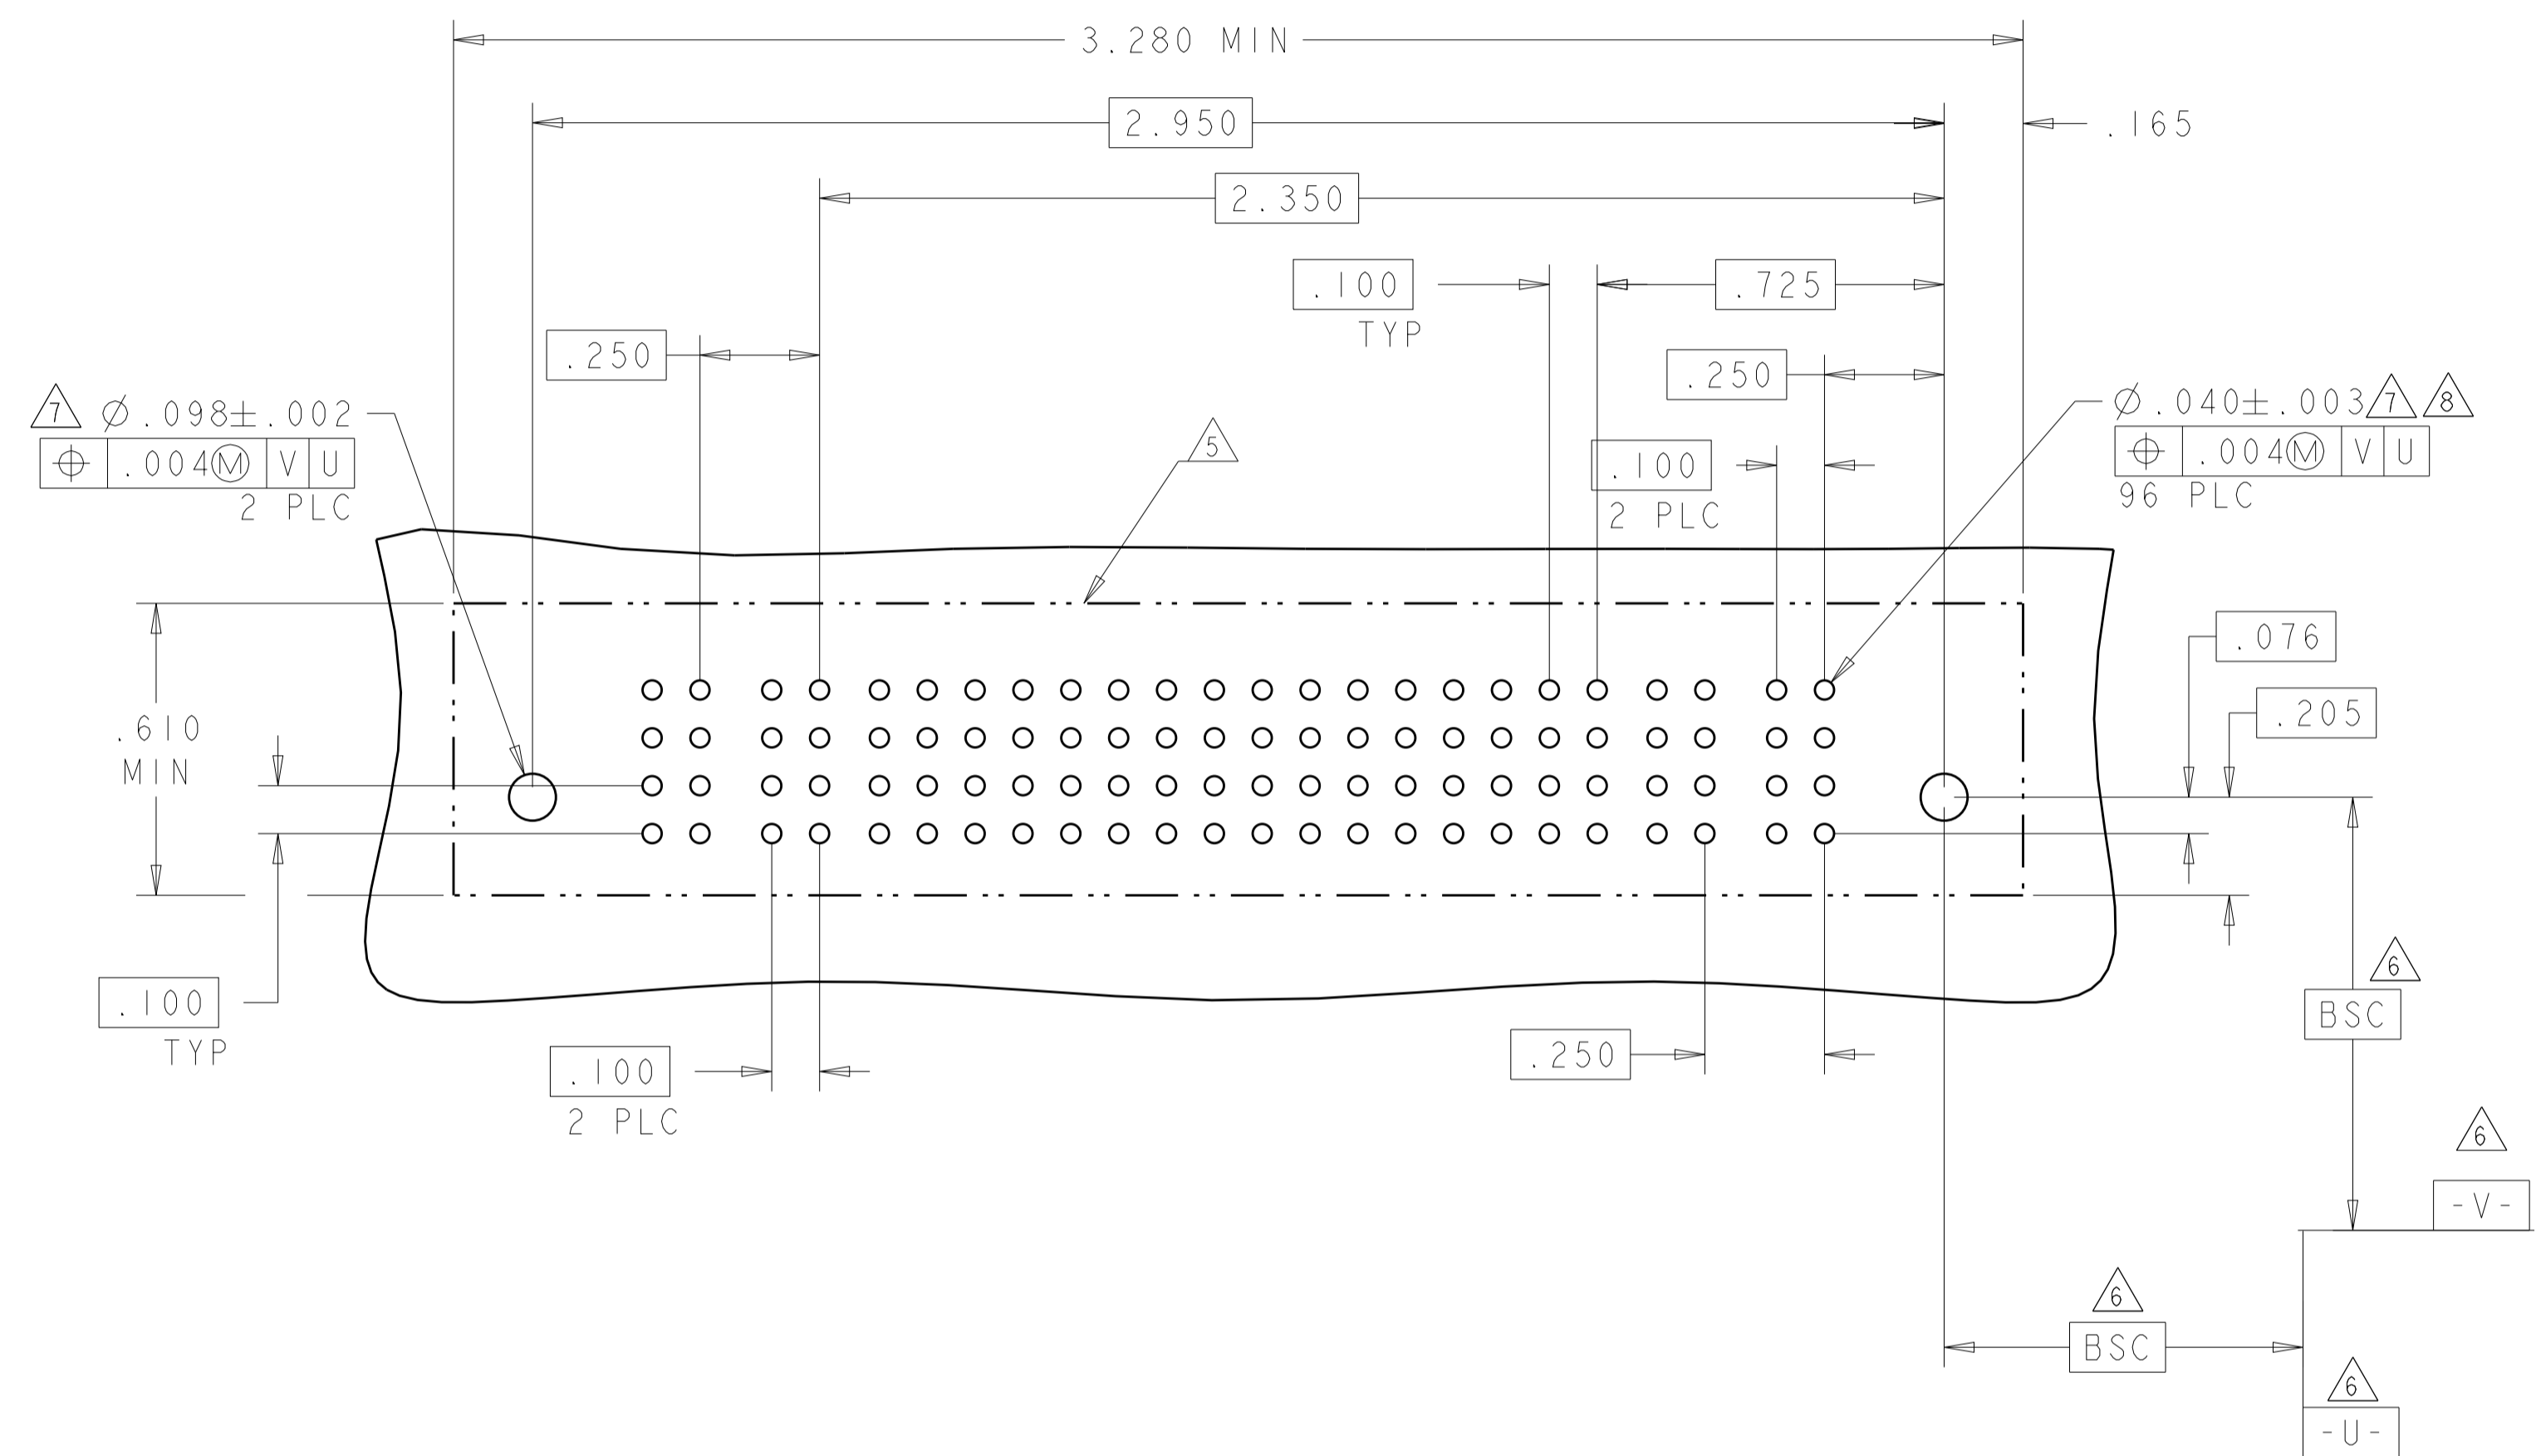

PART NUMBER	ROWS	POWER		SIGNAL						POWER					
		P5	P4	6	5	4	3	2	1	P3	P2	P1			
6450150-9	D	VM	VM	E	E	E	E	E	E	E	E	VA	VM	VM	
	C			E	E	E	E	E	E	E	E				
	B			E	E	E	E	E	E	E	E				E
	A			E	E	E	E	E	E	E	E				E
3ACP+24S+2P		HD								HD					

PART NUMBER	ROWS	POWER		SIGNAL						POWER					
		P5	P4	6	5	4	3	2	1	P3	P2	P1			
2-6450150-8	D	VM	VM	E	E	E	E	E	E	E	VA	VM	VM		
	C			E	E	E	E	E	E	E				E	
	B			E	E	E	E	E	E	E				E	E
	A			E	E	E	E	E	E	E				E	E
3ACP+24S+2P		HD								HD					

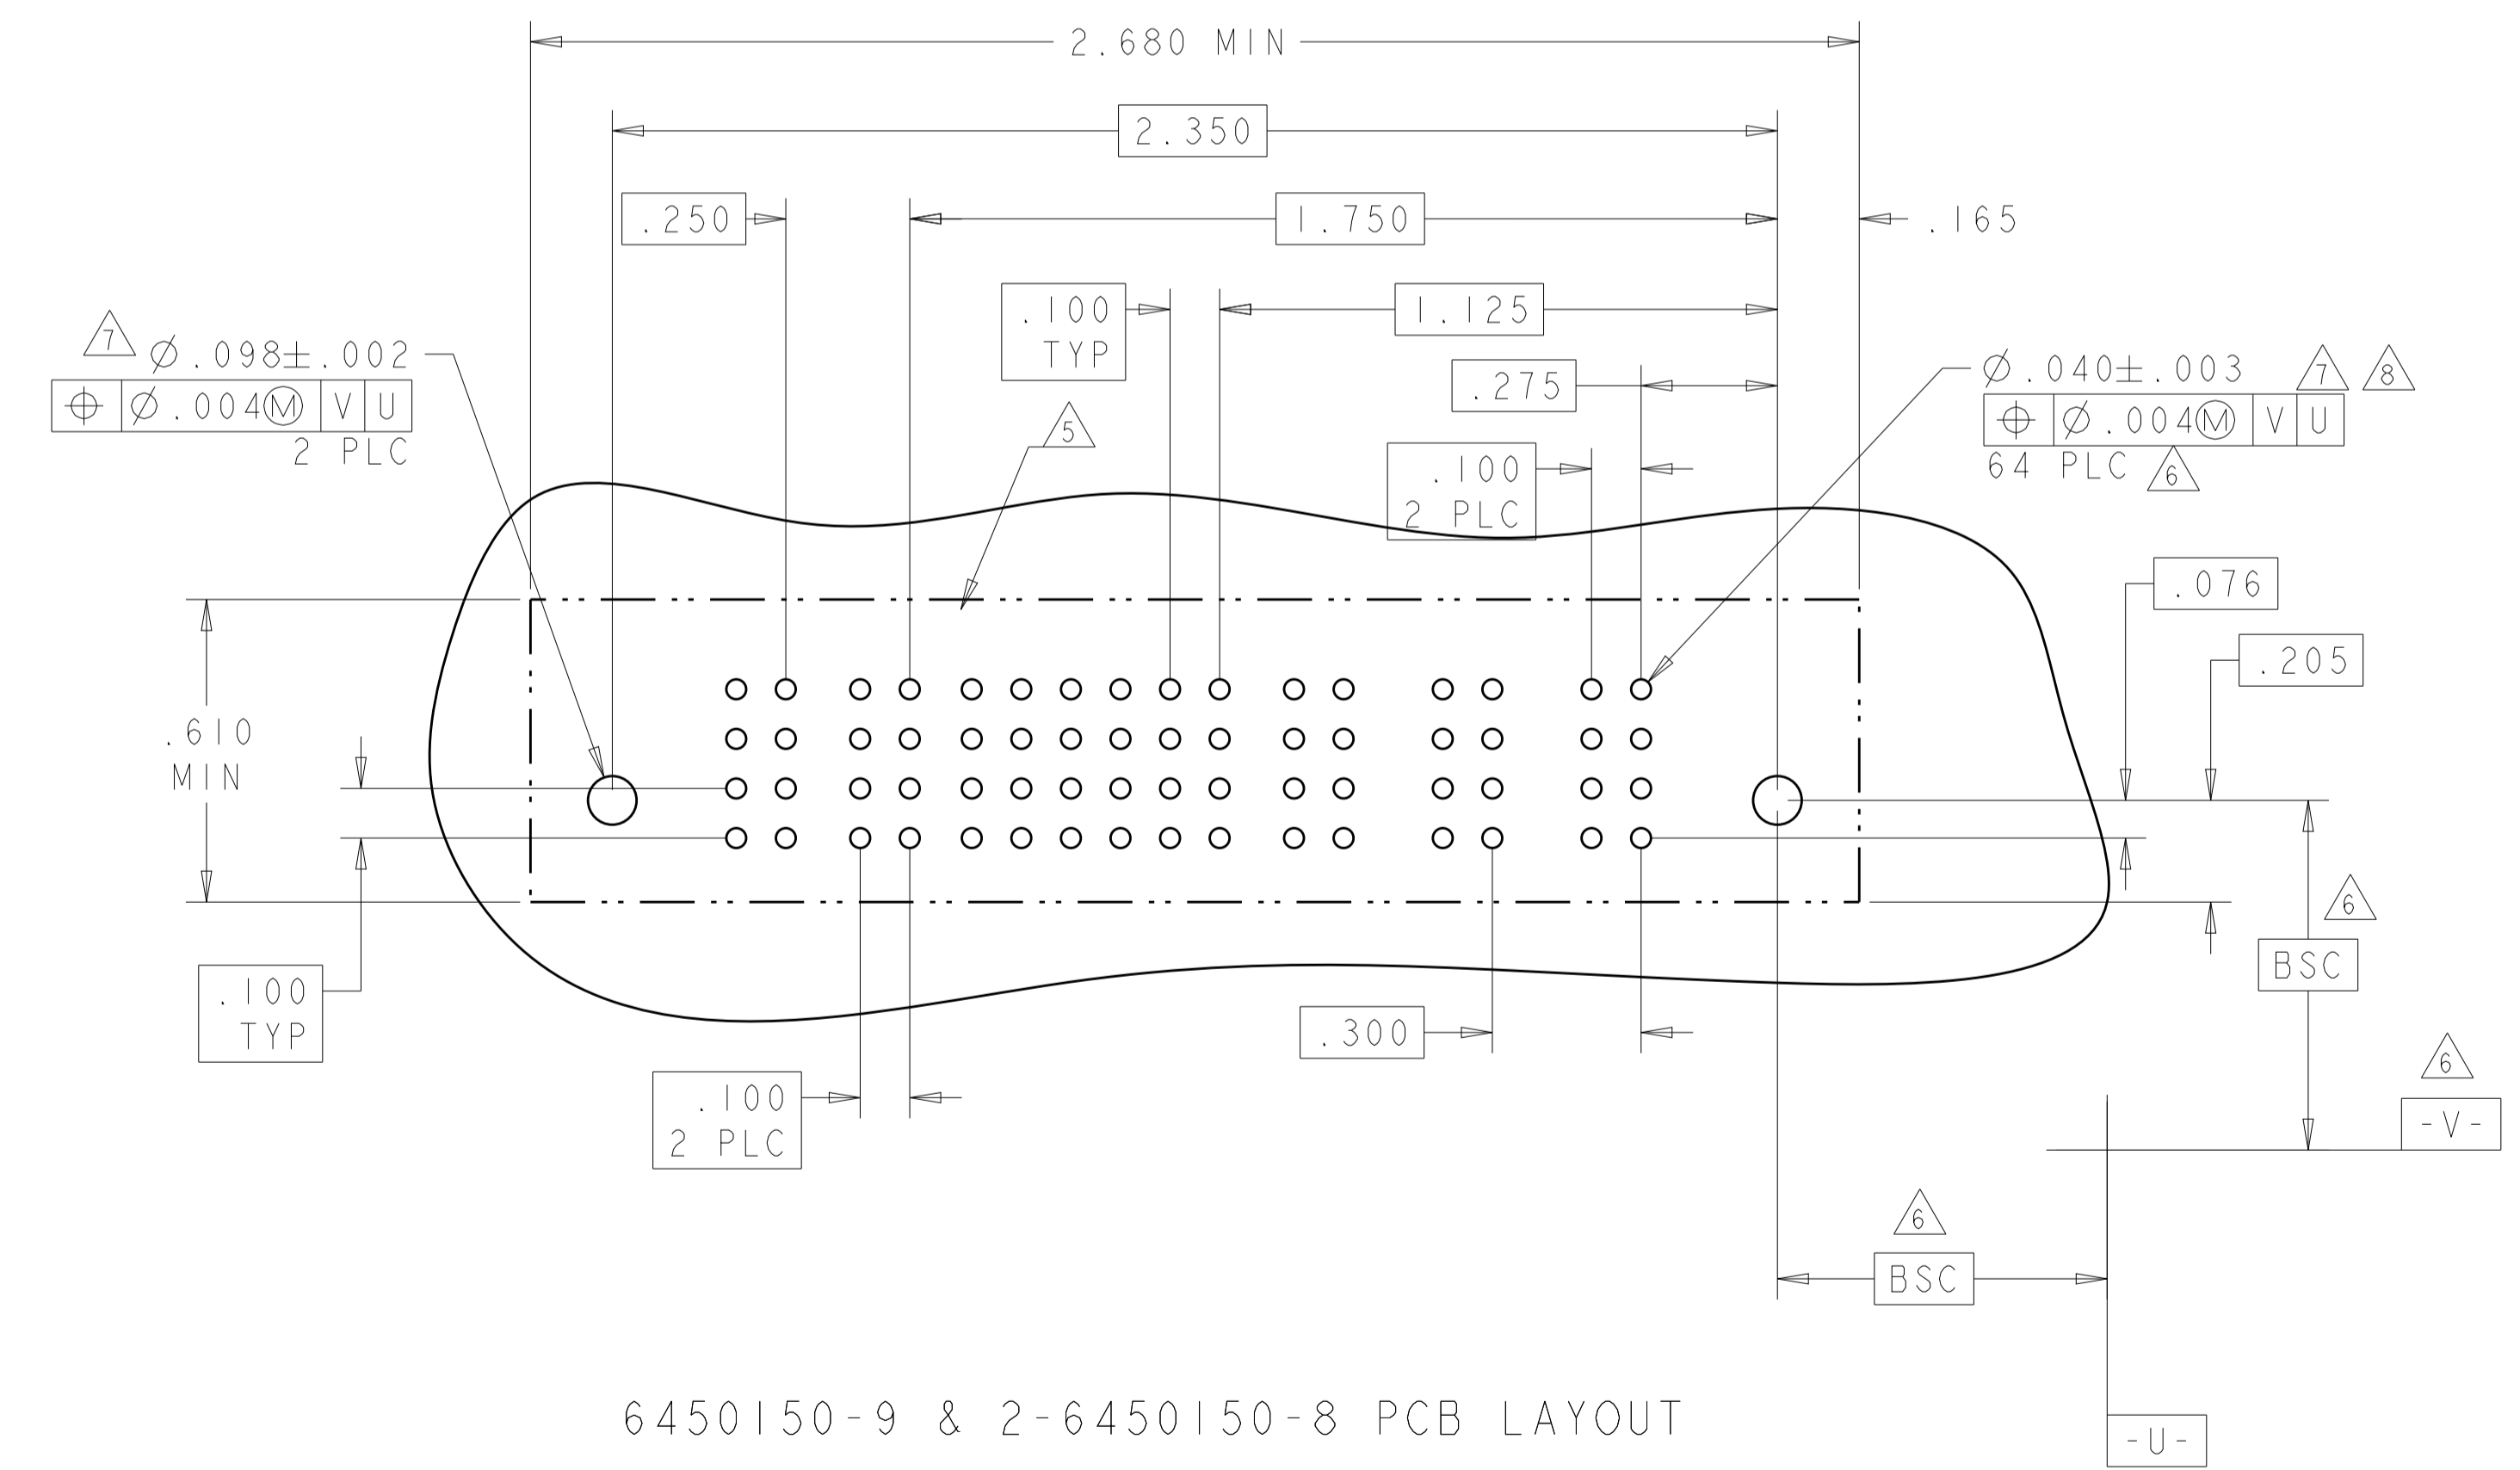

6450150-9 & 2-6450150-8 PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.


DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	OWN: R. GRZYBOWSKI 16FEB05	CHK: M. PERCHERKE 16FEB05	APVD: M. PERCHERKE	NAME: M. PERCHERKE
INCHES	0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.002 ANGLES ±.020	PRODUCT SPEC: 108-1973	APPLICATION SPEC: 114-13038	WEIGHT: -	RESTRICTED TO: -
MATERIAL: -	FINISH: -	SIZE: A1	CAGE CODE: 100779	DRAWING NO: 6450150	SCALE: 1:1
CUSTOMER DRAWING		SHEET 7 OF 12		REV G5	

STE TE Connectivity  
VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

LOC		DIST		REVISIONS				
ES	00	P	LTH	DESCRIPTION	DATE	DWN	APVD	
-	-	-	-	SEE SHEET 1	-	-	-	

NO CONTACTS LOADED

PART NUMBER	ROWS	POWER (L)								SIGNAL					POWER (R)							
		P16	P15	P14	P13	P12	P11	P10	P9	P8	5	4	3	2	1	P7	P6	P5	P4	P3	P2	P1
2-6450150-2	D C B A	VA		VM		VM	VM	VM	VM	VM	E	E	E	E	E	VM	VM	VM	VM	VM	VM	VM
											E	E	E	E	E							
											E	E	E	E	E							
											E	E	E	E	E							
7ACP+20S+4ACP+5P																						

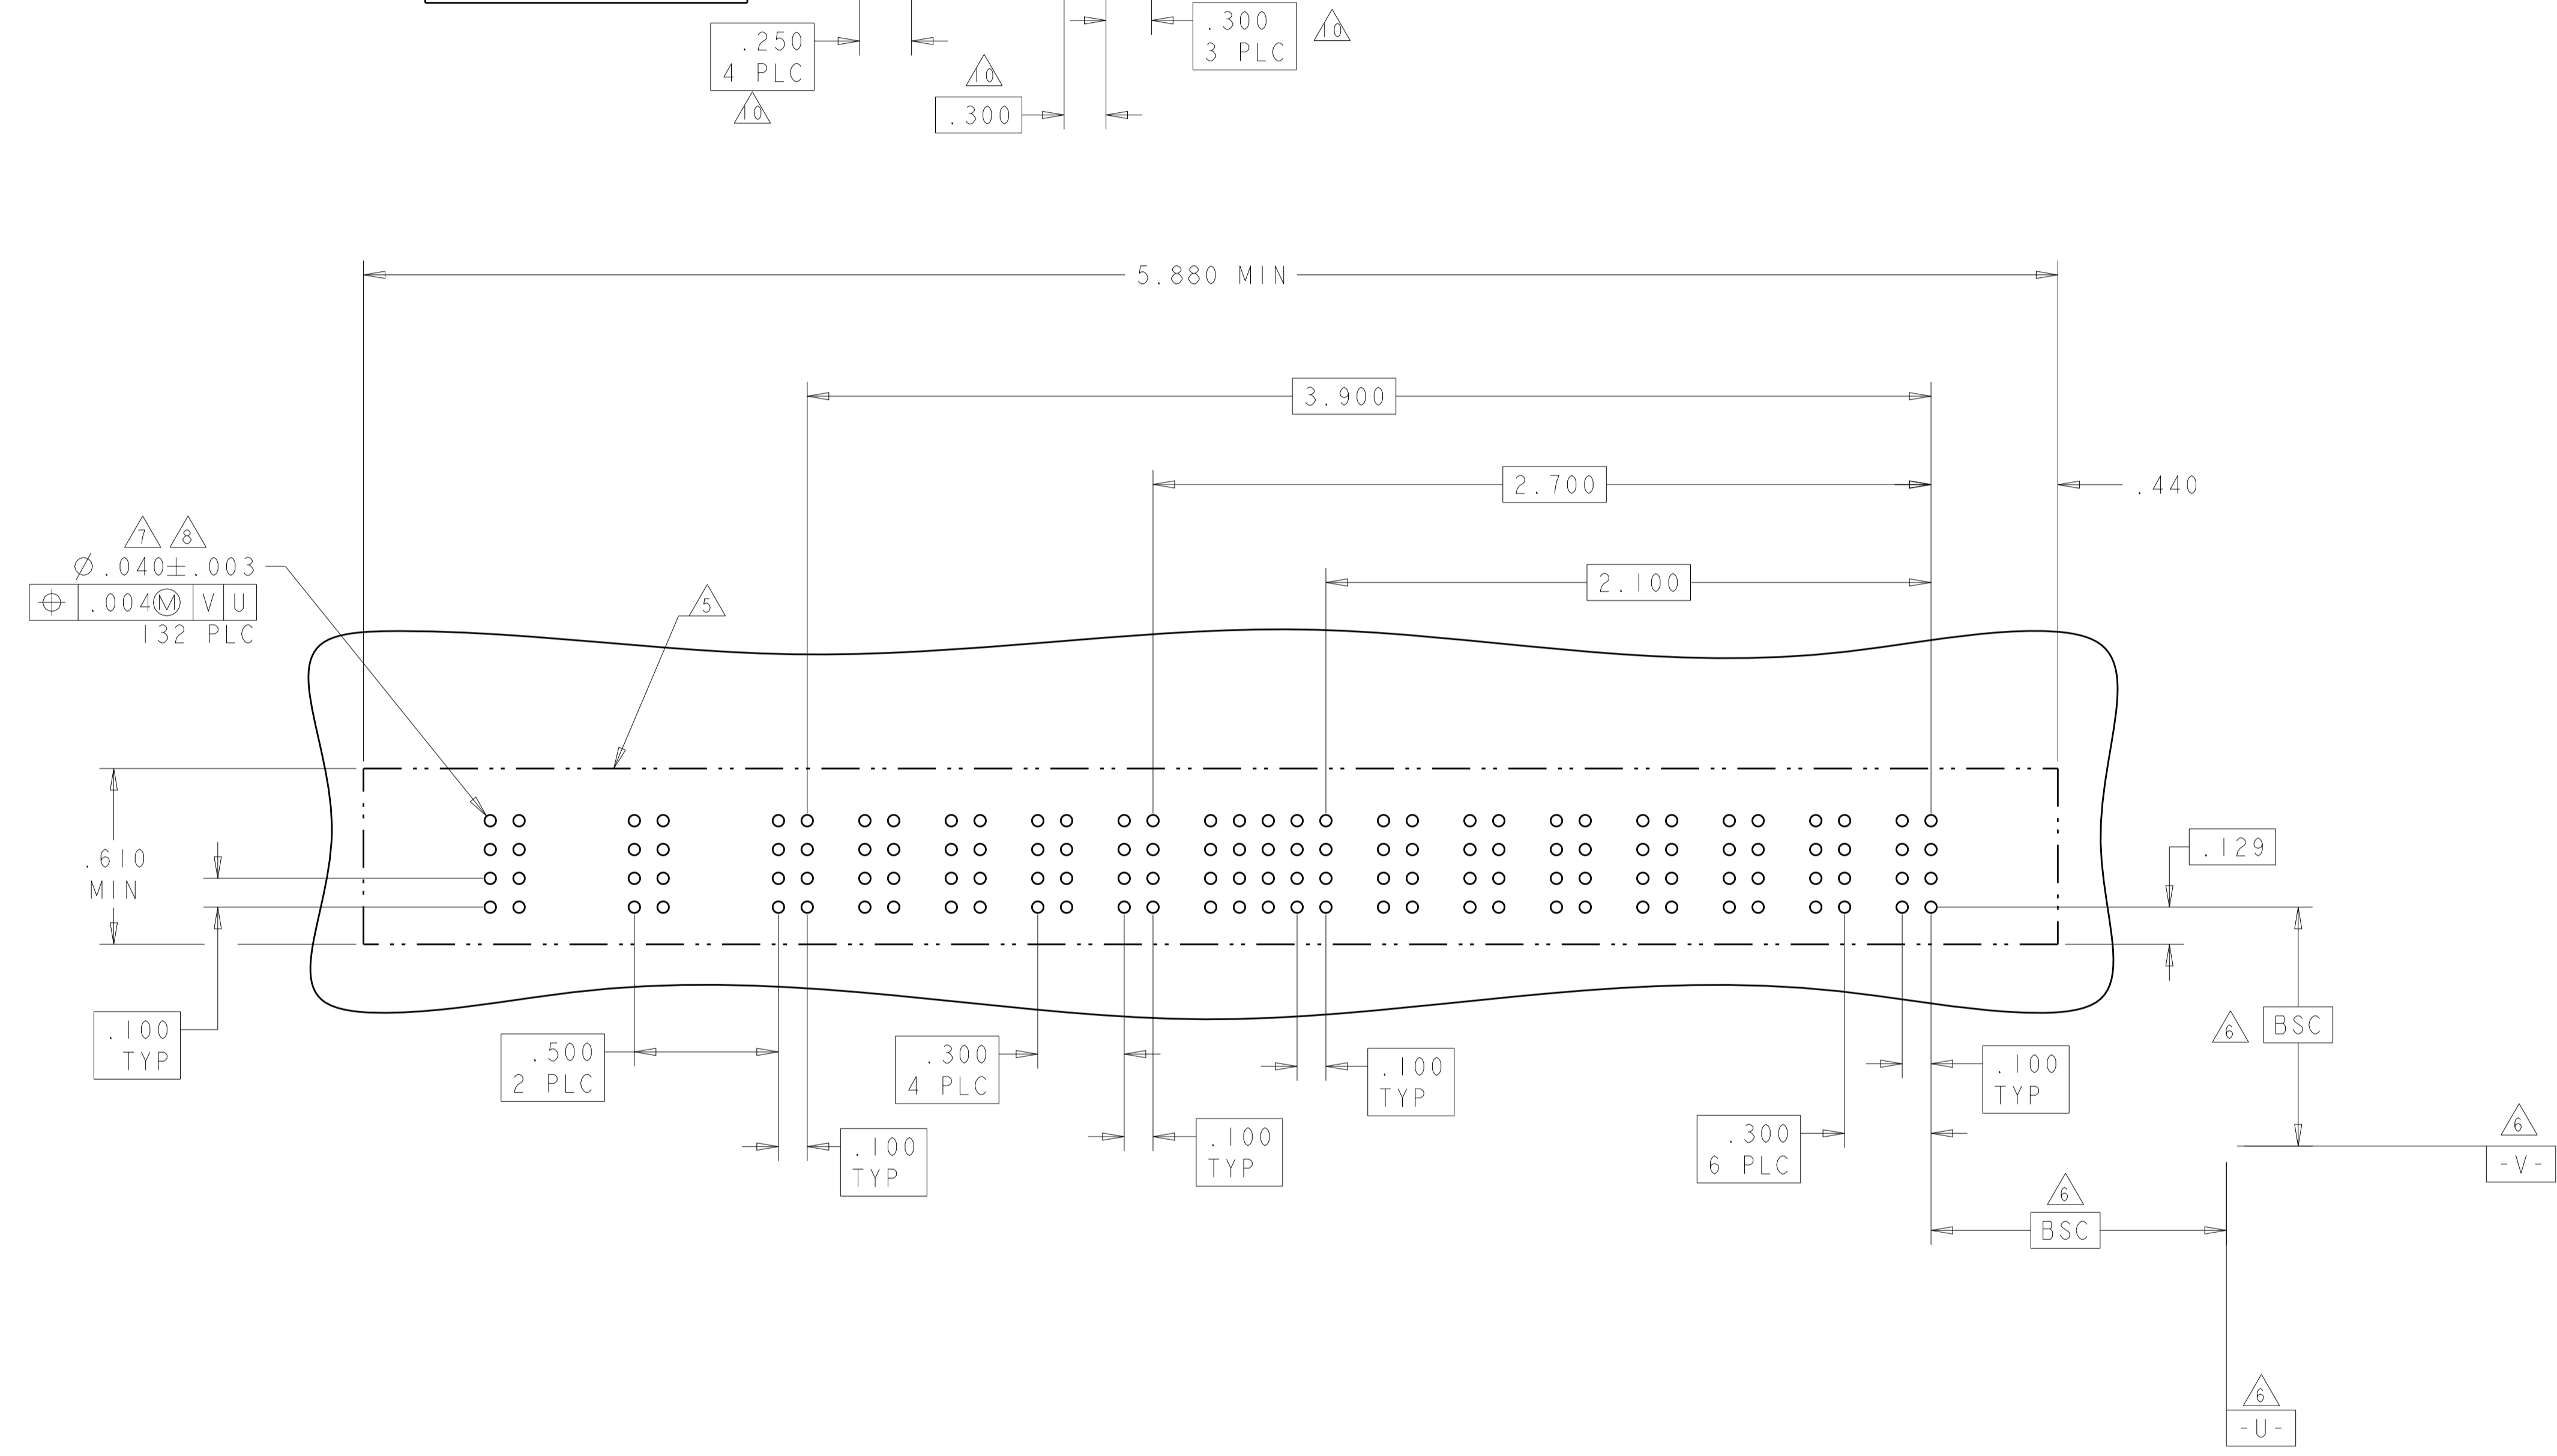



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	R. GRZYBOWSKI	16FEB05		TE Connectivity
DIMENSIONS: INCHES		CHK	M. PERCHERKE	16FEB05		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	M. PERCHERKE		NAME	VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
0 PLC ± .01		PRODUCT SPEC			SIZE	A100779C=6450150
1 PLC ± .01		APPLICATION SPEC			RESTRICTED TO	
2 PLC ± .01		WEIGHT			SCALE	1:1
3 PLC ± .005		CUSTOMER DRAWING			SHEET	8 OF 12
4 PLC ± .0020					REV	G5
ANGLES ± .2°						
FINISH						



LOC		DIST		REVISIONS				
P	LTN	DATE	DMN	APVD	DESCRIPTION	DATE	DMN	APVD
-	-	-	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER		SIGNAL				POWER	
		P4	P3	4	3	2	1	P2	P1
2-6450150-3	D	VM	VM	E	E	E	E	VA	VA
	C			E	E	E	E		
	B			E	E	E	E		
	A			E	E	E	E		
2P + 16S + 2P		HD						HD	

PART NUMBER	ROWS	POWER		SIGNAL								POWER						
		P4	P3	12	11	10	9	8	7	6	5	4	3	2	1	P2	P1	
2-6450150-4	D	VM	VA	E	E	E	E	E	E	E	E	E	E	E	E	E	VA	VM
	C			E	E	E	E	E	E	E	E	E	E	E	E			
	B			E	E	E	E	E	E	E	E	E	E	E	E			
	A			E	E	E	E	E	E	E	E	E	E	E	E			
2P + 48S + 2P		HD										HD						

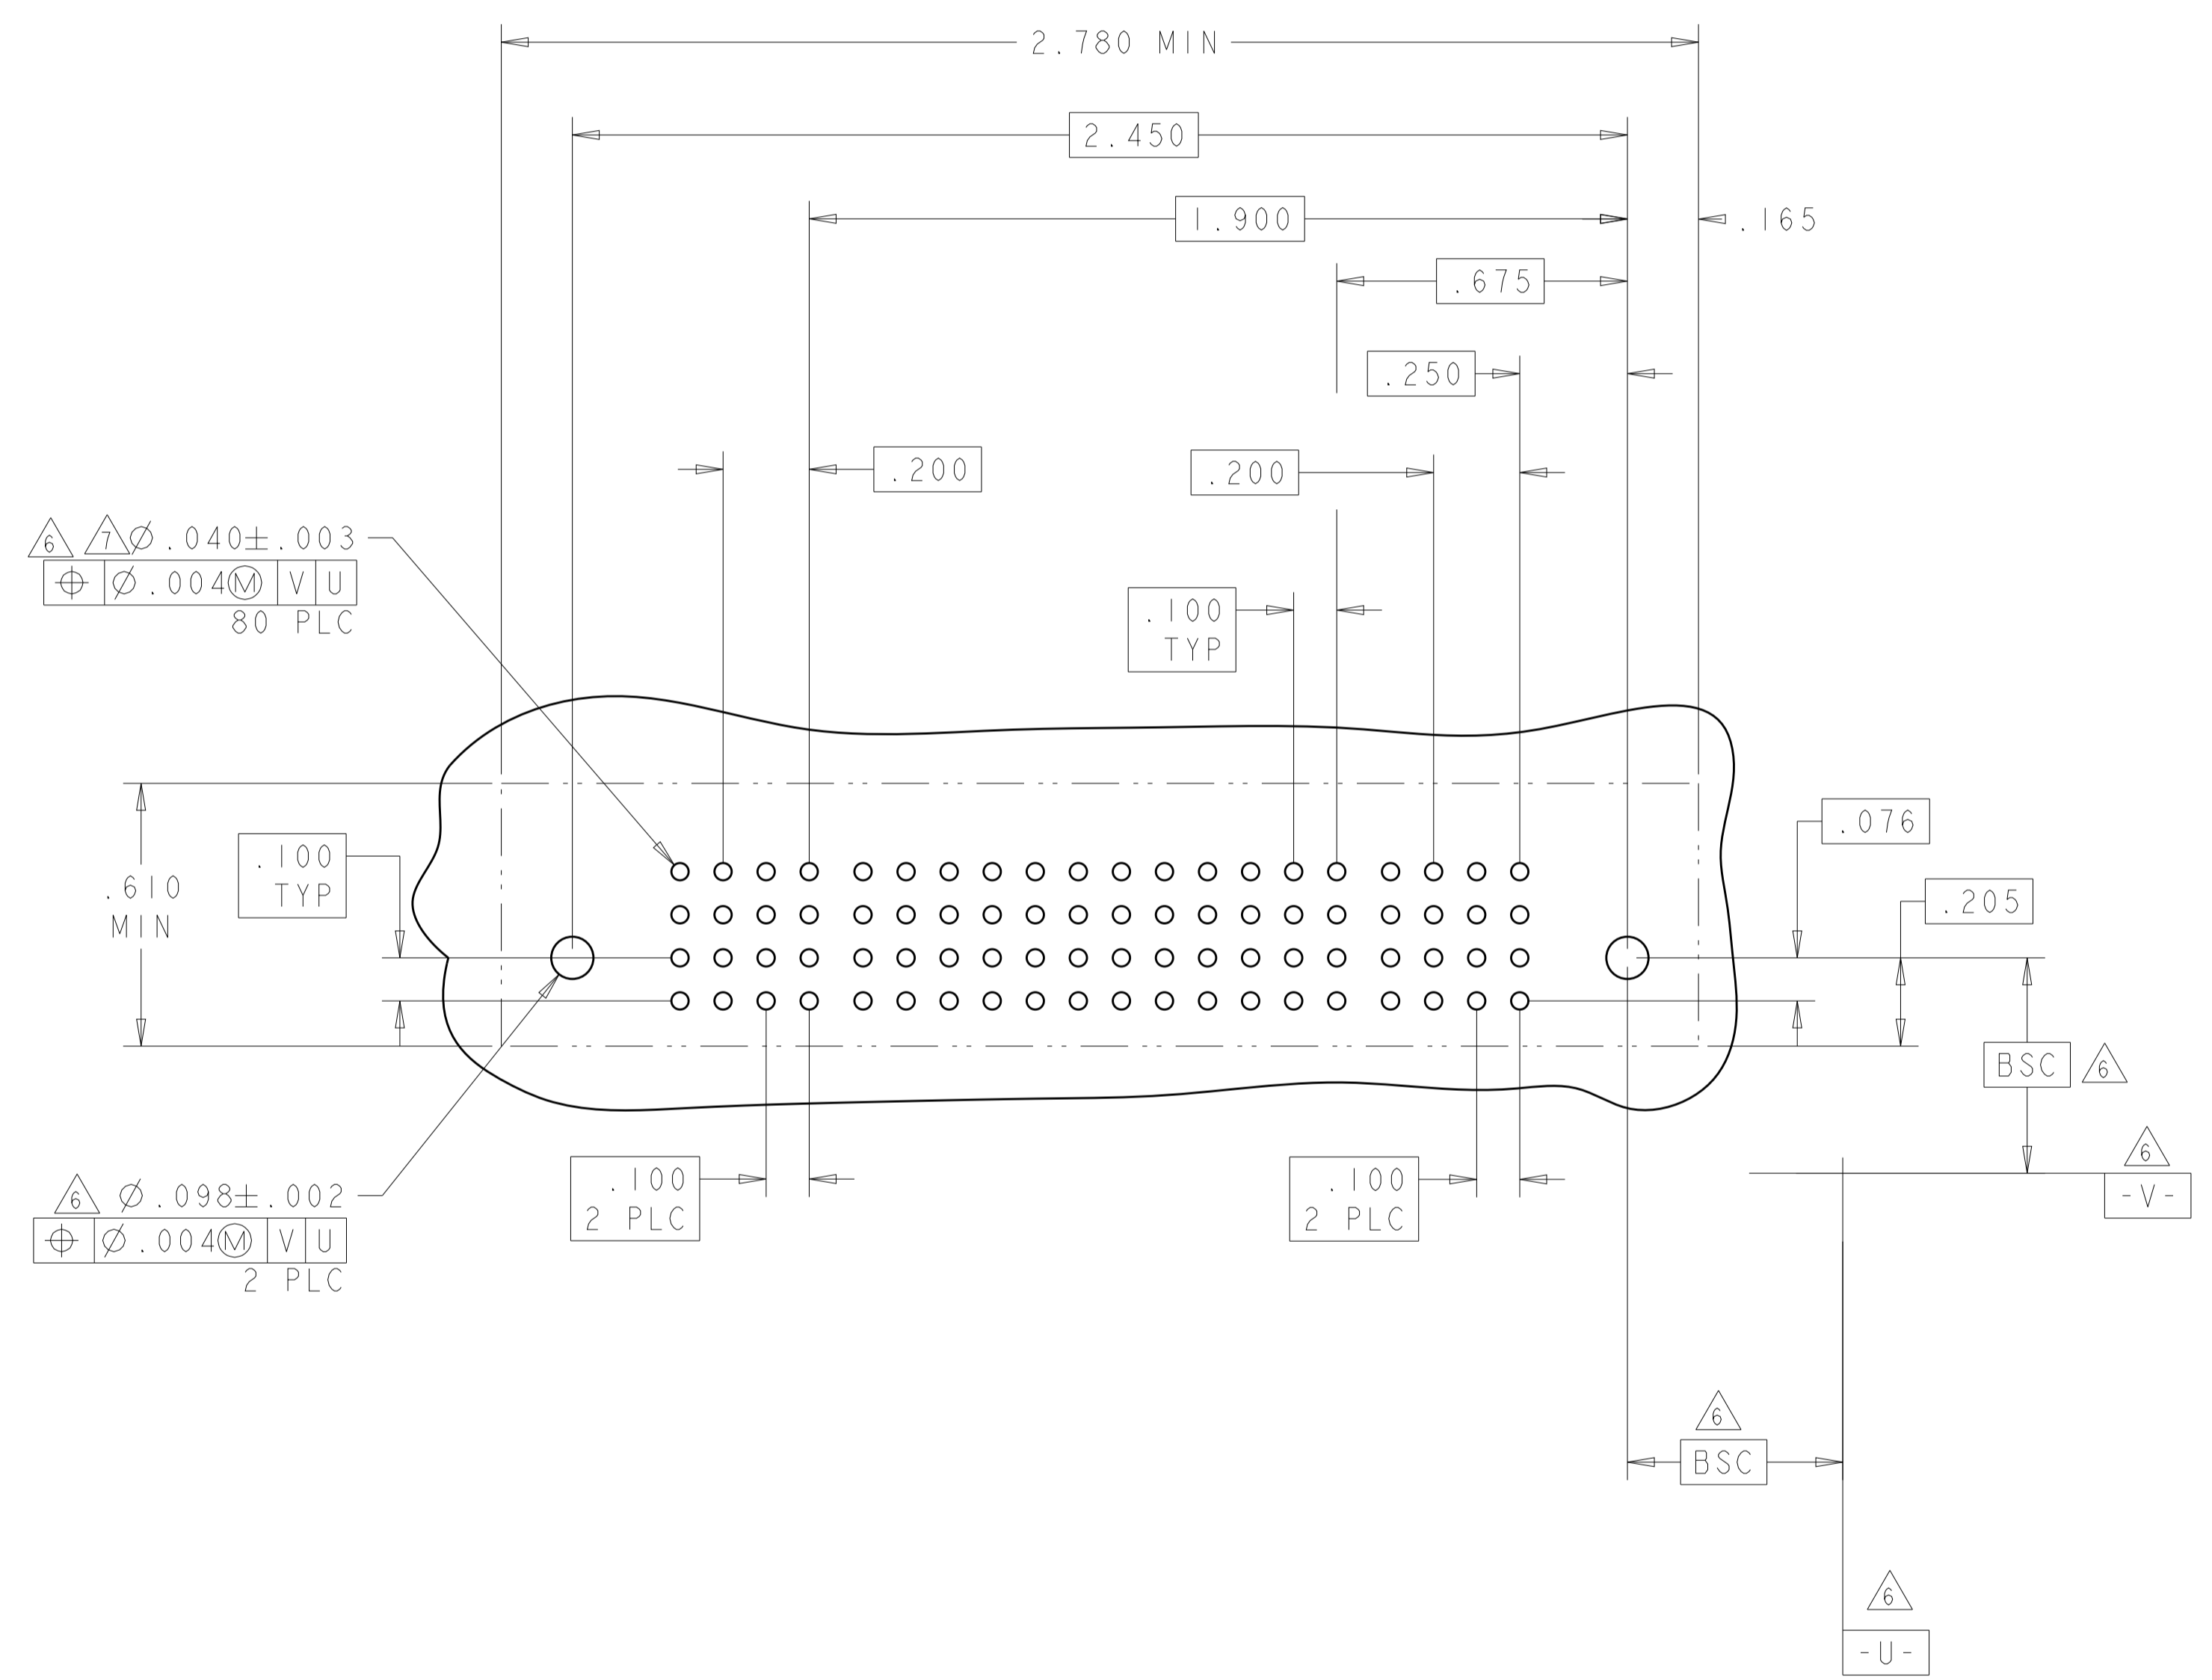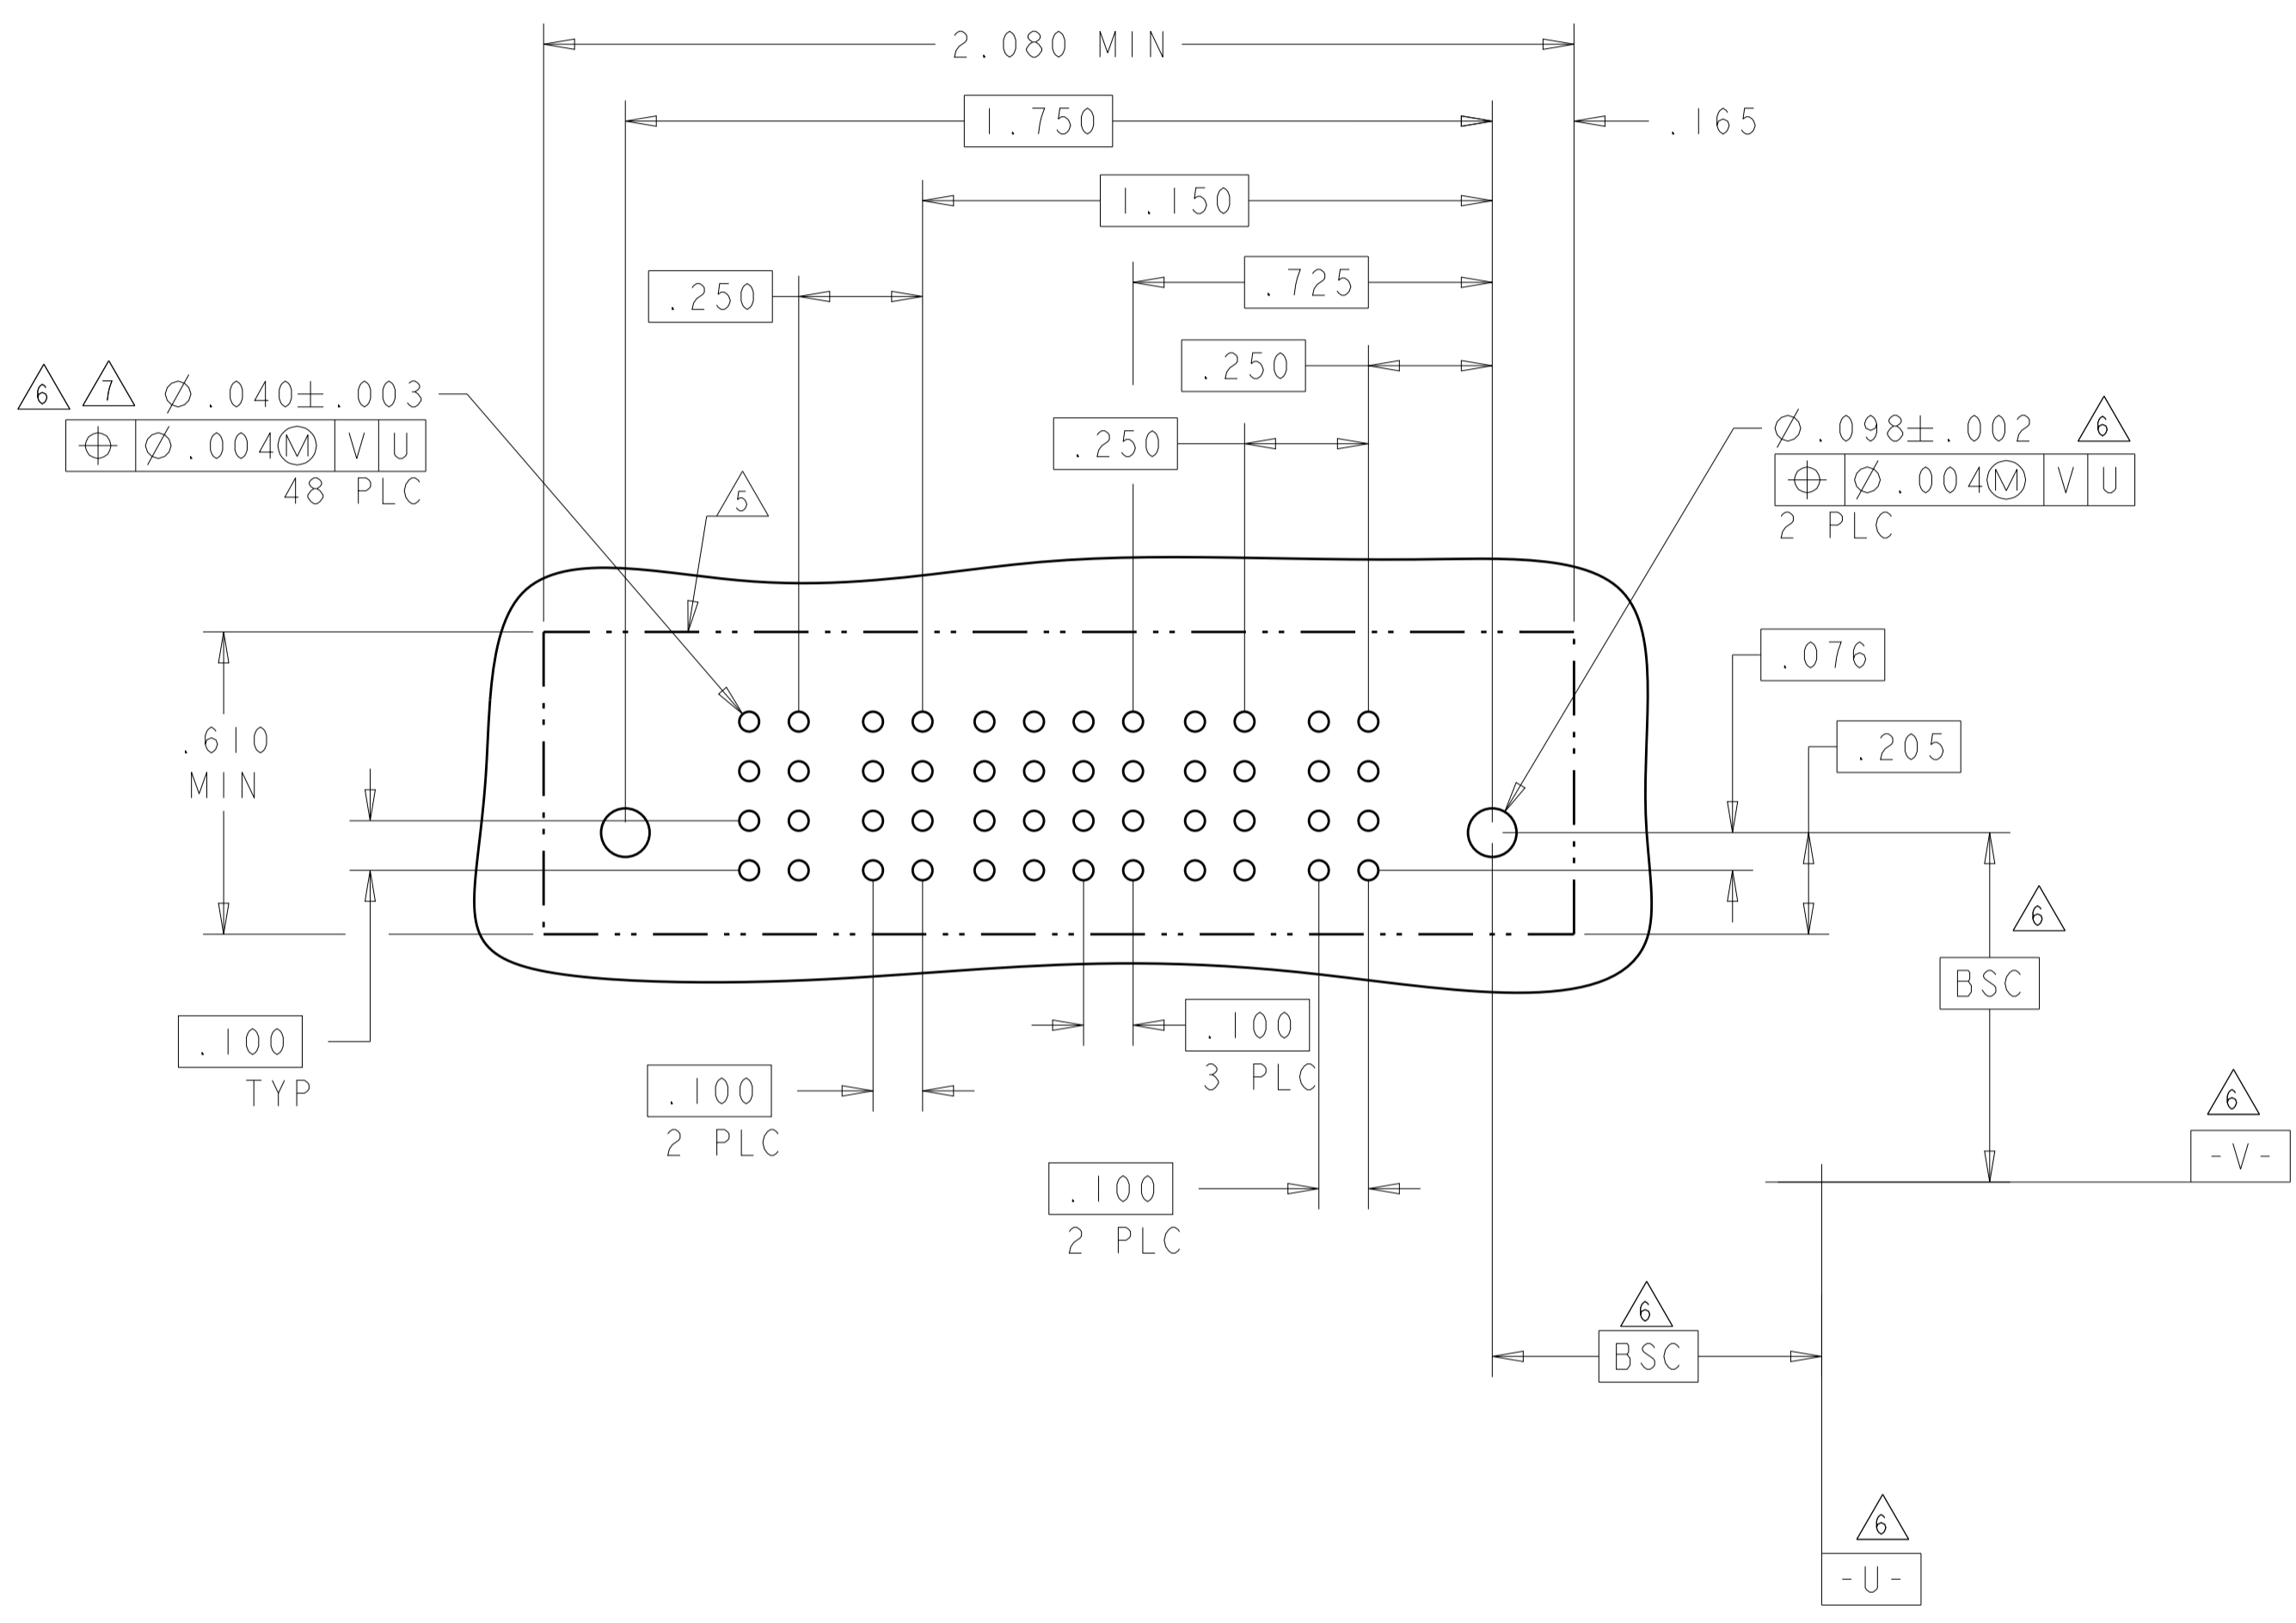

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN: R. GRZYBOWSKI 16FEB05  
 CHK: M. PERCHERKE 16FEB05  
 APVD: M. PERCHERKE

DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 0 PLC ±.01  
 1 PLC ±.01  
 2 PLC ±.01  
 3 PLC ±.005  
 4 PLC ±.002  
 ANGLES ±.020

MATERIAL: FINISH:

PRODUCT SPEC: 108-1973  
 APPLICATION SPEC: 114-13038  
 WEIGHT: CUSTOMER DRAWING

NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL  
 SIZE: A1  
 CAGE CODE: 100779  
 DRAWING NO: 6450150

RESTRICTED TO: SCALE: 1:1 SHEET 9 OF 12 REV: G5

TE Connectivity



LOC	DIST	REVISIONS					
		P	LTN	DESCRIPTION	DATE	OWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER						SIGNAL				POWER								
		P11	P10	P9	P8	P7	P6	P5	4	3	2	1	P4	P3	P2	P1				
2-6450150-5	D	C	B	A	HD	VM	VA	VM	VM	VA	VM	E	E	E	E	VM	VM	VM	VM	HD
	E											E	E	E						
	E											E	E	E						
	E											E	E	E						
4P + 16S + 7ACP																				

PART NUMBER	ROWS	POWER (L)			SIGNAL						POWER (R)									
		P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1						
2-6450150-6	D	C	B	A	HD	VM	VM	VA	E	E	E	E	E	E	VM	VM	VM	VM	HD	
	E								E	E	E	E	E							
	E								E	E	E	E	E							
	E								E	E	E	E	E							
4P + 24S + 3ACP																				

(F1)

NO CONTACT LOADED

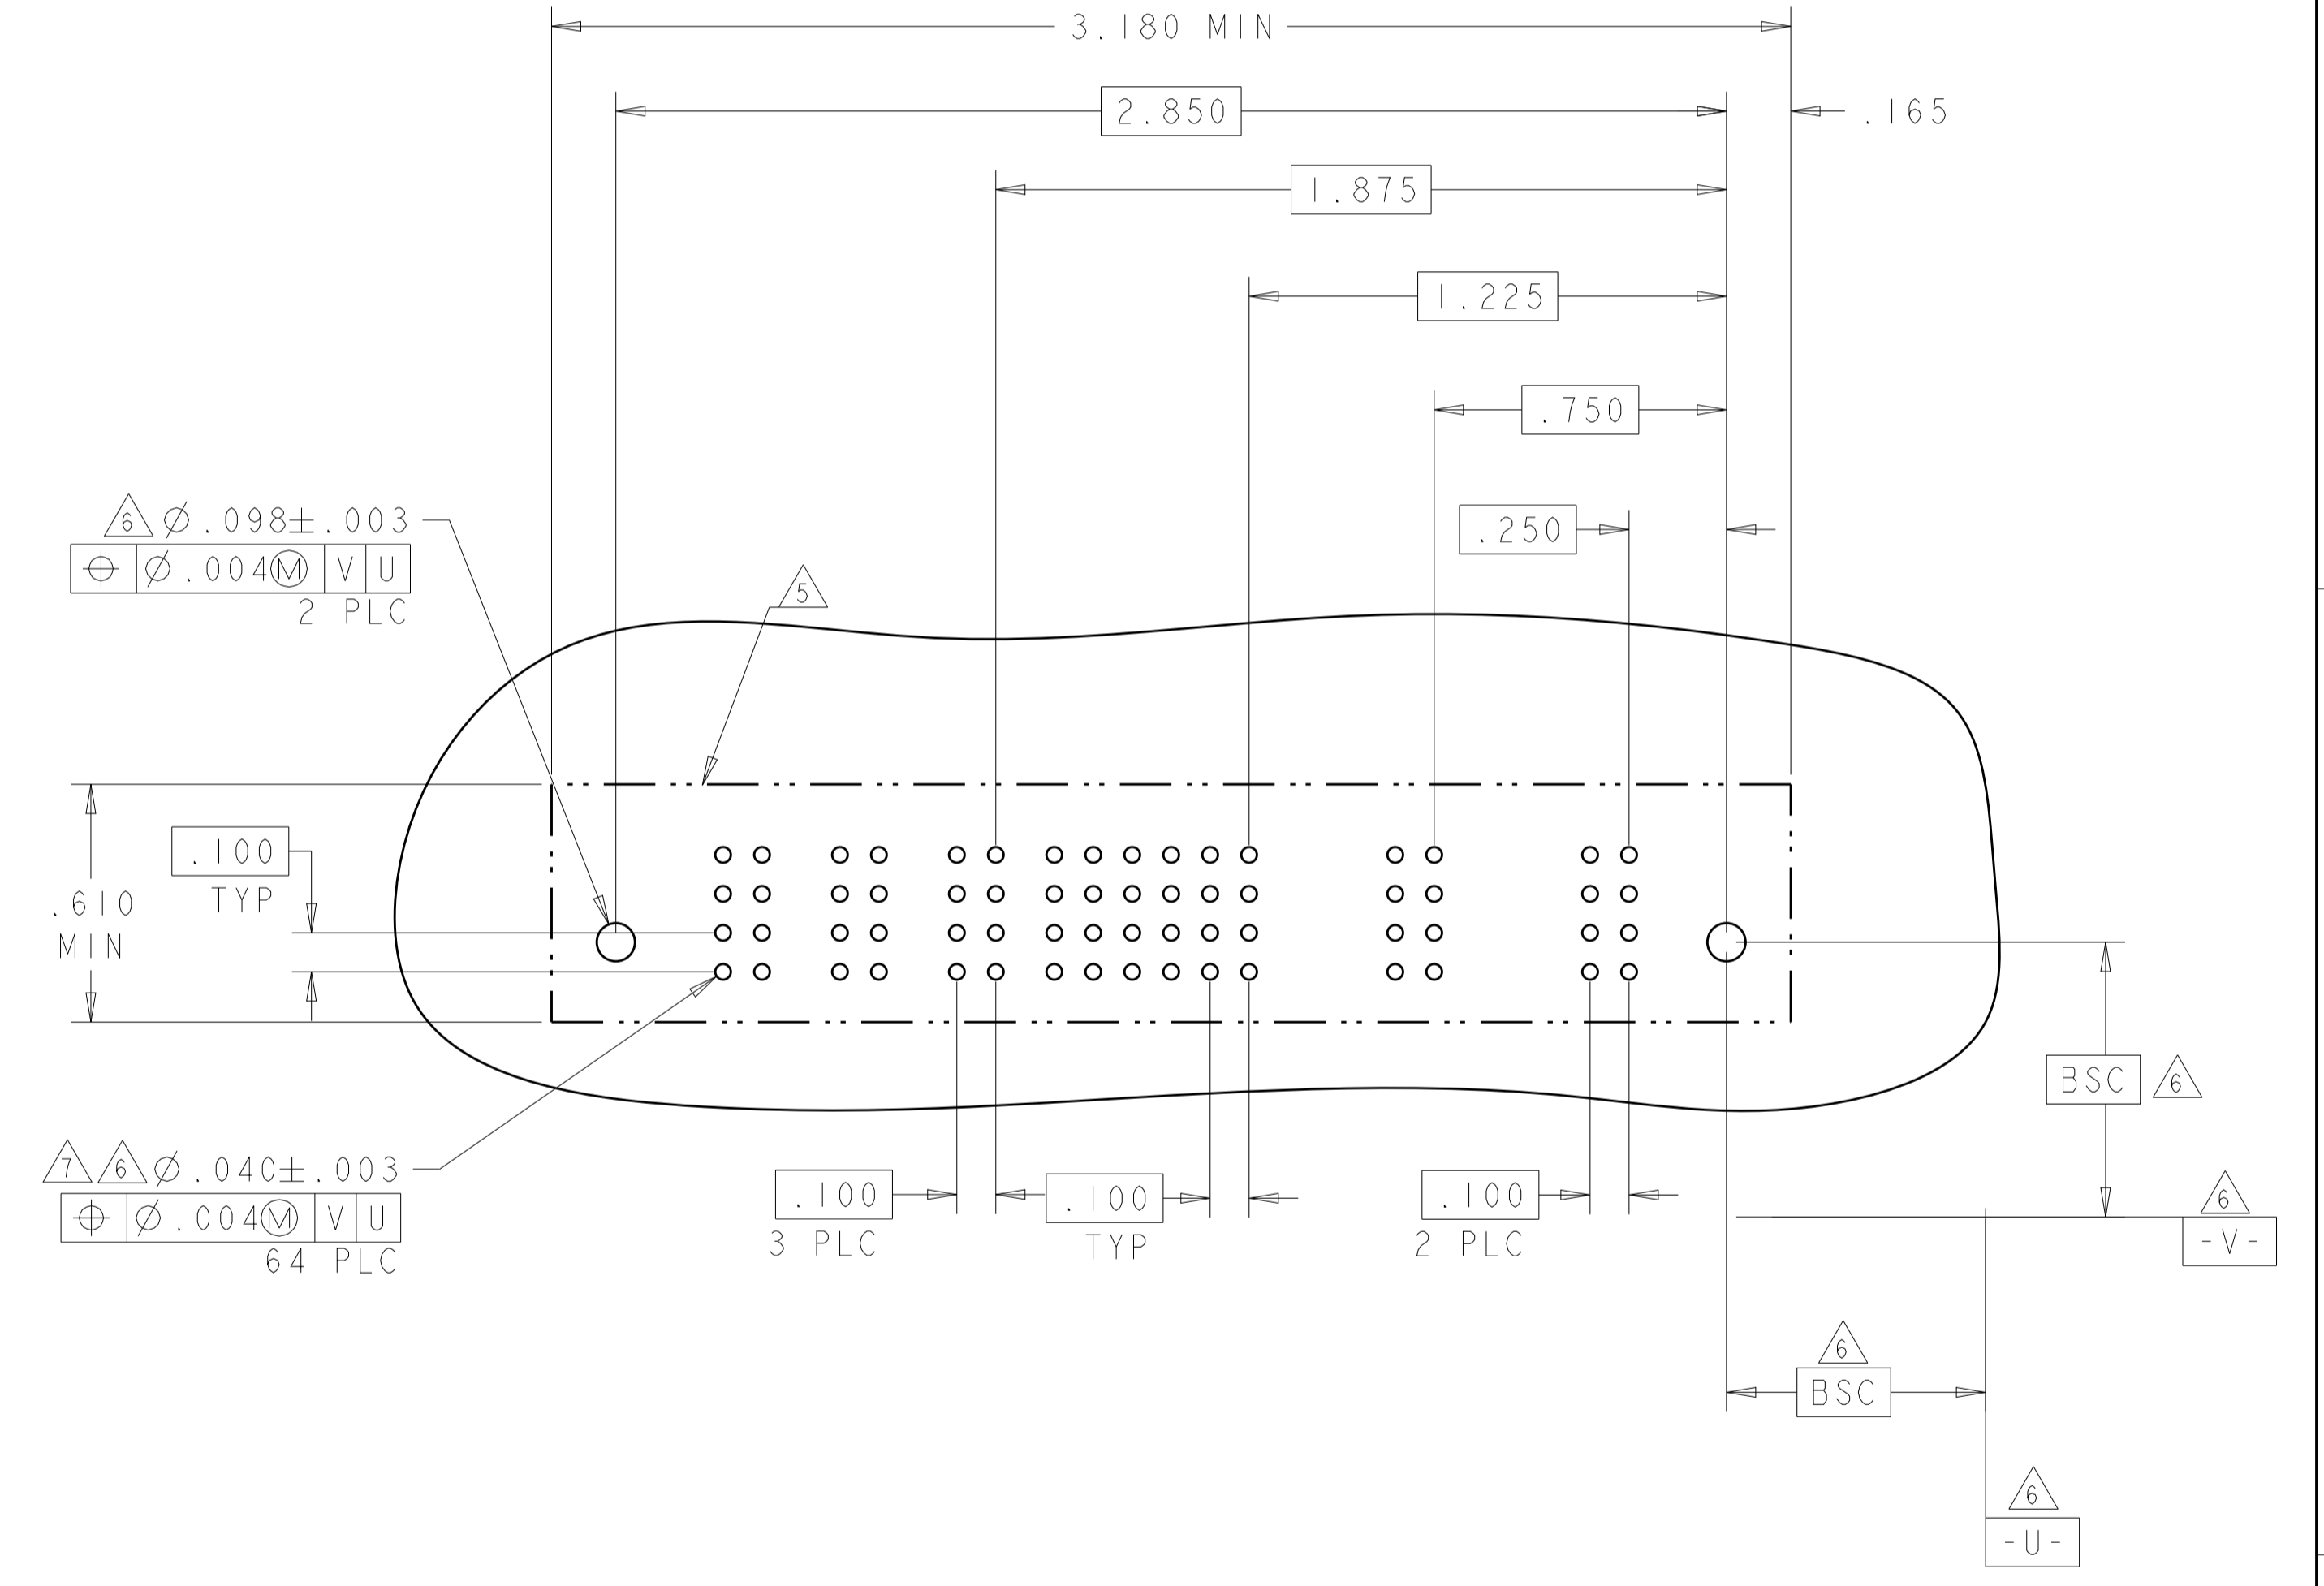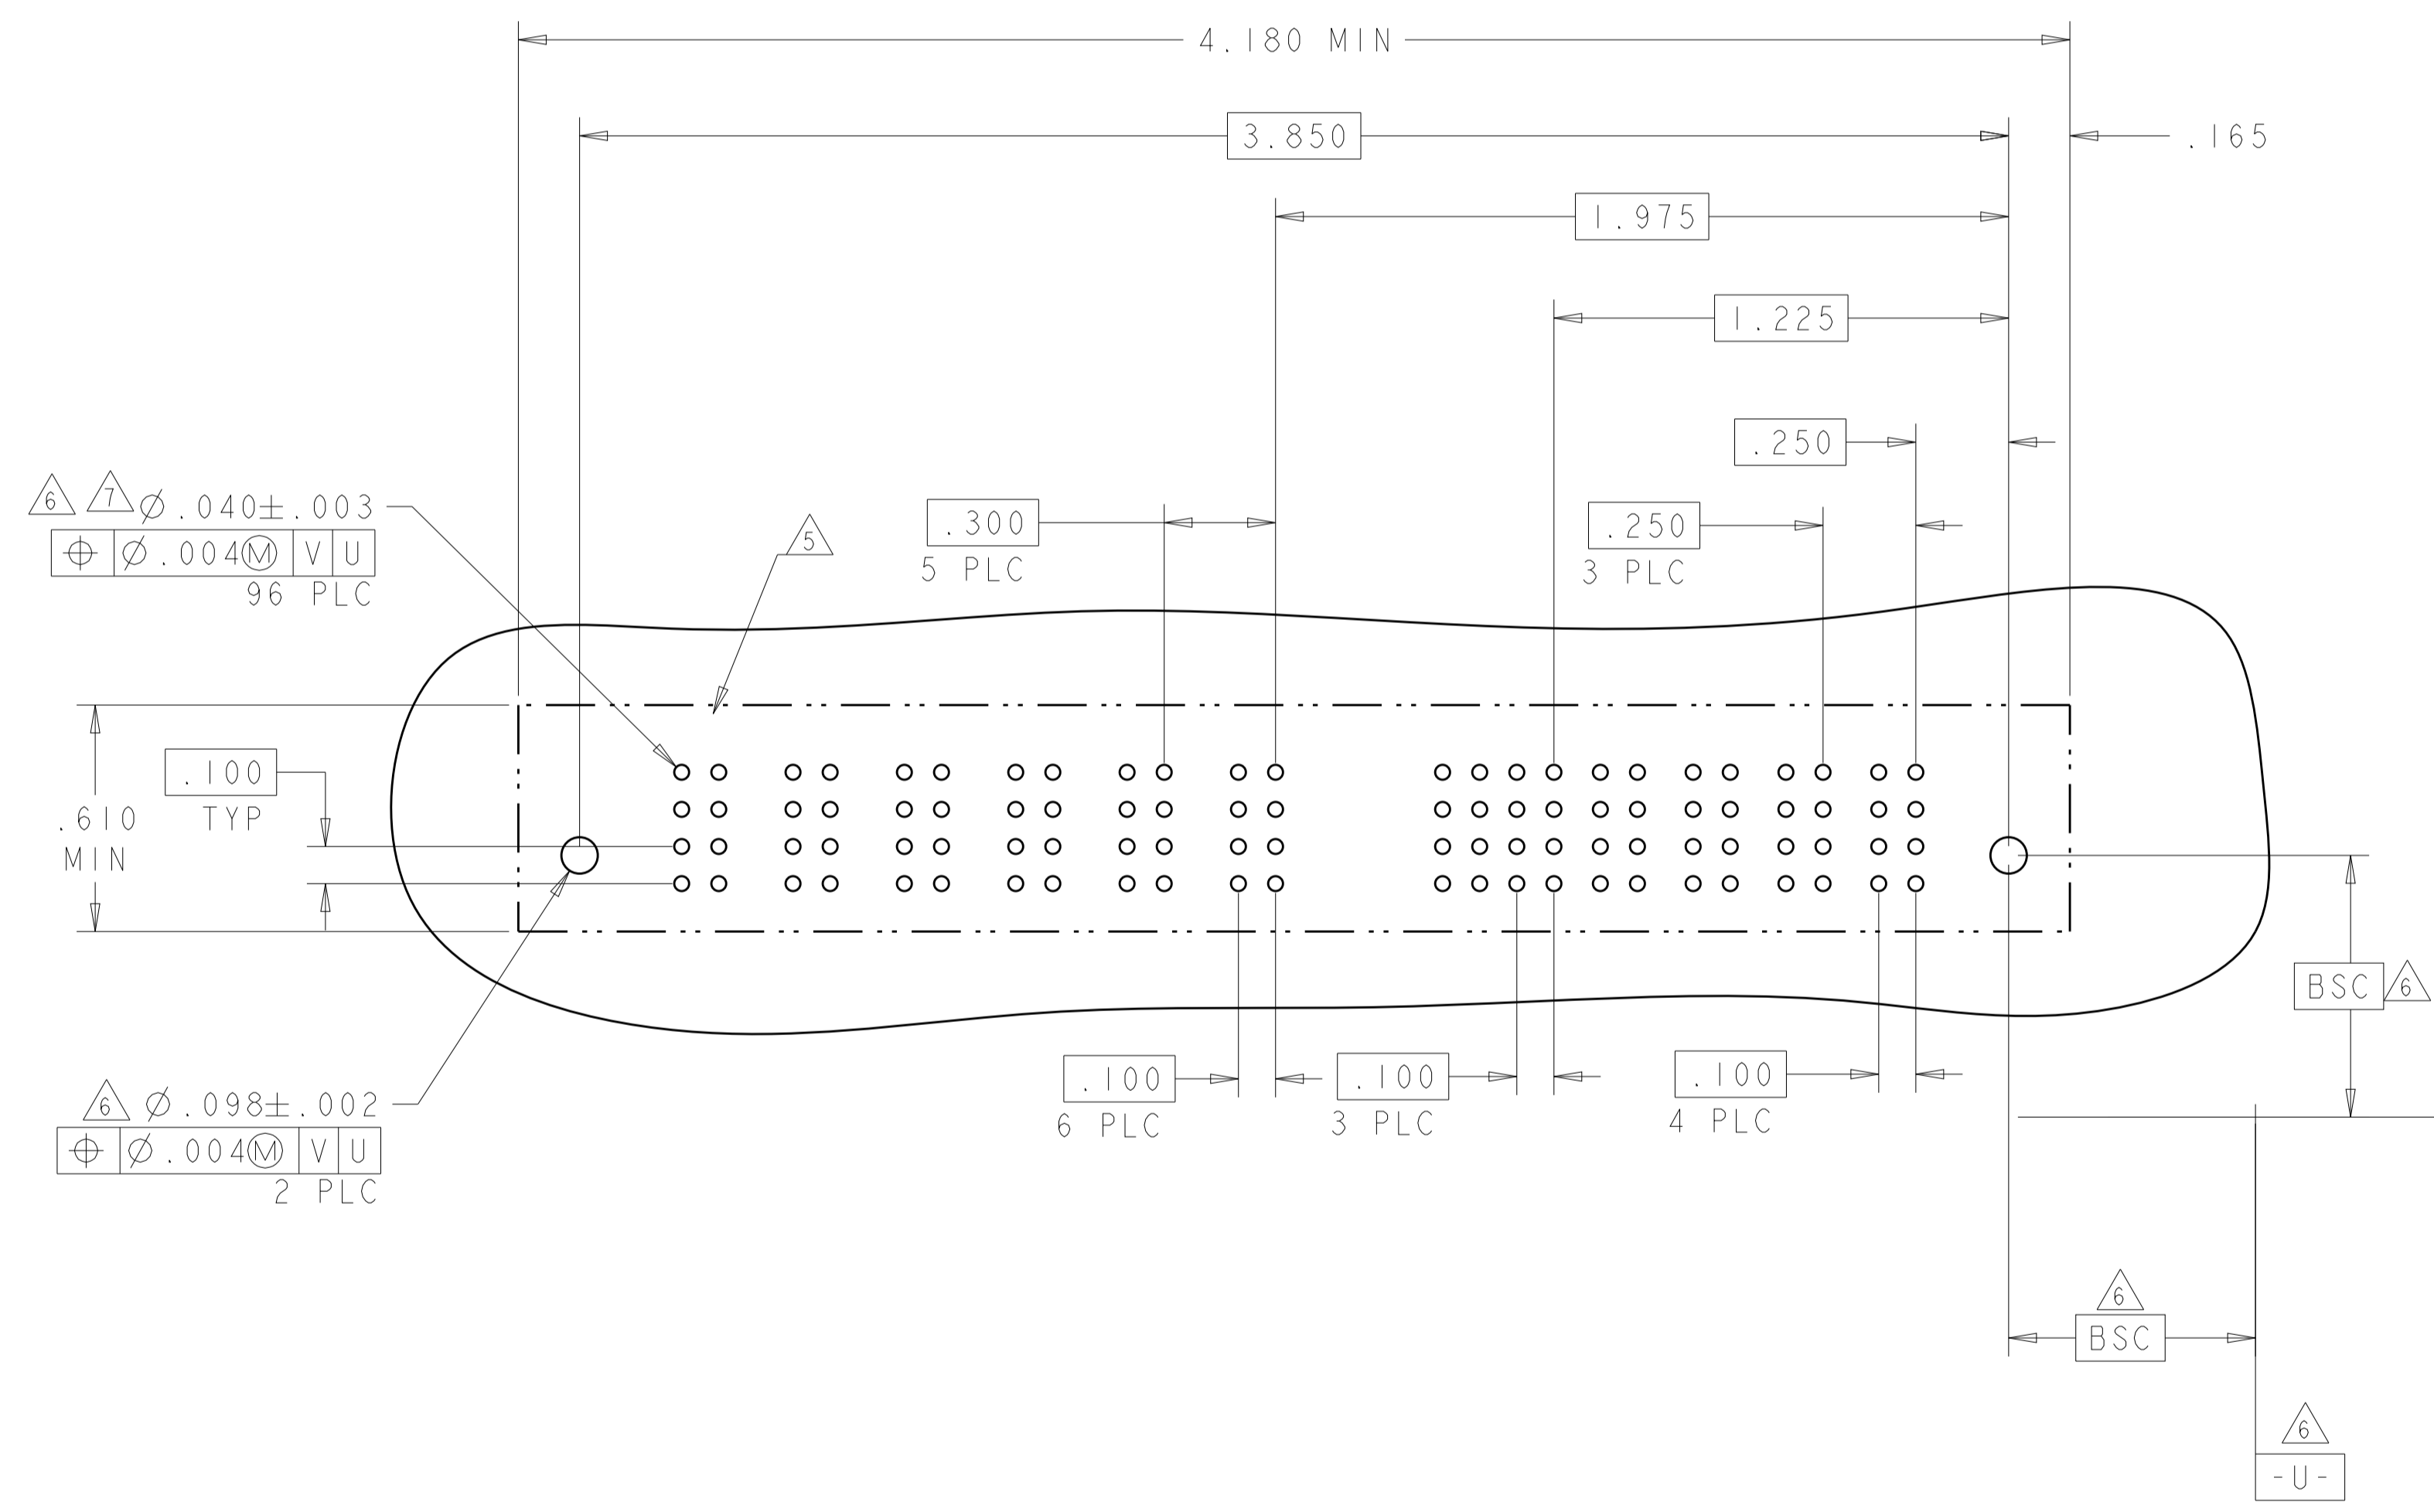

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2°	FINISH	OTHERWISE SPECIFIED:
-----------------------	--	--------	----------------------

MATERIAL	FINISH	WEIGHT	CAGE CODE	DRAWING NO	RESTRICTED TO
-	-	-	A100779	C=6450150	-

16FEB05  
 R. GRZYBOWSKI  
 M. PERCHERKE  
 M. PERCHERKE  
 NAME  
 PRODUCT SPEC  
 108-1973  
 APPLICATION SPEC  
 114-13038  
 WEIGHT  
 CUSTOMER DRAWING


**STE** TE Connectivity

VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SCALE 1:1 SHEET 10 OF 12 REV G5

LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER (L)	SIGNAL								POWER (R)												
			PI4	PI3	PI2	PI1	PI0	P9	8	7		6	5	4	3	2	1	P8	P7	P6	P5	P4	P3
2-6450150-7	D C B A	VM VM VM VM	E	E	E	E	E	E	E	E	E	E	E	E	E	E	VA	VM	VM	VM	VM	VM	VM
8ACP + 32S + 6ACP																							

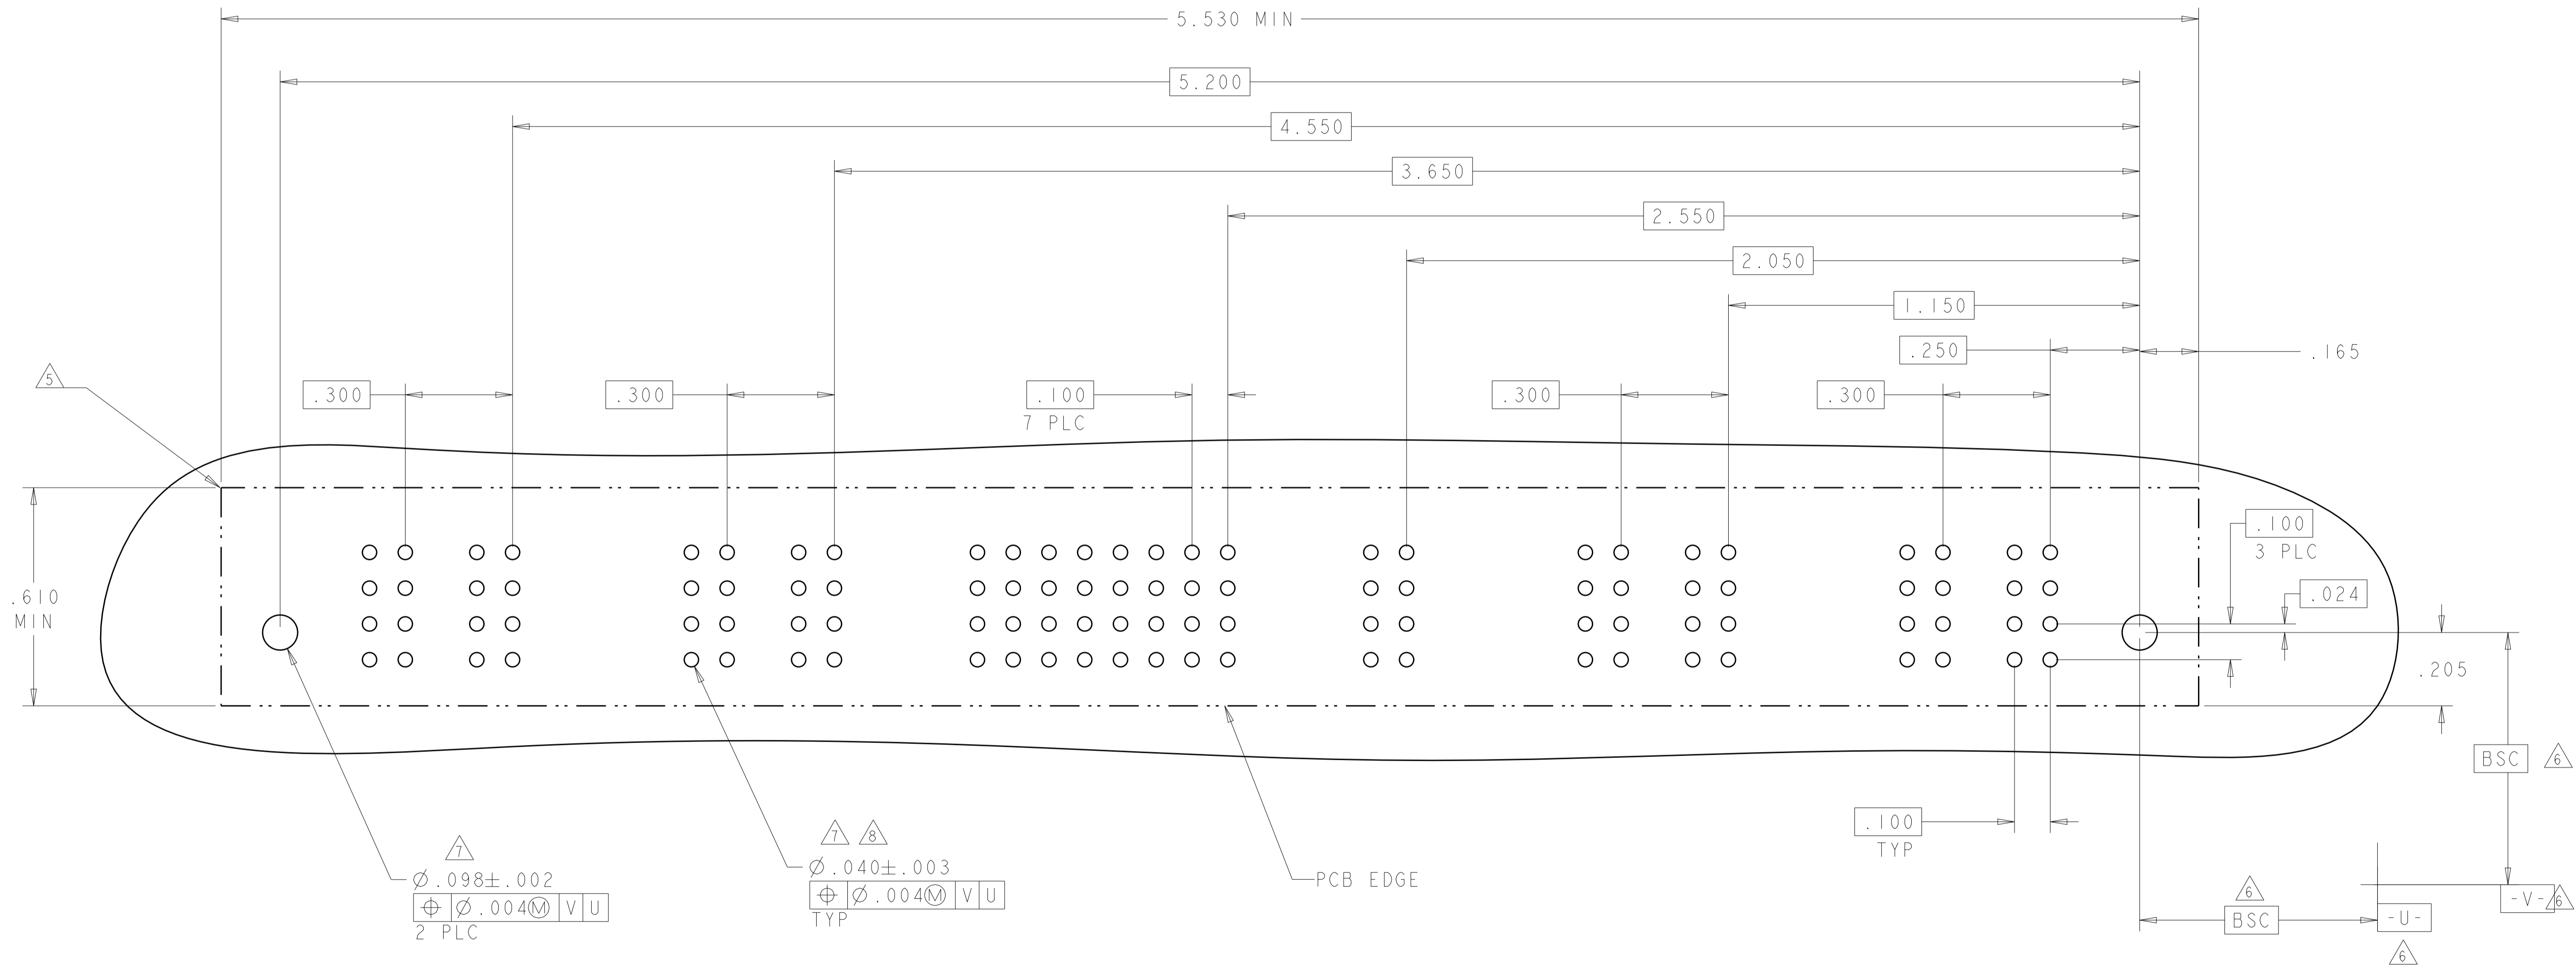


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: R. GRZYBOWSKI 16FEB05	TE Connectivity
DIMENSIONS: INCHES		CHK: M. PERCHERKE 16FEB05	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.0°		APVD: M. PERCHERKE	NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
MATERIAL: -		PRODUCT SPEC: 108-1973	SIZE: A1
FINISH: -		APPLICATION SPEC: 114-13038	CAGE CODE: C=6450150
WEIGHT: -		RESTRICTED TO: -	SCALE: 1:1
CUSTOMER DRAWING		REVISION: 5	SHEET 11 OF 12

LOC	DIST	REVISIONS			
		REV	DATE	BY	APPV
ES	00	-	-	-	-
		SEE SHEET 1			

PART NUMBER	ROWS	POWER						SIGNAL						
		P8	P7	P6	P5	P4	P3	4	3	2	3	2	1	P2
2-6450150-9	D							E	E	E	E	E		
	C		VM					E	E	E	E	E	VM	VM
	B			VM				E	E	E	E	E		
	A		HD		VA			E	E	E	E	E		HD

NO CONTACTS LOADED

NO CONTACTS LOADED

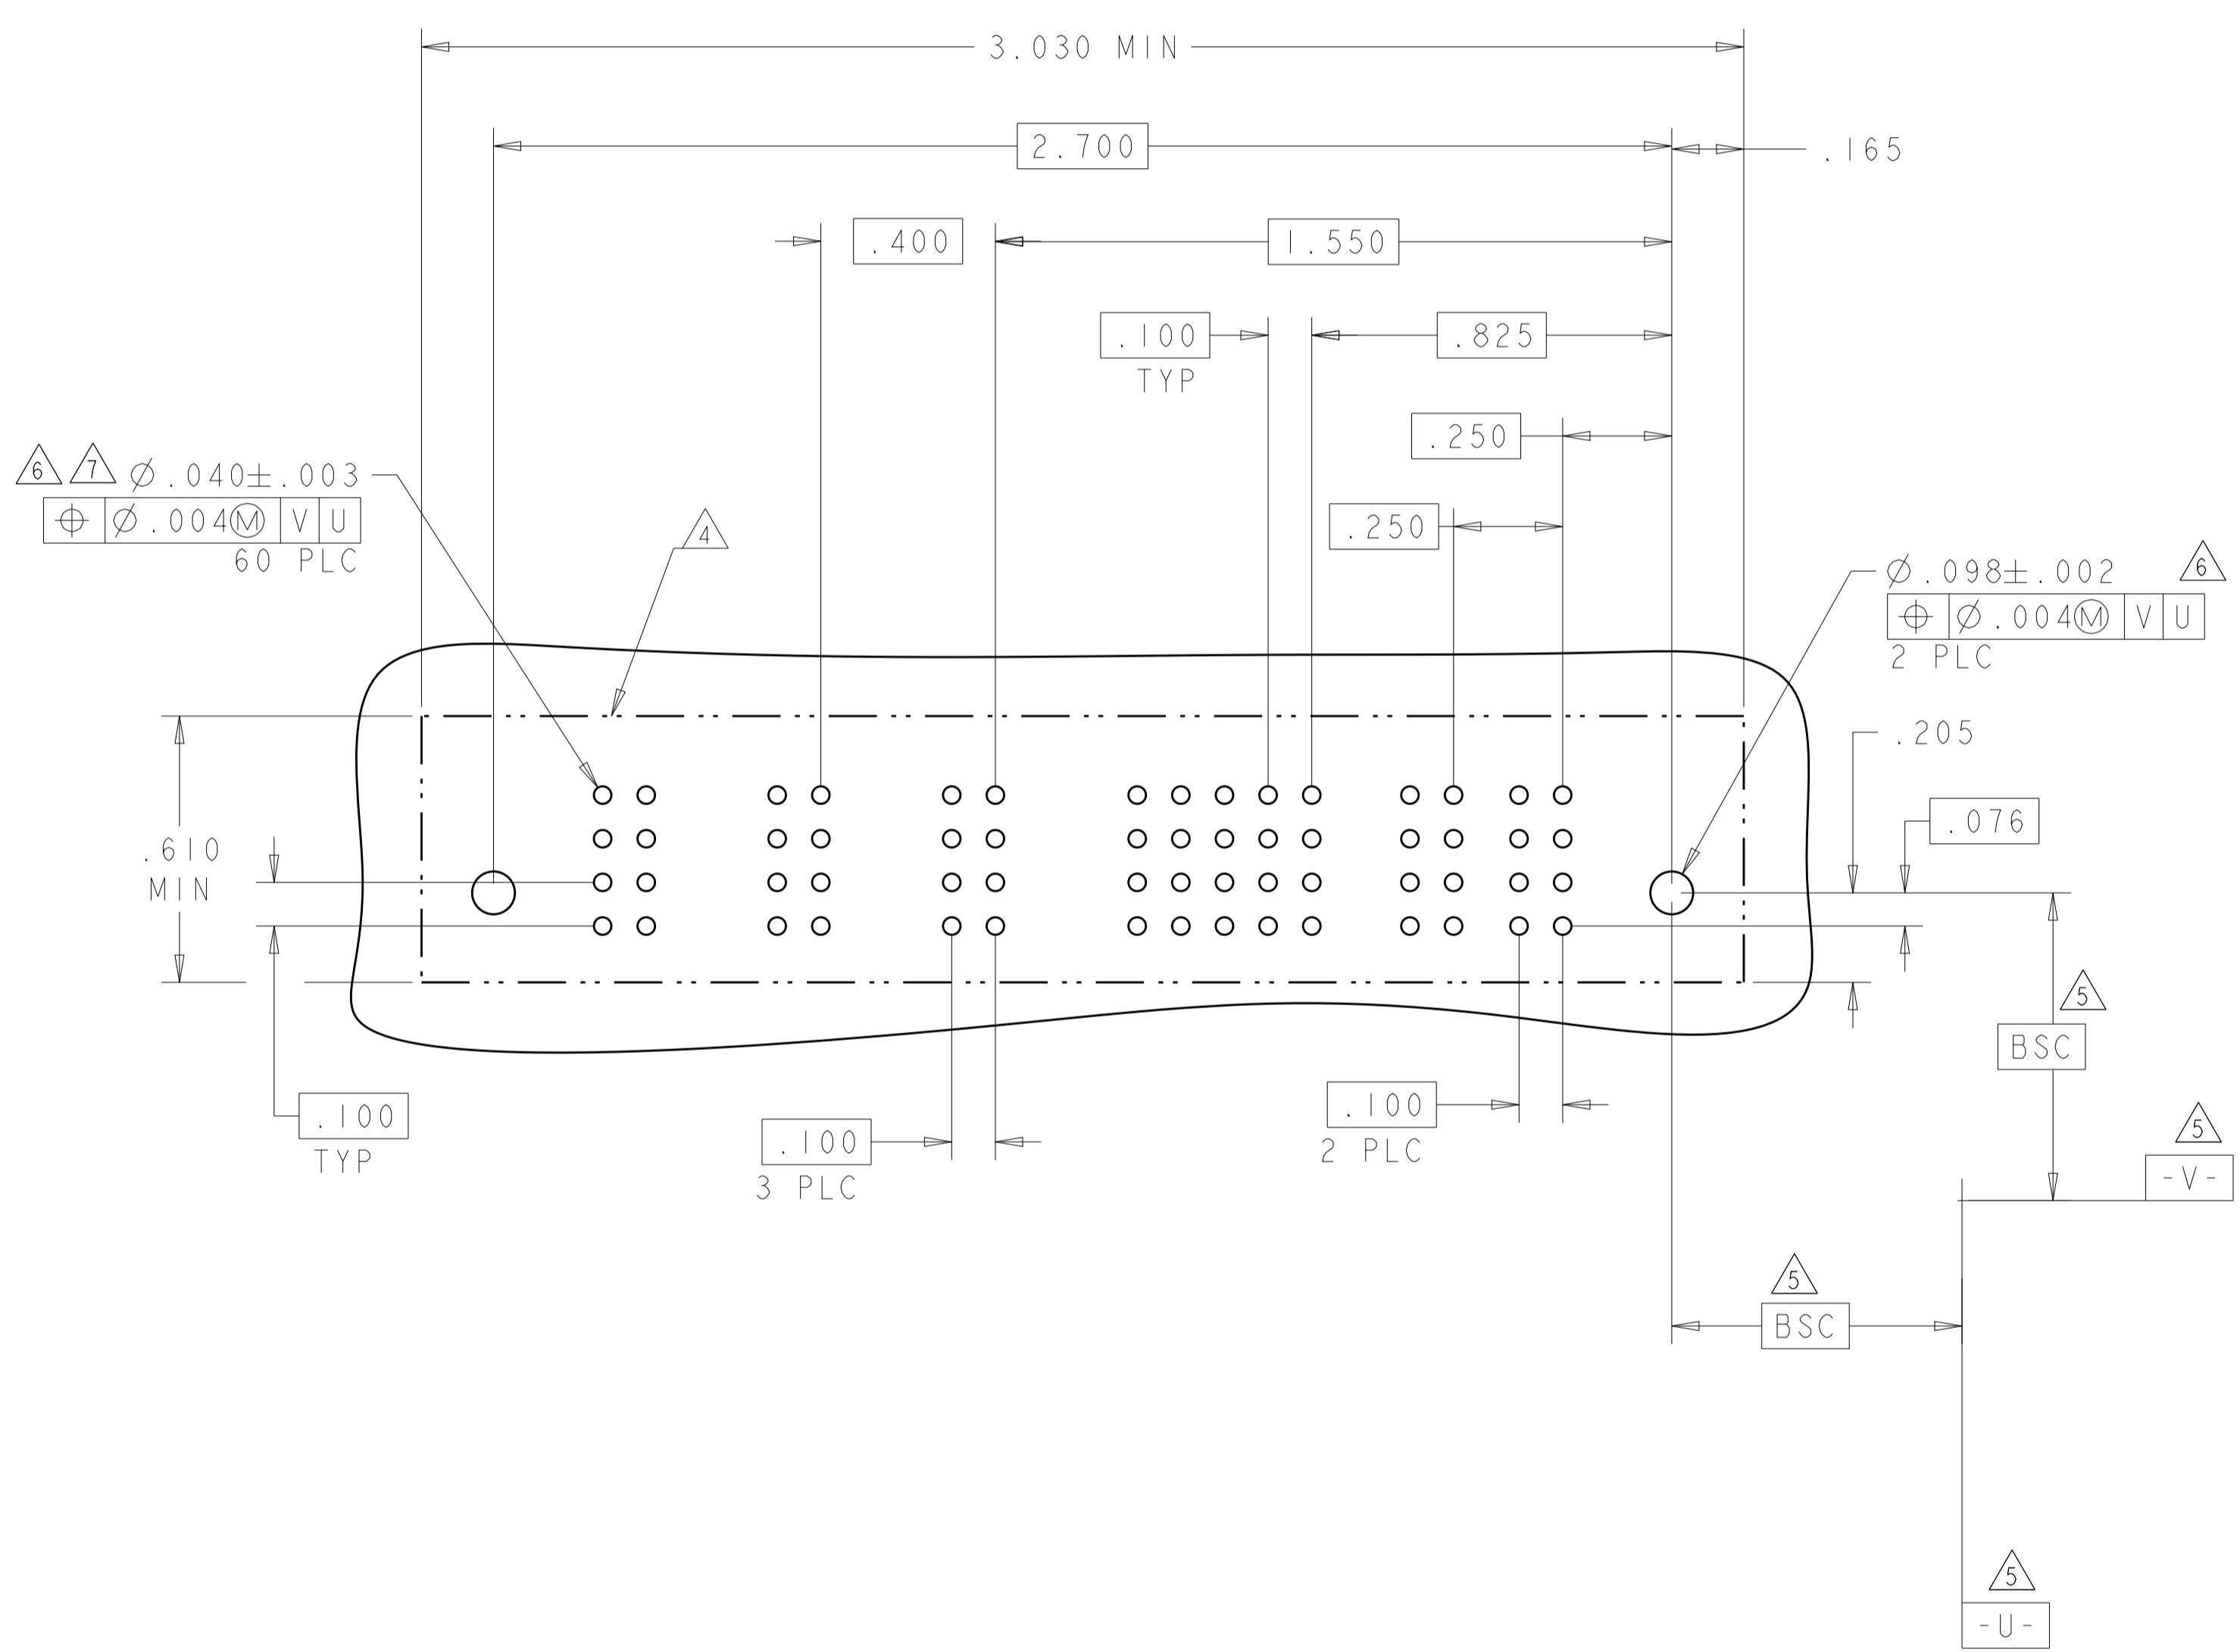

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 16FEB05 CHK M. PERCHERKE 16FEB05 APVD M. PERCHERKE	TE Connectivity NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
DIMENSIONS: INCHES 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2°	PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038 WEIGHT - CUSTOMER DRAWING	
MATERIAL -	FINISH -	SIZE CAGE CODE DRAWING NO A100779C=6450150 SCALE 1:1 SHEET 12 OF 12 REV G5	RESTRICTED TO -

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А