


# SILICON BRIDGE DIODES

## **USKB SERIES**

UL File No. E142422

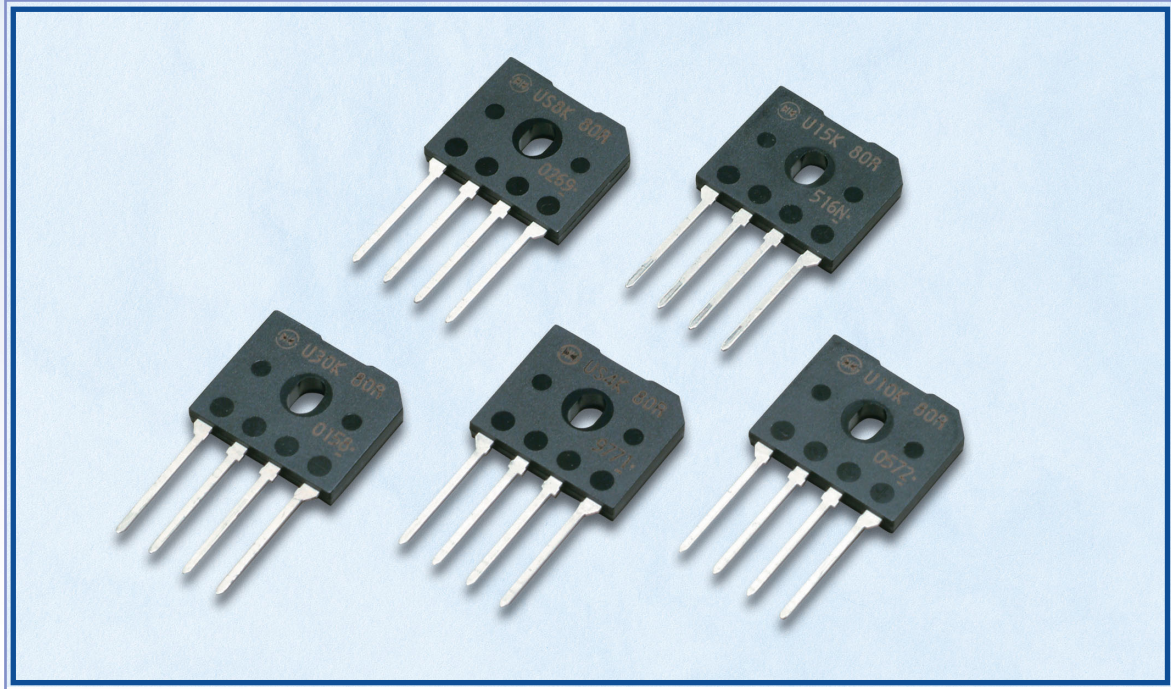

### Summary

Bridge diodes are being required to take up less space accompanying the reduced size of electronic equipment. In order to respond to these needs, Shindengen has developed a new package in offering a complete lineup of bridge diodes that can be used in a wide range of power supply environments.

### Features

- Rectified forward current : 4A (US4KB80R) , 6A (US6KB80R) , 8A (US8KB80R) ,  
(with heat sink) 10A (US10KB80R) , 15A (US15KB80R) , 30A (US30KB80R)
- Large current capacity of 30A with compact package
- High  $I_{FSM}$  and High Voltage
- UL approved Bridge Rectifier Diodes, registered in file number E142422
- High-density mounting for improved space efficiency through the use of SIP (Single In-Line Package)

### Application

TV, Monitor, Switching power supply, PC, Audio, Printer



## SHINDENGEN

## RATINGS

### ● Absolute Maximum Ratings (Tc=25°C/Unless otherwise specified)

Item	Symbol	Conditions	US4KB80R	US6KB80R	US8KB80R	Unit	
Storage Temperature	Tstg		-55~150			°C	
Operation Junction Temperature	Tj		150			°C	
Maximun Reverse Voltage	V <sub>RM</sub>		800			V	
Average Rectified Forward Current	I <sub>O</sub>	60Hz sine wave, Resistance load	With heatsink	4 (Tc=125°C)	6 (Tc=116°C)	8 (Tc=108°C)	A
			Without heatsink	2.1 (Ta=30°C)	2.1 (Ta=30°C)	2.2 (Ta=26°C)	
Peak Surge Forward Current	I <sub>FSM</sub>	60Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25°C	150	175	200	A	
	I <sub>FSM</sub> <sup>1</sup>	Non-repetitive, Tj=25°C	245 (tp=3ms)	470 (tp=1ms)	575 (tp=1ms)		
Current Squared Time	I <sub>t</sub> <sup>2</sup>	Tj=25°C, Per diode	93 (3ms≤t<8.3ms)	112 (1ms≤t<8.3ms)	166 (1ms≤t<8.3ms)	A <sup>2</sup> s	
Dielectric Strength	V <sub>dis</sub>	Terminals to cace, AC 1 minute	2.0			kV	
Mounting Torque	TOR	(Recommended torque:0.5N·m)	0.8			N·m	

### ● Electrical Characteristics (Tc=25°C/Unless otherwise specified)

Forward Voltage	V <sub>F</sub>	Pulse measurement, Per diode	MAX. 1.00 (I <sub>F</sub> =2A)	MAX. 1.00 (I <sub>F</sub> =3A)	MAX. 1.00 (I <sub>F</sub> =4A)	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =800V, Pulse measurement, Per diode	MAX. 10			μA
Thermal Resistance	θ <sub>JC</sub>	Junction to case, With heatsink	MAX. 3.5	MAX. 3.0	MAX. 2.8	°C/W
	θ <sub>JL</sub>	Junction to lead, Without heatsink	MAX. 5			
	θ <sub>JA</sub>	Junction to ambient, Without heatsink	MAX. 35			
Type No.			US4K80R	US6K80R	US8K80R	

### ● Absolute Maximum Ratings (Tc=25°C/Unless otherwise specified)







Item	Symbol	Conditions	US10KB80R	US15KB80R	US30KB80R	Unit	
Storage Temperature	Tstg		-55~150			°C	
Operation Junction Temperature	Tj		150			°C	
Maximun Reverse Voltage	V <sub>RM</sub>		800			V	
Average Rectified Forward Current	I <sub>O</sub>	60Hz sine wave, Resistance load	With heatsink	10 (Tc=100°C)	15 (Tc=101°C)	30 (Tc=97°C)	A
			Without heatsink	2 (Ta=28°C)	2 (Ta=30°C)	2.1 (Ta=27°C)	
Peak Surge Forward Current	I <sub>FSM</sub>	60Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25°C	150	200	350	A	
	I <sub>FSM</sub> <sup>1</sup>	Non-repetitive, Tj=25°C	245 (tp=3ms)	330 (tp=3ms)	1000 (tp=1ms)		
Current Squared Time	I <sub>t</sub> <sup>2</sup>	Tj=25°C, Per diode	93 (3ms≤t<8.3ms)	166 (3ms≤t<8.3ms)	510 (1ms≤t<8.3ms)	A <sup>2</sup> s	
Dielectric Strength	V <sub>dis</sub>	Terminals to cace, AC 1 minute	2.0			kV	
Mounting Torque	TOR	(Recommended torque:0.5N·m)	0.8			N·m	

### ● Electrical Characteristics (Tc=25°C/Unless otherwise specified)







Forward Voltage	V <sub>F</sub>	Pulse measurement, Per diode	MAX. 1.10 (I <sub>F</sub> =5A)	MAX. 1.10 (I <sub>F</sub> =7.5A)	MAX. 1.10 (I <sub>F</sub> =15A)	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =800V, Pulse measurement, Per diode	MAX. 10			μA
Thermal Resistance	θ <sub>JC</sub>	Junction to case, With heatsink	MAX. 2.5	MAX. 1.5	MAX. 0.8	°C/W
	θ <sub>JL</sub>	Junction to lead, Without heatsink	MAX. 5			
	θ <sub>JA</sub>	Junction to ambient, Without heatsink	MAX. 35			
Type No.			U10K80R	U15K80R	U30K80R	

# CHARACTERISTIC DIAGRAMS

## US4KB80R

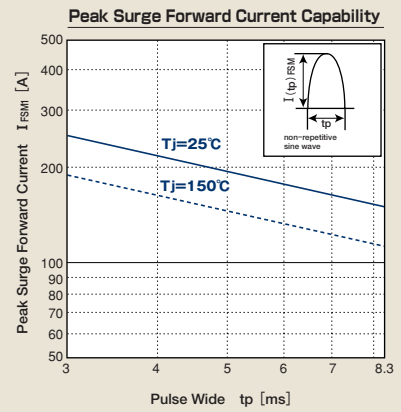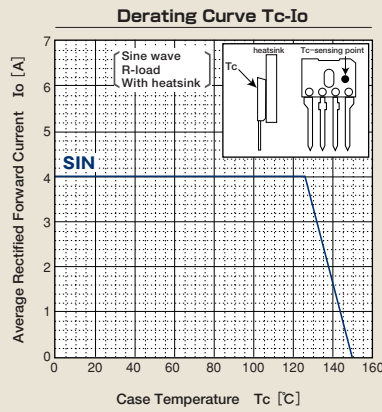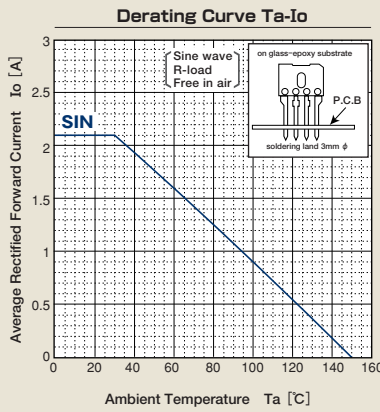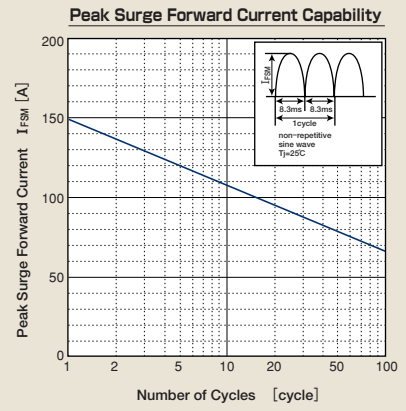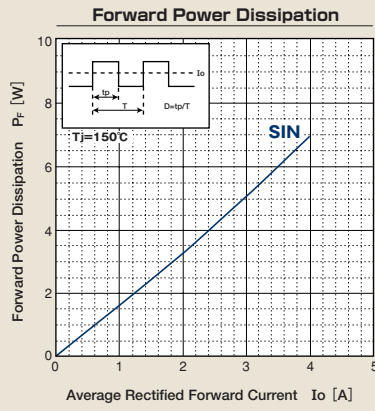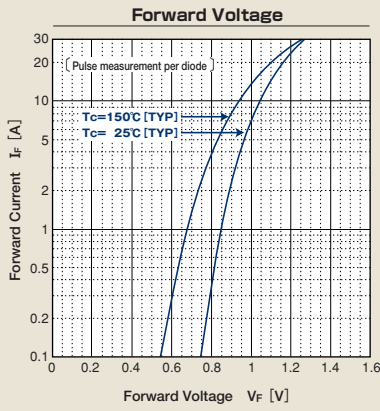







## US6KB80R

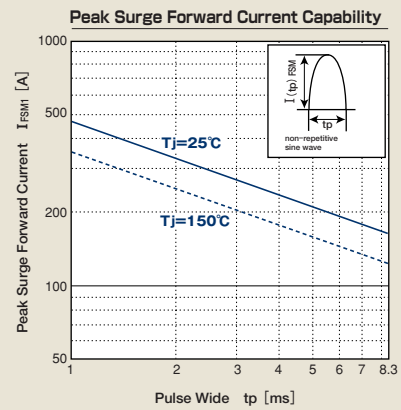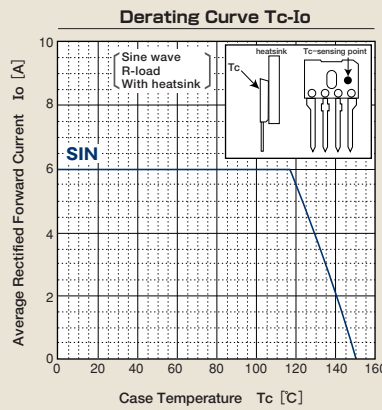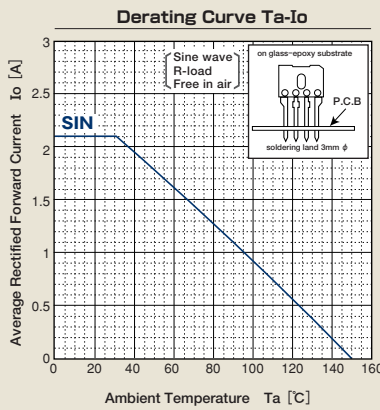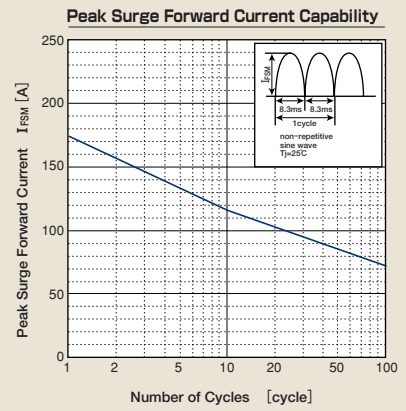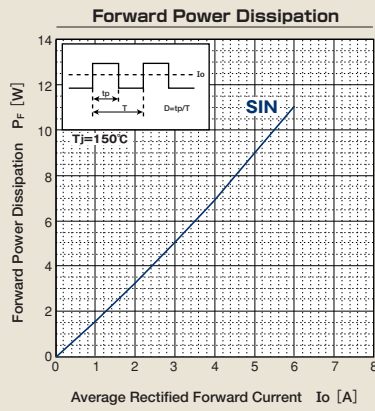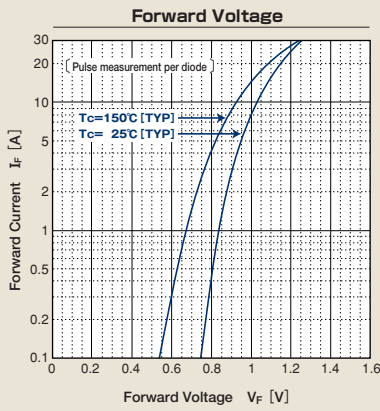









# CHARACTERISTIC DIAGRAMS

## US8KB80R

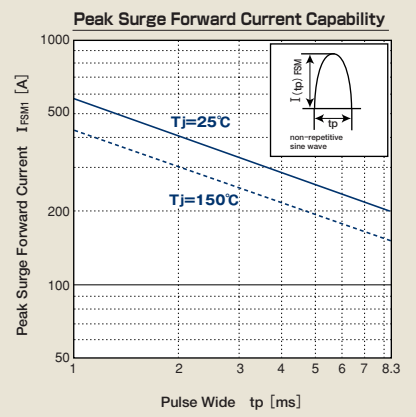
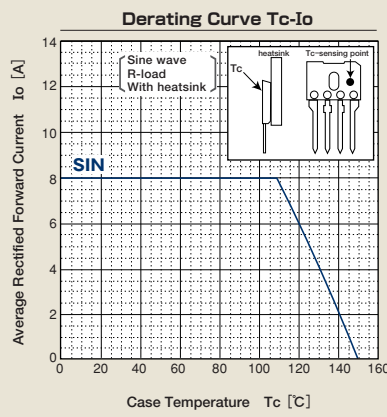
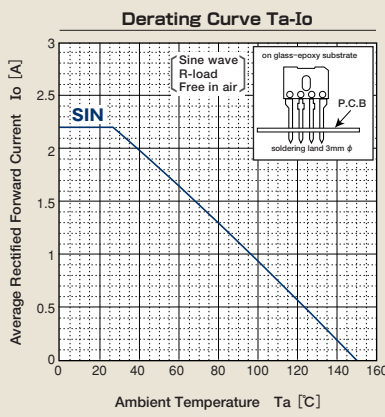
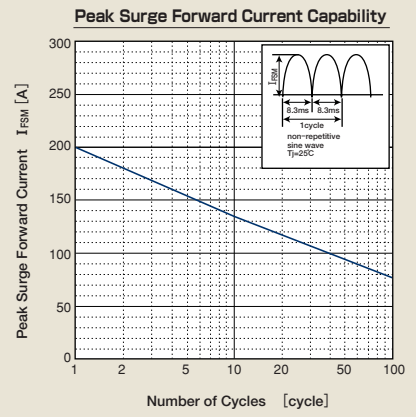
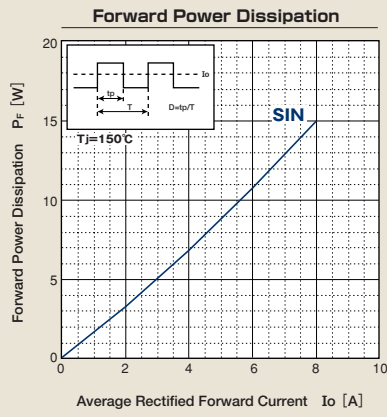
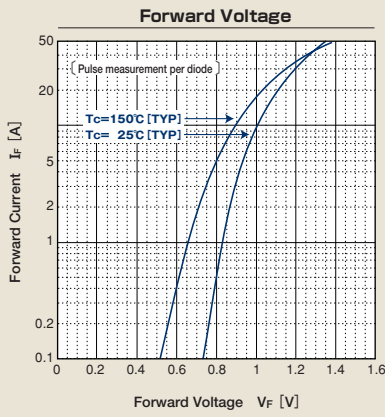


## US10KB80R

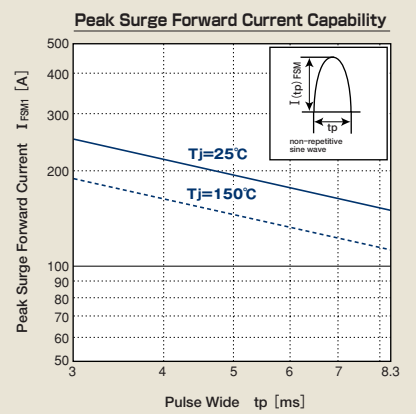
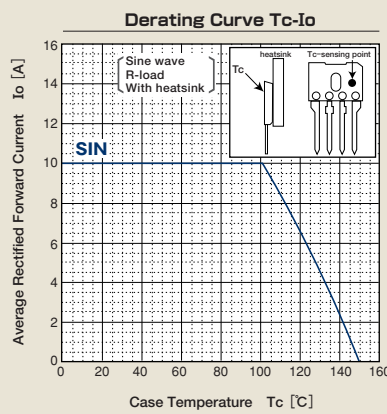
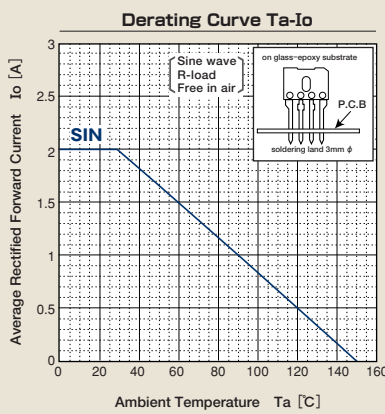
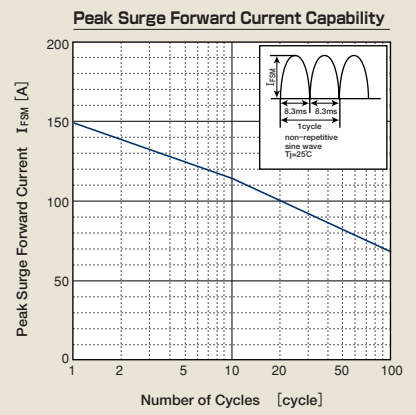
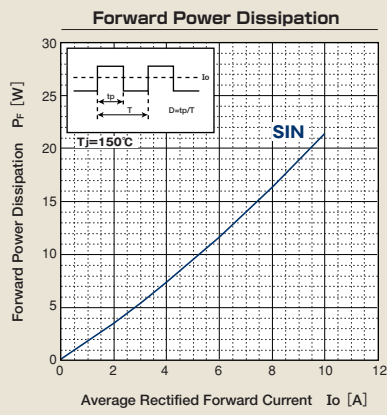
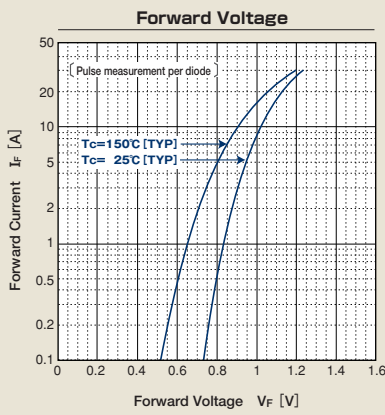


# CHARACTERISTIC DIAGRAMS




## US15KB80R

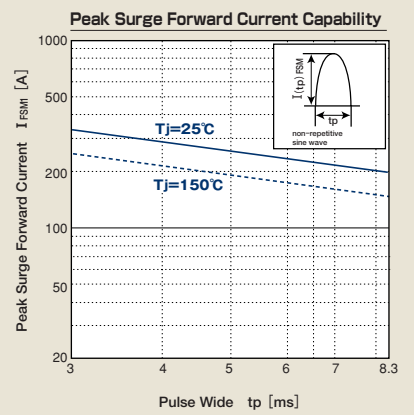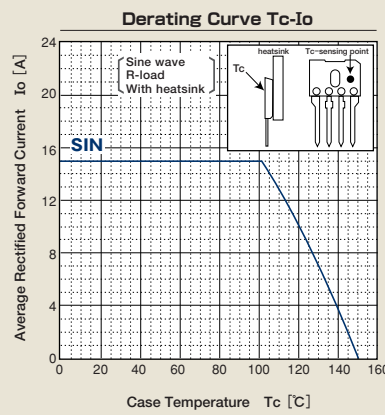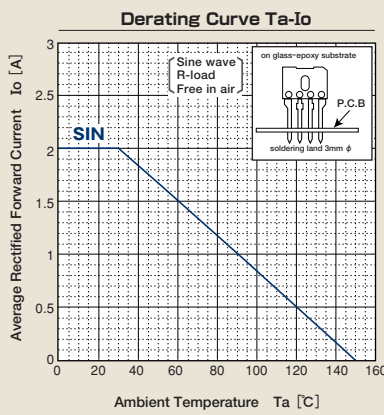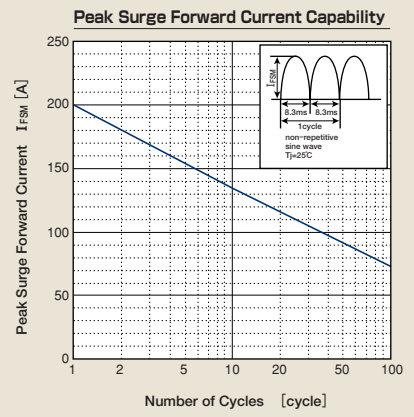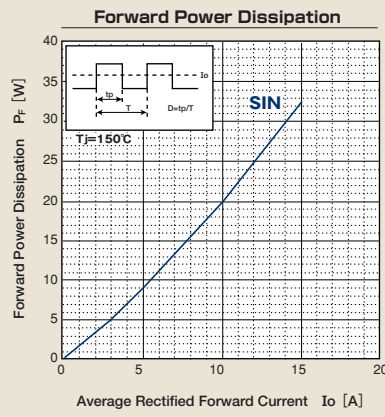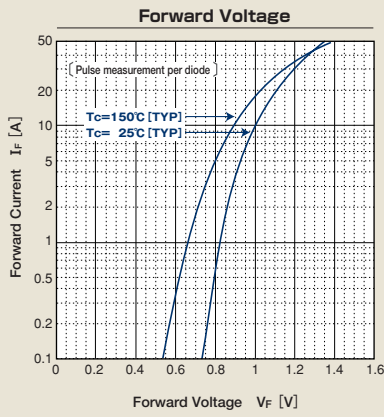

## US30KB80R

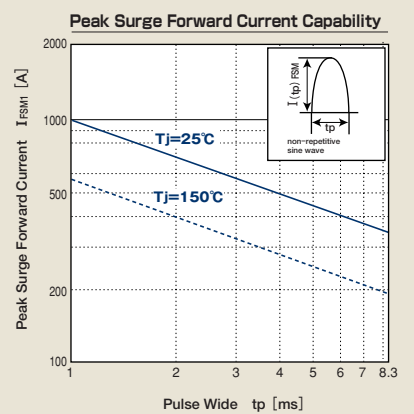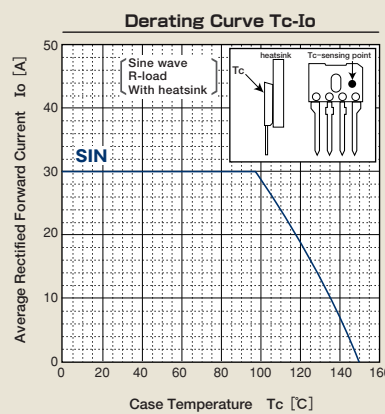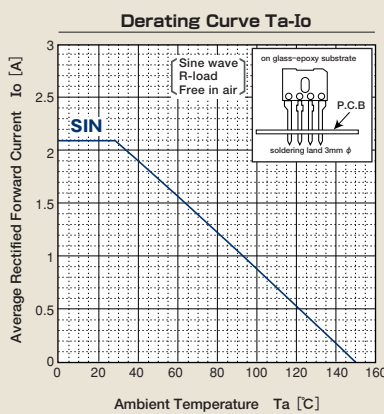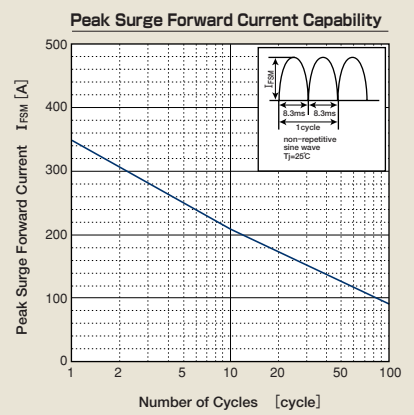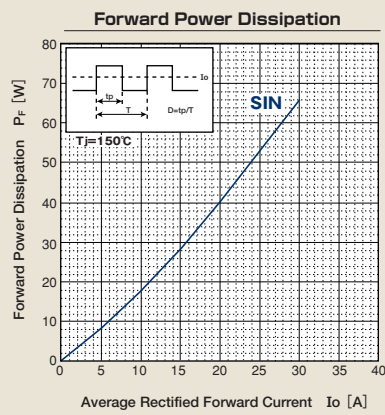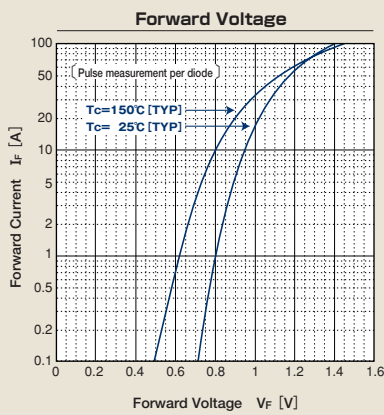

## OUTLINE DIMENSIONS

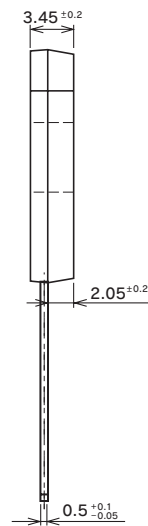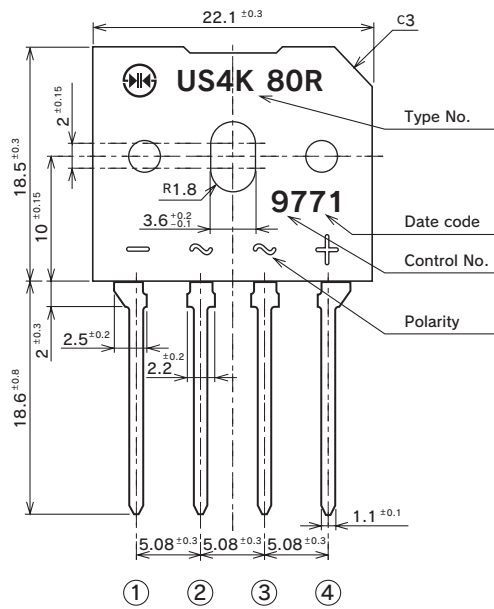**Package : D6K**


Unit : mm

■The level of quality of our products is intended for use in standard applications. (OA and other office equipment, communication equipment, measuring instruments, home appliances, industrial equipment, etc.) In the case these products are to be used in equipment or devices in which failure or malfunction of a product may directly affect human life or health (Nuclear power control equipment, aerospace equipment, devices and systems for preserving life, transportation equipment, traffic control equipment, safety control devices, fire prevention/anti-theft equipment, combustion control equipment, etc.), always make sure to contact us in advance.

■All specifications are subject to change without notice.

■Please contact us for the latest specifications before you order.

■Please use our products after confirming the details in the specifications and the application manuals.

### U.S.A

#### Shindengen America, Inc.

##### Head Office

161 Plaza La Vista Road, Camarillo, CA 93010 U.S.A.  
Phone:+1-805-445-8420 Fax:+1-805-445-8421

##### Chicago Office

2333 Waukegan Road, Suite 170 Bannockburn, IL. 60015 U.S.A.  
Phone:+1-847-444-1363 Fax:+1-847-444-0654

### Europe

#### Shindengen UK Ltd.

##### Head Office

Howard Court, 12 Tewin Road,  
Welwyn Garden City, Hertfordshire. AL7 1BW U.K.  
Phone:+44-1707-332992 Fax:+44-1707-332955

##### German Branch

Kapell Strasse 6, D-40479, Dusseldorf, Germany  
Phone:+49-211-4919680 Fax:+49-211-4986499

### Asia

#### Shindengen Singapore PTE Ltd.

750D, Chai Chee Road, #05-01,  
Technopark@Chai Chee, Singapore 469004  
Phone:+65-6445-0082 Fax:+65-6445-6089

#### Shindengen (H.K.) Co., Ltd.

##### Head Office

Suite 3206, 32/F, Tower 1, The Gateway, 25 Canton Road, TST,  
Kowloon, Hong Kong.  
Phone:+852-2317-1884 Fax:+852-2314-8561

##### Taipei Branch

Room N1010, 10F, Chia-Hsin Bldg. 2 No. 96, Sec. 2,  
Chung Shan N. RD. Taipei, Taiwan R.O.C.  
Phone:+886-2-2560-3990 Fax:+886-2-2560-3991

##### Shanghai Liaison Office

W504 Sun Plaza, No.88 Xian xia Road, Shanghai, 200336, China  
Phone:+86-21-6270-1173 Fax:+86-21-6270-0419

#### Shindengen Electric Mfg. Co., Ltd.

##### Head Office

New-Ohtemachi Bldg., 2-1 Ohtemachi 2-chome, Chiyoda-ku,  
Tokyo 100-0004, Japan  
Phone : +81-3-3279-4545, 4546, 4547  
Fax : +81-3-3279-4519

##### Seoul Office

Korea City Air-Terminal Bldg. 606, 159-6, Samsung-Dong,  
Kangnam-ku, Seoul, Korea  
Phone:+82-2-551-1431 Fax:+82-2-551-1432



**SHINDENGEN**  
ELECTRIC MFG. CO., LTD.

[URL] <http://www.shindengen.co.jp>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Shindengen:](#)

[US8KB80R-7000](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А