THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	ECR–16–014363	11OCT2016	FL	SY

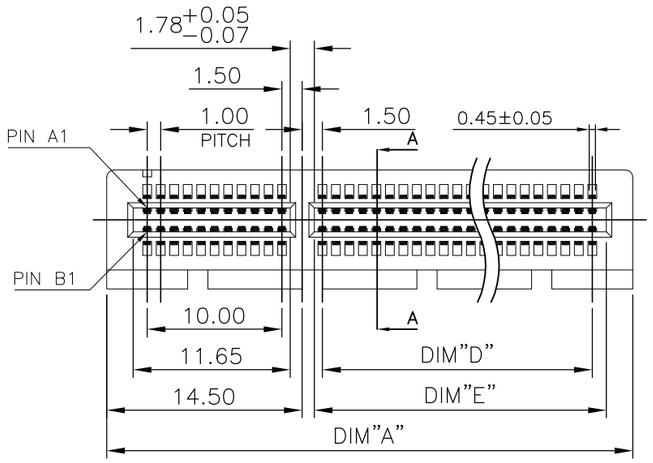

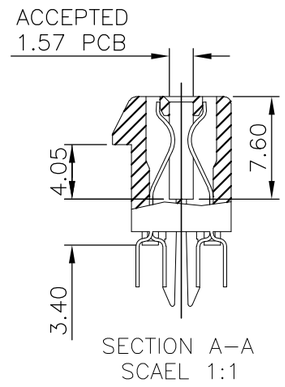

NOTE:
1. MATERIAL:
   HOUSING (SEE TABLE): PA46 OR PA9T, UL94 V–0, COLOR: BLACK.
   CONTACTS: PHOSPHOR BRONZE.
   BOARDLOCK: BRASS.
2. FINISH:
   2.1 CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA,
   2.54um [100u"] MIN. MATTE–TIN ON SOLDER TAIL,
   WITH ENTIRE CONTACT UNDERPLATED 1.27um [50u"] MIN. NICKEL.
   2.2 BOARDLOCK: 2.54um [100u"] MATTE–TIN PLATING ALL OVER
   NICKEL 1.27um[50u"] MIN. UNDERPLATED OVERALL.
3. WAVE SOLDER CAPABLE TO 265°C MAX. PER TE SPEC. 109–202, CONDITION B.
4. WEIGHT:
   36 POS.: 2.55 GRAMS
   64 POS.: 3.90 GRAMS
   98 POS.: 5.50 GRAMS
   164 POS.: 8.80 GRAMS
5. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC. TEC–109–201, CONDITION B.

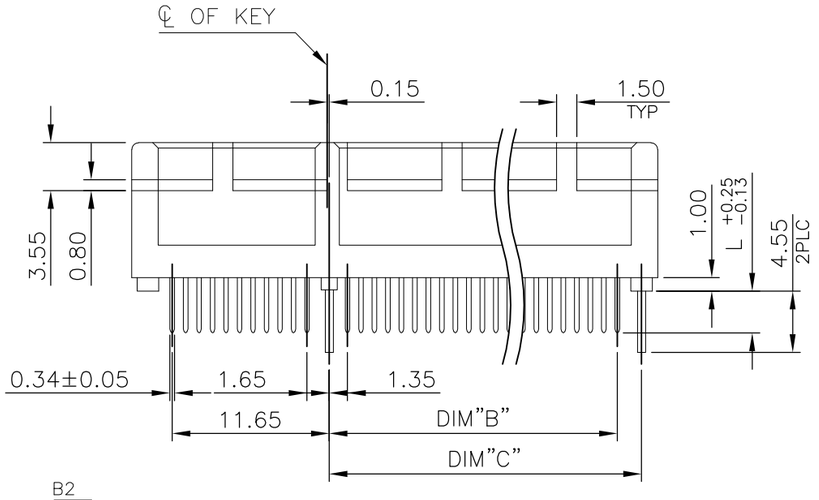

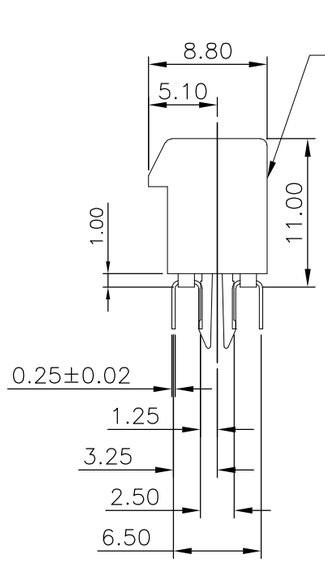

PACKAGING	SOLDER CAPACITY	HOUSING MATERIAL	DIM L	GOLD PLATING	DIM E	DIM D	DIM C	DIM B	DIM A	POS.	PART NUMBER
HARD TRAY	NOTE 3 & 5	PA9T	2.30	0.381μm[15μ"] MIN.	71.65	70.0	73.15	71.35	89.0	164	6– –2
											5– –2
			3.10	0.762μm[30μ"] MIN.							4– –6
				0.381μm[15μ"] MIN.							4– –5
				GOLD FLASH							4– –4
			2.30	0.762μm[30μ"] MIN.							4– –3
				0.381μm[15μ"] MIN.							4– –2
				GOLD FLASH							4– –1
TRAY	NOTE 3	PA46	3.10	0.762μm[30μ"] MIN.	38.65	37.0	40.15	38.35	56.0	98	3– –6
				0.381μm[15μ"] MIN.							3– –5
				GOLD FLASH							3– –4
			2.30	0.762μm[30μ"] MIN.							3– –3
				0.381μm[15μ"] MIN.							3– –2
				GOLD FLASH							3– –1
			3.10	0.762μm[30μ"] MIN.	21.65	20.0	23.15	21.35	39.0	64	2– –6
				0.381μm[15μ"] MIN.							2– –5
				GOLD FLASH							2– –4
			2.30	0.762μm[30μ"] MIN.							2– –3
				0.381μm[15μ"] MIN.							2– –2
				GOLD FLASH							2– –1
			3.10	0.762μm[30μ"] MIN.	7.65	6.0	9.15	7.35	25.0	36	1– –6
				0.381μm[15μ"] MIN.							1– –5
				GOLD FLASH							1– –4
			2.30	0.762μm[30μ"] MIN.							1– –3
				0.381μm[15μ"] MIN.							1– –2
				GOLD FLASH							1–1775801–1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± 0.3
2 PLC ± 0.2
3 PLC ± 0.15
4 PLC ± –
ANGLES ± 3°

MATERIAL: SEE NOTE
FINISH: SEE NOTE

DWN B. HSING 21MAY2009
CHK S. CHIEN 21MAY2009
APVD W. KODAMA 21MAY2009
PRODUCT SPEC 108–57375
APPLICATION SPEC —
WEIGHT 0
CUSTOMER DRAWING

TE Connectivity

NAME
PCI EXPRESS CARD EDGE CONNECTOR
VERTICAL, DIP TYPE,(BOARD–LOCK FUNCTION)
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–1775801	—

SCALE	SHEET	REV
1:1	1 OF 4	D

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

1. NO TIE BAR PERMITTED FROM CARD EDGE TO LEADING EDGE OF PAD FOR PINS A1 AND "K"
2. CHAMFER EDGE MUST BE FREE OF CUTTING BURRS

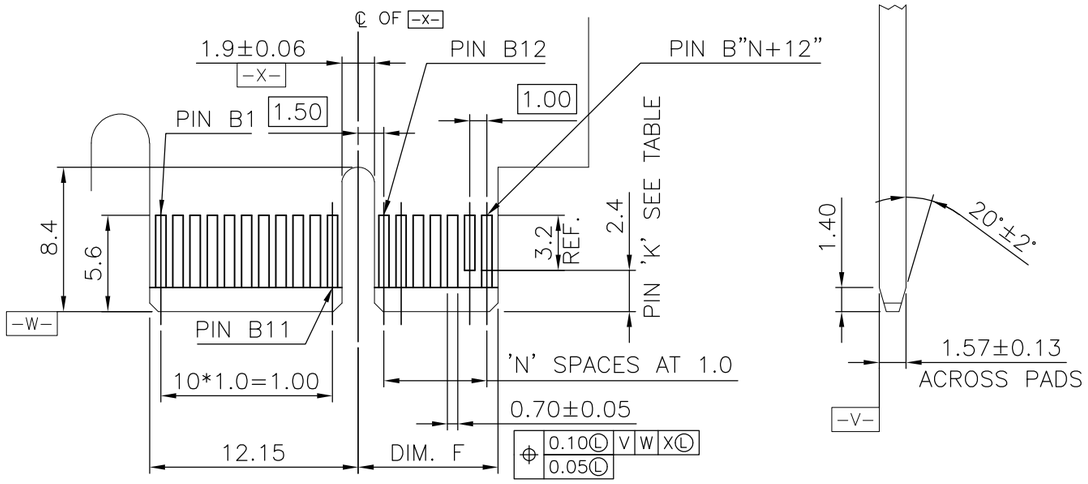

← I/O PANEL DIRECTION

PRIMARY (COMPONENT) SIDE

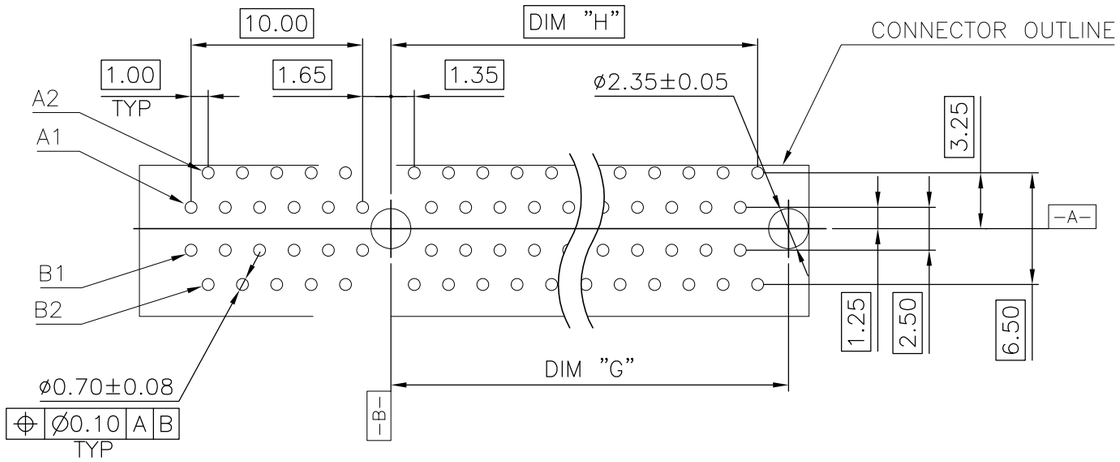

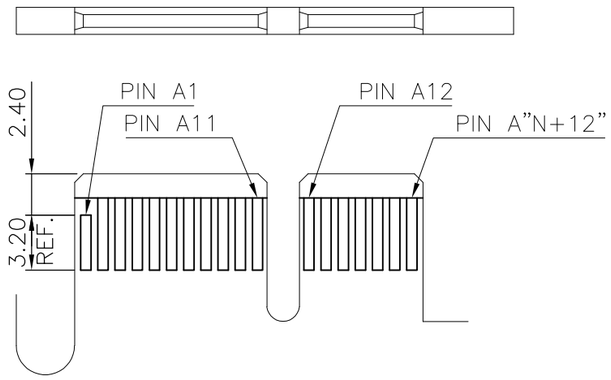

SECONDARY (SOLDER) SIDE

RECOMMENDED PCB LAYOUT

TOLERANCE: ±0.05
DIM.L=3.1mm THICKNESS: 2.4mm
DIM.L=2.3mm THICKNESS: 1.6mm

POS.	N	DIM. F	DIM. G	DIM. H	"K"
36	6	8.15	9.15	7.35	B17
64	20	22.15	23.15	21.35	B17,B31
98	37	39.15	40.15	38.35	B17,B31,B48
164	70	72.15	73.15	71.35	B17,B31,B48,B81

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± 0.3
2 PLC ± 0.2
3 PLC ± 0.15
4 PLC ± –
ANGLES ±3°

MATERIAL –
FINISH –

DWN B. HSING 21MAY2009
CHK S. CHIEN 21MAY2009
APVD W. KODAMA 21MAY2009
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT 0

TE Connectivity

NAME
PCI EXPRESS CARD EDGE CONNECTOR
VERTICAL, DIP TYPE,(BOARD-LOCK FUNCTION)
—

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1775801	—

CUSTOMER DRAWING | SCALE 1:1 | SHEET 2 OF 4 | REV D

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

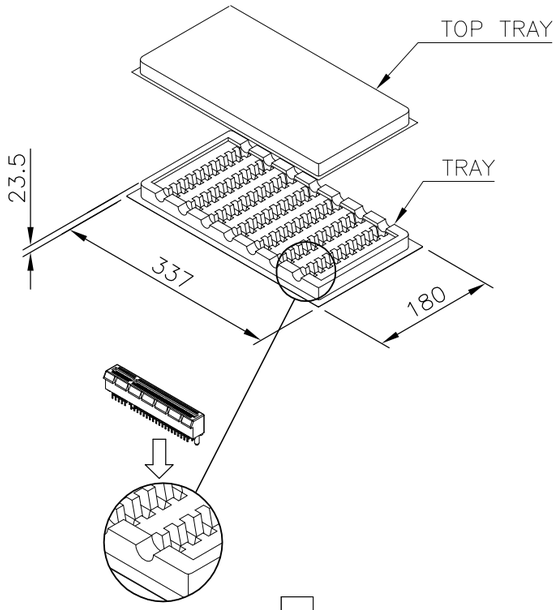

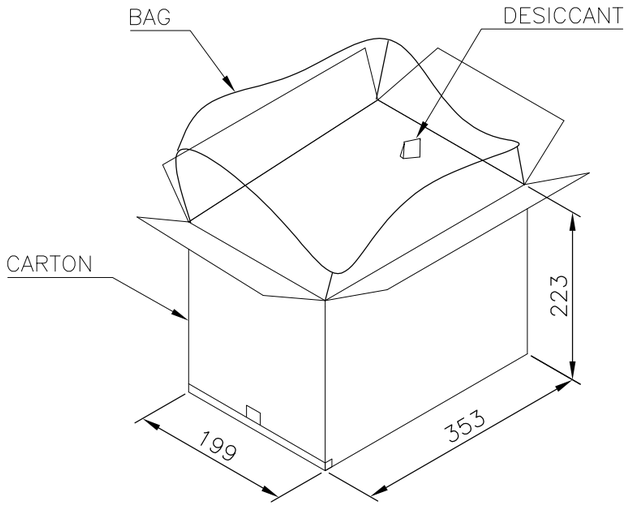

NOTES :
1. MATERIAL :
   TRAY : PVC, COLOR: TRANSPARENT.
   CARTON: CORRUGATED FIBER
   BOX: CORRUGATED FIBER
2. DIMENSION :
   TRAY: SEE DRAWING
   CARTON: SEE DRAWING
   BOX : SEE DRAWING
3. QUANTITY : SEE TABLE
4. WEIGHT : SEE TABLE



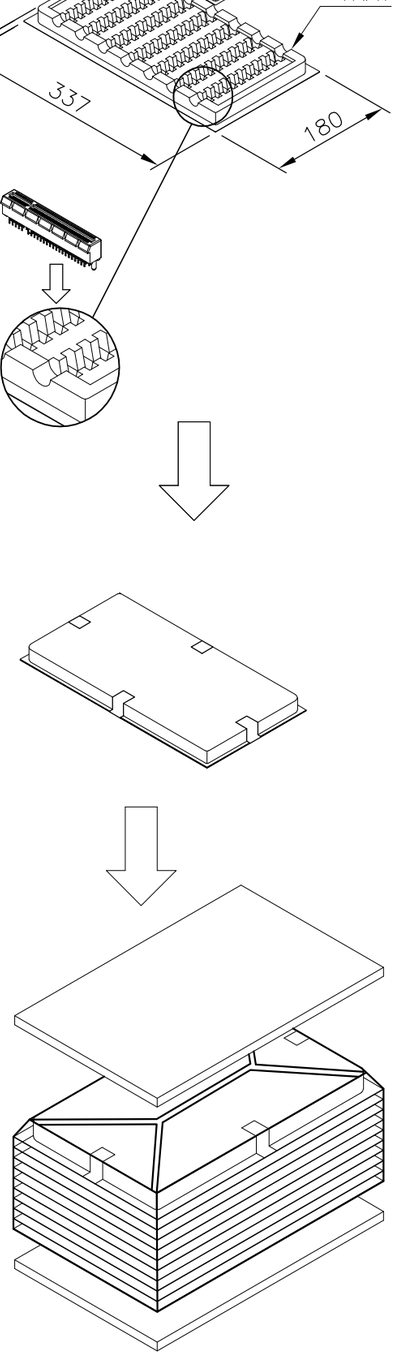

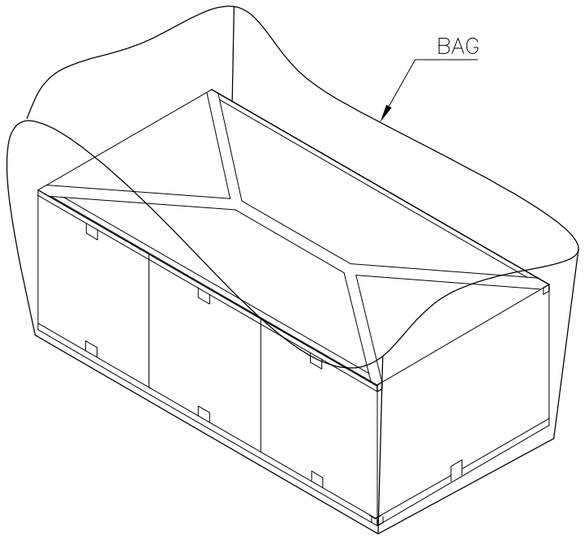

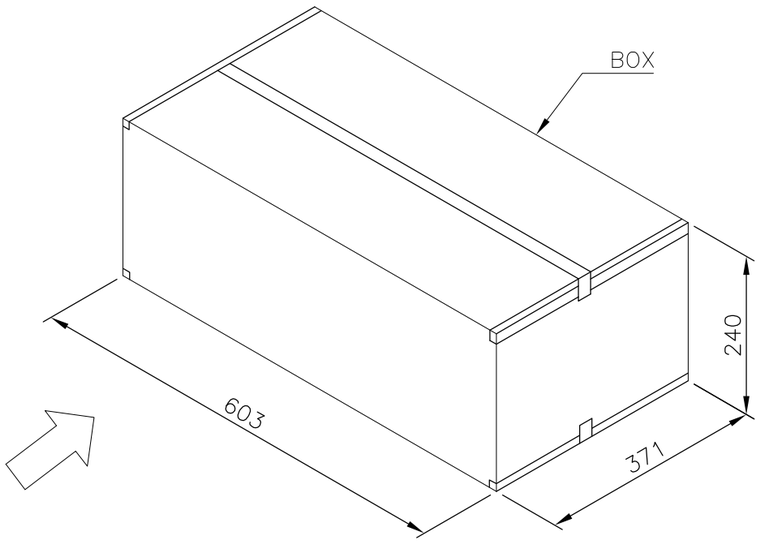

9.6 KG	7.6 KG	30	10	3	900	164
8.5 KG	6.5 KG	40	10	3	1200	98
9.1 KG	7.1 KG	60	10	3	1800	64
7.7 KG	5.7 KG	70	10	3	2100	36
GROSS WEIGHT	NET WEIGHT	PCS/ TRAY	TRAY/ CARTON	CARTON/ BOX	PCS/ BOX	POS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN B. HSING 21MAY2009
CHK S. CHIEN 21MAY2009
APVD W. KODAMA 21MAY2009
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT 0

CUSTOMER DRAWING

TE Connectivity

NAME
PCI EXPRESS CARD EDGE CONNECTOR
VERTICAL, DIP TYPE,(BOARD–LOCK FUNCTION)
—

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1775801	—

SCALE	SHEET	REV
1:1	3 OF 4	D

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION – , – .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

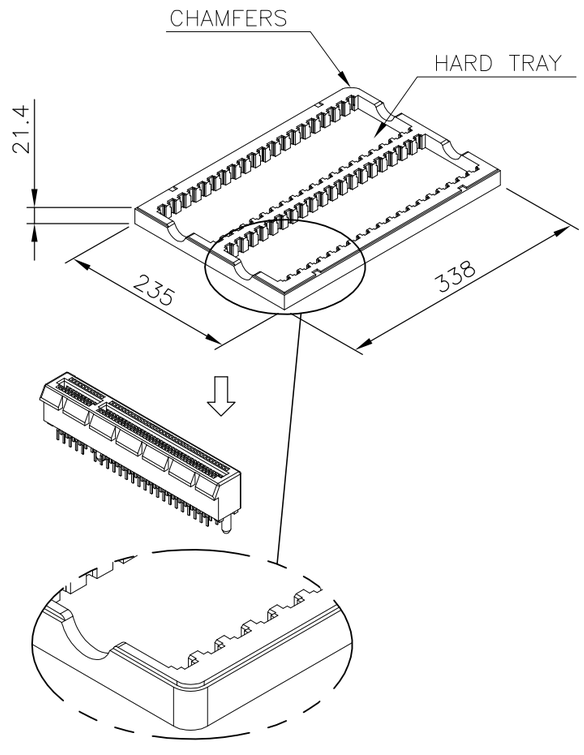

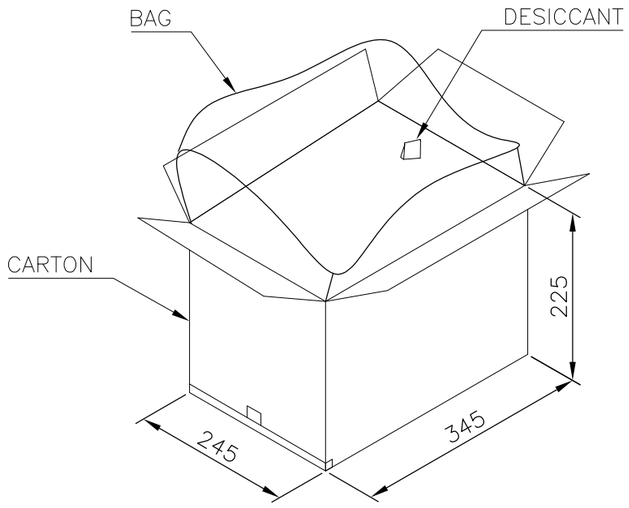

NOTES :
PACKING MATERIAL MET TE SPEC TEC–138–702.
* CADMIUM AND CADMIUM COMPOUNDS CONTENT:
5 PPM UNDER (PLASTIC, RUBBER, INK, PIGMENT, PAINT)
* LEAD, CADMIUM, CHROM VI AND MERCURY IN PACKAGING MATERIALS CONTENT: 100 PPM (COMBINED) UNDER.

1. MATERIAL :
TRAY: HIPS, COLOR: BLACK.
CARTON: CORRUGATED FIBER
BOX: CORRUGATED FIBER
TRANSPARENT BAG: PE, SIZE: 500mm*380mm*0.06mm
640mm*510mm*0.06mm
2. EACH BAG SHALL BE INCLUDED:
* DESICCANT

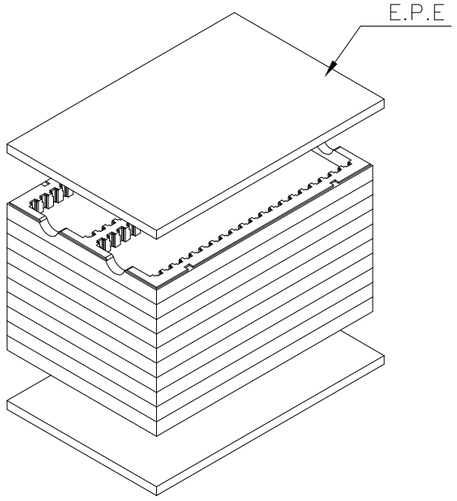

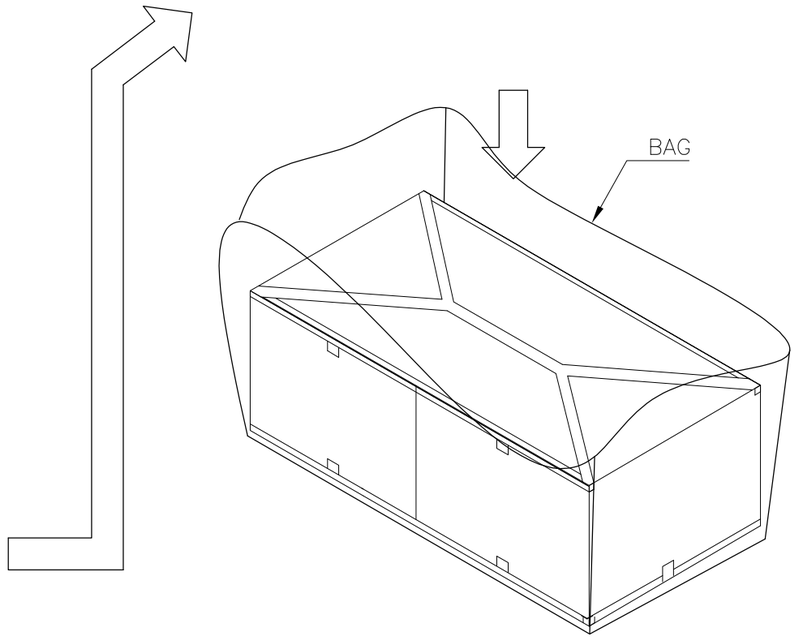

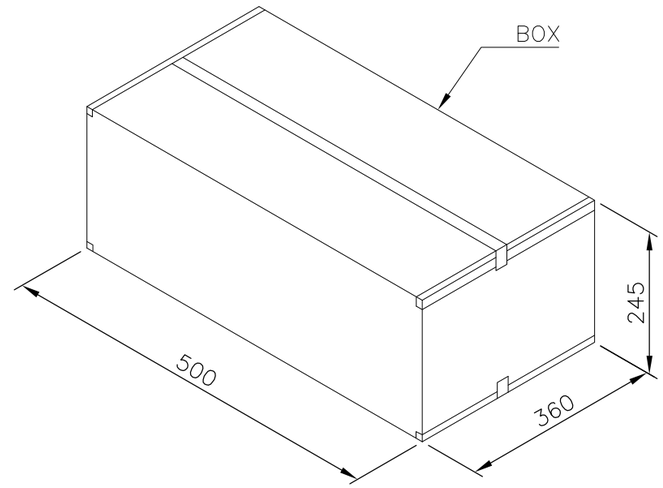

11.5 Kg	7.0 Kg	40	10	2	800	164
GROSS WEIGHT	NET WEIGHT	PCS/ TRAY	TRAY/ CARTON	CARTON/ BOX	PCS/ BOX	POS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN	B. HSING	21MAY2009
CHK	S. CHIEN	21MAY2009
APVD	W. KODAMA	21MAY2009
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	0	

TE Connectivity

NAME
PCI EXPRESS CARD EDGE CONNECTOR
VERTICAL, DIP TYPE,(BOARD–LOCK FUNCTION)
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–1775801	—

CUSTOMER DRAWING | SCALE 1:1 | SHEET 4 OF 4 | REV D

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А