



Aluminum electrolytic capacitors

Capacitors with screw terminals

Series/Type: B43564, B43584


Date: November 2012

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

Capacitors with screw terminals**B43564, B43584****High ripple current – 85 °C****Long-life grade capacitors****Applications**

- Frequency converters
- Wind power converters
- Solar inverters
- Professional power supplies
- Uninterruptible power supplies

**Features**


- High ripple current capability
- Long useful life
- High reliability
- Extremely good electrical characteristics and small dimensions
- All-welded construction ensures reliable electrical contact
- PAPR terminals available (Protection Against Polarity Reversal)
- Version with optimized construction for base cooling (heat sink mounting) available
- Version with low-inductance design available
- Self-extinguishing electrolyte
- RoHS-compatible

B43564

B43584

Construction


- Charge-discharge proof, polar
- Aluminum case with insulating sleeve
- Poles with screw terminal connections
- Mounting with ring clips, clamps or threaded stud
- The bases of types with threaded stud and $d \leq 76.9$ mm are not insulated, types with $d = 91$ mm have fully insulated bases



Specifications and characteristics in brief

| | | | |
|---|--|--|---|
| Rated voltage V_R | 200 ... 500 V DC | | |
| Surge voltage V_S | 1.15 · V_R (for $V_R \leq 250$ V DC) 1.10 · V_R (for $V_R \geq 350$ V DC) | | |
| Rated capacitance C_R | 820 ... 33000 μ F | | |
| Capacitance tolerance | $\pm 20\% \triangleq M$ | | |
| Dissipation factor $\tan \delta$ (20 °C, 120 Hz) | ≤ 0.20 | | |
| Leakage current I_{leak} (20 °C, 5 min) | $I_{\text{leak}} \leq 0.020 \mu\text{A} \cdot \left(\frac{C_R}{\mu\text{F}} \cdot \frac{V_R}{\text{V}} \right)^{0.85} + 4 \mu\text{A}$ | | |
| Self-inductance ESL | d = 51.6 mm: approx. 15 nH d \geq 64.3 mm: approx. 20 nH Capacitors with low-inductance design: d \geq 64.3 mm: approx. 13 nH | | |
| Useful life ¹⁾ | 200 ... 450 V | 500 V | Requirements: |
| 85 °C; V_R ; $I_{\text{AC},R}$ | > 15000 h | > 12000 h | $\Delta C/C \leq \pm 15\%$ of initial value |
| 40 °C; V_R ; 1.5 · $I_{\text{AC},R}$ | > 250000 h | — | $\tan \delta \leq 1.75$ times initial specified limit |
| 40 °C; V_R ; 1.4 · $I_{\text{AC},R}$ | — | > 250000 h | $I_{\text{leak}} \leq$ initial specified limit |
| Voltage endurance test | | | |
| 85 °C; V_R | 2000 h | Post test requirements: $\Delta C/C \leq \pm 10\%$ of initial value $\tan \delta \leq 1.3$ times initial specified limit $I_{\text{leak}} \leq$ initial specified limit | |
| Vibration resistance test | To IEC 60068-2-6, test Fc: Frequency range 10 ... 55 Hz, displacement amplitude 0.75 mm, acceleration max. 10 g, duration 3 × 2 h. Capacitor mounted by its body which is rigidly clamped to the work surface. | | |
| Characteristics at low temperature | Max. impedance ratio at 100 Hz | V_R | ≤ 400 V |
| | | $Z_{-25^\circ\text{C}} / Z_{20^\circ\text{C}}$ | 4 |
| | | $Z_{-40^\circ\text{C}} / Z_{20^\circ\text{C}}$ | 16 |
| | | | ≥ 450 V |
| | | | 3 |
| | | | 12 |
| IEC climatic category | To IEC 60068-1: 25/085/56 (−25 °C/+85 °C/56 days damp heat test) The capacitors can be operated in the temperature range of −40 °C to +85 °C but the impedance at −40 °C should be taken into consideration. | | |
| Detail specification Sectional specification | Similar to CECC 30301-803, CECC 30301-807 IEC 60384-4 | | |

1) Refer to chapter "General technical information, 5 Useful life" on how to interpret useful life.



B43564, B43584

High ripple current – 85 °C

Ripple current capability


Due to the ripple current capability of the contact elements, the following current upper limits must not be exceeded:

| | | | | |
|--------------------|---------|---------|---------|-------|
| Capacitor diameter | 51.6 mm | 64.3 mm | 76.9 mm | 91 mm |
| $I_{AC,max}$ | 34 A | 45 A | 57 A | 80 A |

Dimensional drawings

B43564

Ring clip/clamp mounting




M5: Min. reach of screw = 9.5 mm
9 mm for low inductance design

M6: Min. reach of screw = 12 mm
9.5 mm for low inductance design

B43584

Threaded stud mounting



Positive pole marking: +


The base of types with threaded stud and $d = 91$ mm is fully insulated (the lengths l and l_1 are increased by 0.5 mm in these cases). For types with threaded stud and $d \leq 76$ mm the base is not insulated. Also refer to the mounting instructions in chapter "Capacitors with screw terminals – Accessories".

Dimensions and weights

| Terminal | Dimensions (mm) with insulating sleeve | | | | | | | Approx. weight (g) |
|----------|--|-----------|-------------|-------------|-------|------------|---------------|--------------------|
| | d | $l \pm 1$ | $l_1 \pm 1$ | $l_2 +0/-1$ | d_1 | d_2 max. | $a +0.2/-0.4$ | |
| M5 | 51.6 +0/-0.8 | 80.7 | 87.2 | 17 | M12 | 10.2 | 22.2 | 220 |
| M5 | 51.6 +0/-0.8 | 105.7 | 112.2 | 17 | M12 | 10.2 | 22.2 | 280 |
| M5 | 64.3 +0/-0.8 | 80.7 | 87.2 | 17 | M12 | 13.2 | 28.5 | 370 |
| M5 | 64.3 +0/-0.8 | 105.7 | 112.2 | 17 | M12 | 13.2 | 28.5 | 440 |
| M5 | 64.3 +0/-0.8 | 143.2 | 149.7 | 17 | M12 | 13.2 | 28.5 | 630 |
| M6 | 76.9 +0/-0.7 | 105.7 | 111.5 | 17 | M12 | 17.7 | 31.7 | 620 |
| M6 | 76.9 +0/-0.7 | 143.2 | 149.0 | 17 | M12 | 17.7 | 31.7 | 840 |
| M6 | 76.9 +0/-0.7 | 168.7 | 174.5 | 17 | M12 | 17.7 | 31.7 | 1000 |
| M6 | 76.9 +0/-0.7 | 220.7 | 226.5 | 17 | M12 | 17.7 | 31.7 | 1300 |

B43564, B43584

High ripple current – 85 °C



| Terminal | Dimensions (mm) with insulating sleeve | | | | | | | Approx. weight (g) |
|----------|--|-------|--------------------|----------------------|----------------|---------------------|-------------|--------------------|
| | d | ±1 | l ₁ ± 1 | l ₂ +0/-1 | d ₁ | d ₂ max. | a +0.2/-0.4 | |
| M6 | 91.0 +0/-2 | 97.0 | 102.3 | 17 | M12 | 17.7 | 31.7 | 1000 |
| M6 | 91.0 +0/-2 | 144.5 | 149.8 | 17 | M12 | 17.7 | 31.7 | 1200 |
| M6 | 91.0 +0/-2 | 221.0 | 226.3 | 17 | M12 | 17.7 | 31.7 | 1900 |

For low-inductance design the following deviation applies:

d = 64.3 mm: l₁ – 0.7 mm

d = 91.0 mm: l₁ – 1.7 mm


Packing

| Capacitor diameter d (mm) | length l (mm) | Packing units (pcs.) |
|---------------------------|---------------|----------------------|
| 51.6 | all | 36 |
| 64.3 | all | 25 |

| Capacitor diameter d (mm) | length l (mm) | Packing units (pcs.) |
|---------------------------|---------------|----------------------|
| 76.9 | 105.0 - 168.7 | 16 |
| | 220.7 | 12 |
| 91.0 | all | 9 |



For ecological reasons the packing is pure cardboard.



B43564, B43584


High ripple current – 85 °C

Special designs

- Low-inductance design
- PAPR terminal style

With our PAPR terminal style (**P**rotection **A**gainst **P**olarity **R**eversal) we offer an optional mechanical feature in addition to the visual polarity marking on the cover disk and the sleeve, which prevents from mounting in reverse polarity. The non-circular shape of the terminals and their arrangement perpendicular to each other enables the user to definitely prevent wrong mounting with respect to polarity (*Poka Yoke*).

Dimensional drawing of PAPR terminal configuration



Dimensions for PAPR terminal style (mm)


| Can diameter d | Terminal | $d_3 \pm 0.1$ | $d_4 \pm 0.1$ | $a +0.2/-0.4$ | Min. reach of screw | |
|----------------|----------|---------------|---------------|---------------|----------------------|-----------------------------|
| | | | | | Standard design #050 | For heat sink mounting #057 |
| 51.6 | M5 | 10 | 13 | 22.2 | 9.5 | — |
| 64.3 | M5 | 13 | 15 | 28.5 | 9.5 | 7.3 |
| 76.9 | M6 | 13 | 15 | 31.7 | 12.0 | 9.7 |
| 91.0 | M6 | 13 | 15 | 31.7 | 12.0 | 9.7 |

All other dimensions of the capacitor such as diameter d, case length l and overall length l₁ are identical with those of standard capacitors of this series. Please refer to the tables "Dimensions and weights" (standard types) and "Dimensions and weights for heat sink mounting" (special designs).

■ For heat sink mounting

Design for optimal connection of capacitors to the heat sink when using base cooling with the following features (refer to chapter "General technical information, 5.2 Cooling"):


- Electrical insulation of the capacitors base with 2 overlapping thermal pads for optimal heat flow (minimal thermal resistance at the capacitor base)



- Minimal overall length tolerance (± 0.35 mm) for mounting between heat sink and bus bar
- Case with extra groove near the base for clamp mounting (recommended ring clamp B44030A0165B ... A0190B)

This version is available only for capacitors without threaded stud and for diameters ≥ 64.3 mm.

Regarding ripple current and useful life, please refer to column $I_{AC,R}(B)$ in the table "Technical data and ordering codes" and in the useful life curves.

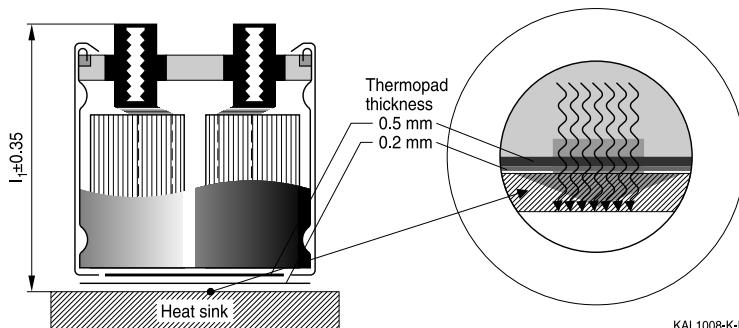

KAL1008-K-E


Dimensions and weights for heat sink mounting:

| Terminal | Dimensions (mm) with insulating sleeve | | | | | Min. reach of screw mm | Approx. weight g |
|----------|--|-----------|----------------|------------|---------------|------------------------|------------------|
| | d | $l \pm 1$ | $l_1 \pm 0.35$ | d_2 max. | a $+0.2/-0.4$ | | |
| M5 | 64.3 $+0/-0.8$ | 80.7 | 86.3 | 13.2 | 28.5 | 7.3 | 370 |
| M5 | 64.3 $+0/-0.8$ | 105.7 | 111.3 | 13.2 | 28.5 | 7.3 | 440 |
| M6 | 76.9 $+0/-0.7$ | 105.7 | 110.6 | 17.7 | 31.7 | 9.7 | 620 |
| M6 | 76.9 $+0/-0.7$ | 143.2 | 148.1 | 17.7 | 31.7 | 9.7 | 840 |
| M6 | 91.0 $+0/-2$ | 97.0 | 101.4 | 17.7 | 31.7 | 9.7 | 1000 |
| M6 | 91.0 $+0/-2$ | 144.5 | 148.9 | 17.7 | 31.7 | 9.7 | 1200 |

Dimensions for other sizes are available upon request.

Ordering codes:

| Design | Identification in third block of ordering code | Remark |
|--|--|---|
| Low inductance (13 nH) | M003 | For capacitors with diameter $d \geq 64.3$ mm |
| For heat sink mounting | M007 | For capacitors with diameter $d \geq 64.3$ mm and without threaded stud |
| PAPR terminal style | M050 | Not for low inductance |
| PAPR terminal style and heat sink mounting | M057 | For capacitors with diameter $d \geq 64.3$ mm and without threaded stud; not for low inductance |



B43564, B43584

High ripple current – 85 °C


Accessories

The following items are included in the delivery package, but are not fastened to the capacitors:

| | Thread | Toothed washers | Screws/nuts | Maximum torque |
|---------------|--------|-----------------|-----------------------------------|---|
| For terminals | M5 | A 5.1 DIN 6797 | DIN 7985 / ISO 7045-M5 × 10-5.6-Z | 2.5 Nm thread depth $t \geq 8 \text{ mm}$ |
| | M6 | A 6.4 DIN 6797 | DIN 7985 / ISO 7045-M6 × 12-5.6-Z | 4.0 Nm thread depth $t \geq 9.5 \text{ mm}$ |
| For mounting | M12 | J 12.5 DIN 6797 | Hex nut BM 12 DIN 439 | 10 Nm |

The following items must be ordered separately. For details, refer to chapter "Capacitors with screw terminals – Accessories".

| Item | Type |
|---|--------|
| Ring clips | B44030 |
| Clamps for capacitors with $d \geq 64.3 \text{ mm}$ | B44030 |
| Insulating parts | B44020 |




Overview of available types

| V_R (V DC) | 200 | 250 | 350 | 400 | 450 | 500 |
|----------------------------|---|--|--|---|--|---------------------|
| Case dimensions d × l (mm) | | | | | | |
| C_R (μ F) | | | | | | |
| 820 | | | | | | 51.6×80.7 |
| 1000 | | | | | 51.6×80.7 | |
| 1200 | | | | | | 51.6×105.7 |
| 1500 | | | 51.6×80.7 | 51.6×80.7 | 51.6×105.7 64.3×80.7 | |
| 1800 | | | | | | 64.3×105.7 |
| 2200 | | 51.6×80.7 | 51.6×105.7 | 51.6×105.7 64.3×80.7 | 64.3×105.7 | |
| 2700 | | 51.6×80.7 | 64.3×80.7 | | | 76.9×105.7 |
| 3300 | 51.6×80.7 | 51.6×80.7 | 64.3×105.7 | 64.3×105.7 | 64.3×143.2 76.9×105.7 91.0×97.0 | |
| 3900 | | 51.6×105.7 | 64.3×105.7 | 76.9×105.7 | | 76.9×143.2 |
| 4700 | 51.6×105.7 64.3×80.7 | 64.3×105.7 | 64.3×143.2 76.9×105.7 | 76.9×105.7 91.0×97.0 | 76.9×143.2 | 91.0×144.5 |
| 5600 | | | 76.9×105.7 | 76.9×143.2 | 76.9×168.7 | |
| 6800 | 64.3×105.7 | 76.9×105.7 | 76.9×143.2 | 76.9×143.2 | 76.9×220.7 | |
| 8200 | 76.9×105.7 | 76.9×105.7 | 76.9×168.7 | 91.0×144.5 | 76.9×220.7 | |
| 10000 | 76.9×105.7 | 76.9×143.2 | 76.9×220.7 91.0×144.5 | 76.9×220.7 | 91.0×221.0 | |
| 12000 | | 76.9×143.2 | 76.9×220.7 | 91.0×221.0 | | |
| 15000 | 76.9×143.2 | 76.9×168.7 91.0×144.5 | 91.0×221.0 | | | |
| 22000 | 91.0×144.5 | 76.9×220.7 | | | | |
| 27000 | 76.9×220.7 | 91.0×221.0 | | | | |
| 33000 | 91.0×221.0 | | | | | |

The capacitance and voltage ratings listed above are available in different cases upon request.

Other voltage and capacitance ratings are also available upon request.



B43564, B43584

High ripple current – 85 °C

Technical data and ordering codes

| C_R 100 Hz 20 °C μF | Case dimensions d × l mm | ESR_{typ} 100 Hz 20 °C $m\Omega$ | Z_{max} 10 kHz 20 °C $m\Omega$ | $I_{AC,max}$ 100 Hz 40 °C A | $I_{AC,R}$ 100 Hz 85 °C A | $I_{AC,R(B)}$ 100 Hz 85 °C A | Ordering code (composition see below) |
|-------------------------------------|-----------------------------------|---|---|--------------------------------------|------------------------------------|---------------------------------------|---|
| $V_R = 200$ V DC | | | | | | | |
| 3300 | 51.6 × 80.7 | 40 | 48 | 21 | 7.9 | 15.3 | B435*4E2338M0## |
| 4700 | 51.6 × 105.7 | 29 | 35 | 27 | 10.1 | 17.6 | B435*4E2478M0## |
| 4700 | 64.3 × 80.7 | 29 | 35 | 27 | 10.0 | 18.6 | B435*4F2478M0## |
| 6800 | 64.3 × 105.7 | 21 | 25 | 34 | 12.6 | 22.0 | B435*4E2688M0## |
| 8200 | 76.9 × 105.7 | 17 | 20 | 41 | 15.2 | 26.8 | B435*4E2828M0## |
| 10000 | 76.9 × 105.7 | 14 | 17 | 47 | 17.4 | 32.8 | B435*4E2109M0## |
| 15000 | 76.9 × 143.2 | 8 | 10 | 57 | 25.6 | 43.6 | B435*4E2159M0## |
| 22000 | 91.0 × 144.5 | 5 | 6 | 80 | 35.9 | 63.6 | B435*4E2229M0## |
| 27000 | 76.9 × 220.7 | 4 | 5 | 57 | 44.5 | 57.0 | B435*4E2279M0## |
| 33000 | 91.0 × 221.0 | 4 | 5 | 80 | 44.8 | 66.7 | B435*4E2339M0## |
| $V_R = 250$ V DC | | | | | | | |
| 2200 | 51.6 × 80.7 | 51 | 61 | 18 | 6.8 | 12.5 | B435*4A2228M0## |
| 2700 | 51.6 × 80.7 | 46 | 55 | 20 | 7.4 | 14.6 | B435*4A2278M0## |
| 3300 | 51.6 × 80.7 | 36 | 43 | 23 | 8.4 | 17.4 | B435*4A2338M0## |
| 3900 | 51.6 × 105.7 | 32 | 38 | 26 | 9.7 | 17.2 | B435*4A2398M0## |
| 4700 | 64.3 × 105.7 | 26 | 31 | 30 | 11.1 | 18.2 | B435*4C2478M0## |
| 6800 | 76.9 × 105.7 | 19 | 23 | 39 | 14.5 | 25.9 | B435*4B2688M0## |
| 8200 | 76.9 × 105.7 | 16 | 19 | 44 | 16.4 | 31.3 | B435*4A2828M0## |
| 10000 | 76.9 × 143.2 | 13 | 16 | 51 | 19.1 | 31.0 | B435*4A2109M0## |
| 12000 | 76.9 × 143.2 | 9 | 11 | 57 | 24.1 | 41.3 | B435*4A2129M0## |
| 15000 | 76.9 × 168.7 | 8 | 10 | 57 | 27.4 | 42.9 | B435*4B2159M0## |
| 15000 | 91.0 × 144.5 | 7 | 8 | 79 | 29.2 | 49.5 | B435*4A2159M0## |
| 22000 | 76.9 × 220.7 | 5 | 6 | 57 | 39.8 | 56.9 | B435*4A2229M0## |
| 27000 | 91.0 × 221.0 | 4 | 5 | 80 | 45.1 | 67.7 | B435*4A2279M0## |

Composition of ordering code

* = Mounting style


6 = for capacitors with ring clip/clamp mounting

8 = for capacitors with threaded stud

= Design

00 = for capacitors with standard inductance

03 = for capacitors with low inductance (13 nH)
(only for capacitors with diameter $d \geq 64.3$ mm)07 = for heat sink mounting (only for capacitors
with diameter $d \geq 64.3$ mm and without
threaded stud)50 = for terminals with PAPR style (not for
low-inductance)57 = for terminals with PAPR style and heat sink
mounting (only $d \geq 64.3$ mm and without
threaded stud, not for low inductance)



Technical data and ordering codes

| C_R 100 Hz 20 °C μF | Case dimensions d × l mm | ESR_{typ} 100 Hz 20 °C $\text{m}\Omega$ | Z_{max} 10 kHz 20 °C $\text{m}\Omega$ | $I_{\text{AC,max}}$ 100 Hz 40 °C A | $I_{\text{AC,R}}$ 100 Hz 85 °C A | $I_{\text{AC,R(B)}}$ 100 Hz 85 °C A | Ordering code (composition see below) |
|--|-----------------------------------|--|---|---|---|--|---|
| $V_R = 350 \text{ V DC}$ | | | | | | | |
| 1500 | 51.6 × 80.7 | 62 | 74 | 17 | 6.2 | 11.8 | B435*4C4158M0## |
| 2200 | 51.6 × 105.7 | 48 | 58 | 21 | 8.0 | 14.0 | B435*4D4228M0## |
| 2700 | 64.3 × 80.7 | 39 | 47 | 24 | 8.8 | 17.5 | B435*4A4278M0## |
| 3300 | 64.3 × 105.7 | 32 | 38 | 29 | 11.0 | 19.0 | B435*4D4338M0## |
| 3900 | 64.3 × 105.7 | 28 | 34 | 31 | 11.6 | 21.0 | B435*4A4398M0## |
| 4700 | 64.3 × 143.2 | 25 | 30 | 34 | 12.8 | 19.4 | B435*4C4478M0## |
| 4700 | 76.9 × 105.7 | 25 | 30 | 34 | 13.1 | 25.0 | B435*4B4478M0## |
| 5600 | 76.9 × 105.7 | 22 | 26 | 38 | 14.2 | 28.0 | B435*4A4568M0## |
| 6800 | 76.9 × 143.2 | 19 | 23 | 43 | 16.0 | 26.8 | B435*4A4688M0## |
| 8200 | 76.9 × 168.7 | 15 | 18 | 53 | 19.8 | 30.5 | B435*4B4828M0## |
| 10000 | 76.9 × 220.7 | 13 | 16 | 57 | 23.0 | 32.0 | B435*4A4109M0## |
| 10000 | 91.0 × 144.5 | 13 | 16 | 58 | 21.5 | 37.4 | B435*4B4109M0## |
| 12000 | 76.9 × 220.7 | 11 | 13 | 57 | 26.2 | 36.8 | B435*4A4129M0## |
| 15000 | 91.0 × 221.0 | 9 | 11 | 80 | 29.9 | 44.2 | B435*4A4159M0## |
| $V_R = 400 \text{ V DC}$ | | | | | | | |
| 1500 | 51.6 × 80.7 | 62 | 74 | 17 | 6.4 | 12.8 | B435*4A9158M0## |
| 2200 | 51.6 × 105.7 | 48 | 58 | 21 | 8.0 | 14.3 | B435*4A9228M0## |
| 2200 | 64.3 × 80.7 | 48 | 58 | 21 | 7.9 | 15.2 | B435*4B9228M0## |
| 3300 | 64.3 × 105.7 | 36 | 43 | 27 | 9.9 | 17.6 | B435*4A9338M0## |
| 3900 | 76.9 × 105.7 | 29 | 35 | 32 | 11.8 | 21.5 | B435*4A9398M0## |
| 4700 | 76.9 × 105.7 | 23 | 28 | 37 | 13.8 | 26.8 | B435*4A9478M0## |

Composition of ordering code

* = Mounting style

6 = for capacitors with ring clip/clamp mounting

8 = for capacitors with threaded stud

= Design


00 = for capacitors with standard inductance

03 = for capacitors with low inductance (13 nH)
(only for capacitors with diameter $d \geq 64.3$ mm)

07 = for heat sink mounting (only for capacitors
with diameter $d \geq 64.3$ mm and without
threaded stud)

50 = for terminals with PAPR style (not for
low-inductance)

57 = for terminals with PAPR style and heat sink
mounting (only $d \geq 64.3$ mm and without
threaded stud, not for low inductance)



B43564, B43584

High ripple current – 85 °C

Technical data and ordering codes

| C_R 100 Hz 20 °C μF | Case dimensions d × l mm | ESR_{typ} 100 Hz 20 °C mΩ | Z_{max} 10 kHz 20 °C mΩ | $I_{AC,max}$ 100 Hz 40 °C A | $I_{AC,R}$ 100 Hz 85 °C A | $I_{AC,R(B)}$ 100 Hz 85 °C A | Ordering code (composition see below) |
|-------------------------------------|-----------------------------------|--------------------------------------|------------------------------------|--------------------------------------|------------------------------------|---------------------------------------|---|
| $V_R = 400$ V DC | | | | | | | |
| 4700 | 91.0 × 97.0 | 23 | 28 | 40 | 15.1 | 32.0 | B435*4B9478M0## |
| 5600 | 76.9 × 143.2 | 21 | 25 | 40 | 15.0 | 24.7 | B435*4A9568M0## |
| 6800 | 76.9 × 143.2 | 18 | 20 | 46 | 17.1 | 29.7 | B435*4A9688M0## |
| 8200 | 91.0 × 144.5 | 15 | 18 | 53 | 19.8 | 33.6 | B435*4A9828M0## |
| 10000 | 76.9 × 220.7 | 12 | 14 | 57 | 24.7 | 34.3 | B435*4A9109M0## |
| 12000 | 91.0 × 221.0 | 10 | 12 | 74 | 27.6 | 40.0 | B435*4A9129M0## |
| $V_R = 450$ V DC | | | | | | | |
| 1000 | 51.6 × 80.7 | 93 | 112 | 14 | 5.1 | 9.8 | B435*4B5108M0## |
| 1500 | 51.6 × 105.7 | 66 | 79 | 18 | 6.7 | 11.6 | B435*4C5158M0## |
| 1500 | 64.3 × 80.7 | 66 | 79 | 18 | 6.6 | 12.3 | B435*4D5158M0## |
| 2200 | 64.3 × 105.7 | 43 | 52 | 24 | 9.0 | 15.3 | B435*4B5228M0## |
| 3300 | 64.3 × 143.2 | 32 | 38 | 31 | 11.7 | 17.8 | B435*4B5338M0## |
| 3300 | 76.9 × 105.7 | 32 | 38 | 31 | 11.6 | 21.9 | B435*4C5338M0## |
| 3300 | 91.0 × 97.0 | 32 | 38 | 33 | 12.2 | 23.2 | B435*4D5338M0## |
| 4700 | 76.9 × 143.2 | 21 | 25 | 42 | 15.7 | 26.3 | B435*4B5478M0## |
| 5600 | 76.9 × 168.7 | 19 | 23 | 47 | 17.4 | 26.3 | B435*4A5568M0## |
| 6800 | 76.9 × 220.7 | 16 | 19 | 54 | 20.1 | 27.0 | B435*4A5688M0## |
| 8200 | 76.9 × 220.7 | 13 | 16 | 57 | 23.8 | 33.0 | B435*4A5828M0## |
| 10000 | 91.0 × 221.0 | 11 | 13 | 71 | 26.5 | 38.3 | B435*4A5109M0## |

Composition of ordering code

* = Mounting style


6 = for capacitors with ring clip/clamp mounting

8 = for capacitors with threaded stud

= Design

00 = for capacitors with standard inductance

03 = for capacitors with low inductance (13 nH)
(only for capacitors with diameter $d \geq 64.3$ mm)07 = for heat sink mounting (only for capacitors
with diameter $d \geq 64.3$ mm and without
threaded stud)50 = for terminals with PAPR style (not for
low-inductance)57 = for terminals with PAPR style and heat sink
mounting (only $d \geq 64.3$ mm and without
threaded stud, not for low inductance)



Technical data and ordering codes

| C_R 100 Hz 20 °C μF | Case dimensions d × l mm | ESR_{typ} 100 Hz 20 °C mΩ | Z_{max} 10 kHz 20 °C mΩ | $I_{AC,max}$ 100 Hz 40 °C A | $I_{AC,R}$ 100 Hz 85 °C A | $I_{AC,R(B)}$ 100 Hz 85 °C A | Ordering code (composition see below) |
|-------------------------------------|-----------------------------------|--------------------------------------|------------------------------------|--------------------------------------|------------------------------------|---------------------------------------|---|
| $V_R = 500$ V DC | | | | | | | |
| 820 | 51.6 × 80.7 | 120 | 144 | 12 | 4.6 | 9.1 | B435*4B6827M0## |
| 1200 | 51.6 × 105.7 | 88 | 106 | 16 | 6.0 | 10.5 | B435*4B6128M0## |
| 1800 | 64.3 × 105.7 | 59 | 71 | 21 | 7.9 | 13.9 | B435*4B6188M0## |
| 2700 | 76.9 × 105.7 | 36 | 43 | 30 | 11.2 | 21.6 | B435*4A6278M0## |
| 3900 | 76.9 × 143.2 | 28 | 34 | 37 | 14.2 | 24.5 | B435*4A6398M0## |
| 4700 | 91.0 × 144.5 | 23 | 28 | 43 | 16.3 | 27.4 | B435*4B6478M0## |

Composition of ordering code

* = Mounting style

6 = for capacitors with ring clip/clamp mounting

8 = for capacitors with threaded stud

= Design


00 = for capacitors with standard inductance

03 = for capacitors with low inductance (13 nH)
(only for capacitors with diameter $d \geq 64.3$ mm)

07 = for heat sink mounting (only for capacitors
with diameter $d \geq 64.3$ mm and without
threaded stud)

50 = for terminals with PAPR style (not for
low-inductance)

57 = for terminals with PAPR style and heat sink
mounting (only $d \geq 64.3$ mm and without
threaded stud, not for low inductance)




B43564, B43584

High ripple current – 85 °C

Useful life¹⁾


depending on ambient temperature T_A (for natural cooling) and versus temperature of case base T_B (for base cooling) under ripple current operating conditions²⁾

$V_R = 200 \dots 450 \text{ V}$

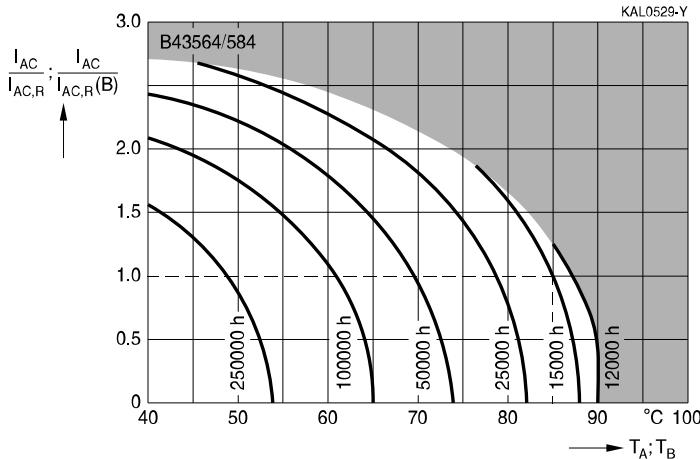**Useful life¹⁾**


depending on ambient temperature T_A (for natural cooling) and versus temperature of case base T_B (for base cooling) under ripple current operating conditions²⁾

$V_R = 500 \text{ V}$

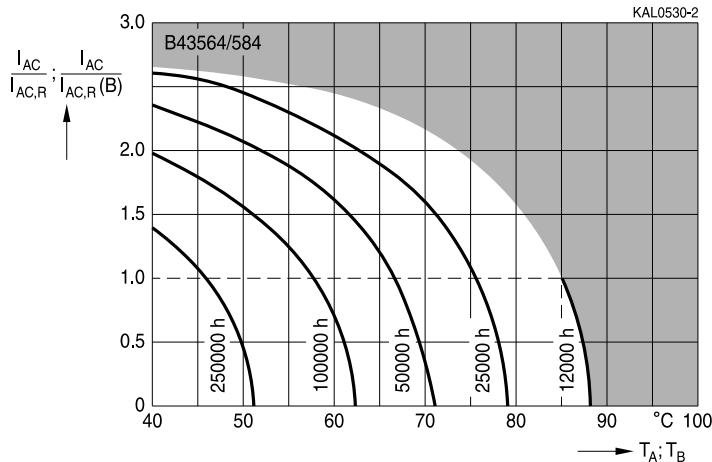


1) Refer to chapter "General technical information, 5 Useful life" on how to interpret useful life.

2) The ripple current refers to $I_{AC,R}$ for natural cooling or $I_{AC,R}(B)$ for base cooling, respectively.





Frequency factor of permissible ripple current I_{AC} versus frequency f

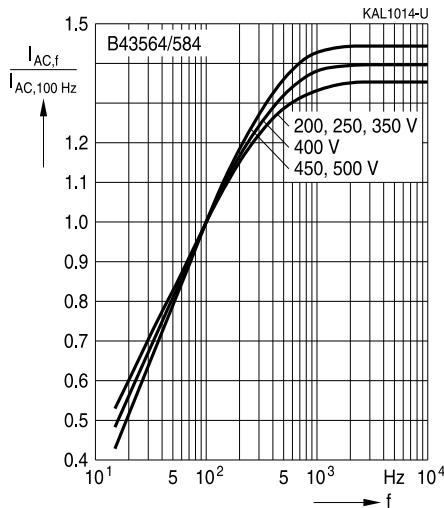

Frequency characteristics of ESR

Typical behavior

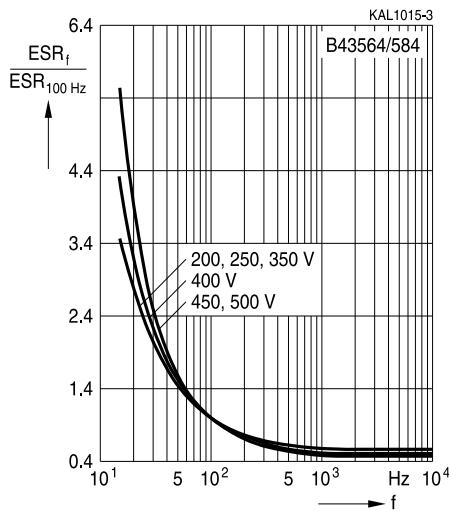




B43564, B43584

High ripple current – 85 °C


Impedance Z versus frequency f

Typical behavior at 20 °C

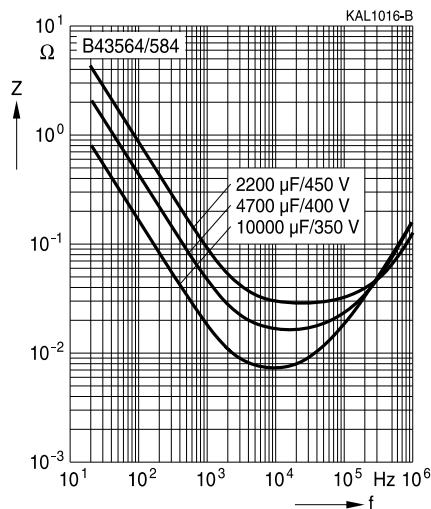

B43564, B43584

High ripple current – 85 °C



Cautions and warnings

Personal safety

The electrolytes used by EPCOS have been optimized both with a view to the intended application and with regard to health and environmental compatibility. They do not contain any solvents that are detrimental to health, e.g. dimethyl formamide (DMF) or dimethyl acetamide (DMAC).

Furthermore, some of the high-voltage electrolytes used by EPCOS are self-extinguishing.


As far as possible, EPCOS does not use any dangerous chemicals or compounds to produce operating electrolytes. However, in exceptional cases, such materials must be used in order to achieve specific physical and electrical properties because no alternative materials are currently known. However, the amount of dangerous materials used in our products is limited to an absolute minimum.

Materials and chemicals used in EPCOS aluminum electrolytic capacitors are continuously adapted in compliance with the EPCOS Corporate Environmental Policy and the latest EU regulations and guidelines such as RoHS, REACH/SVHC, GADSL, and ELV.

MDS (Material Data Sheets) are available on the EPCOS website for all types listed in the data book. MDS for customer specific capacitors are available upon request.

MSDS (Material Safety Data Sheets) are available for all of our electrolytes upon request.

Nevertheless, the following rules should be observed when handling aluminum electrolytic capacitors: No electrolyte should come into contact with eyes or skin. If electrolyte does come into contact with the skin, wash the affected areas immediately with running water. If the eyes are affected, rinse them for 10 minutes with plenty of water. If symptoms persist, seek medical treatment. Avoid inhaling electrolyte vapor or mists. Workplaces and other affected areas should be well ventilated. Clothing that has been contaminated by electrolyte must be changed and rinsed in water.




B43564, B43584

High ripple current – 85 °C


Product safety

The table below summarizes the safety instructions that must be observed without fail. A detailed description can be found in the relevant sections of chapter "General technical information".

| Topic | Safety information | Reference chapter "General technical information" |
|--|---|--|
| Polarity | Make sure that polar capacitors are connected with the right polarity. | 1 "Basic construction of aluminum electrolytic capacitors" |
| Reverse voltage | Voltages polarity classes should be prevented by connecting a diode. | 3.1.6 "Reverse voltage" |
| Mounting position of screw-terminal capacitors | Do not mount the capacitor with the terminals (safety vent) upside down. | 11.1. "Mounting positions of capacitors with screw terminals" |
| Robustness of terminals | The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2.5 Nm M6: 4.0 Nm | 11.3 "Mounting torques" |
| Mounting of single-ended capacitors | The internal structure of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. | 11.4 "Mounting considerations for single-ended capacitors" |
| Soldering | Do not exceed the specified time or temperature limits during soldering. | 11.5 "Soldering" |
| Soldering, cleaning agents | Do not allow halogenated hydrocarbons to come into contact with aluminum electrolytic capacitors. | 11.6 "Cleaning agents" |
| Upper category temperature | Do not exceed the upper category temperature. | 7.2 "Maximum permissible operating temperature" |
| Passive flammability | Avoid external energy, such as fire or electricity. | 8.1 "Passive flammability" |



| Topic | Safety information | Reference chapter "General technical information" |
|--|---|---|
| Active flammability | Avoid overload of the capacitors. | 8.2 "Active flammability" |
| Maintenance | Make periodic inspections of the capacitors. Before the inspection, make sure that the power supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. | 10 "Maintenance" |
| Storage | Do not store capacitors at high temperatures or high humidity. Capacitors should be stored at +5 to +35 °C and a relative humidity of ≤ 75%. | 7.3 Storage conditions |
| | | Reference chapter "Capacitors with screw terminals" |
| Breakdown strength of insulating sleeves | Do not damage the insulating sleeve, especially when ring clips are used for mounting. | "Screw terminals – accessories" |




B43564, B43584

High ripple current – 85 °C

Symbols and terms

| Symbol | English | German |
|----------------------|---|--|
| C | Capacitance | Kapazität |
| C_R | Rated capacitance | Nennkapazität |
| C_S | Series capacitance | Serienkapazität |
| $C_{S,T}$ | Series capacitance at temperature T | Serienkapazität bei Temperatur T |
| C_f | Capacitance at frequency f | Kapazität bei Frequenz f |
| d | Case diameter, nominal dimension | Gehäusedurchmesser, Nennmaß |
| d_{\max} | Maximum case diameter | Maximaler Gehäusedurchmesser |
| ESL | Self-inductance | Eigeninduktivität |
| ESR | Equivalent series resistance | Ersatzserienwiderstand |
| ESR_f | Equivalent series resistance at frequency f | Ersatzserienwiderstand bei Frequenz f |
| ESR_T | Equivalent series resistance at temperature T | Ersatzserienwiderstand bei Temperatur T |
| f | Frequency | Frequenz |
| I | Current | Strom |
| I_{AC} | Alternating current (ripple current) | Wechselstrom |
| $I_{AC,rms}$ | Root-mean-square value of alternating current | Wechselstrom, Effektivwert |
| $I_{AC,f}$ | Ripple current at frequency f | Wechselstrom bei Frequenz f |
| $I_{AC,max}$ | Maximum permissible ripple current | Maximal zulässiger Wechselstrom |
| $I_{AC,R}$ | Rated ripple current | Nennwechselstrom |
| $I_{AC,R}$ (B) | Rated ripple current for base cooling | Nennwechselstromstrom für Bodenkühlung |
| I_{leak} | Leakage current | Reststrom |
| $I_{\text{leak,op}}$ | Operating leakage current | Betriebsreststrom |
| l | Case length, nominal dimension | Gehäselänge, Nennmaß |
| l_{\max} | Maximum case length (without terminals and mounting stud) | Maximale Gehäselänge (ohne Anschlüsse und Gewindegöhlen) |
| R | Resistance | Widerstand |
| R_{ins} | Insulation resistance | Isolationswiderstand |
| R_{symm} | Balancing resistance | Symmetrierwiderstand |
| T | Temperature | Temperatur |
| ΔT | Temperature difference | Temperaturdifferenz |
| T_A | Ambient temperature | Umgebungstemperatur |
| T_C | Case temperature | Gehäsetemperatur |
| T_B | Capacitor base temperature | Temperatur des Becherbodens |
| t | Time | Zeit |
| Δt | Period | Zeitraum |
| t_b | Service life (operating hours) | Brauchbarkeitsdauer (Betriebszeit) |



| Symbol | English | German |
|---------------|---|--------------------------------------|
| V | Voltage | Spannung |
| V_F | Forming voltage | Formierspannung |
| V_{op} | Operating voltage | Betriebsspannung |
| V_R | Rated voltage, DC voltage | Nennspannung, Gleichspannung |
| V_s | Surge voltage | Spitzenspannung |
| X_C | Capacitive reactance | Kapazitiver Blindwiderstand |
| X_L | Inductive reactance | Induktiver Blindwiderstand |
| Z | Impedance | Scheinwiderstand |
| Z_T | Impedance at temperature T | Scheinwiderstand bei Temperatur T |
| $\tan \delta$ | Dissipation factor | Verlustfaktor |
| λ | Failure rate | Ausfallrate |
| ϵ_0 | Absolute permittivity | Elektrische Feldkonstante |
| ϵ_r | Relative permittivity | Dielektrizitätszahl |
| ω | Angular velocity; $2 \cdot \pi \cdot f$ | Kreisfrequenz; $2 \cdot \pi \cdot f$ |

Note

All dimensions are given in mm.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.



OCEAN CHIPS

Океан Электроники

Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибутором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибутором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А