



PUSB3F99

ESD protection for ultra high-speed interfaces

Rev. 1 — 15 December 2017

Product data sheet

1 Product profile

1.1 General description

The device is designed to protect high-speed interfaces such as SuperSpeed USB, High-Definition Multimedia Interface (HDMI), DisplayPort, external Serial Advanced Technology Attachment (eSATA) and Low Voltage Differential Signaling (LVDS) interfaces against ElectroStatic Discharge (ESD).

The device includes four high-level ESD protection diode structures for ultra high-speed signal lines and is encapsulated in a leadless small DFN2510A-10 (SOT1176-1) plastic package.

All signal lines are protected by a special diode configuration offering ultra low line capacitance of only 0.5 pF. These diodes utilize a unique snap-back structure in order to provide protection to downstream components from ESD voltages up to ± 10 kV contact exceeding IEC 61000-4-2, level 4.

1.2 Features and benefits

- System ESD protection for USB 2.0 and SuperSpeed USB 3.1, HDMI 2.0, DisplayPort, eSATA and LVDS
- All signal lines with integrated rail-to-rail clamping diodes for downstream ESD protection of ± 10 kV exceeding IEC 61000-4-2, level 4
- Matched 0.5 mm trace spacing
- Signal lines with ≤ 0.05 pF matching capacitance between signal pairs
- Line capacitance of only 0.5 pF for each channel
- Design-friendly 'pass-through' signal routing


1.3 Applications

The device is designed for high-speed receiver and transmitter port protection:

- TVs and monitors
- DVD recorders and players
- Notebooks, main board graphic cards and ports
- Set-top boxes and game consoles

2 Pinning information

Table 1. Pinning

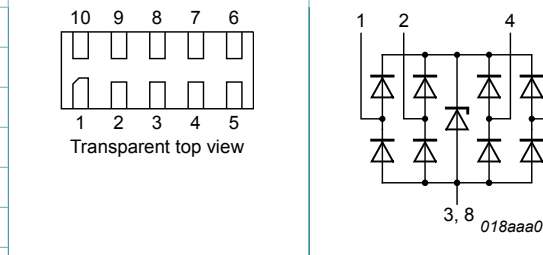Pin	Symbol	Description	Simplified outline	Graphic symbol
1	CH1	channel 1 ESD protection	 The simplified outline shows a 10-pin package with pins 1-5 on the left and 6-10 on the right. The graphic symbol shows a 5-pin package with pins 1, 2, 4, and 5 on the top and pin 3, 8 on the bottom. The symbol includes four ESD protection diodes connected to pins 1, 2, 4, and 5, and a central diode connected to pins 3 and 8. The part number 018aaa001 is shown at the bottom right of the symbol.	
2	CH2	channel 2 ESD protection		
3	GND	ground		
4	CH3	channel 3 ESD protection		
5	CH4	channel 4 ESD protection		
6	n.c.	not connected		
7	n.c.	not connected		
8	GND	ground		
9	n.c.	not connected		
10	n.c.	not connected		

6 Characteristics

Table 5. Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.


Symbol	Parameter	Conditions		Min	Typ	Max	Unit
V_{BR}	breakdown voltage	$I_I = 1\text{ mA}$		6	-	-	V
I_{LR}	reverse leakage current	per channel; $V_I = 3\text{ V}$		-	-	1	μA
V_F	forward voltage	$I_I = 1\text{ mA}$		-	0.7	-	V
C_{line}	line capacitance	$f = 1\text{ MHz}$; $V_I = 3.3\text{ V}$	[1]	-	0.5	0.6	pF
ΔC_{line}	line capacitance difference	$f = 1\text{ MHz}$; $V_I = 3.3\text{ V}$	[1]	-	0.05	-	pF
r_{dyn}	dynamic resistance	surge	[2]				
		• positive transient		-	0.41	-	Ω
		• negative transient		-	0.26	-	Ω
		TLP	[3]				
		• positive transient		-	0.43	-	Ω
		• negative transient		-	0.28	-	Ω
V_{CL}	clamping voltage	$I_{PP} = 5.2\text{ A}$	[2]				
		• positive transient		-	4.6	-	V
		$I_{PP} = -4.4\text{ A}$	[2]				
		• negative transient		-	-2.2	-	V

[1] This parameter is guaranteed by design.


[2] According to IEC 61000-4-5 (8/20 μs current waveform).

[3] 100 ns Transmission Line Pulse (TLP); 50 Ω ; pulser at 80 ns.

6.1

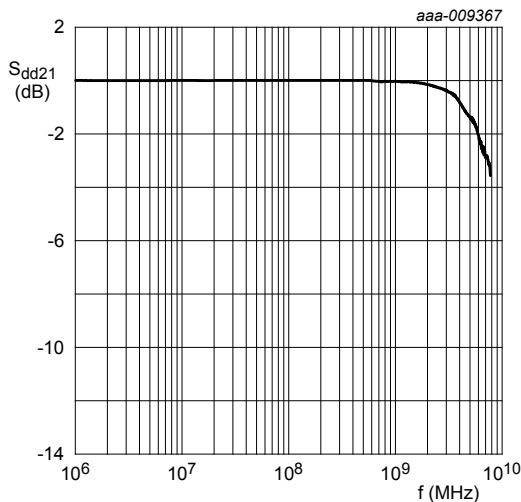


differential mode
Figure 1. Insertion loss; typical values

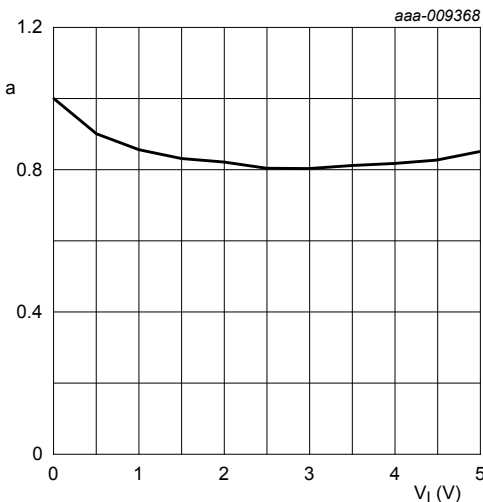


$$\alpha = \frac{C_{\text{line}}}{C_{\text{line}}(V_I = 0 \text{ V})}$$


Figure 2. Relative capacitance as a function of input voltage; typical values

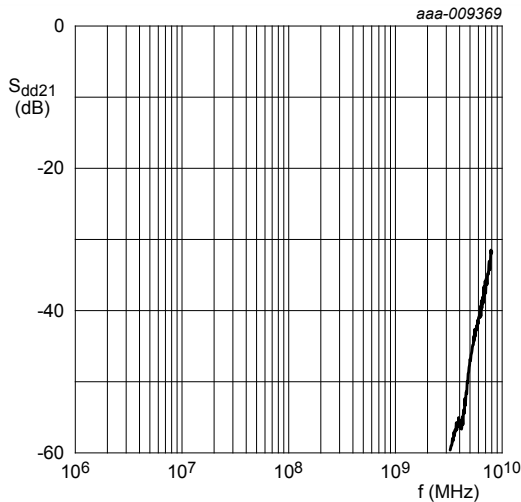

Sdd21 normalized to 100 Ω; differential pairs CH1/CH2 versus CH3/CH4
Figure 3. Crosstalk; typical values

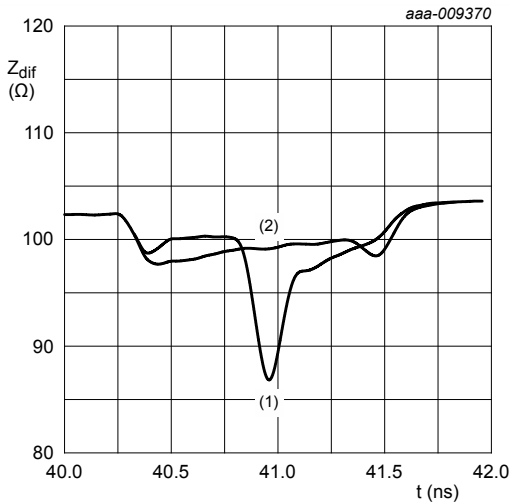

t_r = 200 ps; differential pair CH1 + CH2
(1) PUSB3F99 on reference board
(2) Reference board without device under test (DUT)
Figure 4. Differential Time Domain Reflectometer (TDR) plot; typical values

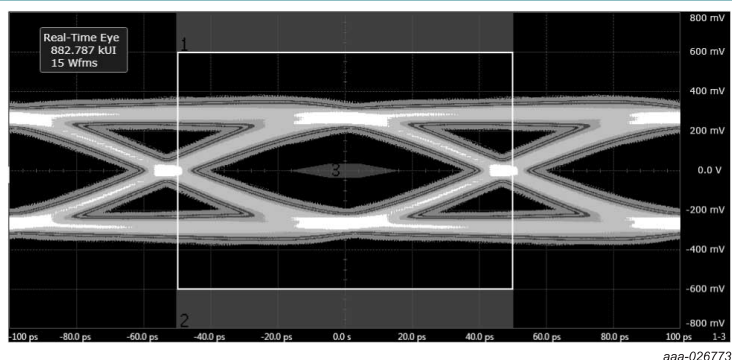


Data rate: 10 Gbit/s; Vertical scale: 200 mV/div; Horizontal scale: 20 ps/div

3.1 dB de-emphasis

2.2 dB pre-shoot

Figure 5. USB 3.1 eye diagram, Printed-Circuit Board (PCB) with PUSB3F99

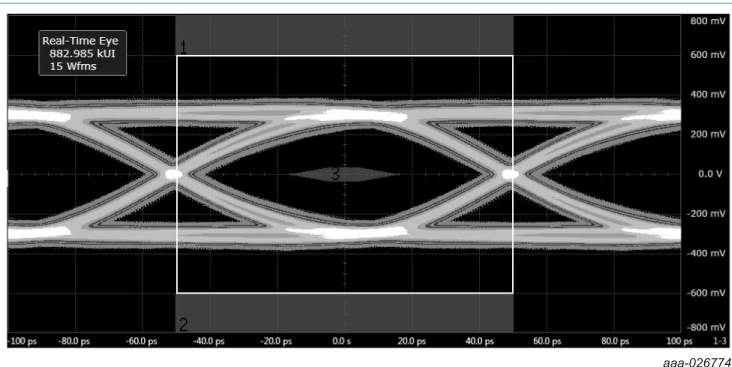


Data rate: 10 Gbit/s; Vertical scale: 200 mV/div; Horizontal scale: 20 ps/div

3.1 dB de-emphasis

2.2 dB pre-shoot

Figure 6. USB 3.1 eye diagram, PCB without PUSB3F99 (reference)

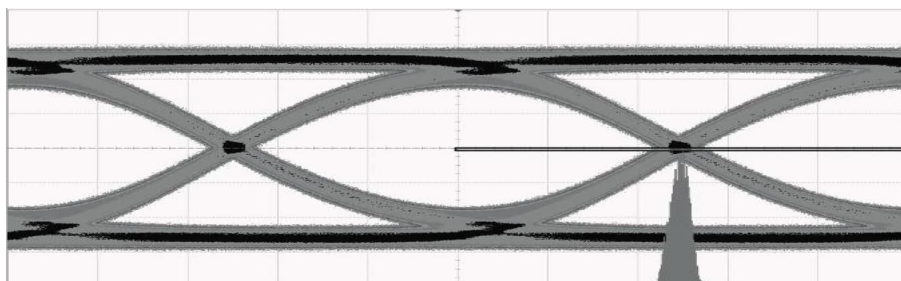


aaa-014159

Test frequency: 148.5 MHz

Differential swing voltage: 810 mV

Horizontal scale: 34 ps/div

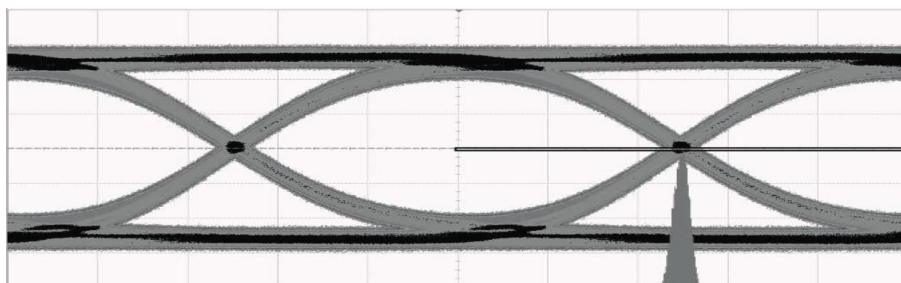Figure 7. HDMI 2.0 TP1 eye diagram, PCB with PUSB3F99 (2160p, 60 Hz


aaa-014160

Test frequency: 148.5 MHz

Differential swing voltage: 800 mV

Horizontal scale: 34 ps/div

Figure 8. HDMI 2.0 TP1 eye diagram, PCB without PUSB3F99 (2160p, 60 Hz, reference)

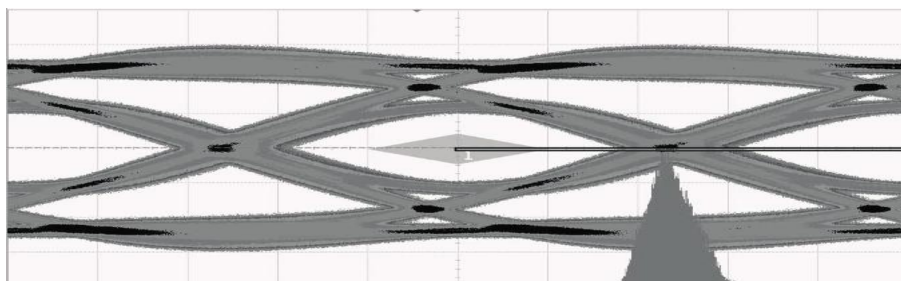


aaa-014161

Test frequency: 148.5 MHz

Differential swing voltage: 809 mV

Horizontal scale: 34 ps/div

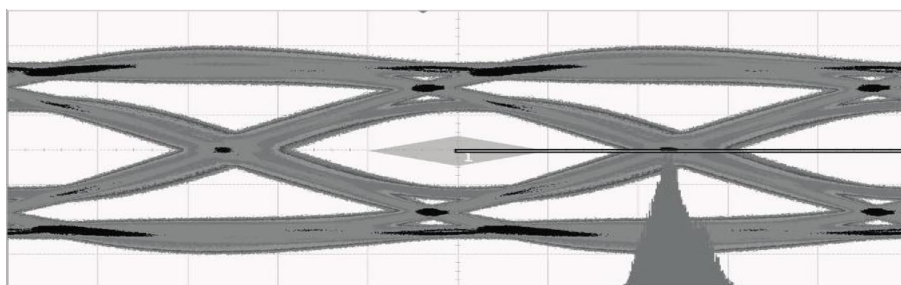Remark: Measured at Test Point 2 (TP2) worst cable emulator, reference cable equalizer and worst case positive skew.**Figure 9. HDMI 2.0 TP2 eye diagram, PCB with PUSB3F99 (2160p, 60 Hz)**


aaa-014162

Test frequency: 148.5 MHz


Differential swing voltage: 820 mV

Horizontal scale: 34 ps/div


Remark: Measured at Test Point 2 (TP2) worst cable emulator, reference cable equalizer and worst case positive skew.**Figure 10. HDMI 2.0 TP2 eye diagram, PCB without PUSB3F99 (2160p, 60 Hz, reference)**

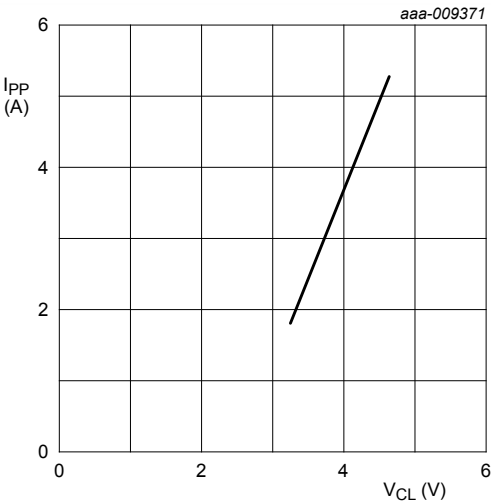


IEC 61000-4-5; $t_p = 8/20 \mu s$; positive pulse
Figure 11. Dynamic resistance with positive clamping; typical values

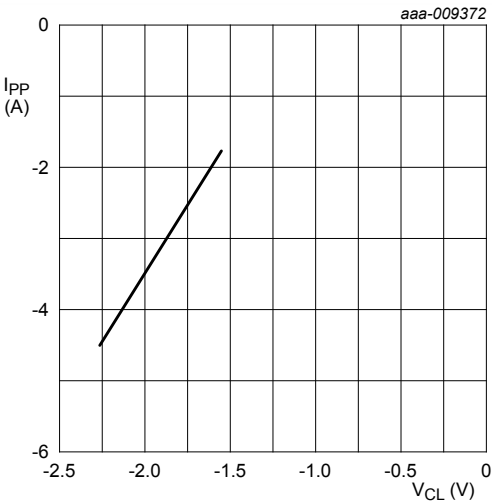

IEC 61000-4-5; $t_p = 8/20 \mu s$; negative pulse
Figure 12. Dynamic resistance with negative clamping; typical values

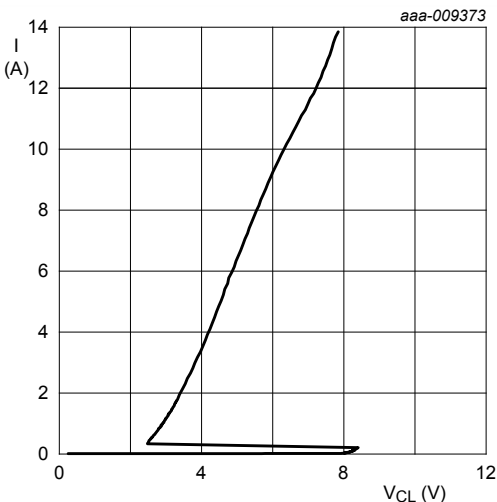

$t_p = 100 ns$; Transmission Line Pulse (TLP)
Figure 13. Dynamic resistance with positive clamping; typical values

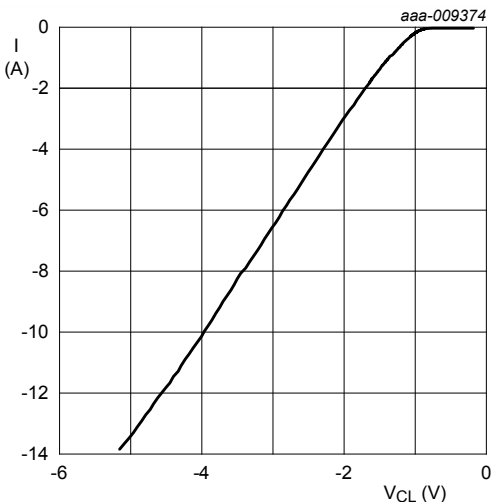

$t_p = 100 ns$; Transmission Line Pulse (TLP)
Figure 14. Dynamic resistance with negative clamping; typical values

The device uses an advanced clamping structure showing a negative dynamic resistance. This snap-back behavior strongly reduces the clamping voltage to the system behind the ESD protection during an ESD event. Do not connect unlimited DC current sources to the data lines to avoid keeping the ESD protection device in snap-back state after exceeding breakdown voltage (due to an ESD pulse for instance).


7 Application information

The device is designed to provide high-level ESD protection for high-speed serial data buses such as HDMI, DisplayPort, eSATA and LVDS data lines.

When designing the Printed-Circuit Board (PCB), give careful consideration to impedance matching and signal coupling. Do not connect the signal lines to unlimited current sources like, for example, a battery.

8 Package outline

Table 6. Package outline

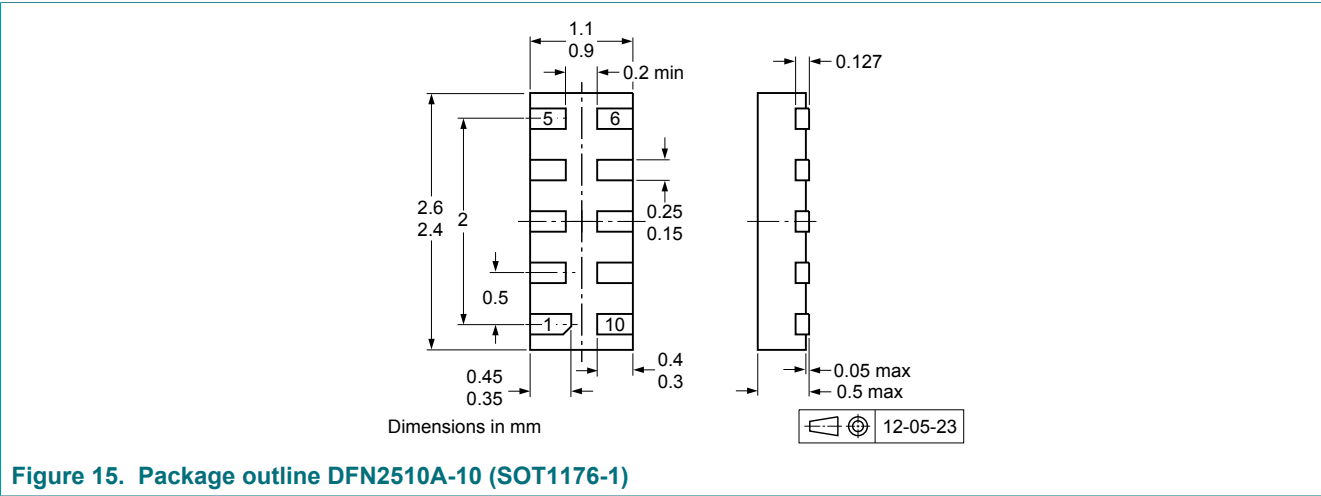

9 Soldering

Table 7. Soldering

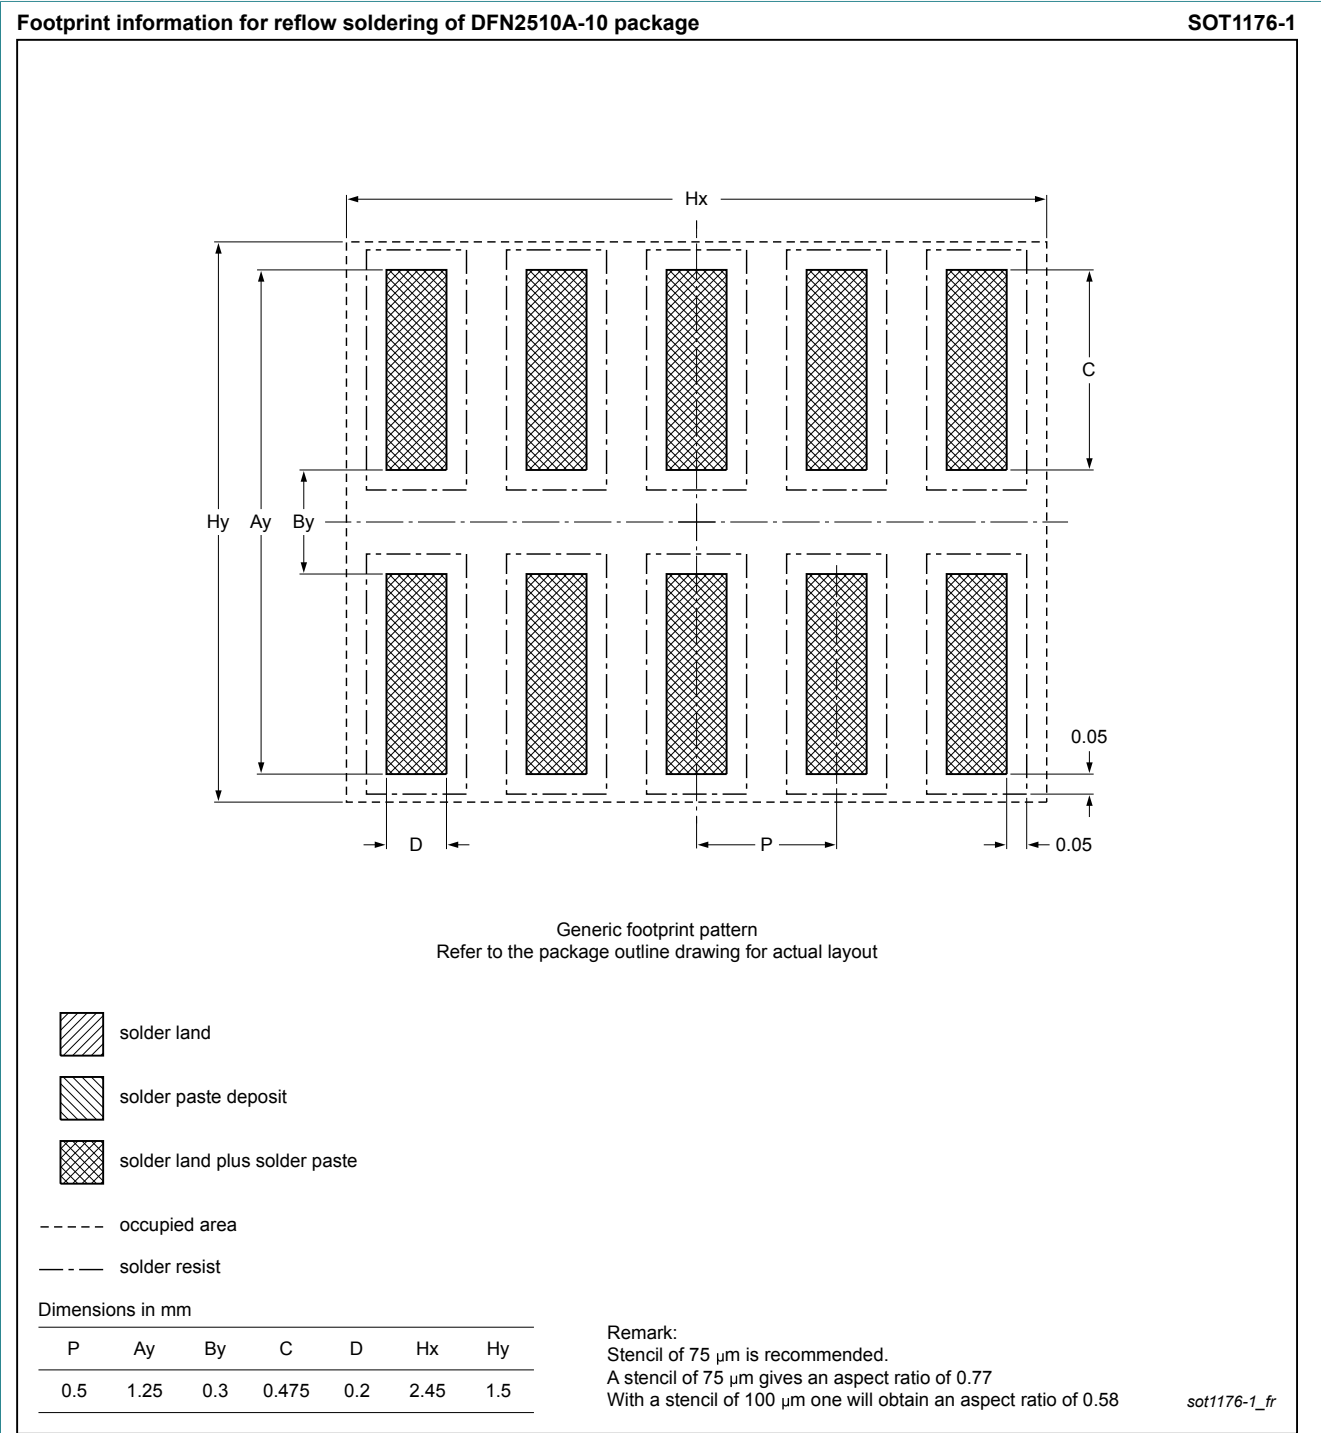


Figure 16. Reflow soldering footprint DFN2510A-10 (SOT1176-1)

10 Revision history

Table 8. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
PUSB3F99 v.1	20171215	Product data sheet	-	-

Contents

1 Product profile 1

1.1 General description 1

1.2 Features and benefits 1

1.3 Applications 1

2 Pinning information 2

3 Ordering information 2

4 Marking 2

5 Limiting values 2

6 Characteristics 3

6.1 4

7 Application information 9

8 Package outline 9

9 Soldering 10

10 Revision history 11

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А