



# STP17NK40Z - STP17NK40ZFP

N-CHANNEL 400V - 0.23Ω - 15A TO-220/TO-220FP

Zener-Protected SuperMESH™ Power MOSFET

| TYPE         | V <sub>DSS</sub> | R <sub>DS(on)</sub> | I <sub>D</sub> | P <sub>w</sub> |
|--------------|------------------|---------------------|----------------|----------------|
| STP17NK40Z   | 400 V            | < 0.25 Ω            | 15 A           | 150 W          |
| STP17NK40ZFP | 400 V            | < 0.25 Ω            | 15 A           | 35 W           |


- TYPICAL R<sub>DS(on)</sub> = 0.23 Ω
- EXTREMELY HIGH dv/dt CAPABILITY
- 100% AVALANCHE TESTED
- GATE CHARGE MINIMIZED
- VERY LOW INTRINSIC CAPACITANCES
- VERY GOOD MANUFACTURING REPEATIBILITY

## DESCRIPTION


The SuperMESH™ series is obtained through an extreme optimization of ST's well established strip-based PowerMESH™ layout. In addition to pushing on-resistance significantly down, special care is taken to ensure a very good dv/dt capability for the most demanding applications. Such series complements ST full range of high voltage MOSFETs including revolutionary MDmesh™ products.

## APPLICATIONS

- HIGH CURRENT, HIGH SPEED SWITCHING
- IDEAL FOR OFF-LINE POWER SUPPLIES, ADAPTORS AND PFC
- LIGHTING

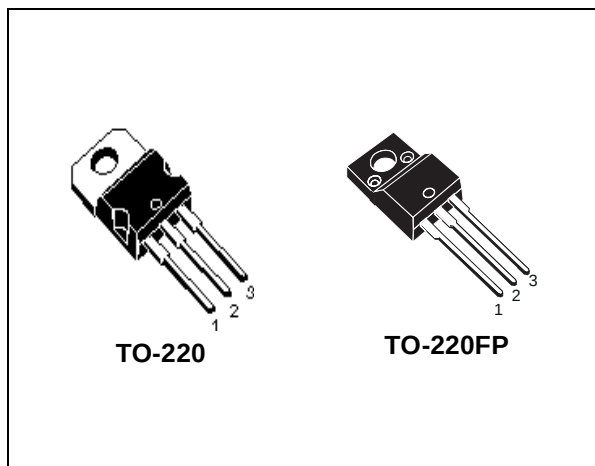

## INTERNAL SCHEMATIC DIAGRAM



## ORDERING INFORMATION

| SALES TYPE   | MARKING    | PACKAGE  | PACKAGING |
|--------------|------------|----------|-----------|
| STP17NK40Z   | P17NK40Z   | TO-220   | TUBE      |
| STP17NK40ZFP | P17NK40ZFP | TO-220FP | TUBE      |

## STP17NK40Z - STP17NK40ZFP

### ABSOLUTE MAXIMUM RATINGS

| Symbol             | Parameter                                               | Value                    |              | Unit                                 |
|--------------------|---------------------------------------------------------|--------------------------|--------------|--------------------------------------|
|                    |                                                         | STP17NK40Z               | STP17NK40ZFP |                                      |
| $V_{DS}$           | Drain-source Voltage ( $V_{GS} = 0$ )                   | 400                      |              | V                                    |
| $V_{DGR}$          | Drain-gate Voltage ( $R_{GS} = 20\text{ k}\Omega$ )     | 400                      |              | V                                    |
| $V_{GS}$           | Gate- source Voltage                                    | $\pm 30$                 |              | V                                    |
| $I_D$              | Drain Current (continuous) at $T_C = 25^\circ\text{C}$  | 15                       | 15 (*)       | A                                    |
| $I_D$              | Drain Current (continuous) at $T_C = 100^\circ\text{C}$ | 9.4                      | 9.4 (*)      | A                                    |
| $I_{DM}(\bullet)$  | Drain Current (pulsed)                                  | 60                       | 60 (*)       | A                                    |
| $P_{TOT}$          | Total Dissipation at $T_C = 25^\circ\text{C}$           | 150                      | 35           | W                                    |
|                    | Derating Factor                                         | 1.2                      | 0.28         | W/ $^\circ\text{C}$                  |
| $I_{GS}$           | Gate-source Current (DC)                                | $\pm 20$                 |              | mA                                   |
| $V_{ESD(G-S)}$     | Gate source ESD(HBM-C=100pF, R=1.5K $\Omega$ )          | 4500                     |              | V                                    |
| dv/dt (1)          | Peak Diode Recovery voltage slope                       | 4.5                      |              | V/ns                                 |
| Viso               | Insulation Withstand Voltage (DC)                       | --                       | 2500         | V                                    |
| $T_j$<br>$T_{stg}$ | Operating Junction Temperature<br>Storage Temperature   | -55 to 150<br>-55 to 150 |              | $^\circ\text{C}$<br>$^\circ\text{C}$ |

(●) Pulse width limited by safe operating area

(1)  $I_{SD} \leq 15\text{A}$ ,  $di/dt \leq 200\text{A}/\mu\text{s}$ ,  $V_{DD} \leq V_{(BR)DSS}$ ,  $T_j \leq T_{JMAX}$ .

(\*) Limited only by maximum temperature allowed

### THERMAL DATA

|           |                                                | TO-220 | TO-220FP |                           |
|-----------|------------------------------------------------|--------|----------|---------------------------|
| Rthj-case | Thermal Resistance Junction-case Max           | 0.83   | 3.6      | $^\circ\text{C}/\text{W}$ |
| Rthj-amb  | Thermal Resistance Junction-ambient Max        | 62.5   |          | $^\circ\text{C}/\text{W}$ |
| $T_I$     | Maximum Lead Temperature For Soldering Purpose | 300    |          | $^\circ\text{C}$          |

### AVALANCHE CHARACTERISTICS

| Symbol   | Parameter                                                                                                    | Max Value | Unit |
|----------|--------------------------------------------------------------------------------------------------------------|-----------|------|
| $I_{AR}$ | Avalanche Current, Repetitive or Not-Repetitive (pulse width limited by $T_j$ max)                           | 15        | A    |
| $E_{AS}$ | Single Pulse Avalanche Energy (starting $T_j = 25^\circ\text{C}$ , $I_D = I_{AR}$ , $V_{DD} = 50\text{ V}$ ) | 450       | mJ   |

### GATE-SOURCE ZENER DIODE

| Symbol     | Parameter                     | Test Conditions                        | Min. | Typ. | Max. | Unit |
|------------|-------------------------------|----------------------------------------|------|------|------|------|
| $BV_{GSO}$ | Gate-Source Breakdown Voltage | $I_{GS} = \pm 1\text{mA}$ (Open Drain) | 30   |      |      | V    |

### PROTECTION FEATURES OF GATE-TO-SOURCE ZENER DIODES

The built-in back-to-back Zener diodes have specifically been designed to enhance not only the device's ESD capability, but also to make them safely absorb possible voltage transients that may occasionally be applied from gate to source. In this respect the Zener voltage is appropriate to achieve an efficient and cost-effective intervention to protect the device's integrity. These integrated Zener diodes thus avoid the usage of external components.

**ELECTRICAL CHARACTERISTICS** ( $T_{CASE} = 25^{\circ}C$  UNLESS OTHERWISE SPECIFIED)  
ON/OFF

| Symbol        | Parameter                                        | Test Conditions                                                                     | Min. | Typ. | Max.     | Unit               |
|---------------|--------------------------------------------------|-------------------------------------------------------------------------------------|------|------|----------|--------------------|
| $V_{(BR)DSS}$ | Drain-source Breakdown Voltage                   | $I_D = 1\text{ mA}$ , $V_{GS} = 0$                                                  | 400  |      |          | V                  |
| $I_{DSS}$     | Zero Gate Voltage Drain Current ( $V_{GS} = 0$ ) | $V_{DS} = \text{Max Rating}$<br>$V_{DS} = \text{Max Rating}$ , $T_C = 125^{\circ}C$ |      |      | 1<br>50  | $\mu A$<br>$\mu A$ |
| $I_{GSS}$     | Gate-body Leakage Current ( $V_{DS} = 0$ )       | $V_{GS} = \pm 20\text{ V}$                                                          |      |      | $\pm 10$ | $\mu A$            |
| $V_{GS(th)}$  | Gate Threshold Voltage                           | $V_{DS} = V_{GS}$ , $I_D = 100\text{ }\mu A$                                        | 3    | 3.75 | 4.5      | V                  |
| $R_{DS(on)}$  | Static Drain-source On Resistance                | $V_{GS} = 10\text{ V}$ , $I_D = 7.5\text{ A}$                                       |      | 0.23 | 0.25     | $\Omega$           |

**DYNAMIC**

| Symbol                              | Parameter                                                               | Test Conditions                                                | Min. | Typ.              | Max. | Unit           |
|-------------------------------------|-------------------------------------------------------------------------|----------------------------------------------------------------|------|-------------------|------|----------------|
| $g_{fs} (1)$                        | Forward Transconductance                                                | $V_{DS} = 15\text{ V}$ , $I_D = 7.5\text{ A}$                  |      | 10.6              |      | S              |
| $C_{iss}$<br>$C_{oss}$<br>$C_{rss}$ | Input Capacitance<br>Output Capacitance<br>Reverse Transfer Capacitance | $V_{DS} = 25\text{ V}$ , $f = 1\text{ MHz}$ , $V_{GS} = 0$     |      | 1900<br>271<br>63 |      | pF<br>pF<br>pF |
| $C_{oss\text{ eq.}} (3)$            | Equivalent Output Capacitance                                           | $V_{GS} = 0\text{ V}$ , $V_{DS} = 0\text{ V to } 400\text{ V}$ |      | 175               |      | pF             |

**SWITCHING ON**

| Symbol                        | Parameter                                                    | Test Conditions                                                                                                                | Min. | Typ.           | Max. | Unit           |
|-------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|------|----------------|------|----------------|
| $t_{d(on)}$<br>$t_r$          | Turn-on Delay Time<br>Rise Time                              | $V_{DD} = 200\text{ V}$ , $I_D = 7.5\text{ A}$<br>$R_G = 4.7\Omega$ , $V_{GS} = 10\text{ V}$<br>(Resistive Load see, Figure 3) |      | 25<br>23       |      | ns<br>ns       |
| $Q_g$<br>$Q_{gs}$<br>$Q_{gd}$ | Total Gate Charge<br>Gate-Source Charge<br>Gate-Drain Charge | $V_{DD} = 320\text{ V}$ , $I_D = 15\text{ A}$ ,<br>$V_{GS} = 10\text{ V}$                                                      |      | 65<br>13<br>35 |      | nC<br>nC<br>nC |

**SWITCHING OFF**

| Symbol                          | Parameter                                             | Test Conditions                                                                                                                 | Min. | Typ.           | Max. | Unit           |
|---------------------------------|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|------|----------------|------|----------------|
| $t_{d(off)}$<br>$t_f$           | Turn-off Delay Time<br>Fall Time                      | $V_{DD} = 200\text{ V}$ , $I_D = 7.5\text{ A}$<br>$R_G = 4.7\Omega$ , $V_{GS} = 10\text{ V}$<br>(Resistive Load see, Figure 3)  |      | 55<br>13       |      | ns<br>ns       |
| $t_{r(voff)}$<br>$t_f$<br>$t_c$ | Off-voltage Rise Time<br>Fall Time<br>Cross-over Time | $V_{DD} = 320\text{ V}$ , $I_D = 15\text{ A}$ ,<br>$R_G = 4.7\Omega$ , $V_{GS} = 10\text{ V}$<br>(Inductive Load see, Figure 5) |      | 12<br>13<br>25 |      | ns<br>ns<br>ns |

**SOURCE DRAIN DIODE**


| Symbol                            | Parameter                                                                    | Test Conditions                                                                                                                         | Min. | Typ.              | Max.     | Unit          |
|-----------------------------------|------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|------|-------------------|----------|---------------|
| $I_{SD}$<br>$I_{SDM} (2)$         | Source-drain Current<br>Source-drain Current (pulsed)                        |                                                                                                                                         |      |                   | 15<br>60 | A<br>A        |
| $V_{SD} (1)$                      | Forward On Voltage                                                           | $I_{SD} = 15\text{ A}$ , $V_{GS} = 0$                                                                                                   |      |                   | 1.6      | V             |
| $t_{rr}$<br>$Q_{rr}$<br>$I_{RRM}$ | Reverse Recovery Time<br>Reverse Recovery Charge<br>Reverse Recovery Current | $I_{SD} = 15\text{ A}$ , $di/dt = 100\text{ A}/\mu s$<br>$V_{DD} = 100\text{ V}$ , $T_J = 150^{\circ}C$<br>(see test circuit, Figure 5) |      | 332<br>2650<br>16 |          | ns<br>nC<br>A |

Note: 1. Pulsed: Pulse duration = 300  $\mu s$ , duty cycle 1.5 %.


2. Pulse width limited by safe operating area.

3.  $C_{oss\text{ eq.}}$  is defined as a constant equivalent capacitance giving the same charging time as  $C_{oss}$  when  $V_{DS}$  increases from 0 to 80%  $V_{DSS}$ .


Safe Operating Area For TO-220

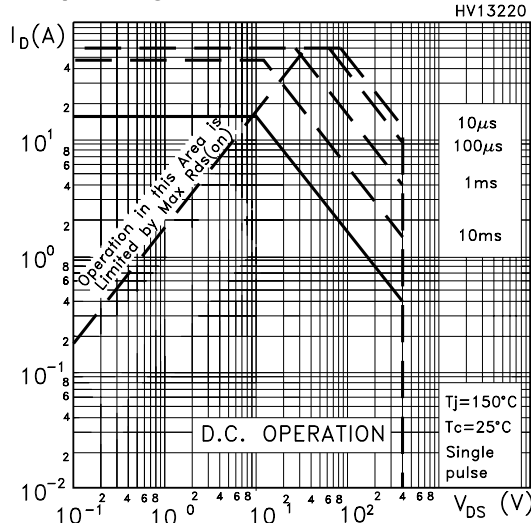


Safe Operating Area For TO-220FP

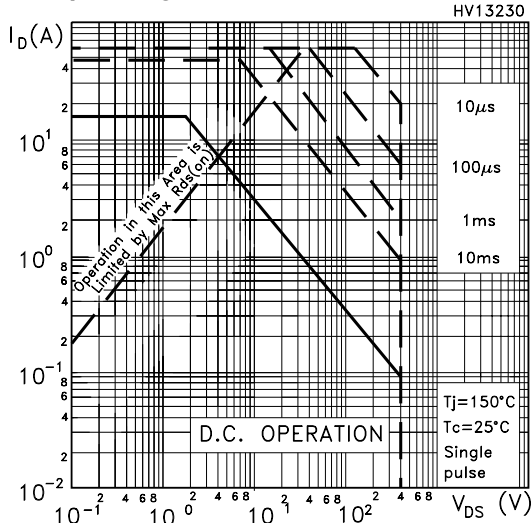


Thermal Impedance For TO-220

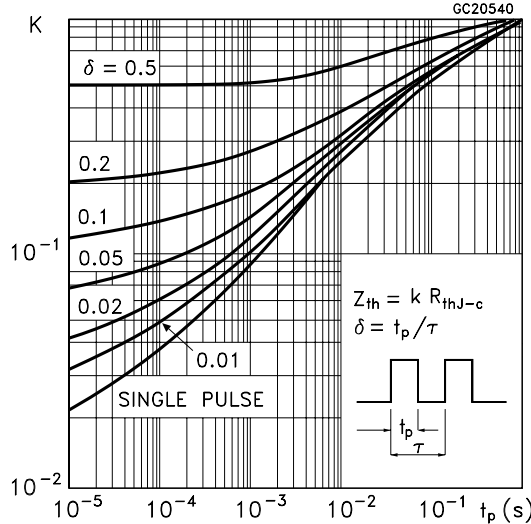


Thermal Impedance For TO-220FP

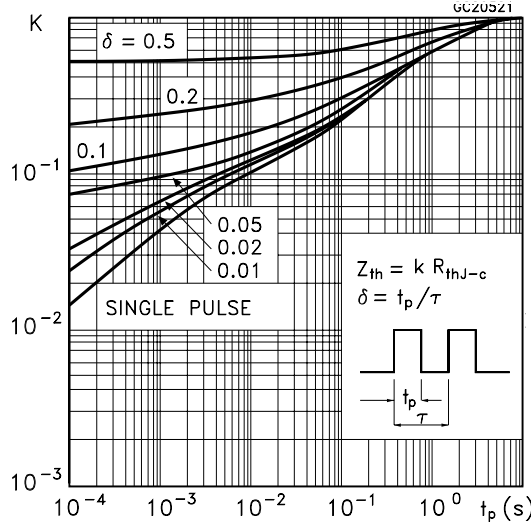


Output Characteristics

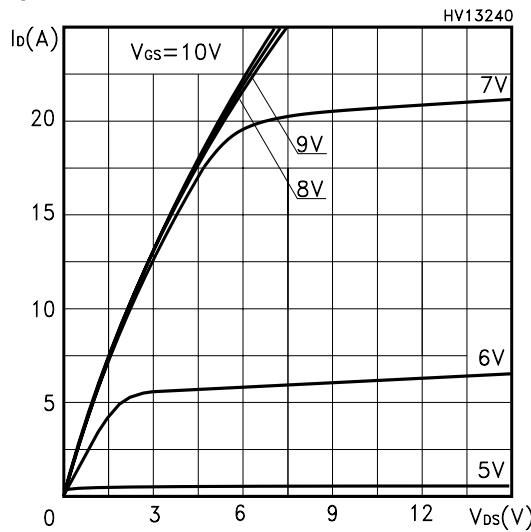


Transfer Characteristics

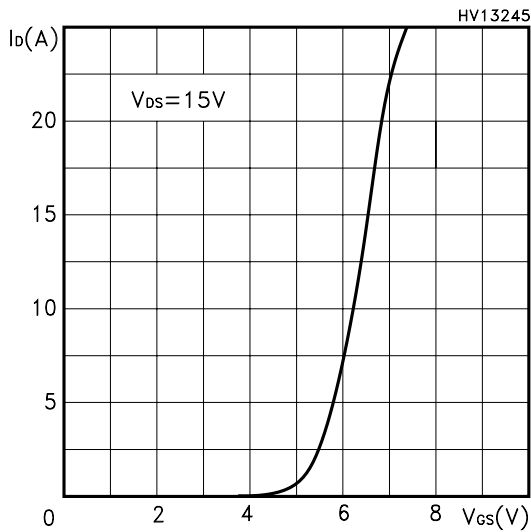


### Transconductance

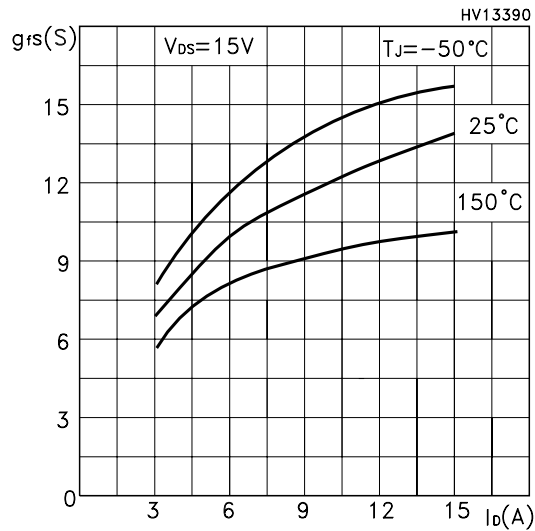


### Static Drain-source On Resistance

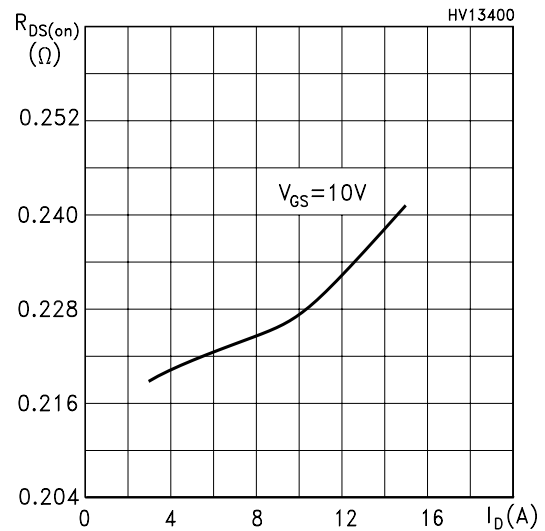


### Gate Charge vs Gate-source Voltage

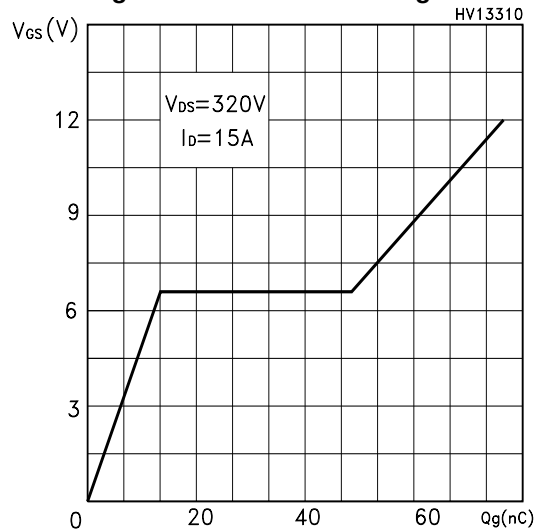


### Capacitance Variations

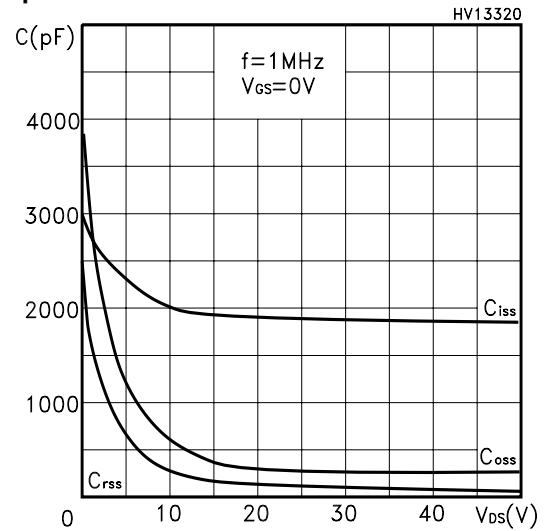


### Normalized Gate Threshold Voltage vs Temp.

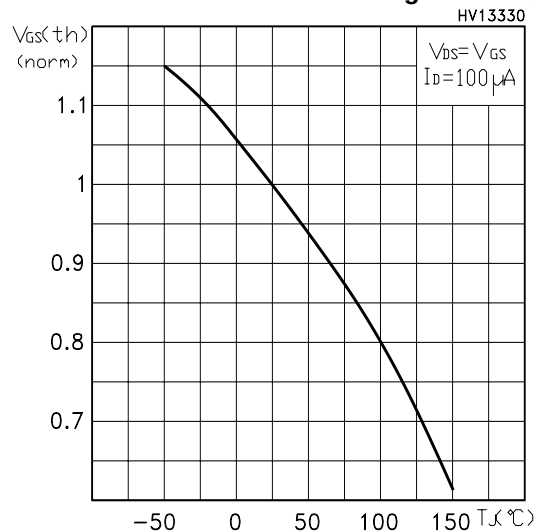


### Normalized On Resistance vs Temperature

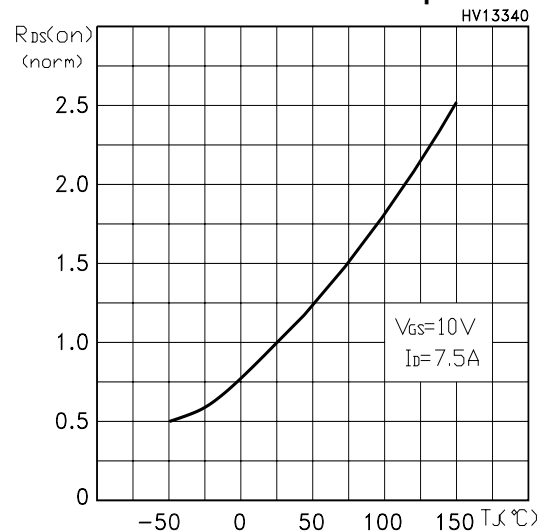


Source-drain Diode Forward Characteristics

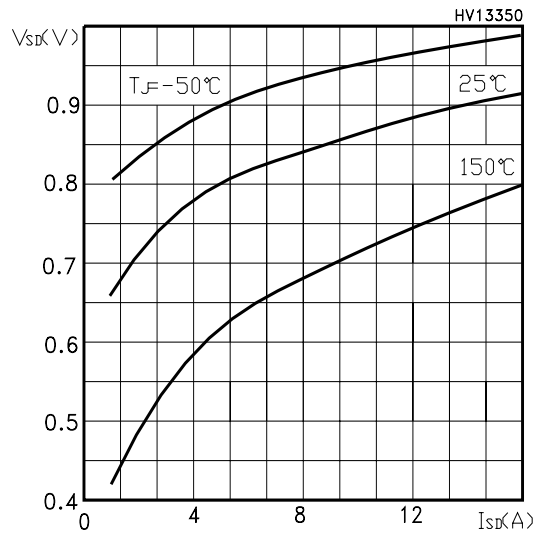


Normalized BVDSS vs Temperature

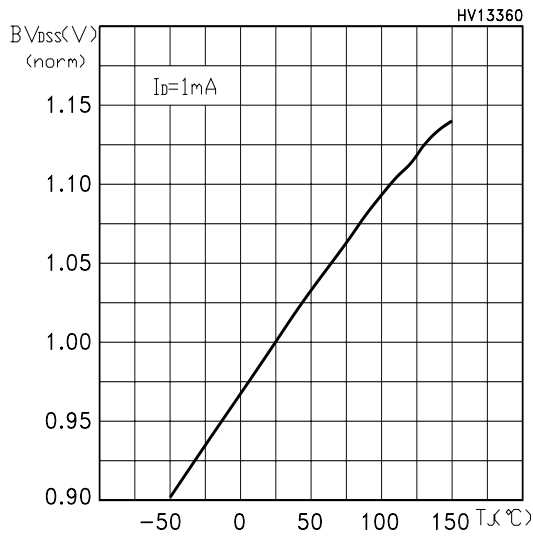


Maximum Avalanche Energy vs Temperature

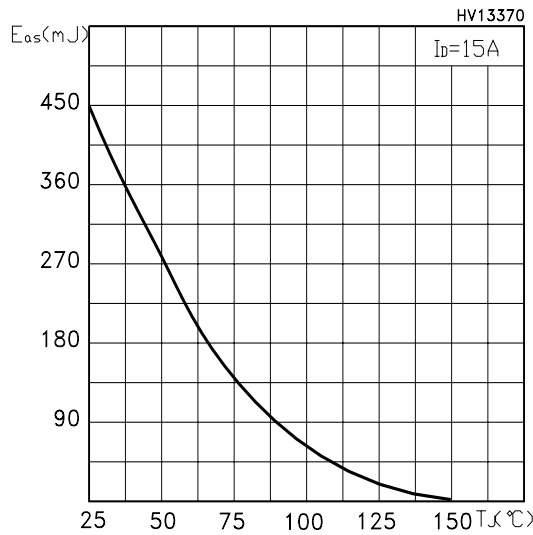


**Fig. 1: Unclamped Inductive Load Test Circuit**

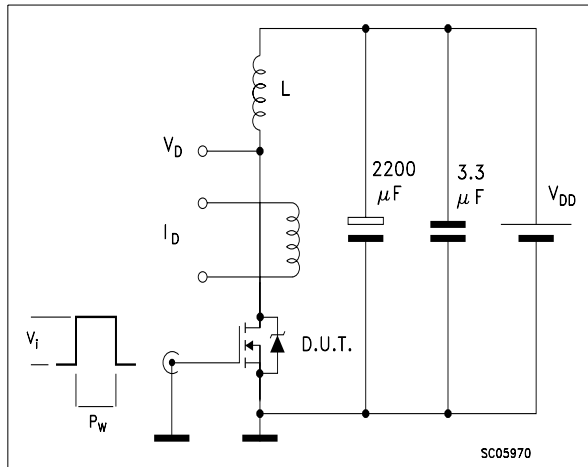


**Fig. 2: Unclamped Inductive Waveform**

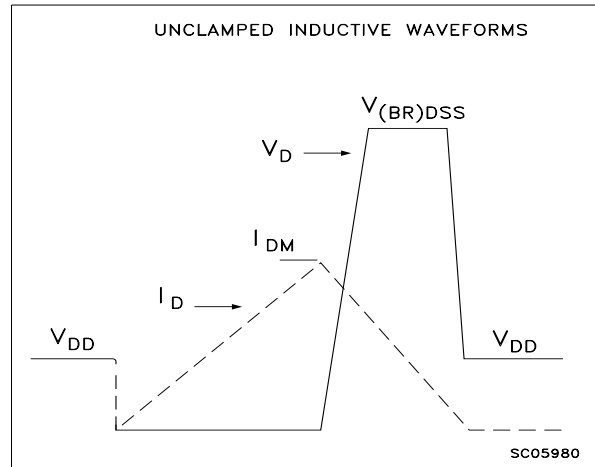


**Fig. 3: Switching Times Test Circuit For Resistive Load**

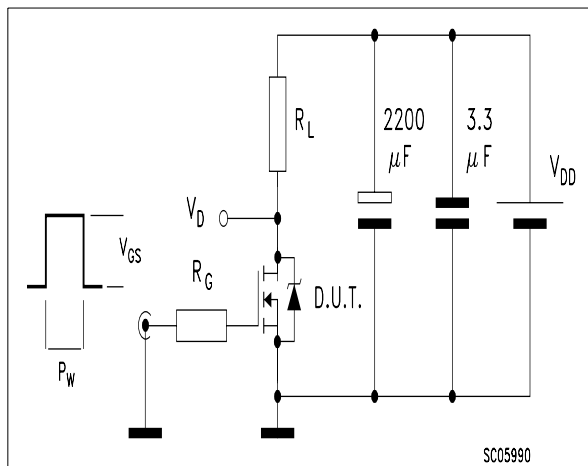

**Fig. 4: Gate Charge test Circuit**

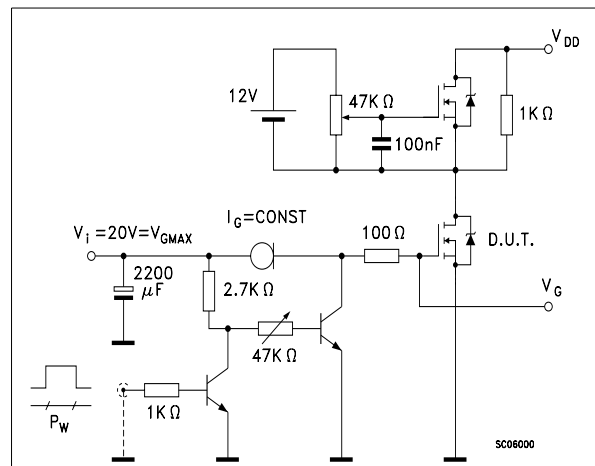


**Fig. 5: Test Circuit For Inductive Load Switching And Diode Recovery Times**

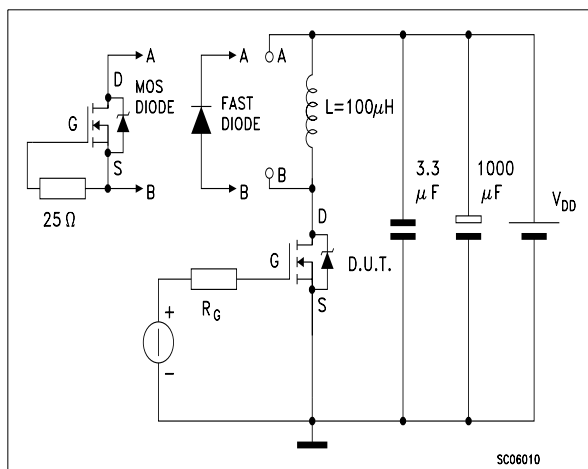

TO-220 MECHANICAL DATA


| DIM. | mm    |      |       | inch  |       |       |
|------|-------|------|-------|-------|-------|-------|
|      | MIN.  | TYP. | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.40  |      | 4.60  | 0.173 |       | 0.181 |
| C    | 1.23  |      | 1.32  | 0.048 |       | 0.051 |
| D    | 2.40  |      | 2.72  | 0.094 |       | 0.107 |
| D1   |       | 1.27 |       |       | 0.050 |       |
| E    | 0.49  |      | 0.70  | 0.019 |       | 0.027 |
| F    | 0.61  |      | 0.88  | 0.024 |       | 0.034 |
| F1   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| F2   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| G    | 4.95  |      | 5.15  | 0.194 |       | 0.203 |
| G1   | 2.4   |      | 2.7   | 0.094 |       | 0.106 |
| H2   | 10.0  |      | 10.40 | 0.393 |       | 0.409 |
| L2   |       | 16.4 |       |       | 0.645 |       |
| L4   | 13.0  |      | 14.0  | 0.511 |       | 0.551 |
| L5   | 2.65  |      | 2.95  | 0.104 |       | 0.116 |
| L6   | 15.25 |      | 15.75 | 0.600 |       | 0.620 |
| L7   | 6.2   |      | 6.6   | 0.244 |       | 0.260 |
| L9   | 3.5   |      | 3.93  | 0.137 |       | 0.154 |
| DIA. | 3.75  |      | 3.85  | 0.147 |       | 0.151 |

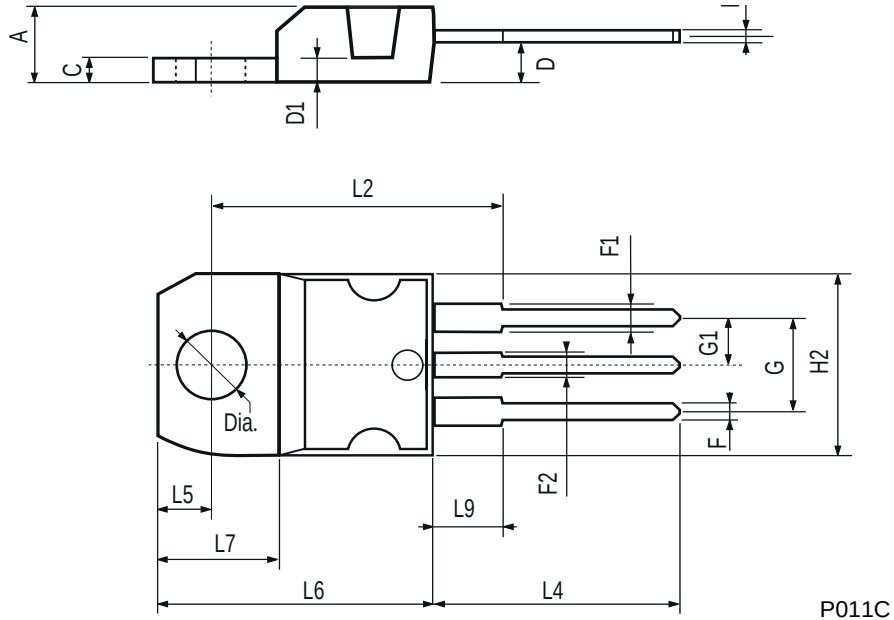



## TO-220FP MECHANICAL DATA

| DIM. | mm.  |     |      | inch  |       |       |
|------|------|-----|------|-------|-------|-------|
|      | MIN. | TYP | MAX. | MIN.  | TYP.  | MAX.  |
| A    | 4.4  |     | 4.6  | 0.173 |       | 0.181 |
| B    | 2.5  |     | 2.7  | 0.098 |       | 0.106 |
| D    | 2.5  |     | 2.75 | 0.098 |       | 0.108 |
| E    | 0.45 |     | 0.7  | 0.017 |       | 0.027 |
| F    | 0.75 |     | 1    | 0.030 |       | 0.039 |
| F1   | 1.15 |     | 1.5  | 0.045 |       | 0.067 |
| F2   | 1.15 |     | 1.5  | 0.045 |       | 0.067 |
| G    | 4.95 |     | 5.2  | 0.195 |       | 0.204 |
| G1   | 2.4  |     | 2.7  | 0.094 |       | 0.106 |
| H    | 10   |     | 10.4 | 0.393 |       | 0.409 |
| L2   |      | 16  |      |       | 0.630 |       |
| L3   | 28.6 |     | 30.6 | 1.126 |       | 1.204 |
| L4   | 9.8  |     | 10.6 | .0385 |       | 0.417 |
| L5   | 2.9  |     | 3.6  | 0.114 |       | 0.141 |
| L6   | 15.9 |     | 16.4 | 0.626 |       | 0.645 |
| L7   | 9    |     | 9.3  | 0.354 |       | 0.366 |
| Ø    | 3    |     | 3.2  | 0.118 |       | 0.126 |

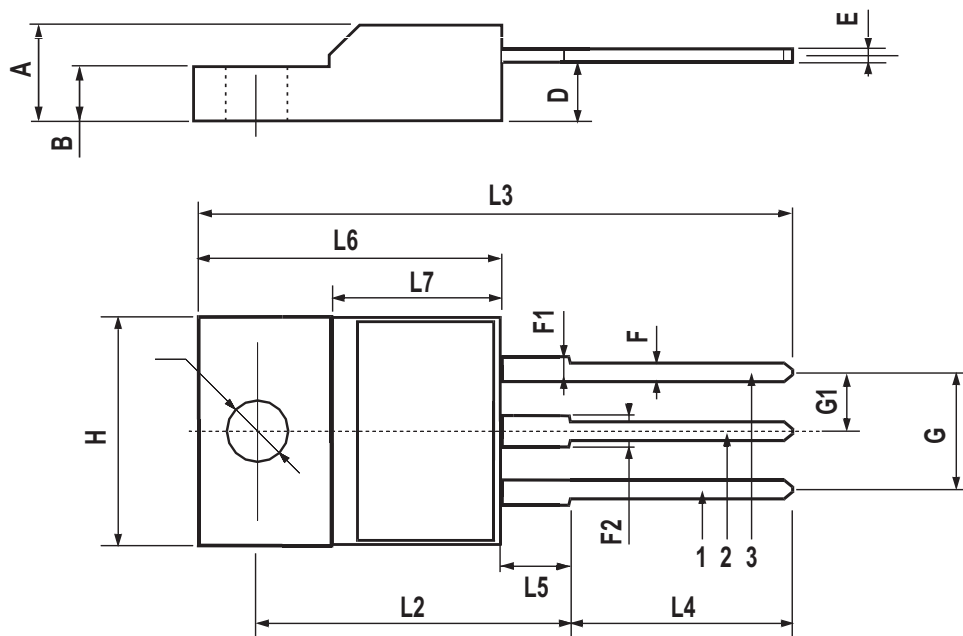

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

© <http://www.st.com>

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А