

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0432028827](#)
Status: **Active**
Overview: [modular_plugs_jacks](#)
Description: Modular Jack, Right Angle, Low Profile, Shielded, All Panel Grounding Tabs, without Bottom Grounding Tab, Rear Position PCB Ground Tab, 8/8

Documents:
[3D Model](#) [Product Specification PS-43202-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E107635

General


Product Family Modular Jacks/Plugs
Series [43202](#)
Component Type PCB Jack
Magnetic No
Overview [modular_plugs_jacks](#)
Performance Category 3
Power over Ethernet (PoE) N/A
Product Name RJ45

Physical

Color - Resin Black
Durability (mating cycles max) 500
Flammability 94V-0
Inverted / Top Latch No
Lightpipes/LEDs None
Material - Metal Brass, Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Orientation Right Angle (Side Entry)
PCB Retention Yes
PCB Thickness Recommended (in) 0.062 In
PCB Thickness Recommended (mm) 1.60 mm
Packaging Type Tray
Pitch - Mating Interface (in) 0.050 In
Pitch - Mating Interface (mm) 1.27 mm
Plating min: Mating (µin) 50
Plating min: Mating (µm) 1.25
Plating min: Termination (µin) 100
Plating min: Termination (µm) 2.5
Ports 1
Positions / Loaded Contacts 8/8
Surface Mount Compatible (SMC) Yes
Temperature Range - Operating -40°C to +85°C
Termination Interface: Style Through Hole
Wire/Cable Type N/A

Electrical

Current - Maximum per Contact 1.5A
Grounding to PCB Yes
Grounding to Panel Yes

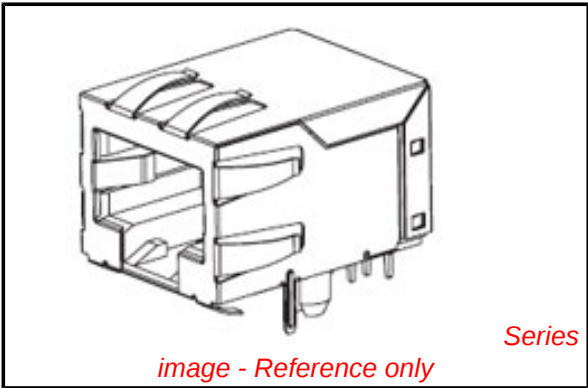

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Not Reviewed
**Halogen-Free
Status**
Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[43202Series](#)

Mates With
FCC 68 Plugs

Shielded	Yes
Voltage - Maximum	125V
Solder Process Data	
Lead-free Process Capability	Wave Capable (TH only)
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-43202-004
Product Specification	PS-43202-001, RPS-43202-002
Sales Drawing	SDA-43202

This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

NOTES:

1) MATERIAL:

HOUSING: NYLON(PA), GLASS FILLED, UL94V-0, COLOR: SEE SHEETS 5 AND 6
INSULATOR: NYLON(PA), GLASS FILLED, UL94V-0, COLOR: SEE SHEETS 5 AND 6
TERMINALS: PHOSPHOR BRONZE, .012/ 0.30 THICK
SHIELD: BRASS, .007/ 0.18 THICK

2) FINISH:

TERMINALS:

A = SELECT GOLD IN CONTACT AREA: 50 MICROINCHES / 1.27 MICROMETERS MIN.,
*SELECT TIN IN PC TAIL AREA: 100 MICROINCHES / 2.54 MICROMETERS MIN.,
WITH OVERALL NICKEL UNDERPLATE: 50 MICROINCHES / 1.27 MICROMETERS MIN.
B = SELECT GOLD IN CONTACT AREA: 30 MICROINCHES / 0.76 MICROMETERS MIN.,
*SELECT TIN IN PC TAIL AREA: 100 MICROINCHES / 2.54 MICROMETERS MIN.,
WITH OVERALL NICKEL UNDERPLATE: 50 MICROINCHES / 1.27 MICROMETERS MIN.
*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS
DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC".
CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD
IN THE PC TAILS AND/OR SHIELD.

SHIELD:

100 MICROINCHES / 2.54 MICROMETERS NICKEL OVER 50 MICROINCHES / 1.27
MICROMETERS COPPER UNDERPLATE PCB GROUND TABS DIPPED IN TIN

3) PRODUCT SPECIFICATION AND PROCESSING PARAMETERS: PS-43202.


4) PACKAGING SPECIFICATION:

UNSHIELDED CONNECTOR ASSEMBLIES PACKAGED IN THERMOFORMED TRAYS
PER MOLEX PACKAGING SPECIFICATION PK-43202-003.
UNSHIELDED CONNECTOR ASSEMBLIES PACKAGED IN TUBES
PER MOLEX PACKAGING SPECIFICATION PK-43202-005.
SHIELDED CONNECTOR ASSEMBLIES PACKAGED IN THERMOFORMED TRAYS
PER MOLEX PACKAGING SPECIFICATION PK-43202-004.

5) SEE SHEETS 7 - 9 FOR P.C. BOARD LAYOUTS.

6) CONFORMS TO FCC REGULATION PART 68.5 FOR MODULAR JACKS.

7) THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC
SPECIFICATION PS-45499-002.



SHIELDED MODULAR JACK
SHOWN WITH PANEL GROUND
OPTION 'D' AND FRONT
PCB GROUND TABS.

DRAWING LEGEND

SHEET 1- NOTES, DRAWING LEGEND
SHEET 2- SHIELDED MODULAR JACK W/ BOTTOM GROUND TABS
SHEET 3- SHIELDED MODULAR JACK W/O BOTTOM GROUND TABS
SHEET 4- UNSHIELDED MODULAR JACK
SHEET 5- PART NUMBER CHARTS
SHEET 6- PART NUMBER CHARTS
SHEET 7- FOOTPRINT LAYOUT FOR 4 POSITION HOUSING
SHEET 8- FOOTPRINT LAYOUT FOR 6 POSITION HOUSING
SHEET 9- FOOTPRINT LAYOUT FOR 8 POSITION HOUSING


OBS COLORED JACKS EC NO: UCP2008-1189 DRAWN:JBELL 2007/11/30 CHKD:LSCHMIDT 2008/02/20 APPR:FSM/TH 2008/03/04	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	TITLE ULTRA LOW PROFILE RIGHT ANGLE MODULAR JACK ASSEMBLY MOLEX INCORPORATED	DOCUMENT NO. SDA-43202	SHEET NO. 1 OF 9		
				mm	INCH	DRAWN BY JTR	DATE 1993/03/31							
			4 PLACES	±---	±---	CHECKED BY JTR	DATE 1993/03/31							
			3 PLACES	±---	±.010									
			2 PLACES	±0.25	±.014									
			1 PLACE	±0.36	±---									
			ANGULAR ±1/2°		APPROVED BY RAS		DATE 1993/03/31							
					MATERIAL NO.									
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHTS 5&6		SIZE							
					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

9	L2
8	L2
7	L2
6	L4
5	L
4	K2
3	L1
2	L1
1	L4
SH	REV


SHIELDED MODULAR JACK W/O BOTTOM GROUND TABS

SIZE 8, LOADED 10 VERSION SHOWN

SIDE/TOP GROUND TAB OPTIONS FOR SHIELDS




OPTION "E"
NO TOP OR SIDE TABS




OPTION "F"
TOP TABS

OPTIONAL TOP GROUND TABS

SHIELDED MODULAR JACK ASSEMBLY
SEE SHEET 6 FOR MATERIAL NO.




OPTION "G"
TOP AND STAGGERED SIDE TABS




OPTION "H"
TOP AND SIDE TABS

OPTIONAL SIDE
GROUND TABS
(2 PLACES)

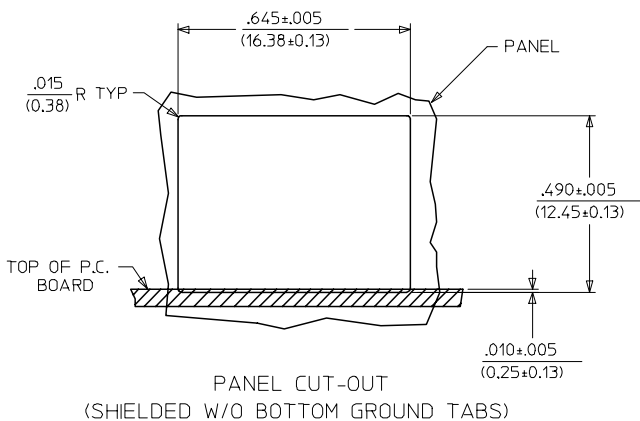


HOUSING SIZE	CIRCUIT SIZE	DIM. B
8	10	.450±.005 (11.43±0.13)
8	8	.350±.005 (8.89±0.13)

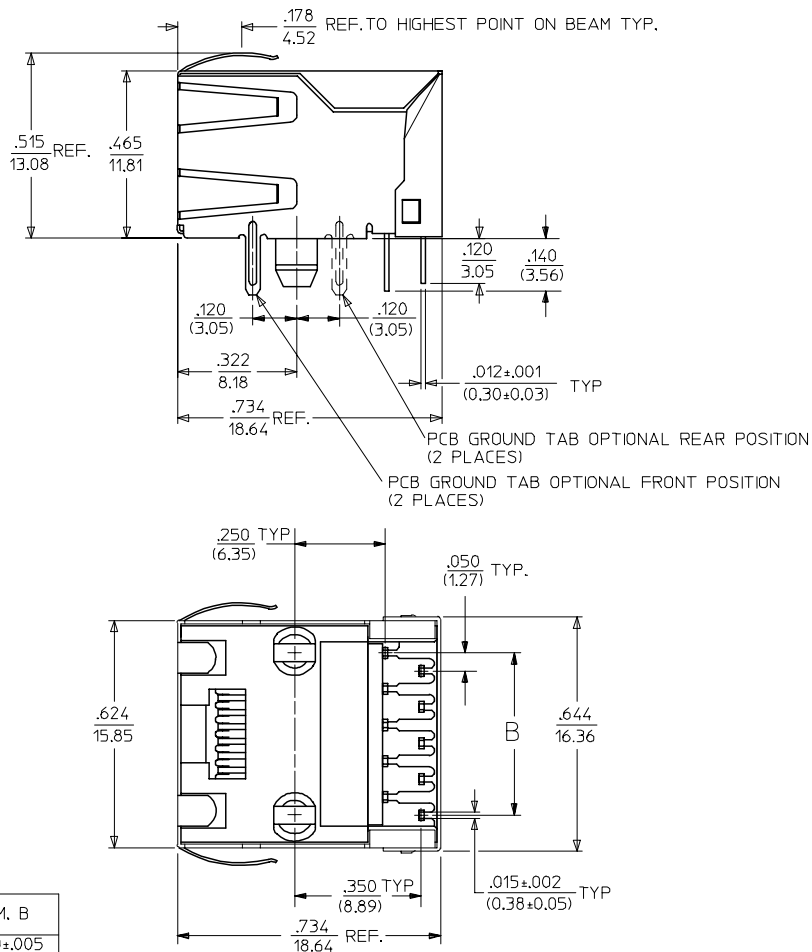

SEE SHEET ONE EC NO: UCP2004-1888 DRAWN: SCHMIDT 2004/03/31 CHKD: SCHMIDT 2004/03/31 APPR: FSMITH 2004/03/31 L1	DESCRIPTION	QUALITY SYMBOLS - 0 - 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			SCALE 4:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	REVISE ON CAD ONLY						
			mm		INCH		DIMENSION STYLE			TITLE					
							IN/MM			ULTRA LOW PROFILE RIGHT ANGLE MODULAR JACK ASSEMBLY					
			4 PLACES ± --- ± ---				DRAWN BY DATE								
			3 PLACES ± --- ± .010				JTR 1993/03/31								
			2 PLACES ± 0.25 ± .014				CHECKED BY DATE								
			1 PLACE ± 0.36 ± ---				JTR 1993/03/31			MOLEX MOLEX INCORPORATED					
			ANGULAR ±1/2°				APPROVED BY DATE								
			DRAFT WHERE APPLICABLE				RAS 1993/03/31			MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
			MUST REMAIN WITHIN DIMENSIONS							SEE SHT 6		SDA-43202		3 OF 9	
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							C				

	13	12	11	10	9	8	7	6	5	4	3	2	1		
J	SHIELDED MODULAR JACKS W/O BOTTOM GROUND TABS (SHEET 3)							UNSHIELDED MODULAR JACKS- (SHEET 4)							J
	ASSEMBLY MATERIAL NUMBER	CONNECTOR SIZE	NUMBER OF CIRCUITS	SIDE/TOP PANEL GROUND TAB OPTION	PCB GROUND TAB OPTION	TERMINAL PLATING OPTION	PACKAGING	HOUSING COLOR	ASSEMBLY MATERIAL NUMBER	CONNECTOR SIZE	NUMBER OF CIRCUITS	TERMINAL PLATING OPTION	KEYING OPTION	PACKAGING OPTION	HOUSING COLOR
	43202-8800	8	10	E	FRONT POSITION	A	TRAY	BLACK	43202-4101	4	4	A	NO	TRAY	BLACK
	43202-8801	8	10	F	FRONT POSITION	A	TRAY		43202-4104	4	2	A	NO	TRAY	
I	43202-8802	8	10	G	FRONT POSITION	A	TRAY		43202-6101	6	6	A	NO	TRAY	
	43202-8803	8	10	H	FRONT POSITION	A	TRAY		43202-6102	6	6	B	NO	TRAY	
	43202-8808	8	10	E	REAR POSITION	A	TRAY		43202-6104	6	4	A	NO	TRAY	
	43202-8809	8	10	F	REAR POSITION	A	TRAY		43202-6105	6	4	B	NO	TRAY	
	43202-8810	8	10	G	REAR POSITION	A	TRAY		43202-6107	6	2	A	NO	TRAY	
H	43202-8811	8	10	H	REAR POSITION	A	TRAY		43202-6110	6	6	B	NO	TUBE	
	43202-8816	8	8	E	FRONT POSITION	A	TRAY		43202-8101	8	10	A	NO	TRAY	
	43202-8817	8	8	F	FRONT POSITION	A	TRAY		43202-8104	8	8	A	NO	TRAY	
	43202-8818	8	8	G	FRONT POSITION	A	TRAY		43202-8105	8	8	B	NO	TRAY	
	43202-8819	8	8	H	FRONT POSITION	A	TRAY		43202-8113	8	8	A	YES	TRAY	
	43202-8824	8	8	E	REAR POSITION	A	TRAY		43202-8116	8	6	A	NO	TRAY	
	43202-8825	8	8	F	REAR POSITION	A	TRAY		43202-8119	8	4	A	NO	TRAY	
G	43202-8826	8	8	G	REAR POSITION	A	TRAY		43202-8122	8	2	A	NO	TRAY	
	43202-8827	8	8	H	REAR POSITION	A	TRAY		43202-8504	8	8	A	NO	TUBE	
									43202-8513	8	8	A	YES	TUBE	
F															F
E															E
D															D
C															C
B															B
A															A
<div><div><div><div>OBS COLORED JACKS</div><div>EC NO: UCP2008-1189</div><div>DRWN:JBELL</div><div>CHKD:LSCHMIDT</div><div>APPR:FSM1TH</div><div>2007/11/30</div><div>2008/02/20</div><div>2008/03/04</div></div><div>DESCRIPTION</div><div>REV</div></div><div><div>QUALITY SYMBOLS</div><div>▽=0</div><div>▽=0</div></div><div><div>GENERAL TOLERANCES (UNLESS SPECIFIED)</div><div><div><div>mm</div><div>INCH</div></div><div>4 PLACES ± --- ± ---</div><div>3 PLACES ± --- ± .010</div><div>2 PLACES ± 0.25 ± .014</div><div>1 PLACE ± 0.36 ± ---</div><div>ANGULAR ± 1/2°</div></div><div>DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</div></div><div><div>DIMENSION STYLE</div><div>IN/MM</div><div>DRAWN BY</div><div>DATE</div><div>CHECKED BY</div><div>DATE</div><div>APPROVED BY</div><div>DATE</div><div>MATERIAL NO.</div><div>SEE CHART</div><div>SIZE</div><div>C</div></div><div><div>SCALE</div><div>4:1</div><div>DESIGN UNITS</div><div>INCH</div><div>THIRD ANGLE PROJECTION</div><div><div>ULTRA LOW PROFILE</div><div>RIGHT ANGLE MODULAR JACK</div><div>ASSEMBLY</div></div><div><div>MOLEX</div><div>MOLEX INCORPORATED</div></div><div><div>DOCUMENT NO.</div><div>SDA-43202</div><div>SHEET NO.</div><div>6 OF 9</div></div><div><div colspan="2">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</div></div></div></div>															
	12	11	10	9	8	7	6	5	4	3	2	1			



NOTES:
1. RECOMMENDED PCB THICKNESS: .062±.005/(1.57±0.13)

ADD PCB THICKNESS EC NO.: UCP2005-2739 DRAWN: SCHMIDT 2005/06/20 CHKD: ELHAG 2005/06/22 APPR: F SMITH 2005/06/23	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY			
				mm	INCH	DIMENSION STYLE IN/MM		TITLE ULTRA LOW PROFILE RIGHT ANGLE MODULAR JACK ASSEMBLY MOLEX MOLEX INCORPORATED			
			4 PLACES	± ---	± ---	DRAWN BY L.E. LENZ	DATE 1995/03/09				
			3 PLACES	± ---	± .010	CHECKED BY JTR	DATE 1995/03/09				
			2 PLACES	± 0.25	± .014	APPROVED BY RAS		DATE 1995/03/09	MATERIAL NO. SEE SHTS 5&6	DOCUMENT NO. SDA-43202	SHEET NO. 9 OF 9
			1 PLACE	± 0.36	± ---	DRAFT WHERE APPLICABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
			ANGULAR ±1/2°		MUST REMAIN WITHIN DIMENSIONS						
L2	REV									C	

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А