

**GPD** New!  
Series

- Guaranteed short time at 150°C
- Downsized and high-ripple current version of GPA series
- For automobile modules and other high temperature applications
- Endurance with ripple current : 2,000 to 3,000 hours at 125°C to 135°C
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant

GPA  
P186 → **GPD**

Downsized  
Higher ripple current




◆ SPECIFICATIONS

| Items                                                                                                             | Characteristics                                                                                                                                                                                                                                                                                                                              |                                      |                                                                               |      |      |      |      |  |
|-------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|-------------------------------------------------------------------------------|------|------|------|------|--|
| Category                                                                                                          | -40 to +135°C                                                                                                                                                                                                                                                                                                                                |                                      |                                                                               |      |      |      |      |  |
| Temperature Range                                                                                                 | -40 to +135°C                                                                                                                                                                                                                                                                                                                                |                                      |                                                                               |      |      |      |      |  |
| Rated Voltage Range                                                                                               | 25 to 100V <sub>dc</sub>                                                                                                                                                                                                                                                                                                                     |                                      |                                                                               |      |      |      |      |  |
| Capacitance Tolerance                                                                                             | ±20% (M) (at 20°C, 120Hz)                                                                                                                                                                                                                                                                                                                    |                                      |                                                                               |      |      |      |      |  |
| Leakage Current                                                                                                   | I=0.03CV or 4μA, whichever is greater.<br>Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C, 1 minute)                                                                                                                                                                                      |                                      |                                                                               |      |      |      |      |  |
| Dissipation Factor (tanδ)                                                                                         | Rated voltage (V <sub>dc</sub> )                                                                                                                                                                                                                                                                                                             | 25V                                  | 35V                                                                           | 50V  | 63V  | 80V  | 100V |  |
|                                                                                                                   | tanδ (Max.)                                                                                                                                                                                                                                                                                                                                  | 0.14                                 | 0.12                                                                          | 0.10 | 0.10 | 0.08 | 0.08 |  |
| When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz) |                                                                                                                                                                                                                                                                                                                                              |                                      |                                                                               |      |      |      |      |  |
| Low Temperature Characteristics (Max. Impedance Ratio)                                                            | Rated voltage (V <sub>dc</sub> )                                                                                                                                                                                                                                                                                                             | 25V                                  | 35V                                                                           | 50V  | 63V  | 80V  | 100V |  |
|                                                                                                                   | Z(-25°C)/Z(+20°C)                                                                                                                                                                                                                                                                                                                            | 2                                    | 2                                                                             | 2    | 2    | 2    | 2    |  |
|                                                                                                                   | Z(-40°C)/Z(+20°C)                                                                                                                                                                                                                                                                                                                            | 4                                    | 4                                                                             | 4    | 4    | 4    | 4    |  |
| (at 120Hz)                                                                                                        |                                                                                                                                                                                                                                                                                                                                              |                                      |                                                                               |      |      |      |      |  |
| Endurance 1                                                                                                       | The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for the specified period of time at 125°C or 135°C.                                                                    |                                      |                                                                               |      |      |      |      |  |
|                                                                                                                   | Time                                                                                                                                                                                                                                                                                                                                         | 125°C                                | 3,000hours                                                                    |      |      |      |      |  |
|                                                                                                                   |                                                                                                                                                                                                                                                                                                                                              | 135°C                                | 25 to 50V <sub>dc</sub> : 3,000hours<br>63 to 100V <sub>dc</sub> : 2,000hours |      |      |      |      |  |
|                                                                                                                   | Capacitance change                                                                                                                                                                                                                                                                                                                           | ≤ ±30% of the initial value          |                                                                               |      |      |      |      |  |
|                                                                                                                   | D.F. (tanδ)                                                                                                                                                                                                                                                                                                                                  | ≤300% of the initial specified value |                                                                               |      |      |      |      |  |
| Leakage current                                                                                                   | ≤The initial specified value                                                                                                                                                                                                                                                                                                                 |                                      |                                                                               |      |      |      |      |  |
| Endurance 2                                                                                                       | The following specifications shall be satisfied when the capacitors are restored to 20°C after the test condition that the rated voltage is applied for 100 hours at 150°C and DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for the specified period of time at 125°C or 135°C. |                                      |                                                                               |      |      |      |      |  |
|                                                                                                                   | Time                                                                                                                                                                                                                                                                                                                                         | 125°C                                | 2,500hours                                                                    |      |      |      |      |  |
|                                                                                                                   |                                                                                                                                                                                                                                                                                                                                              | 135°C                                | 25 to 50V <sub>dc</sub> : 2,500hours<br>63 to 100V <sub>dc</sub> : 1,500hours |      |      |      |      |  |
|                                                                                                                   | Capacitance change                                                                                                                                                                                                                                                                                                                           | ≤ ±30% of the initial value          |                                                                               |      |      |      |      |  |
|                                                                                                                   | D.F. (tanδ)                                                                                                                                                                                                                                                                                                                                  | ≤300% of the initial specified value |                                                                               |      |      |      |      |  |
| Leakage current                                                                                                   | ≤The initial specified value                                                                                                                                                                                                                                                                                                                 |                                      |                                                                               |      |      |      |      |  |
| Shelf Life                                                                                                        | The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 125°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.                                                      |                                      |                                                                               |      |      |      |      |  |
|                                                                                                                   | Capacitance change                                                                                                                                                                                                                                                                                                                           | ≤ ±30% of the initial value          |                                                                               |      |      |      |      |  |
|                                                                                                                   | D.F. (tanδ)                                                                                                                                                                                                                                                                                                                                  | ≤300% of the initial specified value |                                                                               |      |      |      |      |  |
|                                                                                                                   | Leakage current                                                                                                                                                                                                                                                                                                                              | ≤The initial specified value         |                                                                               |      |      |      |      |  |


◆ DIMENSIONS [mm]

● Terminal Code : E

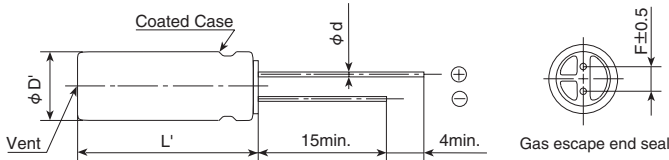

| φD  | 12.5       | 14.5 | 16  | 18  |
|-----|------------|------|-----|-----|
| φd  | 0.6        | 0.8  | 0.8 | 0.8 |
| F   | 5.0        | 7.5  | 7.5 | 7.5 |
| φD' | φD+0.5max. |      |     |     |
| L'  | L+1.5max.  |      |     |     |

◆ PART NUMBERING SYSTEM

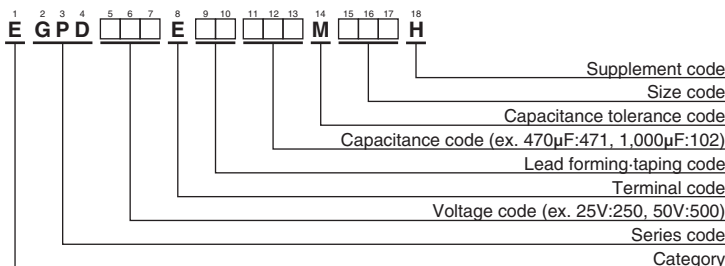

Please refer to "Product code guide (radial lead type)"

◆ STANDARD RATINGS

| WV<br>(Vdc) | Cap<br>(μF) | Case size<br>φ D×L(mm) | ESR<br>(Ω max/100kHz) |       | Rated ripple current<br>(mArms/100kHz) |                      | Part No.             |
|-------------|-------------|------------------------|-----------------------|-------|----------------------------------------|----------------------|----------------------|
|             |             |                        | 20°C                  | -40°C | 125°C                                  | 135°C                |                      |
| 25          | 2,000       | 12.5×20                | 0.042                 | 0.48  | 2,760                                  | 1,690                | EGPD250E □□ 202MK20H |
|             | 2,700       | 14.5×20                | 0.038                 | 0.37  | 2,990                                  | 1,830                | EGPD250E □□ 272MU20H |
|             | 3,000       | 12.5×25                | 0.033                 | 0.30  | 3,480                                  | 2,010                | EGPD250E □□ 302MK25H |
|             | 3,300       | 16×20                  | 0.035                 | 0.27  | 3,040                                  | 1,860                | EGPD250E □□ 332ML20H |
|             | 3,600       | 12.5×30                | 0.028                 | 0.24  | 4,490                                  | 2,900                | EGPD250E □□ 362MK30H |
|             | 3,900       | 14.5×25                | 0.030                 | 0.28  | 4,120                                  | 2,780                | EGPD250E □□ 392MU25H |
|             | 4,300       | 18×20                  | 0.034                 | 0.22  | 3,250                                  | 1,870                | EGPD250E □□ 432MM20H |
|             | 4,700       | 12.5×35                | 0.025                 | 0.21  | 5,140                                  | 3,190                | EGPD250E □□ 472MK35H |
|             | 4,700       | 16×25                  | 0.028                 | 0.22  | 4,260                                  | 2,870                | EGPD250E □□ 472ML25H |
|             | 5,100       | 12.5×40                | 0.024                 | 0.19  | 5,810                                  | 3,470                | EGPD250E □□ 512MK40H |
|             | 5,100       | 14.5×30                | 0.025                 | 0.24  | 4,880                                  | 3,150                | EGPD250E □□ 512MU30H |
|             | 5,600       | 14.5×35                | 0.023                 | 0.20  | 5,420                                  | 3,360                | EGPD250E □□ 562MU35H |
|             | 5,600       | 16×30                  | 0.023                 | 0.18  | 5,480                                  | 3,400                | EGPD250E □□ 562ML30H |
|             | 6,200       | 18×25                  | 0.027                 | 0.19  | 4,500                                  | 2,900                | EGPD250E □□ 622MM25H |
|             | 6,800       | 14.5×40                | 0.022                 | 0.16  | 6,240                                  | 3,730                | EGPD250E □□ 682MU40H |
|             | 7,500       | 16×35                  | 0.020                 | 0.14  | 6,070                                  | 3,630                | EGPD250E □□ 752ML35H |
|             | 7,500       | 18×30                  | 0.022                 | 0.16  | 5,600                                  | 3,470                | EGPD250E □□ 752MM30H |
|             | 9,100       | 16×40                  | 0.019                 | 0.12  | 6,810                                  | 3,930                | EGPD250E □□ 912ML40H |
| 10,000      | 18×35       | 0.019                  | 0.12                  | 6,280 | 3,750                                  | EGPD250E □□ 103MM35H |                      |
| 12,000      | 18×40       | 0.018                  | 0.10                  | 7,070 | 4,080                                  | EGPD250E □□ 123MM40H |                      |
| 35          | 1,300       | 12.5×20                | 0.042                 | 0.48  | 2,760                                  | 1,690                | EGPD350E □□ 132MK20H |
|             | 1,600       | 14.5×20                | 0.038                 | 0.37  | 2,990                                  | 1,830                | EGPD350E □□ 162MU20H |
|             | 1,800       | 12.5×25                | 0.033                 | 0.30  | 3,480                                  | 2,010                | EGPD350E □□ 182MK25H |
|             | 2,000       | 16×20                  | 0.035                 | 0.27  | 3,040                                  | 1,860                | EGPD350E □□ 202ML20H |
|             | 2,200       | 12.5×30                | 0.028                 | 0.24  | 4,490                                  | 2,900                | EGPD350E □□ 222MK30H |
|             | 2,400       | 14.5×25                | 0.030                 | 0.28  | 4,120                                  | 2,780                | EGPD350E □□ 242MU25H |
|             | 2,400       | 18×20                  | 0.034                 | 0.22  | 3,250                                  | 1,870                | EGPD350E □□ 242MM20H |
|             | 2,700       | 12.5×35                | 0.025                 | 0.21  | 5,140                                  | 3,190                | EGPD350E □□ 272MK35H |
|             | 3,000       | 14.5×30                | 0.025                 | 0.24  | 4,880                                  | 3,150                | EGPD350E □□ 302MU30H |
|             | 3,000       | 16×25                  | 0.028                 | 0.22  | 4,260                                  | 2,870                | EGPD350E □□ 302ML25H |
|             | 3,300       | 12.5×40                | 0.024                 | 0.19  | 5,810                                  | 3,470                | EGPD350E □□ 332MK40H |
|             | 3,300       | 14.5×35                | 0.023                 | 0.20  | 5,420                                  | 3,360                | EGPD350E □□ 332MU35H |
|             | 3,600       | 16×30                  | 0.023                 | 0.18  | 5,480                                  | 3,400                | EGPD350E □□ 362ML30H |
|             | 3,900       | 18×25                  | 0.027                 | 0.19  | 4,500                                  | 2,900                | EGPD350E □□ 392MM25H |
|             | 4,300       | 14.5×40                | 0.022                 | 0.16  | 6,240                                  | 3,730                | EGPD350E □□ 432MU40H |
|             | 4,300       | 16×35                  | 0.020                 | 0.14  | 6,070                                  | 3,630                | EGPD350E □□ 432ML35H |
|             | 4,700       | 18×30                  | 0.022                 | 0.16  | 5,600                                  | 3,470                | EGPD350E □□ 472MM30H |
|             | 5,600       | 16×40                  | 0.019                 | 0.12  | 6,810                                  | 3,930                | EGPD350E □□ 562ML40H |
| 6,200       | 18×35       | 0.019                  | 0.12                  | 6,280 | 3,750                                  | EGPD350E □□ 622MM35H |                      |
| 7,500       | 18×40       | 0.018                  | 0.10                  | 7,070 | 4,080                                  | EGPD350E □□ 752MM40H |                      |
| 50          | 620         | 12.5×20                | 0.073                 | 0.88  | 2,400                                  | 1,470                | EGPD500E □□ 621MK20H |
|             | 750         | 14.5×20                | 0.063                 | 0.73  | 2,760                                  | 1,590                | EGPD500E □□ 751MU20H |
|             | 820         | 12.5×25                | 0.058                 | 0.67  | 3,350                                  | 2,260                | EGPD500E □□ 821MK25H |
|             | 1,000       | 16×20                  | 0.050                 | 0.55  | 2,960                                  | 1,870                | EGPD500E □□ 102ML20H |
|             | 1,100       | 12.5×30                | 0.048                 | 0.52  | 4,220                                  | 2,520                | EGPD500E □□ 112MK30H |
|             | 1,100       | 14.5×25                | 0.048                 | 0.52  | 3,750                                  | 2,420                | EGPD500E □□ 112MU25H |
|             | 1,300       | 12.5×35                | 0.042                 | 0.44  | 4,810                                  | 2,780                | EGPD500E □□ 132MK35H |
|             | 1,300       | 16×25                  | 0.042                 | 0.44  | 4,040                                  | 2,500                | EGPD500E □□ 132ML25H |
|             | 1,300       | 18×20                  | 0.042                 | 0.44  | 3,130                                  | 2,110                | EGPD500E □□ 132MM20H |
|             | 1,500       | 14.5×30                | 0.038                 | 0.39  | 4,590                                  | 2,740                | EGPD500E □□ 152MU30H |
|             | 1,600       | 12.5×40                | 0.037                 | 0.36  | 5,240                                  | 3,020                | EGPD500E □□ 162MK40H |
|             | 1,600       | 14.5×35                | 0.035                 | 0.36  | 5,060                                  | 2,920                | EGPD500E □□ 162MU35H |
|             | 1,600       | 16×30                  | 0.035                 | 0.36  | 5,130                                  | 2,960                | EGPD500E □□ 162ML30H |
|             | 1,800       | 18×25                  | 0.033                 | 0.32  | 4,230                                  | 2,530                | EGPD500E □□ 182MM25H |
|             | 2,200       | 14.5×40                | 0.029                 | 0.27  | 5,630                                  | 3,250                | EGPD500E □□ 222MU40H |
|             | 2,200       | 16×35                  | 0.029                 | 0.27  | 5,480                                  | 3,160                | EGPD500E □□ 222ML35H |
|             | 2,400       | 18×30                  | 0.028                 | 0.25  | 5,240                                  | 3,020                | EGPD500E □□ 242MM30H |
|             | 2,700       | 16×40                  | 0.025                 | 0.22  | 5,930                                  | 3,420                | EGPD500E □□ 272ML40H |
| 3,000       | 18×35       | 0.024                  | 0.20                  | 5,870 | 3,390                                  | EGPD500E □□ 302MM35H |                      |
| 3,600       | 18×40       | 0.023                  | 0.16                  | 6,420 | 3,700                                  | EGPD500E □□ 362MM40H |                      |
| 63          | 390         | 12.5×20                | 0.072                 | 0.56  | 1,640                                  | 1,420                | EGPD630E □□ 391MK20H |
|             | 560         | 12.5×25                | 0.052                 | 0.39  | 2,520                                  | 2,050                | EGPD630E □□ 561MK25H |
|             | 560         | 14.5×20                | 0.061                 | 0.40  | 1,790                                  | 1,550                | EGPD630E □□ 561MU20H |
|             | 680         | 16×20                  | 0.053                 | 0.34  | 2,140                                  | 1,910                | EGPD630E □□ 681ML20H |
|             | 750         | 12.5×30                | 0.042                 | 0.30  | 3,110                                  | 2,630                | EGPD630E □□ 751MK30H |
|             | 750         | 14.5×25                | 0.047                 | 0.30  | 2,650                                  | 2,160                | EGPD630E □□ 751MU25H |
|             | 910         | 12.5×35                | 0.035                 | 0.25  | 3,760                                  | 2,970                | EGPD630E □□ 911MK35H |
|             | 910         | 18×20                  | 0.044                 | 0.26  | 2,350                                  | 2,100                | EGPD630E □□ 911MM20H |

□□ : Enter the appropriate lead forming or taping code.

◆STANDARD RATINGS

| WV<br>(Vdc) | Cap<br>(μF) | Case size<br>φ D×L(mm) | ESR<br>(Ω max/100kHz) |       | Rated ripple current<br>(mArms/100kHz) |                      | Part No.             |
|-------------|-------------|------------------------|-----------------------|-------|----------------------------------------|----------------------|----------------------|
|             |             |                        | 20°C                  | -40°C | 125°C                                  | 135°C                |                      |
| 63          | 1,000       | 14.5×30                | 0.037                 | 0.23  | 3,360                                  | 2,840                | EGPD630E □□ 102MU30H |
|             | 1,000       | 16×25                  | 0.038                 | 0.23  | 2,940                                  | 2,680                | EGPD630E □□ 102ML25H |
|             | 1,100       | 12.5×40                | 0.031                 | 0.22  | 4,610                                  | 3,260                | EGPD630E □□ 112MK40H |
|             | 1,200       | 14.5×35                | 0.033                 | 0.20  | 3,860                                  | 3,050                | EGPD630E □□ 122MU35H |
|             | 1,200       | 16×30                  | 0.034                 | 0.20  | 3,860                                  | 3,050                | EGPD630E □□ 122ML30H |
|             | 1,300       | 18×25                  | 0.033                 | 0.19  | 3,080                                  | 2,810                | EGPD630E □□ 132MM25H |
|             | 1,500       | 14.5×40                | 0.028                 | 0.16  | 4,930                                  | 3,490                | EGPD630E □□ 152MU40H |
|             | 1,600       | 16×35                  | 0.027                 | 0.15  | 4,590                                  | 3,420                | EGPD630E □□ 162ML35H |
|             | 1,600       | 18×30                  | 0.028                 | 0.15  | 4,080                                  | 3,220                | EGPD630E □□ 162MM30H |
|             | 1,800       | 16×40                  | 0.025                 | 0.14  | 5,190                                  | 3,670                | EGPD630E □□ 182ML40H |
| 2,200       | 18×35       | 0.022                  | 0.12                  | 5,220 | 3,690                                  | EGPD630E □□ 222MM35H |                      |
| 2,400       | 18×40       | 0.021                  | 0.11                  | 5,660 | 3,820                                  | EGPD630E □□ 242MM40H |                      |
| 80          | 270         | 12.5×20                | 0.072                 | 0.56  | 1,640                                  | 1,420                | EGPD800E □□ 271MK20H |
|             | 360         | 14.5×20                | 0.061                 | 0.40  | 1,790                                  | 1,550                | EGPD800E □□ 361MU20H |
|             | 390         | 12.5×25                | 0.052                 | 0.39  | 2,520                                  | 2,050                | EGPD800E □□ 391MK25H |
|             | 470         | 16×20                  | 0.053                 | 0.34  | 2,140                                  | 1,910                | EGPD800E □□ 471ML20H |
|             | 510         | 12.5×30                | 0.042                 | 0.30  | 3,110                                  | 2,630                | EGPD800E □□ 511MK30H |
|             | 510         | 14.5×25                | 0.047                 | 0.30  | 2,650                                  | 2,160                | EGPD800E □□ 511MU25H |
|             | 620         | 12.5×35                | 0.035                 | 0.25  | 3,760                                  | 2,970                | EGPD800E □□ 621MK35H |
|             | 620         | 18×20                  | 0.044                 | 0.26  | 2,350                                  | 2,100                | EGPD800E □□ 621MM20H |
|             | 680         | 14.5×30                | 0.037                 | 0.23  | 3,360                                  | 2,840                | EGPD800E □□ 681MU30H |
|             | 680         | 16×25                  | 0.038                 | 0.23  | 2,940                                  | 2,680                | EGPD800E □□ 681ML25H |
|             | 750         | 12.5×40                | 0.031                 | 0.22  | 4,610                                  | 3,260                | EGPD800E □□ 751MK40H |
|             | 750         | 14.5×35                | 0.033                 | 0.20  | 3,860                                  | 3,050                | EGPD800E □□ 751MU35H |
|             | 750         | 16×30                  | 0.034                 | 0.20  | 3,860                                  | 3,050                | EGPD800E □□ 751ML30H |
|             | 820         | 18×25                  | 0.033                 | 0.19  | 3,080                                  | 2,810                | EGPD800E □□ 821MM25H |
|             | 1,000       | 14.5×40                | 0.028                 | 0.16  | 4,930                                  | 3,490                | EGPD800E □□ 102MU40H |
|             | 1,000       | 16×35                  | 0.027                 | 0.15  | 4,590                                  | 3,420                | EGPD800E □□ 102ML35H |
| 1,100       | 18×30       | 0.028                  | 0.15                  | 4,080 | 3,220                                  | EGPD800E □□ 112MM30H |                      |
| 1,300       | 16×40       | 0.025                  | 0.14                  | 5,190 | 3,670                                  | EGPD800E □□ 132ML40H |                      |
| 1,300       | 18×35       | 0.022                  | 0.12                  | 5,220 | 3,690                                  | EGPD800E □□ 132MM35H |                      |
| 1,600       | 18×40       | 0.021                  | 0.11                  | 5,660 | 3,820                                  | EGPD800E □□ 162MM40H |                      |
| 100         | 160         | 12.5×20                | 0.090                 | 0.75  | 1,580                                  | 1,410                | EGPD101E □□ 161MK20H |
|             | 200         | 14.5×20                | 0.083                 | 0.61  | 1,660                                  | 1,480                | EGPD101E □□ 201MU20H |
|             | 220         | 12.5×25                | 0.068                 | 0.55  | 2,140                                  | 1,960                | EGPD101E □□ 221MK25H |
|             | 270         | 16×20                  | 0.067                 | 0.47  | 2,050                                  | 1,670                | EGPD101E □□ 271ML20H |
|             | 300         | 12.5×30                | 0.052                 | 0.41  | 2,950                                  | 2,330                | EGPD101E □□ 301MK30H |
|             | 300         | 14.5×25                | 0.058                 | 0.42  | 2,300                                  | 2,100                | EGPD101E □□ 301MU25H |
|             | 360         | 12.5×35                | 0.045                 | 0.35  | 3,530                                  | 2,630                | EGPD101E □□ 361MK35H |
|             | 360         | 18×20                  | 0.061                 | 0.35  | 2,270                                  | 1,860                | EGPD101E □□ 361MM20H |
|             | 390         | 14.5×30                | 0.047                 | 0.33  | 3,120                                  | 2,460                | EGPD101E □□ 391MU30H |
|             | 390         | 16×25                  | 0.048                 | 0.33  | 2,790                                  | 2,360                | EGPD101E □□ 391ML25H |
|             | 430         | 12.5×40                | 0.038                 | 0.29  | 4,140                                  | 2,920                | EGPD101E □□ 431MK40H |
|             | 430         | 14.5×35                | 0.043                 | 0.30  | 3,510                                  | 2,620                | EGPD101E □□ 431MU35H |
|             | 470         | 16×30                  | 0.041                 | 0.27  | 3,440                                  | 2,720                | EGPD101E □□ 471ML30H |
|             | 510         | 18×25                  | 0.045                 | 0.25  | 2,920                                  | 2,470                | EGPD101E □□ 511MM25H |
|             | 560         | 14.5×40                | 0.034                 | 0.23  | 4,330                                  | 3,060                | EGPD101E □□ 561MU40H |
|             | 560         | 16×35                  | 0.036                 | 0.23  | 4,190                                  | 2,960                | EGPD101E □□ 561ML35H |
|             | 620         | 18×30                  | 0.037                 | 0.20  | 3,920                                  | 2,920                | EGPD101E □□ 621MM30H |
|             | 750         | 16×40                  | 0.028                 | 0.18  | 5,020                                  | 3,380                | EGPD101E □□ 751ML40H |
| 820         | 18×35       | 0.030                  | 0.16                  | 4,710 | 3,330                                  | EGPD101E □□ 821MM35H |                      |
| 910         | 18×40       | 0.026                  | 0.14                  | 5,280 | 3,560                                  | EGPD101E □□ 911MM40H |                      |

□□ : Enter the appropriate lead forming or taping code.

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

| Capacitance(μF) | Frequency(Hz) |      |      |      |
|-----------------|---------------|------|------|------|
|                 | 120           | 1k   | 10k  | 100k |
| 160 to 200      | 0.40          | 0.75 | 0.90 | 1.00 |
| 220 to 620      | 0.50          | 0.85 | 0.94 | 1.00 |
| 680 to 2,000    | 0.60          | 0.87 | 0.95 | 1.00 |
| 2,200 to 4,300  | 0.75          | 0.90 | 0.95 | 1.00 |
| 4,700 to 12,000 | 0.85          | 0.95 | 0.98 | 1.00 |

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

Please contact us for lifetime estimation.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А