


Applications

- General purpose wireless
- Wireless infrastructure
- Base Station Applications

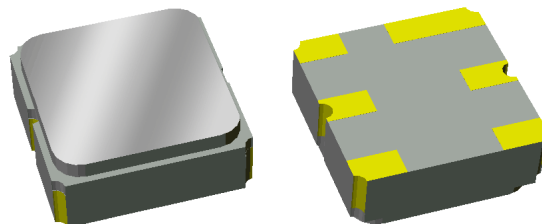


SMP – 12, 3.00 X 3.00 X 1.22 mm

Product Features

- Usable bandwidth of 45 MHz
- For wideband applications
- Low Loss
- Single-ended operation
- Matching required for operation at 50Ω
- Small Size: 3.00 x 3.00 x 1.22 mm
- Ceramic Surface Mount Package (SMP)
- Hermetically sealed
- RoHS compliant (2002/95/EC), **Pb-free**



Functional Block Diagram

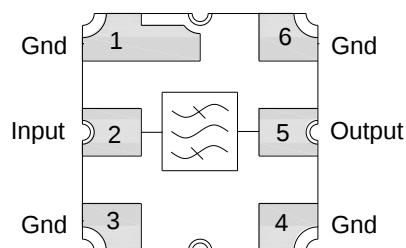

General Description

857193 is a general purpose Uplink filter for Band 28. This filter was specifically designed in a 3x3mm hermetic package for base station applications and is part of our wide portfolio of RF filters in the same package.

Low insertion loss, coupled with high attenuation and excellent power handling, makes this filter a natural choice for our customers' Uplink RF filtering needs.

Pin Configuration – Single Ended

Pin No.	Label
2	Input
5	Output
1,3,4,6	Ground

Ordering Information

Part No.	Description
857193	Product description
857193-EVB	Evaluation board description

Standard T/R size = 5000 units/reel

Absolute Maximum Ratings ⁽¹⁾

Parameter	Rating
Storage Temperature	-40 to +85°C
Operable Temperature	-30 to +105 °C
RF Input Power ⁽²⁾	+22 dBm

Notes

1. Operation of this device outside the parameter ranges given may cause permanent damage.
2. Input power with applied CW signal at =105° C in the 703 – 748MHz frequency band for 24 hrs.

Electrical Specifications ⁽¹⁾

Specified Temperature Range: ⁽²⁾ -30°C to +105°C

Parameter ⁽³⁾	Conditions	Min	Typ ⁽⁴⁾	Max	Units
Center Frequency		-	725.5	-	MHz
Maximum Insertion Loss	703 – 748 MHz	-	2.3	4.0	dB
Amplitude Variation ⁽⁵⁾	703 – 748 MHz Any 5 MHz span within 703 -748 MHz	-	0.8 0.4	1.0 0.6	dB p-p dB p-p
Temperature Drift ⁽⁶⁾	703 – 748 MHz	-	0.25	0.3	dB
Phase Ripple	703 – 748 MHz	-	21	35	deg. p-p
EVM ⁽⁷⁾	703 – 748 MHz Any 3.84 MHz span within 703 – 748 MHz	-	1.6	2.0	%
IIP3 ⁽⁸⁾	Tones 5 MHz separated, power >5 dBm per tone	44	50	-	dBm
Absolute Delay	703 – 748 MHz	-	17	30	ns
Group Delay Variation	703 – 748 MHz	-	20	30	ns p-p
Relative Attenuation ⁽⁹⁾	10 – 100 MHz	30	60	-	dB
	430 – 480 MHz	30	36	-	dB
	480 – 648 MHz	20	25	-	dB
	773 – 830 MHz	20	28	-	dB
	936 – 971 MHz	20	30	-	dB
	1615 – 1660 MHz	45	60	-	dB
	1660 – 2690 MHz	20	55	-	dB
	3510 – 3800 MHz	20	50	-	dB
Input/Output VSWR ⁽¹⁰⁾	703 – 748 MHz	-	1.7	2.0:1	-
Load/Source Impedance ⁽¹¹⁾	single-ended	-	50	-	Ohms

Notes:

1. All specifications are based on the TriQuint schematic shown on page 3
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. Typical values are based on average measurements at room temperature
5. Amplitude Variation is defined as the difference between the lowest loss and the highest loss within defined frequency points
6. Temperature Drift specification is defined on Page 3 and is guaranteed by design and will not be measured in production.
7. Measured with a RRC filtered QPSK modulated signal
8. To be measured only during engineering development
9. Relative to the maximum insertion loss
10. 2% tolerance on the matching component values would be needed to achieve this specification
11. This is the optimum impedance in order to achieve the performance shown

Temp Drift Specification

Temperature Drift Equations:

$$\text{Temp Drift}_{\text{high}} = \left| \frac{\max(T_{\text{ambient}} - T_{\text{hot}}) - \min(T_{\text{ambient}} - T_{\text{hot}})}{2} \right|$$

$$\text{Temp Drift}_{\text{low}} = \left| \frac{\max(T_{\text{ambient}} - T_{\text{cold}}) - \min(T_{\text{ambient}} - T_{\text{cold}})}{2} \right|$$

Temperature Drift Terms Defined:



T_{ambient} - Transmission power in dB measured at +25°C.

T_{hot} - Transmission power in dB measured at +100°C.

T_{cold} - Transmission power in dB measured at -30°C.

Temperature Drift - Greater of Temp Drift_{high} vs Temp Drift_{low}

857193-EVB Evaluation Board

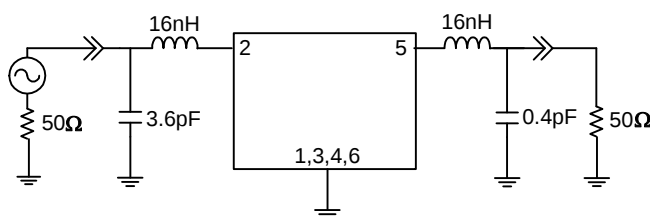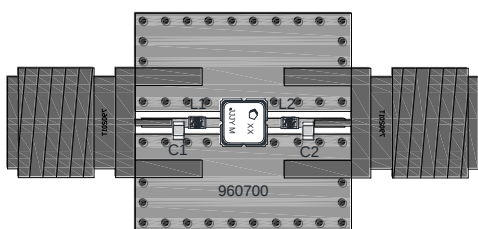


Notes:

1. Impedance matching required.
2. PCB: .500 x .500 x .063; Construction (5 layer stack-up):
½ oz Cu Top Layer; Dielectric: Taconic TLY-5A (.0075); ½ oz Cu Middle Layer, FR4; ½ oz Cu Bottom Layer; total thickness (0.063) (dimensions are in inches).
Contact TriQuint for Gerber files.

Bill of Material – 857193-EVB

Reference Des.	Value	Description	Manuf.	Part Number
U1	N/A	725.5 MHz SAW filter	TriQuint	857193
L1, L2	16nH	0402 chip, series, wire wound, ±3%	Murata	LQW15AN16NH00
C1	3.6 pF	0402 chip, ceramic, GRM, ±2%	Murata	GRM1555C1H3R6GZ01
C2	0.4 pF	0402 chip, ceramic, GRM, ±10%	Murata	GRM1555C1HR40KZ01
SMA	N/A	SMA connector	Radiall USA	9602-1111-018
PCB	N/A	3-layer	Multiple	960700

PCB Mounting Pattern









Notes:


1. All dimensions are in millimeters. Angles are in degrees.
2. This drawing specifies the mounting pattern used on the TriQuint evaluation board for this product. Some modification may be necessary to suit end user assembly materials and processes.

Performance Plots - 857193-EVB

Test conditions unless otherwise noted: Temp= +25°C

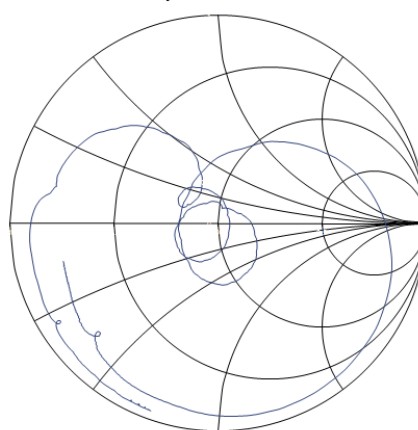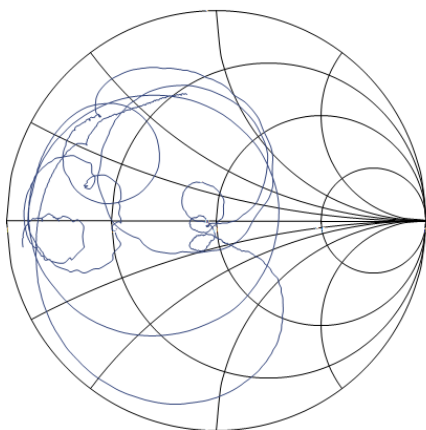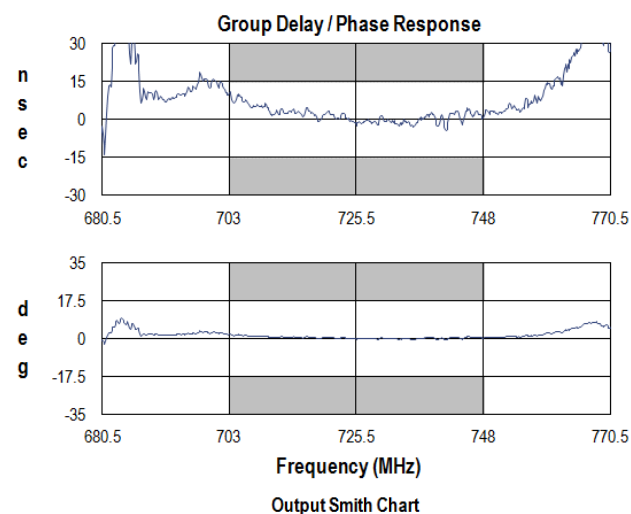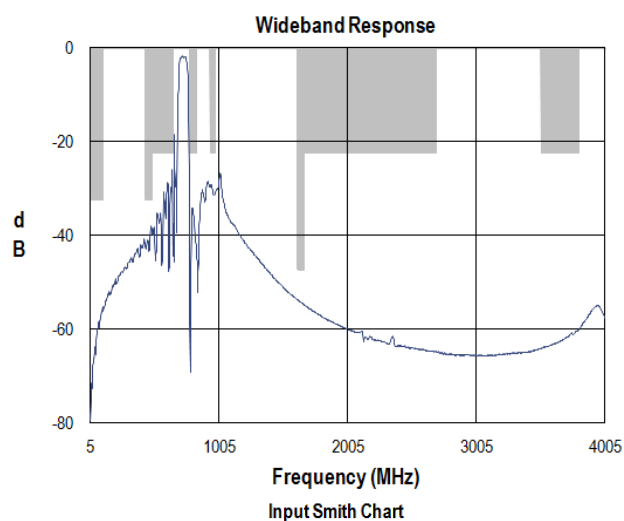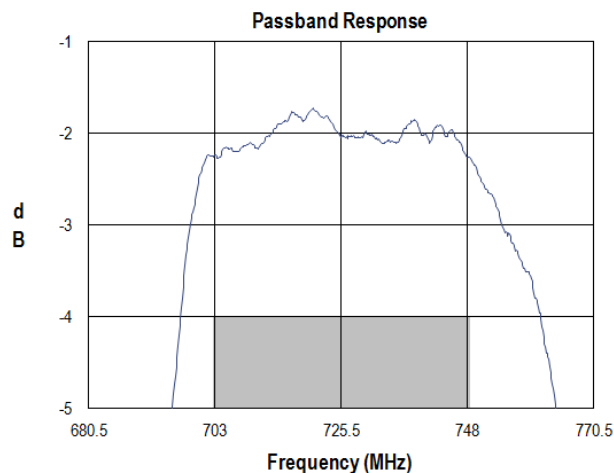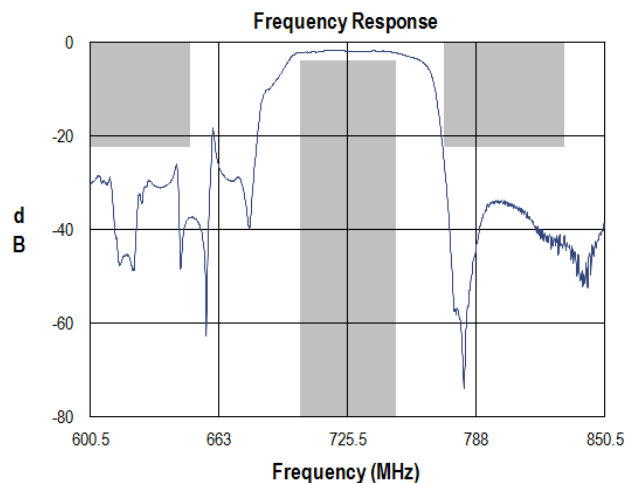

Package Information, Marking and Dimensions

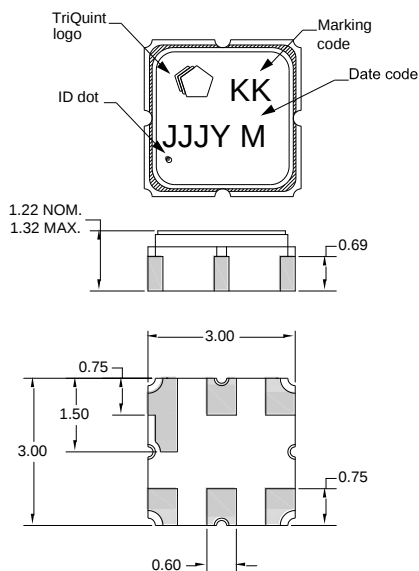

Package Style: SMP-12A

Dimensions: 3.00 x 3.00 x 1.22 mm

Body: Al_2O_3 ceramic

Lid: Kovar, Ni plated

Terminations: Au plating 0.5 - 1.0 μ m, over a 2-6 μ m Ni plating

All dimensions shown are nominal in millimeters

All tolerances are ± 0.15 mm except overall length and width ± 0.10 mm


The date code consists of day of the current year (Julian, 3 digits), Y = last digit of the year, and M = manufacturing site code

Notes:


1. All dimensions shown are typical in millimeters
2. An asterisk (*) in front of the marking code indicates prototype.

Tape and Reel information

Standard T/R size = 5000 units/reel. All dimensions are in millimeters

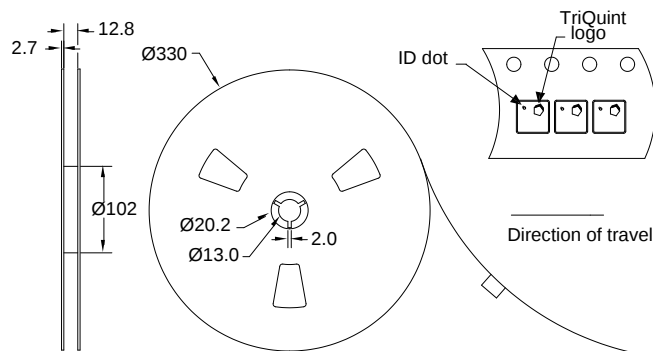

Section A-A

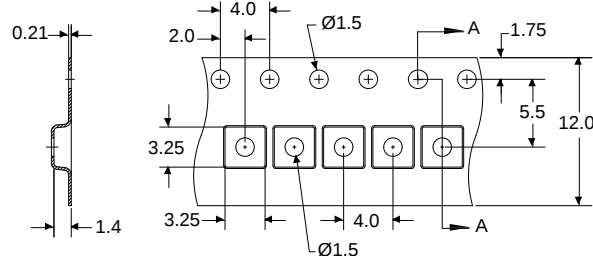

Product Compliance Information

ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: Class 1B
Value: Passes ≥ 650 V to < 700 V
Test: Electrostatic Discharge Sensitivity Testing,
Human Body Model (HBM) - component level
Standard: ESDA/JEDEC JS-001-2012

ESD Rating: Class B
Value: Passes ≥ 300 V to 350 V
Test: Machine Model (MM)
Standard: JEDEC Standard JESD22-A115

MSL Rating

Not applicable. Hermetic package.

Solderability

Compatible with both lead-free (260°C maximum reflow temperature) and tin/lead (245°C maximum reflow temperature) soldering processes.

Refer to [Soldering Profile](#) for recommended guidelines.

RoHS Compliance

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A ($\text{C}_{15}\text{H}_{12}\text{Br}_4\text{O}_2$) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com
Email: info-sales@tqs.com

Tel: +1.407.886.8860
Fax: +1.407.886.7061

For technical questions and application information: Email: flapplication.engineering@tqs.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А