

| | |
|----------|-----------|
| Spec No. | DG-145050 |
| Issue | 08-Aug-14 |

S P E C I F I C A T I O N S

Product Type

ZENIGATA LED

Model No.

GW6TGBJC50C

※These specifications contain 16 pages including the cover and appendix.
If you have any objections, please contact us before issuing purchasing order.

CUSTOMERS ACCEPTANCE

DATE:

PRESENTED

BY:

T. Uemura
Dept. General Manager

REVIEWED BY:

PREPARED BY:

Development Department II
Lighting Device Division
Electronic Components And Devices Group
SHARP CORPORATION

- Handle this document carefully for it contains material protected by international copyright law. Any reproduction, full or in part, of this material is prohibited without the express written permission of the company.
- When using the products covered herein, please observe the conditions written herein and the precautions outlined in the following paragraphs. In no event shall the company be liable for any damages resulting from failure to strictly adhere to these conditions and precautions.
 - (1) Please do verify the validity of this part after assembling it in customer's products, when customer wants to make catalogue and instruction manual based on the specification sheet of this part.
 - (2) The products covered herein are designed and manufactured for the following application areas. When using the products covered herein for the equipment listed in paragraph (3), even for the following application areas, be sure to observe the precautions given in Paragraph (3). Never use the products for the equipment listed in Paragraph (4).
 - Office electronics
 - Instrumentation and measuring equipment
 - Machine tools
 - Audiovisual equipment
 - Home appliances
 - Communication equipment other than for trunk lines
 - (3) Those contemplating using the products covered herein for the following equipment which demands high reliability, should first contact a sales representative of the company and then accept responsibility for incorporating into the design fail-safe operation, redundancy, and other appropriate measures for ensuring reliability and safety of the equipment and the overall system.
 - Control and safety devices for airplanes, trains, automobiles, and other transportation equipment
 - Mainframe computers
 - Traffic control systems
 - Gas leak detectors and automatic cutoff devices
 - Rescue and security equipment
 - Other safety devices and safety equipment, etc.
 - (4) Do not use the products covered herein for the following equipment which demands extremely high performance in terms of functionality, reliability, or accuracy.
 - Aerospace equipment
 - Communications equipment for trunk lines
 - Control equipment for the nuclear power industry
 - Medical equipment related to life support, etc.
 - (5) Please direct all queries and comments regarding the interpretation of the above four Paragraphs to a sales representative of the company.
- Please direct all queries regarding the products covered herein to a sales representative of the company.

GW6TGBJC50C specifications

1. Application

These specifications apply to the light emitting diode module Model No. GW6TGBJC50C.

[LED module (InGaN Blue LED chip + Phosphor)]

Main application : Lighting

2. External dimensions and equivalent circuit ----- Refer to Page 2.

3. Ratings and characteristics ----- Refer to Page 3 - 5.

3-1. Absolute maximum ratings

3-2. Electro-optical characteristics

3-3. Derating curve

4. Reliability ----- Refer to Page 6.

4-1. Test items and test conditions

4-2. Failure criteria

5. Quality level ----- Refer to Page 7.

5-1. Applied standard

5-2. Sampling inspection

5-3. Inspection items and defect criteria

6. Supplements ----- Refer to Page 8 - 10.

6-1. Chromaticity rank table

6-2. Packing

6-3. Label


6-4. Indication printed on product

7. Precautions ----- Refer to Page 11 - 13.

8. Characteristics diagram (TYP.) ----- Refer to Page 14.

2. External dimensions and equivalent circuit


Unit = mm

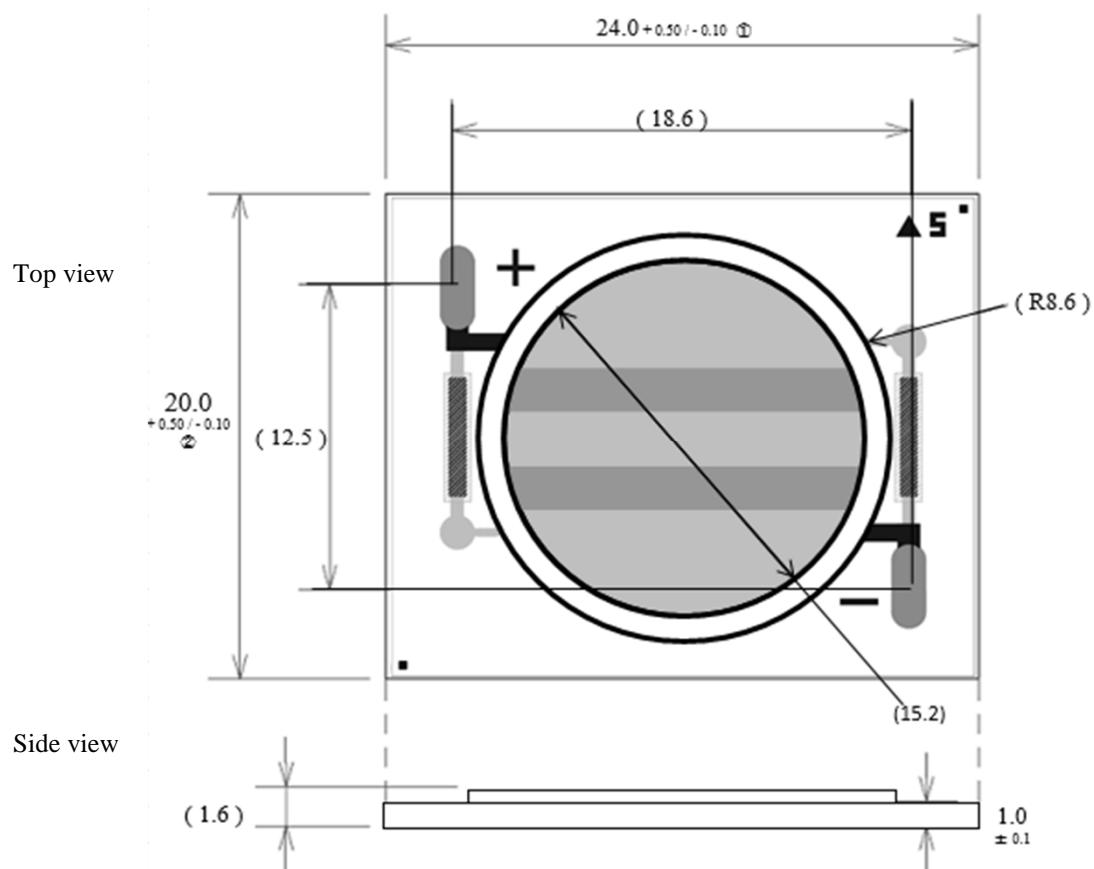

(Note) Values inside parentheses are reference values.

External dimension of ceramic substrate is the indication of maximum length at each side.

Equivalent circuit

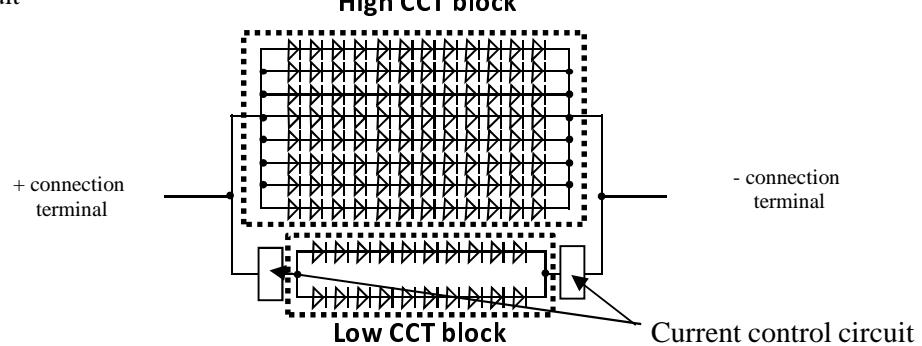

High CCT block 12 series × 8 parallel = 96 pcs of LEDs

Low CCT block 10 series × 2 parallel = 20 pcs of LEDs

| Unit | Material | Drawing No. |
|------|-----------------------------|-------------|
| mm | Substrate : Alumina Ceramic | 52605044 |

3. Ratings and characteristics

3-1. Absolute maximum ratings

| Item | Symbol | Rating | Unit |
|--------------------------|------------------|------------|------|
| Power Dissipation *1,4 | P | 41.6 | W |
| Forward Current *1,4 | I _F | 1050 | mA |
| Reverse Voltage *2,4 | V _R | -15 | V |
| Operating Temperature *3 | T _{opr} | -30 ~ +100 | °C |
| Storage Temperature | T _{stg} | -40 ~ +100 | °C |
| Junction Temperature | T _j | 145 | °C |

*1 Power dissipation and forward current are the value when the module temperature is set lower than the rating by using an adequate heat sink.

*2 Voltage resistible at initial connection error

(Not dealing with the possibility of always-on reverse voltage.)

*3 Case temperature T_c (Refer to measuring point for case temperature in the next page.)

Refer to "Derating curve" in the next page as for operating current.

*4 T_c = 25 °C

3-2. Electro-optical characteristics

(T_j = 25 °C)

| CCT | Item | Symbol | Condition | MIN. | TYP. | MAX. | Unit |
|-------|----------------------------------|----------------|-------------------------|------|----------|------|------|
| 2000K | Forward Voltage *5 | V _F | I _F = 80 mA | 25.8 | (30.4) | 33.4 | V |
| | Luminous Flux *6 | Φ | | 120 | (155) | - | lm |
| | Chromaticity Coordinates *7 | x | | - | (0.5251) | - | - |
| | | y | | - | (0.4120) | - | - |
| | General Color Rendering Index *8 | R _a | | 90 | (94) | - | - |
| 3000K | Forward Voltage *5 | V _F | I _F = 950 mA | 30.5 | (35.8) | 39.6 | V |
| | Luminous Flux *6 | Φ | | 2430 | (2860) | - | lm |
| | Chromaticity Coordinates *7 | x | | - | (0.4370) | - | - |
| | | y | | - | (0.4030) | - | - |
| | General Color Rendering Index *8 | R _a | | 90 | (92) | - | - |

(Note) Values inside parentheses are shown for reference purpose only.

*5 (After 5 ms drive, Measurement tolerance: ± 3 %)

*6 Monitored by Sharp's 1m integrating sphere and Otsuka electronics SR-2000A

(After 5 ms drive, Measurement tolerance: ± 10 %)


*7 Monitored by Sharp's 1m integrating sphere and Otsuka electronics SR-2000A

(After 5 ms drive, Measurement tolerance: ± 0.005)

*8 Monitored by Sharp's 1m integrating sphere and Otsuka electronics SR-2000A

(After 5 ms drive, Measurement tolerance: ± 2)

3-3. Derating curve

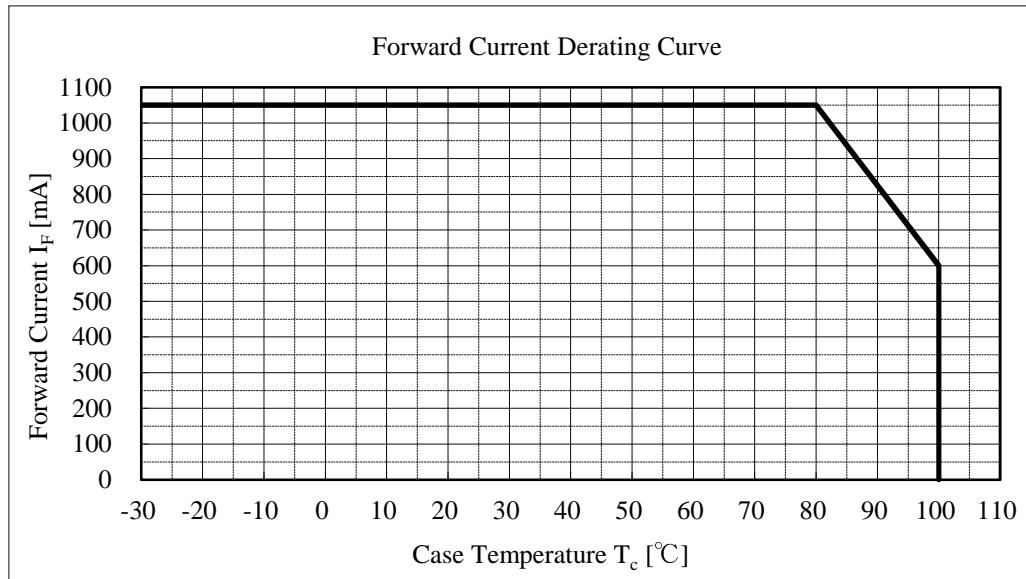

(Note) To keep the case temperature lower than the rating, enough heat-radiation performance needs to be secured by using an adequate heat sink.


For soldering connection, please evaluate in your circumstance to make sure soldering reliability.

(Above derating curve is specified to LED device, not for soldering connection)

And please consider to avoid physical stress between wire and substrate,
and some protection like silicon bond on top of soldered wire is recommended.

Please ensure the maintenance of heat radiation not to exceed case temperature over the rating in operation.

(Measuring point for case temperature)



Please take note of the following, when measuring case temperature.

- 1 The LED device mounting surface should be flat/plain surface.
- 2 The substrate surface temperature should be uniform.

Thermal Resistance: 1.3 °C/W(Typical value)

4. Reliability

The reliability of products shall be satisfied with items listed below.

4-1. Test items and test conditions

Confidence level: 90 %

| No. | Test item | Test conditions | Samples n | Defective C | LTPD (%) |
|-----|------------------------------|---|--------------|----------------|-------------|
| 1 | Temperature Cycle | - 40 °C(30 min) ~ + 100 °C(30 min), 100 cycles | 11 | 0 | 20 |
| 2 | Temperature Humidity Storage | T _{stg} = + 60 °C, RH = 90 %, Time = 1000 h | 11 | 0 | 20 |
| 3 | High Temperature Storage | T _{stg} = + 100°C, Time = 1000 h | 11 | 0 | 20 |
| 4 | Low Temperature Storage | T _{stg} = - 40 °C, Time = 1000 h | 11 | 0 | 20 |
| 5 | Steady State Operating Life | T _c = 90 °C, I _F = 950 mA, Time = 1000 h | 11 | 0 | 20 |
| 6 | Shock | Acceleration: 15000 m/s ² , Pulse width: 0.5 ms Direction: 3 directions (X, Y and Z) 3 trials in each direction | 5 | 0 | 50 |
| 7 | Vibration | Frequency: 100 to 2000 Hz for 4 minutes per trial Acceleration: 200 m/s ² Direction: 3 directions (X, Y and Z) 4 trials in each direction | 5 | 0 | 50 |

4-2. Failure criteria

| No. | Parameter | Symbol | Failure criteria |
|-----|-----------------|----------------|--------------------------------------|
| 1 | Forward Voltage | V _F | V _F > Initial value × 1.1 |
| 2 | Luminous Flux | Φ | Φ < Initial value × 0.7 |

5. Quality level

5-1. Applied standard

ISO2859-1

5-2. Sampling inspection

A single normal sampling plan, level S-4.

5-3. Inspection items and defect criteria

| No. | Item | Defect criteria | Classification | AQL |
|-----|---------------------------------|--|----------------|-----|
| 1 | No radiation | No light emitting | Major defect | 0.1 |
| 2 | Electro-optical characteristics | Not conforming to the specification (Forward voltage, Luminous flux and Chromaticity) | | |
| 3 | External dimensions | Not conforming to the specified dimensions (External dimensions of ① and ② shown in Page 2) | | |
| 4 | Appearance | Nonconformity observed in product appearance is determined as defective only when electro-optical characteristics is affected by. <If any question arises regardless of above mentioned criterion> <ul style="list-style-type: none">■ Foreign material, scratch, or bubble at emitting area: 0.8 mm φ■ Fiber generation at emitting area: 0.2 mm in width and 2.5 mm in length■ Foreign material at connection terminal: 0.8 mm φ■ Substrate burr on edge: Over dimension tolerance | Minor defect | 0.4 |

(Note) Products with removable foreign material attached on is not determined to be defective.

6. Supplements


6-1. Chromaticity rank table

(Tolerance: $x, y \pm 0.005$) $(T_j = 25^\circ C)$

| ランク | | | Chromaticity Diagram | | | |
|-----|----------------------------------|---|----------------------|---------|---------|---------|
| | | | Point 1 | Point 2 | Point 3 | Point 4 |
| 1 | 2000K (I _f =80mA) | x | 0.5097 | 0.5311 | 0.5404 | 0.5190 |
| | | y | 0.4060 | 0.4060 | 0.4180 | 0.4180 |
| | 3000K (I _f =950mA) | x | 0.4287 | 0.4404 | 0.4454 | 0.4334 |
| | | y | 0.3980 | 0.3980 | 0.4080 | 0.4080 |

..... : Black Body curve

Chromaticity Diagram

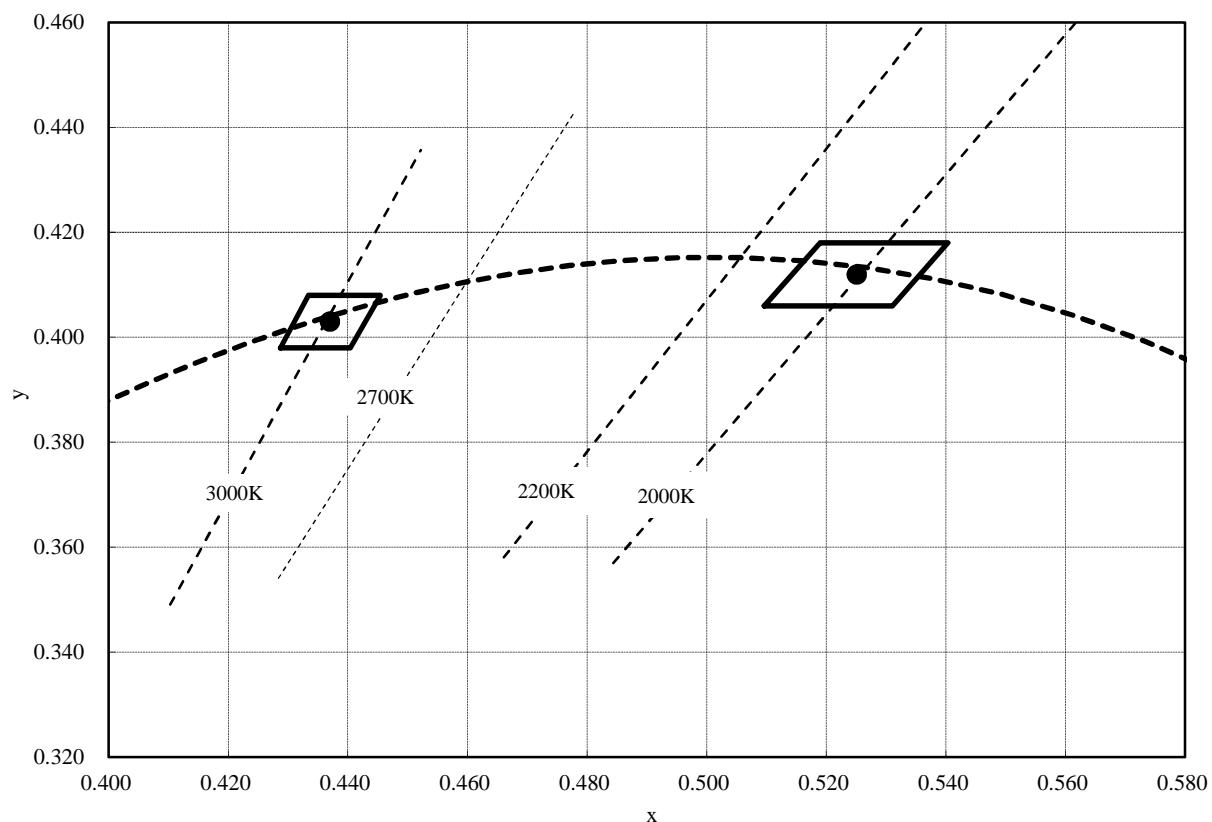

6-2. Packing


- One tray composed of 40 pieces
- 5 trays (200 pieces) and one upper lid-tray in one moisture-proof bag
- 2 bags (400 pieces) in one carton
- Dimensions of outer carton: 235 × 220 × 90 mm (Reference value)

(Note 1) There are cases of one carton composed of one bag. (200 pieces)

(Note 2) State of packing is subject to change.


<Outer carton>

200 pieces × 2 bags = 400 pieces




<One bag>

40 pieces × 5 trays = 200 pieces



<One tray>

5 × 8 = 40 pieces

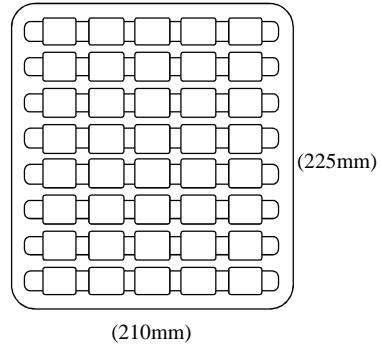

6-3. Label

1) Outer carton

Following label is attached on outer carton.

(Note 3) Label format is subjected to change.



←Model number
 ←(Model number+suffix code)
 ←Quantity
 ←Lot No.
 ←Rank
 ←Production country
 ·MADE IN INDONESIA

1) Lot No. indication

XX 11 B 25

① ② ③ ④

- ① Production plant code
- ② Shipping year (Year last 2 digits)
- ③ Shipping month
(from January to December in ABC order)
- ④ Shipping date (01~31)

*Notation may be different

2) Moisture-Proof bag

Following label is attached on moisture-proof bags.

(Note 3) Label format is subjected to change.



←Model number
 ←(Model number+suffix code)
 ←Quantity and rank
 ←Lot No.
 ←Production country
 ·MADE IN INDONESIA

1) Lot No. indication

XX 1 9 G 11 123 A

① ② ③ ④ ⑤ ⑥ ⑦

- ① Production plant code
- ② Shipping year (Year last digit)
- ③ Shipping month (1~9 or O, N, D)
- ④ Fixed code G
- ⑤ Shipping date (01~31)
- ⑥ Serial No.
- ⑦ Backup code A

*Notation may be different

6-4. Indication printed on product

Model No. and control No. are indicated on substrate surface.

1) Model No. & Rank:

1st line: Abbreviated Model No 'GBJCC' is indicated."

2nd line: Rank:

2) Control No.

Indicated as follows;


12 B 11
① ② ③

① Year of production (the last two figures of the year)

② Month of production

(to be indicated alphabetically with January corresponding to A)

③ Date of production (01~31)

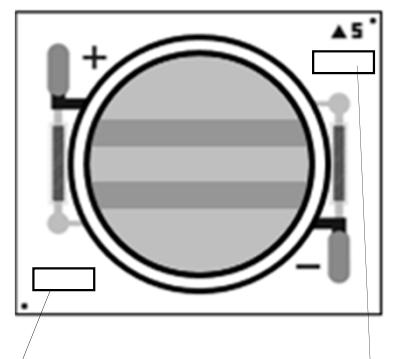

7. Precautions

① Storage conditions

Please follow the conditions below.

- Before opened: Temperature 5 ~ 30 °C, Relative humidity less than 60 %.
(Before opened LED should be used within a year)
- After opened: Temperature 5 ~ 30 °C, Relative humidity less than 60 %.
(Please apply soldering within 1 week)
- After opened LED should be kept in an aluminum moisture proof bag with a moisture absorbent material (silica gel).
- Avoid exposing to air with corrosive gas.

If exposed, electrode surface would be damaged, which may affect soldering.

② Usage conditions

This product is not designed for the use under any of the following conditions.

Please carefully check the performance and reliability well enough in case of using under any of the following conditions;

- In a place with a lot of moisture, dew condensation, briny air, and corrosive gas.
(Cl, H2S, NH3, SO2, NOX, etc.)
- Under the direct sunlight, outdoor exposure, and in a dusty place.
- In water, oil, medical fluid, and organic solvent.

Please do not use component parts like rubber which may contain sulfur (gasket packing, adhesive material, etc.).

Please note that any strong acidic or alcoholic elements could effect the silicon resin used in the LED device. The heat and light released from the LED device, could generate halogen gas from the surrounding materials, which may have adverse impact on the module. Before using please consider carefully about this issue.

③ Heat radiation and Installation

If forward current (IF) is applied to single-state module at any current, there is a risk of damaging LED or emitting smoke, due to increase in temperature.

Equip with specified heat radiator(heat sink), and avoid heat being stuffed inside the module.

Material of substrate is alumina ceramic. If installed inappropriately, trouble of insufficient heat radiation may occur, which may result in board cracks or lighting defects due to overheat. Please take particular notice for installation.

Refer to the following cautions while installing the LED device on heat sink.

- Apply thermolysis adhesive, adhesive sheet or peculiar connector when mounted on heat radiator.
In case of applying adhesive or adhesive sheet only, check the effectiveness and reliability before fixing.
If LED comes off from heat radiator, unusual temperature rise entails hazardous phenomena including device deterioration, coming off of solder at leads, and emitting smoke, along with LED device defects.
- When LED device is mechanically fixed or locked, Please take into consideration regarding the method of attachment due to fail from stress.
- Please apply appropriate stress and design carefully, when fixing the LED device using holder. Any excessive or uneven stress could break LED device's substrate.
- Avoid convexly uneven boards.
Convex board is subject to substrate cracking or debasement of heat release.

- It is recommended to apply adhesive or adhesive sheet with high thermal conductivity for radiation of heat effectively.
- Please take care about the influence of color change of adhesive or adhesive sheet in initial and long term period, which may affect light output or color due to change of reflectance from backside.
- Any excessive or uneven stress on the ceramic substrate could break the substrate. Please design such that, proper/uniform stress is applied on the substrate, when fixing the LED device using a holder.
- When fixing the LED device with a holder, please take note if any excessive or uneven stress is applied when pressing the substrate with holder. Due to this, the gap may arise between LED device and adhesive material, which may affect the heat dissipation of the device.
- Do not touch resin part including white resin part on the surface of LED.


No light emission may occur due to damage of resin or cutting wire of LEDs by outer force.

When using tweezers, please handle by ceramic substrate part and avoid touching resin part.

For mounting, please handle by side part of ceramic or the specified area shown below.

The current control circuit on the substrate has current controlling function.

Therefore, do not touch or damage this area when handling the LED at the time of mounting or after mounting.

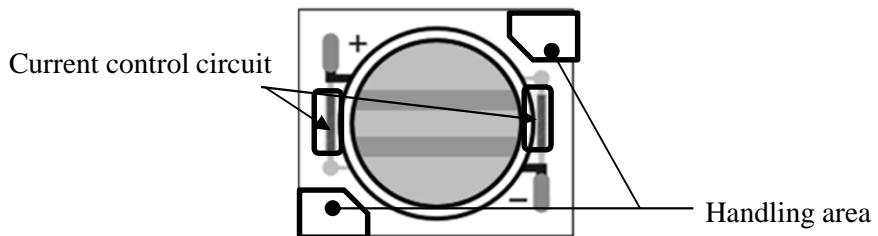

- The outer edges of the substrate may be uneven in some cases. Please avoid choosing these areas as fixing points, while designing for installation.
- In case of using heat radiation sheet or heat radiation adhesive, light reflection or absorption of these materials may influence the output of LED device. Especially, the color change that occur due to long-term use has direct impact on output of LED devices, and hence careful consideration is required while choosing the radiation sheet or adhesive.
- The current control circuit on the substrate gets hot when the device is in use. Please confirm performance and reliability of the materials that are used near this area, when choosing materials.

④ Connecting method

Use soldering for connections. Follow the conditions mentioned below, to preserve the connection strength.

- Use soldering iron with thermo controller (tip temperature 380 °C), within 5 seconds per one place.
- Secure the solderwettability on whole solder pad and leads.
- During the soldering process, put the ceramic board on materials whose conductivity is poor enough not to radiate heat of soldering.
- Warm up (with using a heated plate) the substrate is recommended before soldering.
(preheat condition: 100 °C ~ 150 °C, within 60 sec)
- Avoid touching any part of resin with soldering iron.
- This product is not designed for reflow and flow soldering.
- Avoid such lead arrangement as applying stress to solder-applied area.
- Please do not detach solder and make re-solder.
- Please solder evenly on each electrode.
- Please prevent flux from touching to resin.
- Do the soldering on stable stand. Avoid soldering on moving or vibrating objects.
- Please avoid touching the soldering unit to resin.

⑤ Static electricity

This product is subject to static electricity, so take measures like wearing wrist band to cope with it.
Install circuit protection device to drive circuit, if necessary.

⑥ Drive method

- Any reverse voltage cannot be applied to LEDs when they are in operation or not.

Design a circuit so that any flow of reverse or forward voltage can not be applied to LEDs when they are out of operation.

- Module is composed of LEDs connected in both series and parallel.

Constant voltage power supply runs off more than specified current amount due to lowered VF caused by temperature rise. Constant current power supply is recommended to drive.

- Be cautious while putting on/off the power supply, as excess current, excess voltage or reverse voltage may get injected to the device in some cases.

⑦ Cleaning

Avoid cleaning, since LED device may be effected in some cases by cleaning.

⑧ Color-tone variation

Chromaticity of this product is monitored by integrating sphere right after the operation.

Chromaticity varies depending on measuring method, light spread condition, or ambient temperature.

Please verify your actual conditions before use.

⑨ Safety

- Looking directly at LEDs for a long time may result in hurting your eyes.

- In case that excess current (over ratings) is supplied to the device, hazardous phenomena including abnormal heat generation, emitting smoke, or catching fire can be caused.

Take appropriate measures to excess current and voltage.

- In case of solder connecting method, there is a possibility of fatigue failure by heat.

Please fix the leads in such case to protect from short circuit or leakage of electricity caused by contact.

- Please confirm the safety standards or regulations of application devices.


- Please be careful with substrate edges, that may injure your hands.

⑩ Other cautions

Guarantee covers the compliance to the quality standards mentioned in the specifications, however it does not cover the compatibility with application of the end-use, including assembly and usage environment.

In case any quality problems occurred in the application of end-use, details will be separately discussed and determined between the parties hereto.

8. Characteristics diagram (TYP.)

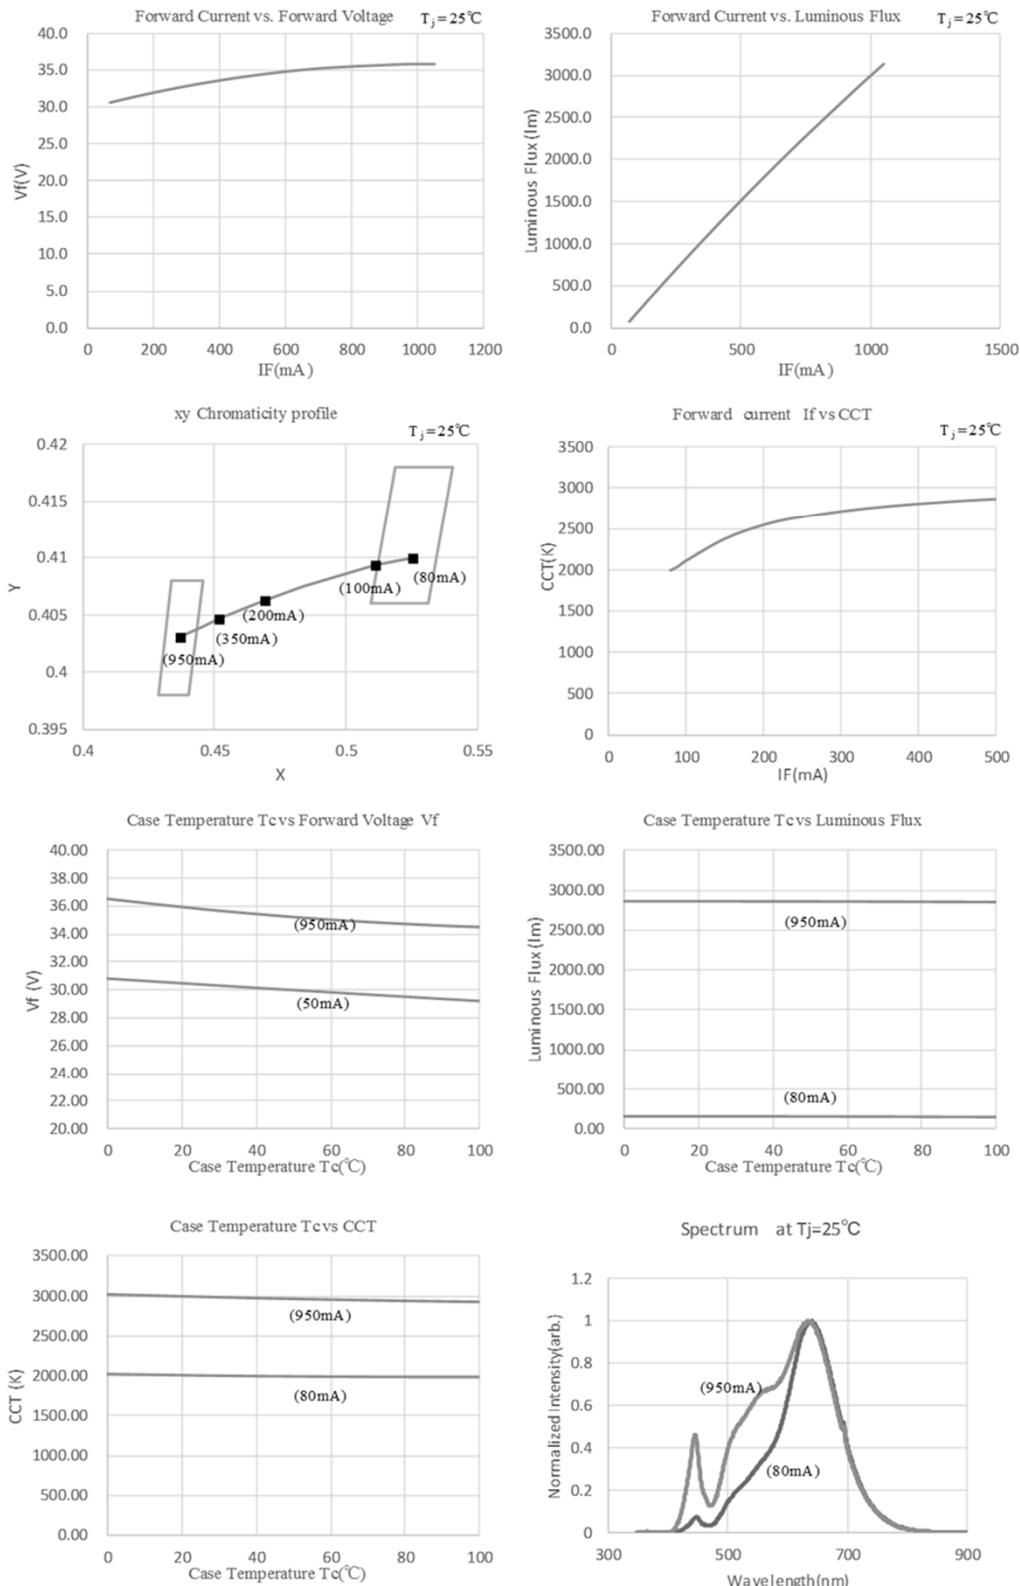

(Note) Characteristics data shown here are for reference purpose only. (Not guaranteed data)



OCEAN CHIPS

Океан Электроники

Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибутором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибутором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А