

## Hazardous Location Industrial VRS Magnetic Speed Sensors



### DESCRIPTION

Hazardous Location VRS sensors are designed for use in locations where explosion-proof or intrinsically safe sensors are required.

Passive VRS (Variable Reluctance Speed) Magnetic Speed sensors are simple, rugged devices that do not require an external voltage source for operation.

A permanent magnet in the sensor establishes a fixed magnetic field. The approach and passing of a ferrous metal target near the sensor's pole piece (sensing area) changes the flux of the magnetic field, dynamically changing its strength. This change in magnetic field strength induces a current into a coil winding which is attached to the output terminals.

### FEATURES

- Self-powered operation
- Direct conversion of actuator speed to output frequency
- Simple installation
- No moving parts
- Designed for use over a wide range of speeds
- Adaptable to a wide variety of configurations
- Customized VRS products for unique speed sensing applications
- Housing diameters: 3/4 in, 5/8 in
- Housing material/style: stainless steel threaded
- Terminations: MS3106 connector, preleaded
- Output voltages: 30 Vp-p to 60 Vp-p

The output signal of a VRS sensor is an ac voltage that varies in amplitude and wave frequency as the speed of the monitored device changes, and is usually expressed in peak to peak voltage (Vp-p).

One complete waveform (cycle) occurs as each target passes the sensor's pole piece. If a standard gear were used as a target, this output signal would resemble a sine wave if viewed on an oscilloscope.

Honeywell also offers VRS sensors for general purpose, high output, power output, high resolution and high temperature, as well as low-cost molded versions.

### POTENTIAL APPLICATIONS

- Engine RPM (revolutions per minute) measurement on aircraft, automobiles, boats, buses, trucks and rail vehicles
- Motor RPM on oil and gas drilling equipment and machinery
- Motor RPM measurement on drills, grinders, lathes and automatic screw machines
- Process speed measurement on food, textile, paper, woodworking, printing, tobacco and pharmaceutical industry machinery
- Motor speed measurement of electrical generating equipment in grain elevators, sawmills and other potentially explosive environments
- Speed measurement of pumps, blowers, mixers, exhaust
- Gear speed measurement

# Hazardous Location

## 3/4 INCH EXPLOSION-PROOF SENSORS (All dimensions for reference only. mm/[in])

When properly installed using the explosion containment method, all 3070X and catalog listings on this page are certified for use in hazardous locations as follows: Class I, Groups A, B, C, D; Class II Groups E, F, G; Class III.

These catalog listings have been tested to and meet the requirements of applicable U.S. and Canadian specifications for the locations described above.

### General Specifications

| Parameter             | Characteristic                      | Parameter                | Characteristic                        |
|-----------------------|-------------------------------------|--------------------------|---------------------------------------|
| Min. output voltage   | 60 Vp-p                             | Inductance               | 115 mH max.                           |
| Coil resistance       | 191 Ohm to 280 Ohm                  | Gear pitch range         | 12 DP (module 2.11) or coarser        |
| Pole piece diameter   | 4,75 mm [0.187 in]                  | Optimum actuator         | 8 DP (module 3.17) ferrous metal gear |
| Min. surface speed    | 0,38 m/s [15 in/s] typ.             | Max. operating frequency | 40 kHz typ.                           |
| Operating temp. range | -73 °C to 93 °C [-100 °F to 200 °F] | Vibration                | Mil-Std 202F Method 204D              |
| Mounting thread       | 3/4-20 UNEF-2A                      | Termination              | 18 AWG PVC-Insulated Leads            |

### Test Condition Specifications

| Parameter       | Characteristic      |
|-----------------|---------------------|
| Surface speed   | 25 m/s [1000 in/s]  |
| Gear            | 8 DP (module 3.17)  |
| Air gap         | 0,127 mm [0.005 in] |
| Load resistance | 100 kOhm            |

| Catalog Listing | Thread Length (A) | Weight          |  |
|-----------------|-------------------|-----------------|--|
| 3070A           | 45 mm [1.8 in]    | 294 g [10.5 oz] |  |
| 3070A35         | 88 mm [3.5 in]    | 322 g [11.5 oz] |  |

# Industrial VRS Magnetic Speed Sensors

## 5/8 INCH EXPLOSION-PROOF SENSORS (All dimensions for reference only. mm/[in])

When properly installed using the explosion containment method, the 3090X catalog listings on this page are certified for use in hazardous locations as follows: Class I, Groups A, B, C, D; Class II Groups E, F, G; Class III.

These catalog listings have been tested to and meet the requirements of applicable U.S. and Canadian specifications for the locations described above.


The catalog listings on this page conform to standards:  II 3 G EEx nA II T6.

### General Specifications

| Parameter             | Characteristic                      | Parameter                   | Characteristic                        |
|-----------------------|-------------------------------------|-----------------------------|---------------------------------------|
| Min. output voltage   | 60 Vp-p                             | Inductance                  | 115 mH max.                           |
| Coil resistance       | 191 Ohm to 280 Ohm                  | Gear pitch range            | 12 DP (module 2.11) or coarser        |
| Pole piece diameter   | 4,75 mm [0.187 in]                  | Optimum actuator            | 8 DP (module 3.17) ferrous metal gear |
| Minimum surface speed | 0,38 m/s [15 in/s] typ.             | Maximum operating frequency | 40 kHz typ.                           |
| Operating temp. range | -73 °C to 93 °C [-100 °F to 200 °F] | Vibration                   | Mil-Std 202F Method 204D              |
| Mounting thread       | 5/8-20 UNF-2A                       | Termination                 | 18 AWG PVC-insulated leads            |

### Test Condition Specifications

| Parameter       | Characteristic      |
|-----------------|---------------------|
| Surface speed   | 25 m/s [1000 in/s]  |
| Gear            | 8 DP (module 3.17)  |
| Air gap         | 0,127 mm [0.005 in] |
| Load resistance | 100 kOhm            |
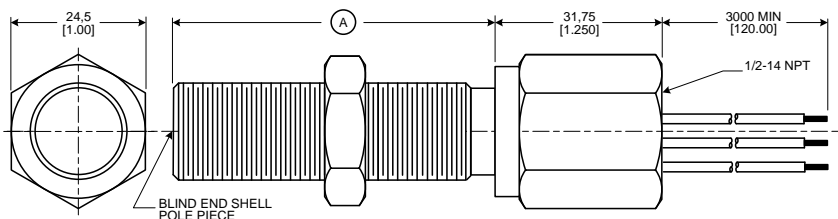
| Catalog Listing | Thread Length (A) | Weight          |  |
|-----------------|-------------------|-----------------|--|
| 3090A           | 45 mm [1.8 in]    | 280 g [9.0 oz]  |  |
| 3090A35         | 88 mm [3.5 in]    | 366 g [10.0 oz] |  |

# Hazardous Location

## 5/8 INCH (M16\*) INTRINSICALLY SAFE VRS SENSORS (All dimensions for reference only. mm/[in])

\*Contact Honeywell for availability of metric mounting thread versions.

When properly installed using the intrinsic safety protection method connected per the control drawings on pages 6 and 7, catalog listings 3042A is intrinsically safe for hazardous locations as follows:

Class I, Groups A, B, C, D.

This product has been tested to and meets the requirements of applicable U.S. and Canadian specifications for the locations described above.

### General Specifications

| Parameter             | Characteristic                      | Parameter                | Characteristic                         |
|-----------------------|-------------------------------------|--------------------------|--|
| Min. output voltage   | 30 Vp-p                             | Inductance               | 26 mH max.                             |
| Coil resistance       | 150 Ohm                             | Gear pitch range         | 16 DP (module 1.58) or coarser         |
| Pole piece diameter   | 3,9 mm [0.156 in]                   | Optimum actuator         | 12 DP (module 3.17) ferrous metal gear |
| Min. surface speed    | 0,38 m/s [15 in/s] typ.             | Max. operating frequency | 40 kHz typ.                            |
| Operating temp. range | -55 °C to 120 °C [-67 °F to 250 °F] | Vibration                | N/A                                    |
| Mounting thread       | 5/8-18 UNF-2A                       | Termination              | MS3106 connector                       |

### Test Condition Specifications

| Parameter       | Characteristic      |
|-----------------|---------------------|
| Surface speed   | 25 m/s [1000 in/s]  |
| Gear            | 8 DP (module 3.17)  |
| Air gap         | 0,127 mm [0.005 in] |
| Load resistance | 100 kOhm            |

| Catalog Listing | Weight        |  |
|-----------------|---------------|--|
| 3042A           | 70 g [2.5 oz] |  |

# Industrial VRS Magnetic Speed Sensors

## 5/8 INCH (M16\*) INTRINSICALLY SAFE VRS SENSORS (All dimensions for reference only. mm/[in])

\*Contact Honeywell for availability of metric mounting thread versions.

When properly installed using the intrinsic safety protection method connected per the control drawings on pages 6 and 7, catalog listing 3042H20 is intrinsically safe for hazardous locations as follows:

Class I, Groups A, B, C, D; Class II Groups E, F, G; Class III.

This product has been tested to and meets the requirements of applicable U.S. and Canadian specifications for the locations described above.

### General Specifications

| Parameter             | Characteristic                      | Parameter                | Characteristic                         |
|-----------------------|-------------------------------------|--------------------------|--|
| Min. output voltage   | 30 Vp-p                             | Inductance               | 26 mH max.                             |
| Coil resistance       | 150 Ohm                             | Gear pitch range         | 16 DP (module 1.58) or coarser         |
| Pole piece diameter   | 3,9 mm [0.156 in]                   | Optimum actuator         | 12 DP (module 3.17) ferrous metal gear |
| Min. surface speed    | 0,38 m/s [15 in/s] typ.             | Max. operating frequency | 40 kHz typ.                            |
| Operating temp. range | -55 °C to 120 °C [-67 °F to 250 °F] | Vibration                | N/A                                    |
| Mounting thread       | 5/8-18 UNF-2A                       | Termination              | 18 AWG PVC-insulated leads             |


### Test Condition Specifications

| Parameter       | Characteristic      |
|-----------------|---------------------|
| Surface speed   | 25 m/s [1000 in/s]  |
| Gear            | 8 DP (module 3.17)  |
| Air gap         | 0,127 mm [0.005 in] |
| Load resistance | 100 kOhm            |

| Catalog Listing | Weight         |  |
|-----------------|----------------|--|
| 3042AH20        | 140 g [5.0 oz] |  |

# Hazardous Location

## CONTROL DRAWING FOR SINGLE CHANNEL BARRIERS

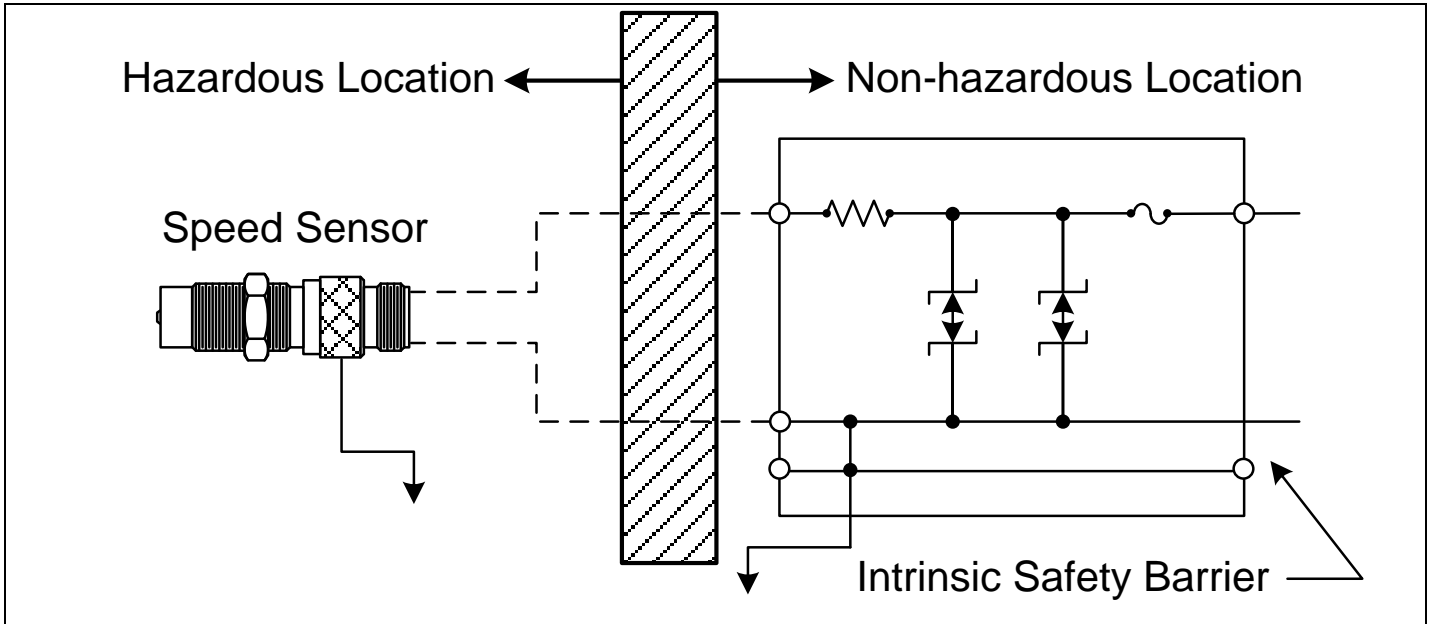

### HAZARDOUS LOCATIONS

Catalog listing 3042H20:

- Class I, Groups A, B, C, D
- Class II, Groups E, F, G
- Class III

Catalog listing 3042A:

- Class I, Groups A, B, C, D

### ENTITY PARAMETERS

$V_{max} = 24\text{ V}$ ,  $I_{max} = 35\text{ mA}$ ,  $L_i = 26\text{ mH}$ ,  $C_i = 0\text{ }\mu\text{F}$

Any barrier (see General Notes) with entity parameters connected in accordance with barrier manufacturers instructions of:

$$V_{max} \geq V_{oc} \quad C_a \geq C_i + \text{cable capacitance}$$

$$I_{max} \geq I_{sc} \quad L_a \geq L_i + \text{cable inductance}$$

### SYSTEM PARAMETERS

Any barrier (see General Notes) having one of the following specified parameters:

| $V_{max}$ | $R_{min}$ | $V_{max}$ | $R_{min}$ | $V_{max}$ | $R_{min}$ |
|-----------|-----------|-----------|-----------|-----------|-----------|
| 30        | 707       | 20        | 421       | 10        | 136       |
| 25        | 580       | 15        | 278       | 5         | 1         |

### GENERAL NOTES

1. For jurisdictions requiring certification to the applicable Canadian standards, the barrier must be CSA Certified and the system must be installed in accordance with the Canadian Electrical Code Part 1.
2. For jurisdictions requiring certification to the applicable Occupational Safety and Health Administration (OSHA) standards, the barrier must be CSA NRTL or equivalent and the system must be installed in accordance with the National Electrical Code (NEC), article 504 or ANSI/NFPA 70.

### SENSOR GROUNDING


Catalog listing 3042A: Sensor housing must be connected to intrinsically safe system ground during installation.

Catalog listing 3042H20: Green wire must be connected to intrinsically safe system ground.

Exia = Intrinsically Safe, Sécurité Intrinsèque

# Industrial VRS Magnetic Speed Sensors

## CONTROL DRAWING FOR DUAL CHANNEL BARRIERS

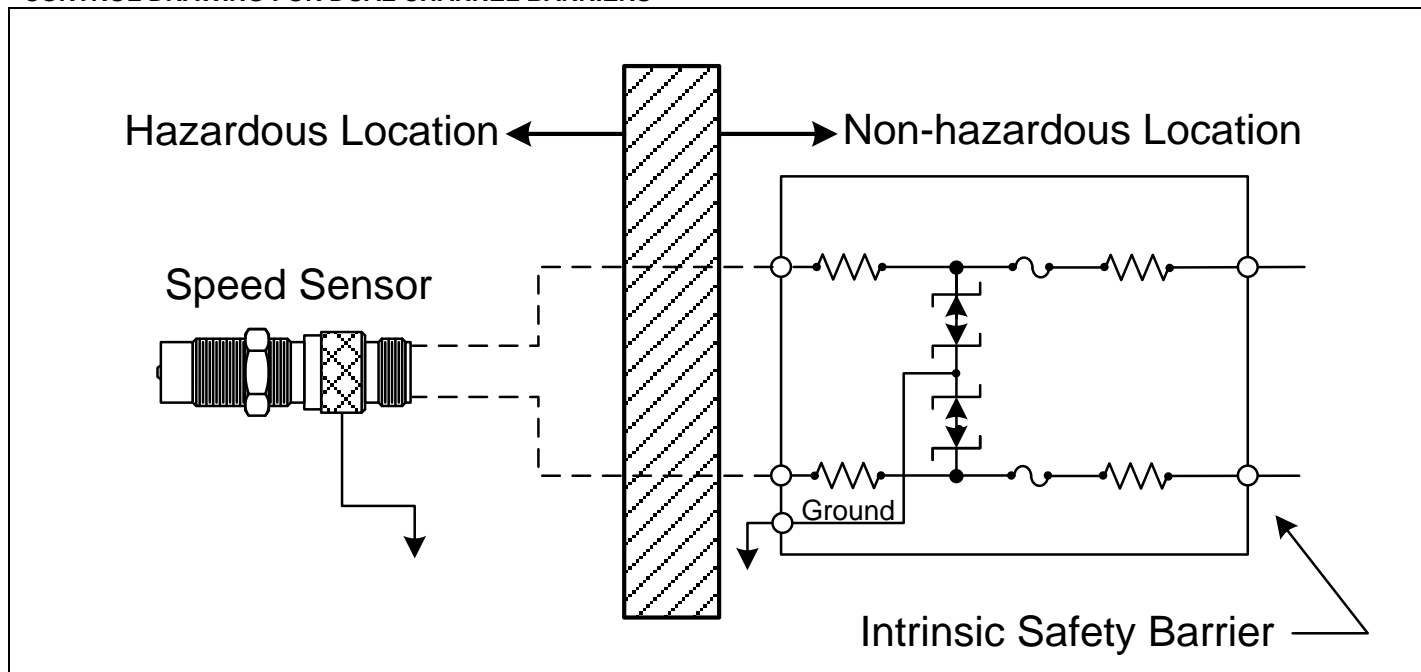

### HAZARDOUS LOCATIONS

Catalog listing 3042H20:

- Class I, Groups A, B, C, D
- Class II, Groups E, F, G
- Class III

Catalog listing 3042A:

Class I, Groups A, B, C, D

### ENTITY PARAMETERS

$V_{max} = 24\text{ V}$ ,  $I_{max} = 35\text{ mA}$ ,  $L_i = 26\text{ mH}$ ,  $C_i = 0\text{ }\mu\text{F}$

Any barrier (see General Notes) with entity parameters connected in accordance with barrier manufacturers instructions of:

$$V_{max} \geq V_{oc} \quad C_a \geq C_i + \text{cable capacitance}$$

$$I_{max} \geq I_{sc} \quad L_a \geq L_i + \text{cable inductance}$$

### SYSTEM PARAMETERS

Any barrier (see General Notes) having one of the following specified parameters:

| $V_{max}$ | $R_{min}$ | $V_{max}$ | $R_{min}$ | $V_{max}$ | $R_{min}$ |
|-----------|-----------|-----------|-----------|-----------|-----------|
| 30        | 1414      | 20        | 842       | 10        | 272       |
| 25        | 1160      | 15        | 556       | 5         | 2         |

### GENERAL NOTES

1. For jurisdictions requiring certification to the applicable Canadian standards, the barrier must be CSA Certified and the system must be installed in accordance with the Canadian Electrical Code Part 1.
2. For jurisdictions requiring Certification to the applicable Occupational Safety and Health Administration (OSHA) standards, the barrier must be CSA NRTL or equivalent and the system must be installed in accordance with the National Electrical Code (NEC), article 504 or ANSI/NFPA 70.

### SENSOR GROUNDING

Catalog listing 3042A: Sensor housing must be connected to intrinsically safe system ground during installation.

Catalog listing 3042H20: Green wire must be connected to intrinsically safe system ground.

Exia = Intrinsically Safe, Sécurité Intrinsèque

## **WARNING**

### **PERSONAL INJURY**

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

### **WARRANTY/REMEDY**

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

## **WARNING**

### **MISUSE OF DOCUMENTATION**

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

### **SALES AND SERVICE**

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office or:

**E-mail:** [info.sc@honeywell.com](mailto:info.sc@honeywell.com)

**Internet:** [www.honeywell.com/sensing](http://www.honeywell.com/sensing)

#### **Phone and Fax:**

|               |                         |
|---------------|-------------------------|
| Asia Pacific  | +65 6355-2828           |
|               | +65 6445-3033 Fax       |
| Europe        | +44 (0) 1698 481481     |
|               | +44 (0) 1698 481676 Fax |
| Latin America | +1-305-805-8188         |
|               | +1-305-883-8257 Fax     |
| USA/Canada    | +1-800-537-6945         |
|               | +1-815-235-6847         |
|               | +1-815-235-6545 Fax     |

Sensing and Control  
Honeywell  
1985 Douglas Drive North  
Golden Valley, MN 55422  
[www.honeywell.com](http://www.honeywell.com)

005879-2-EN  
March 2012  
Copyright © 2012 Honeywell International Inc. All rights reserved.

# **Honeywell**



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А