
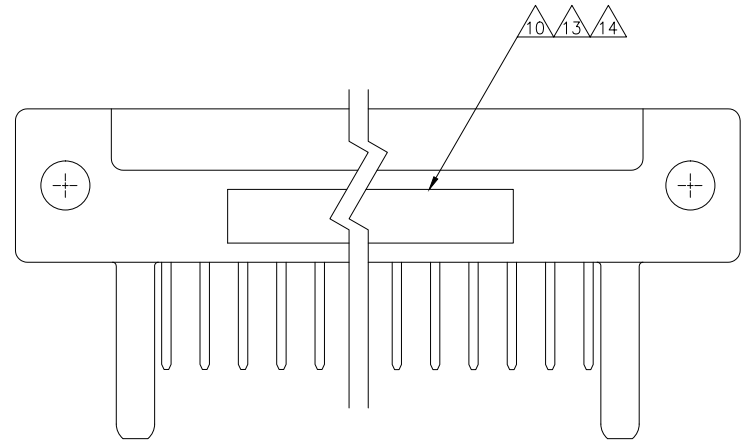
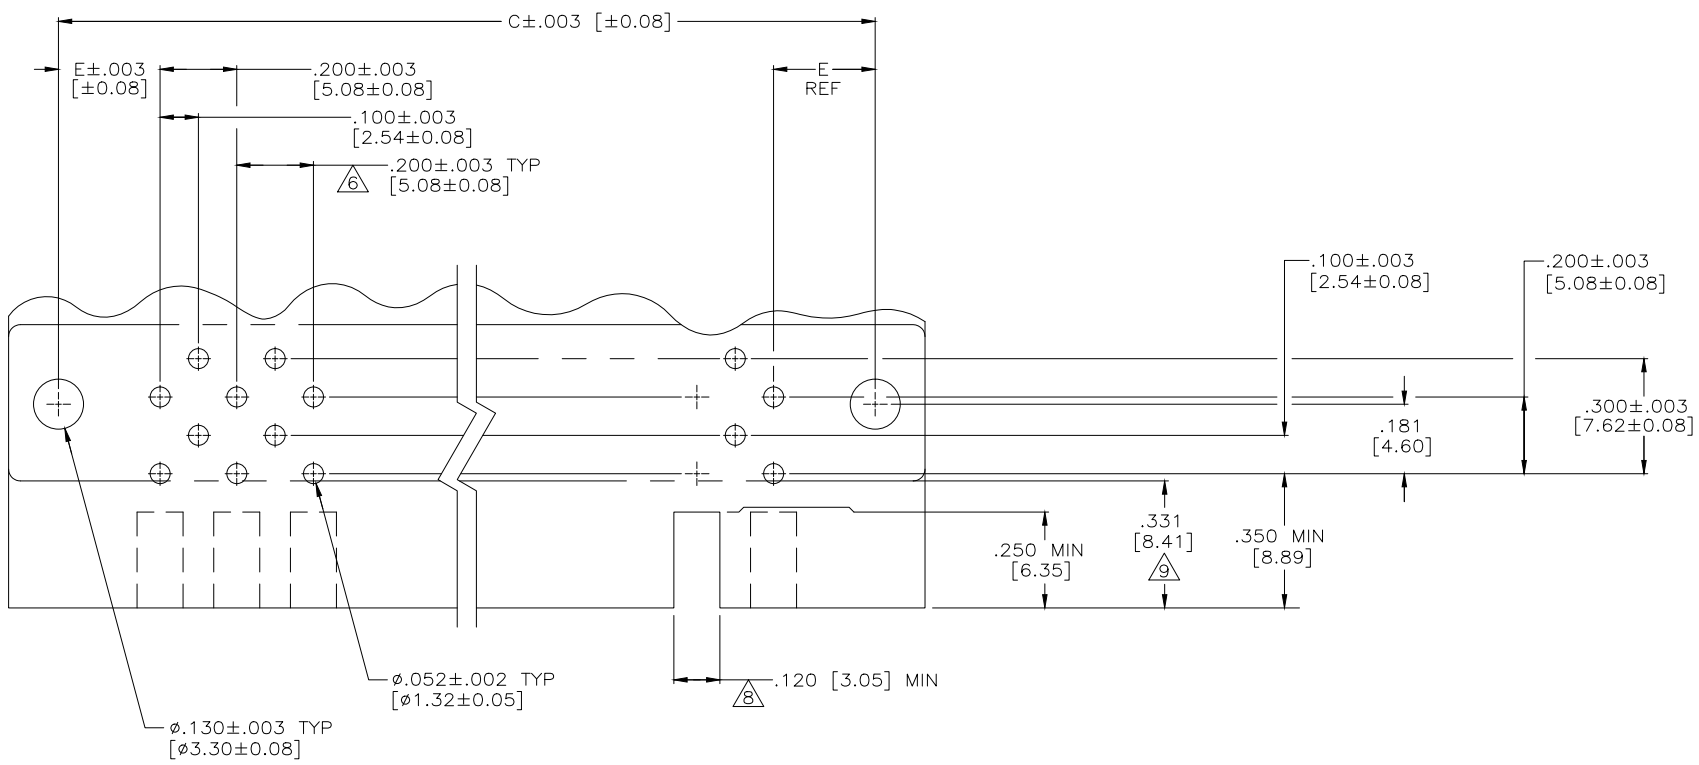


LOC		DIST		REVISIONS				
DF	HO	P	LTR	DESCRIPTION		DATE	DWN	APVD
			AW	REVISED PER ECO-15-008962		30JUN2015	RS	CT




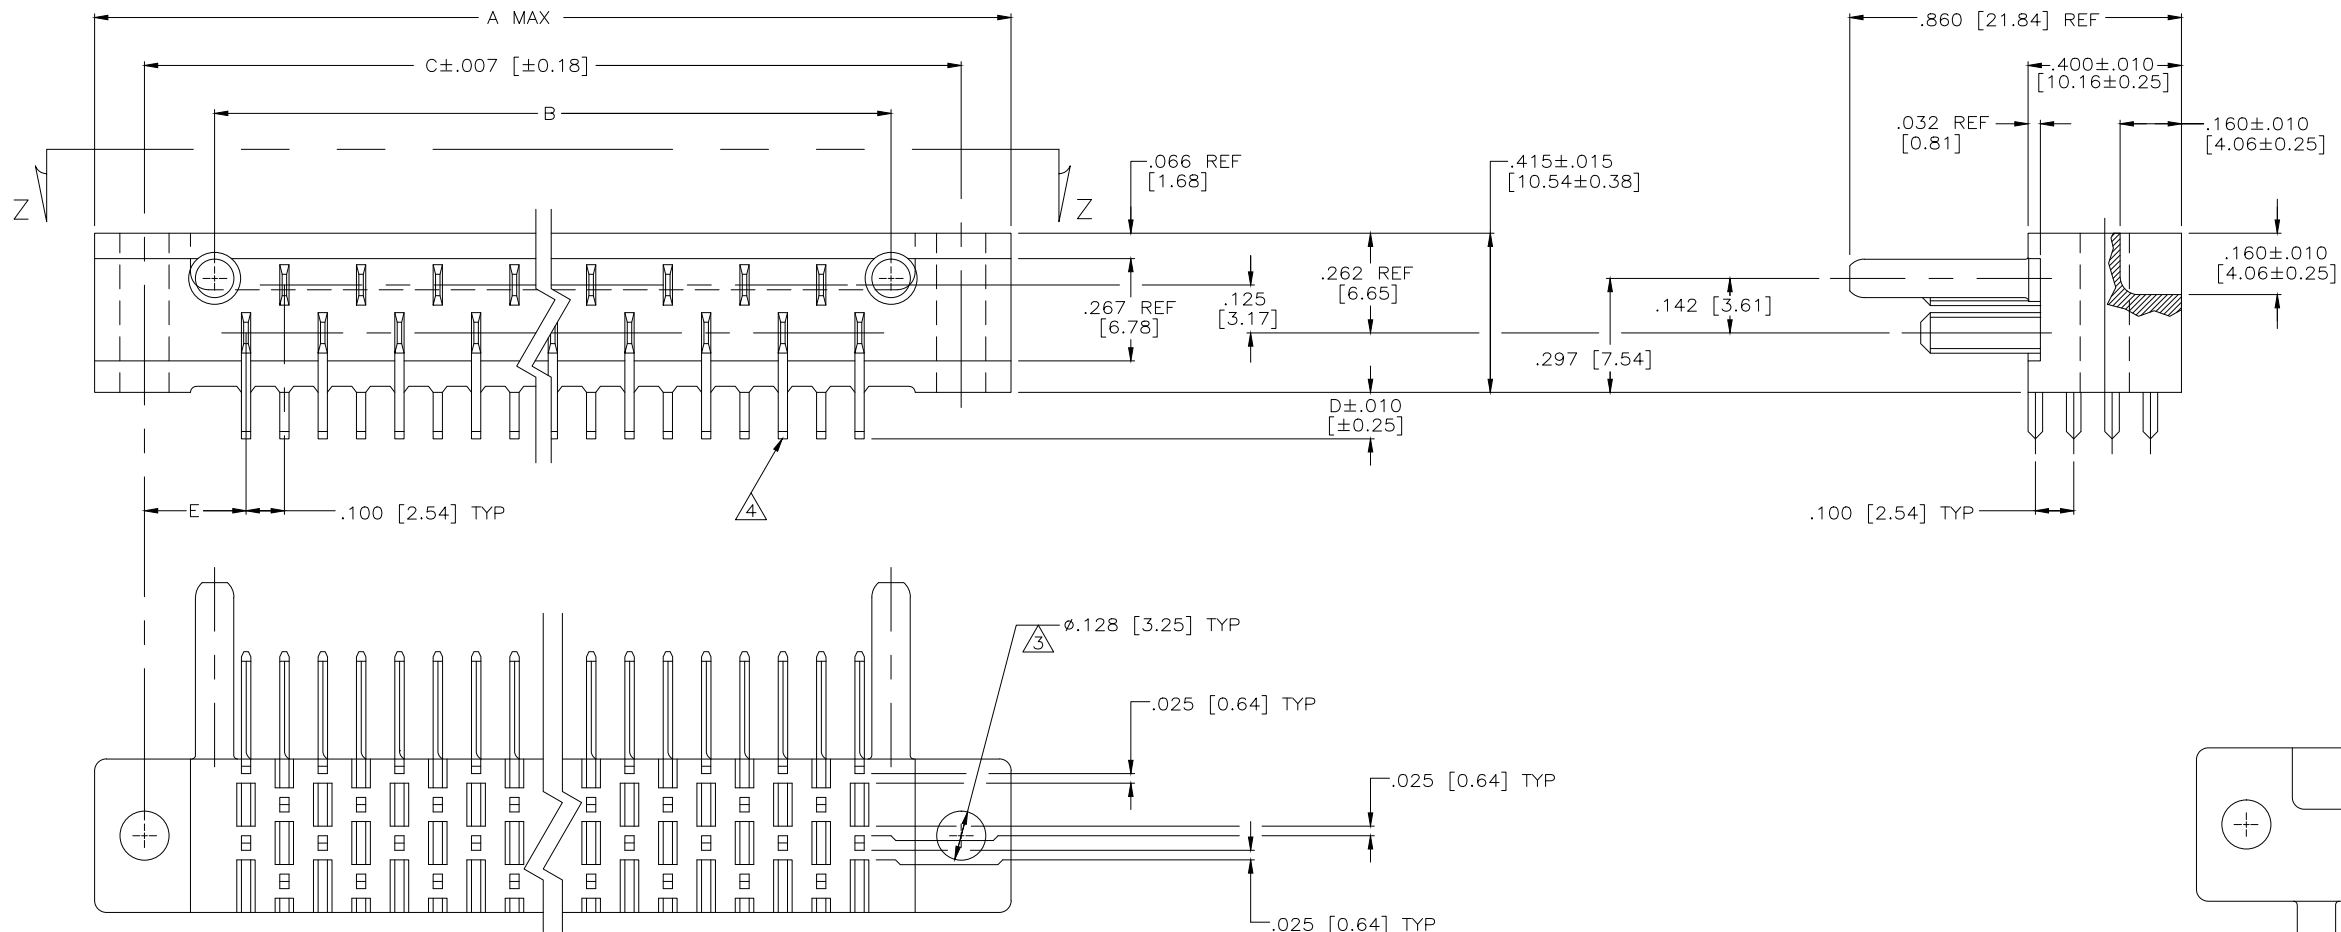


VIEW Z-Z

RECOMMENDED P.C. BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAV SATISH 30JUN2015	TE Connectivity	
DIMENSIONS: INCHES		OK CHARLES THOMAS 30JUN2015	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD CHARLES THOMAS 30JUN2015	ASSEMBLY, AMP BLADE TAB HOUSING	
0 PLC ± -		PRODUCT SPEC	-	
1 PLC ± -		APPLICATION SPEC	-	
2 PLC ± -		WEIGHT	-	
3 PLC ± -.005 [0.13]		SIZE	A1	
4 PLC ± -		CAGE CODE	00779	
ANGLES FINISH		DRAWING NO	582152	
MATERIAL		CUSTOMER DRAWING	SCALE 4:1	
5 - 7		SHEET 1 of 3	REV AW	

LOC		DIST		REVISIONS			
DF		HO		REV	DESCRIPTION	DATE	OWN
				1	SEE SHEET 1		

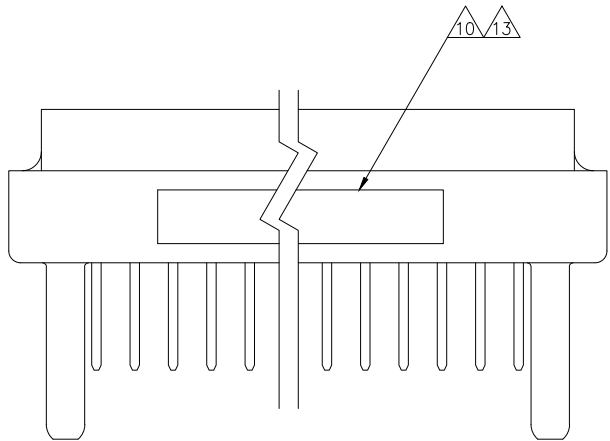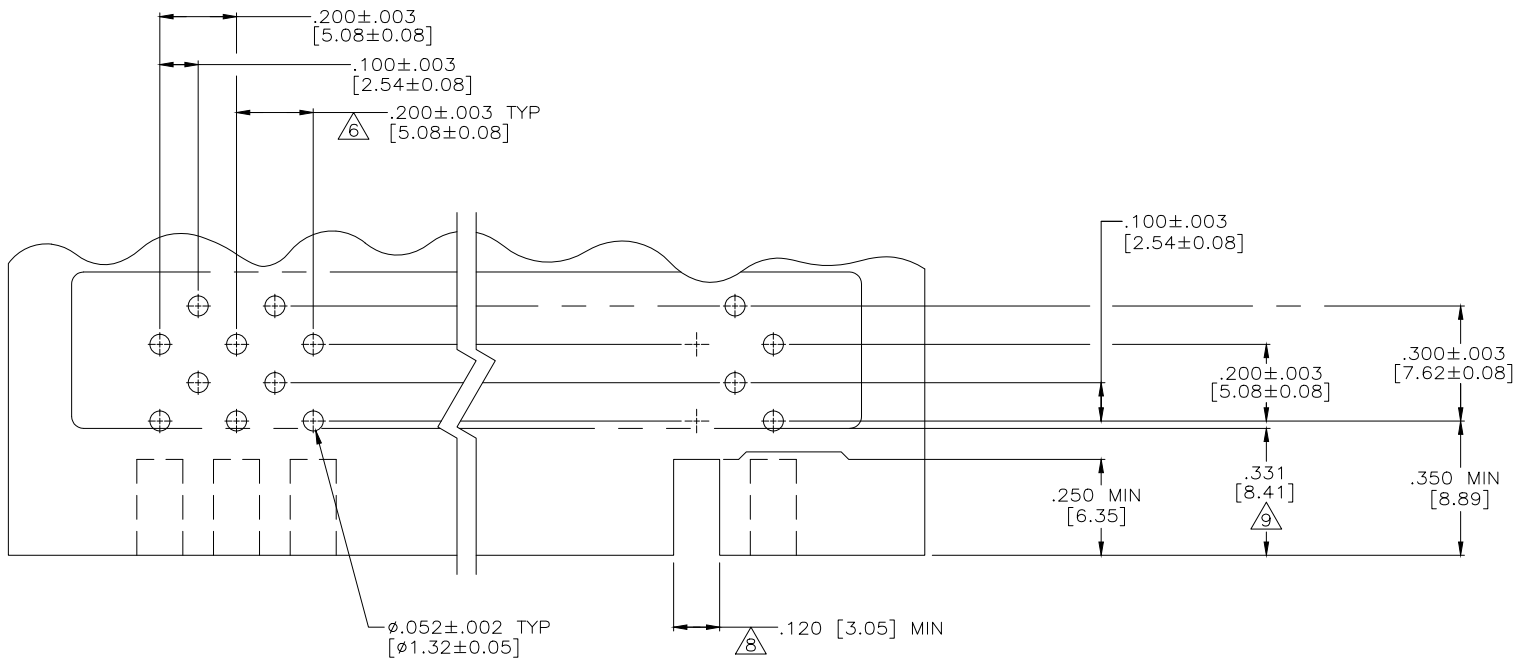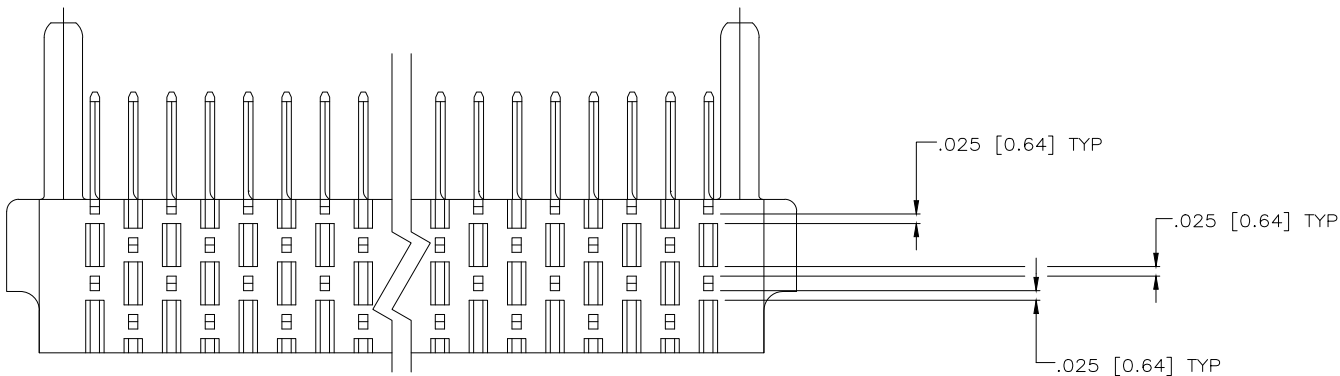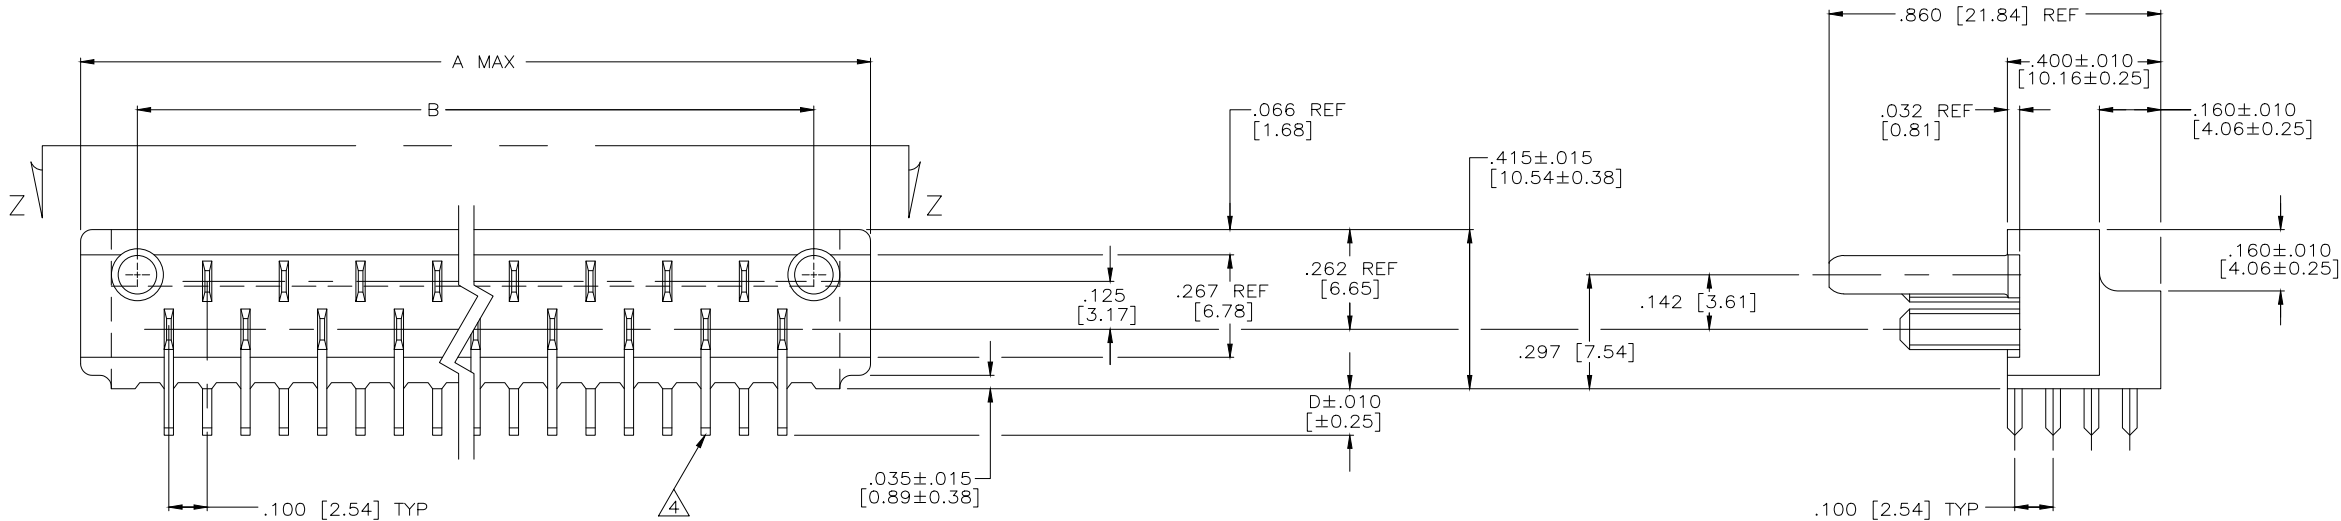

VIEW Z-Z

RECOMMENDED P.C. BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAV SATISH 30JUN2015	TE Connectivity	
DIMENSIONS: INCHES		CHK CHARLES THOMAS 30JUN2015	NAME ASSEMBLY, AMP BLADE TAB HOUSING	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD CHARLES THOMAS 30JUN2015	RESTRICTED TO	
0 PLC ± -		PRODUCT SPEC	SIZE A1	
1 PLC ± -		APPLICATION SPEC	CAGE CODE 00779	
2 PLC ± -		WEIGHT	DRAWING NO 582152	
3 PLC ± .005 [0.13]		CUSTOMER DRAWING	SCALE 4:1	
4 PLC ± -			SHEET 2	
ANGLES FINISH			OF 3	
MATERIAL SEE SHEET 1			REV AW	

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOC

DIST

DF

HO

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

WITH MOUNTING HOLES

PART NO.	NO OF CONT.	A	B	C	D	E	P.C. BD. THICKNESS	NOTE	MARKING
3-582152-1	17	2.390	1.764	2.130	.120	.265	.0625		-
3-582152-2	23	2.990	2.364	2.730	.120	.265	.0625		-
3-582152-3	29	3.590	2.964	3.330	.120	.265	.0625		-
3-582152-4	35	4.190	3.564	3.930	.120	.265	.0625		-
3-582152-5	41	4.790	4.164	4.530	.120	.265	.0625		-
3-582308-1	47	5.623	4.764	5.363	.120	.381	.0625		-
582852-4	41	4.790	4.164	4.530	.120	.265	.0625		-
4-582308-1	47	5.623	4.764	5.363	.120	.381	.0625		-
4-582152-1	17	2.390	1.764	2.130	.120	.265	.0625		-
4-582152-3	29	3.590	2.964	3.330	.120	.265	.0625		-
5-582843-0	23	2.990	2.364	2.730	.120	.265	.0625		-
5-582843-1	47	5.623	4.764	5.363	.120	.381	.0625		-
582843-2	17	2.390	1.764	2.130	.120	.265	.0625		-
582843-3	23	2.990	2.364	2.730	.120	.265	.0625		-
582843-4	29	3.590	2.964	3.330	.120	.265	.0625		-
582843-5	35	4.190	3.564	3.930	.120	.265	.0625		-
582843-6	41	4.790	4.164	4.530	.120	.265	.0625		-
582843-7	47	5.623	4.764	5.363	.120	.381	.0625		-
582907-1	29	3.590	2.964	3.330	.120	.265	.0625		-
6-582152-1	17	2.390	1.764	2.130	.152	.265	.0937		-
6-582152-2	23	2.990	2.364	2.730	.152	.265	.0937		-
6-582152-3	29	3.590	2.964	3.330	.152	.265	.0937		-
6-582152-4	35	4.190	3.564	3.930	.152	.265	.0937		-
6-582152-5	41	4.790	4.164	4.530	.152	.265	.0937		-
6-582308-1	47	5.623	4.764	5.363	.152	.381	.0937		-
7-582308-1	47	5.623	4.764	5.363	.152	.381	.0937		-
1-582843-4	17	2.390	1.764	2.130	.152	.265	.0937		-
582843-1	23	2.990	2.364	2.730	.152	.265	.0937		-
1-582843-5	29	3.590	2.964	3.330	.152	.265	.0937		-
1-582843-6	35	4.190	3.564	3.930	.152	.265	.0937		-
1-582843-7	41	4.790	4.164	4.530	.152	.265	.0937		-
1-582843-8	47	5.623	4.764	5.363	.152	.381	.0937		-
9-582152-1	17	2.390	1.764	2.130	.183	.265	.125		-
9-582152-2	23	2.990	2.364	2.730	.183	.265	.125		-
9-582152-3	29	3.590	2.964	3.330	.183	.265	.125		-
9-582152-4	35	4.190	3.564	3.930	.183	.265	.125		-
9-582152-5	41	4.790	4.164	4.530	.183	.265	.125		-
9-582308-1	47	5.623	4.764	5.363	.183	.381	.125		-
2-582843-5	17	2.390	1.764	2.130	.183	.265	.125		-
2-582843-6	23	2.990	2.364	2.730	.183	.265	.125		-
2-582843-7	29	3.590	2.964	3.330	.183	.265	.125		-
2-582843-8	35	4.190	3.564	3.930	.183	.265	.125		-
2-982843-9	41	4.790	4.164	4.530	.183	.265	.125		-
3-582843-0	47	5.623	4.764	5.363	.183	.381	.125		-

WITHOUT MOUNTING HOLES

PART NO.	NO OF CONT.	A	B	C	D	E	P.C. BD. THICKNESS	NOTE	MARKING
3-582152-6	17	2.070	1.764	-	.120	-	.0625		-
3-582152-7	23	2.670	2.364	-	.120	-	.0625		-
3-582152-8	29	3.270	2.964	-	.120	-	.0625		-
3-582152-9	35	3.870	3.564	-	.120	-	.0625		-
3-582152-0	41	4.470	4.164	-	.120	-	.0625		-
3-582308-2	47	5.070	4.764	-	.120	-	.0625		-
2-582152-9	35	3.870	3.564	-	.120	-	.0625		-
582152-1	23	2.670	2.364	-	.120	-	.0625		-
582152-2	47	5.070	4.764	-	.120	-	.0625		-
582152-3	35	3.870	3.564	-	.120	-	.0625		-
582843-8	17	2.070	1.764	-	.120	-	.0625		-
582843-9	23	2.670	2.364	-	.120	-	.0625		-
1-582843-0	29	3.270	2.964	-	.120	-	.0625		-
1-582843-1	35	3.870	3.564	-	.120	-	.0625		-
1-582843-2	41	4.470	4.164	-	.120	-	.0625		-
1-582843-3	47	5.070	4.764	-	.120	-	.0625		-
6-582152-6	17	2.070	1.764	-	.152	-	.0937		-
6-582152-7	23	2.670	2.364	-	.152	-	.0937		-
6-582152-8	29	3.270	2.964	-	.152	-	.0937		-
6-582152-9	35	3.870	3.564	-	.152	-	.0937		-
6-582152-0	41	4.470	4.164	-	.152	-	.0937		-
6-582308-2	47	5.070	4.764	-	.152	-	.0937		-
1-582843-9	17	2.070	1.764	-	.152	-	.0937		-
2-582843-0	23	2.670	2.364	-	.152	-	.0937		-
2-582843-1	29	3.270	2.964	-	.152	-	.0937		-
2-582843-2	35	3.870	3.564	-	.152	-	.0937		-
2-582843-3	41	4.470	4.164	-	.152	-	.0937		-
2-582843-4	47	5.070	4.764	-	.152	-	.0937		-
9-582152-6	17	2.070	1.764	-	.183	-	.125		-
9-582152-7	23	2.670	2.364	-	.183	-	.125		-
9-582152-8	29	3.270	2.964	-	.183	-	.125		-
9-582152-9	35	3.870	3.564	-	.183	-	.125		-
9-582152-0	41	4.470	4.164	-	.183	-	.125		-
9-582308-2	47	5.070	4.764	-	.183	-	.125		-
3-582843-1	17	2.070	1.764	-	.183	-	.125		-
3-582843-2	23	2.670	2.364	-	.183	-	.125		-
3-582843-3	29	3.270	2.964	-	.183	-	.125		-
3-582843-4	35	3.870	3.564	-	.183	-	.125		-
3-582843-5	41	4.470	4.164	-	.183	-	.125		-
3-582843-6	47	5.070	4.764	-	.183	-	.125		-

1. TAB-HOUSING ASSEMBLY MATES WITH AMP P/N 3-582151 SERIES.

2. BLADE CENTER LINE TO BE MEASURED FROM THE CENTER LINE FORMED BY THE ALIGNMENT PINS & AS LONG AS THE BLADES FALL WITHIN TOLERANCES INDICATED, THE ALLOWABLE WARPAGE IS INDEPENDENT OF THE BLADES & BECOMES A MEASUREMENT OF THE OUTSIDE SURFACE OF THE TAB-HOUSING & DOES NOT EFFECT THE MATING OF THIS TAB-HOUSING WITH 582151.

3. MOUNTING HOLES.

4. POST TO BE SOLDER DIPPED. CONN. MUST MEET REQUIREMENTS OF AMP SPEC 109-11-1.

5. CONTACT MATL.; GILDING METAL. GOLD OVER NICKEL.

6. TOLERANCE NON CUMULATIVE.

7. TAB-HOUSING MATL.; DIALLYL PHTHALATE, GLASS FILLED PER MIL-M-14, TYPE S.D.G.-F. COLOR; GREEN.

8. CUT OUT FOR KEYING BOSS, LOCATED WHERE REQD. (OPTIONAL)

9. FROM EDGE OF P.C. BOARD TO FACE OF TAB-HOUSING.

10. TYCO ELECTRONICS P/N NOT TO BE MARKED ON PART. AMP, DATE CODE, AND CUSTOMER PART NO. MARKED PER TABLE.

11. CONTACT FINISH; .0001 THK. GOLD, OVER NICKEL.

12. TAB-HOUSING MATL.; COLOR, GREY.

13. AMP, TYCO ELECTRONICS PART NO. AND DATE CODE MARKED PER TABLE IN THIS APPROX AREA.

14. CUSTOMER PART NO. MARKED PER TABLE IN THIS APPROX AREA.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES



MATERIAL SEE SHEET 1

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0. PLC ± .005 [0.13]

1. PLC ± .005 [0.13]

2. PLC ± .005 [0.13]

3. PLC ± .005 [0.13]

4. PLC ± .005 [0.13]

ANGLES ± .5°

FINISH SEE SHEET 1

DWN RAGHAV SATISH 30JUN2015

CHK CHARLES THOMAS 30JUN2015

APVD CHARLES THOMAS 30JUN2015

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

ASSEMBLY, AMP BLADE TAB HOUSING

SIZE A1

CAGE CODE 00779

DRAWING NO. 582152

RESTRICTED TO

SCALE 4:1

SHEET 3 OF 3

REV AV

4806 (3/11)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А