



## Film capacitors – Power Factor Correction

PhiCap capacitors

**Series/Type:** B32340C / MKPxxx-I  
**Ordering code:** B32340C\*\*\*\*A\*\*\*  
**Date:** June 2009  
**Version:** 3

## Preliminary data

### Construction

- Dielectric: metallized polypropylene film
- Semi-dry; biodegradable soft resin; non-PCB
- Case: extruded round aluminum can with stud
- Mounting and grounding: threaded M12 stud on bottom of can
- Degree of protection: IP20 (optionally IP54 with terminal cover; additional cable gland at cable entry required)

### Features

- Single phase, provided with discharge resistors
- Dual safety system: overpressure disconnect, self-healing technology
-  file # E106388
-  C22.2 N°190 MC # 236094
- Naturally air cooled (or forced air cooling)
- Indoor mounting

### Typical applications

- For Power Factor Correction

### Terminals


- Fast-on terminals

### Mounting

- Threaded stud at bottom of can (max. torque = 10 Nm for M12)



### Dimensional drawing

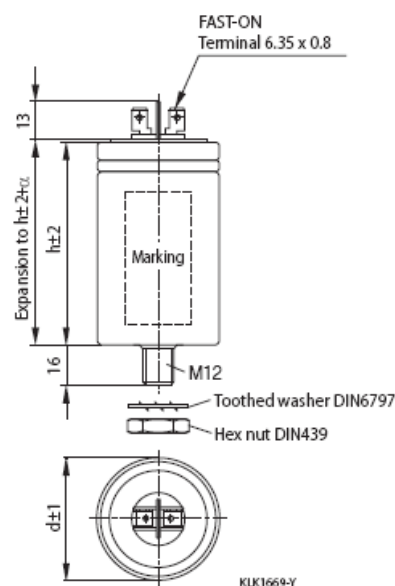

### Characteristics

|                                   |                                  |
|-----------------------------------|----------------------------------|
| Rated capacitance $C_R$ and $Q_R$ | According to specification table |
| Tolerance                         | -5/+10%                          |
| Rated voltage $V_R$               | According to specification table |
| Rated frequency $f_R$             | 50/60 Hz                         |

**Preliminary data**
**Technical data and specifications**
**Maximum ratings (accord. to IEC 60831)**

|                                                   |                                                                                                                                             |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum permissible voltage $V_{\max}$            | $V_R + 10\%$ (up to 8 h daily)<br>$V_R + 15\%$ (up to 30 min daily)<br>$V_R + 20\%$ (up to 5 min daily)<br>$V_R + 30\%$ (up to 1 min daily) |
| Maximum permissible current $I_{\max}$            | Up to $1.3 \cdot I_R$ (up to $1.5 \cdot I_R$ incl. combined effects of harmonics, over voltages and capacitance)                            |
| Maximum transient inrush current                  | Up to $200 \cdot I_R$                                                                                                                       |
| Power dissipation (dielectric)                    | $< 0.2 \text{ W/kvar}$                                                                                                                      |
| Power dissipation (excluding discharge resistors) | $< 0.45 \text{ W/kvar}$                                                                                                                     |

**Test data (accord. To IEC 60831)**

|                                                    |                          |
|----------------------------------------------------|--------------------------|
| AC test voltage terminal-to-terminal               | $2.15 \cdot V_R$ , 2 s   |
| Insulation voltage between terminals and container | 3000 V AC, 10 s          |
| Dissipation factor $\tan \delta$ at 100 Hz         | $\leq 1.0 \cdot 10^{-3}$ |

**Climatic category / -25/D (to IEC 60831)**

|                              |                                                                                                         |
|------------------------------|---------------------------------------------------------------------------------------------------------|
| Ambient temperature          | Max. temp. = 55 °C<br>Max. mean 24 h = 45 °C<br>Max. mean 1 year = 35 °C<br>Lowest temperature = -25 °C |
| Maximum permissible humidity | Average relative $< 95\%$                                                                               |
| Maximum permissible altitude | 4000 m                                                                                                  |
| <b>Mean life expectancy</b>  |                                                                                                         |
| $t_{LD}$                     | Up to 100.000 operating hours                                                                           |

Max. 5 000 switching operations according to IEC 60831

**Preliminary data**
**Design data**

|                           |                                                                                                  |
|---------------------------|--------------------------------------------------------------------------------------------------|
| Dimensions (d × l)        | According to specification table                                                                 |
| Weight approx.            | According to specification table                                                                 |
| Filling                   | Biodegradable soft resin                                                                         |
| Fixing                    | Threaded bolt M12                                                                                |
| Max. torque (Al can stud) | 10 Nm (for Ø 63.5 mm)                                                                            |
| Mounting position         | Upright. See "Installation and maintenance instructions for PFC capacitors" for further details. |

**Terminals**

|                      |                                                                                              |
|----------------------|----------------------------------------------------------------------------------------------|
| Degree of protection | IP20, option IP54 with plastic terminal cap; additional cable gland at cable entry required. |
| Creepage distance    | 10 mm                                                                                        |
| Clearance            | 16.5 mm (to UL 810)                                                                          |


**Safety**

|                            |                                             |
|----------------------------|---------------------------------------------|
| Mechanical safety          | Tear off fuses overpressure disconnecter    |
| Max. short circuit current | (AFC: 10 kA) (to UL 810)                    |
| Discharge resistor time    | ≤ 1 min (75 V) , IEC 60831 specifies 3 min. |

**Reference standards**

IEC 60831–1/2. UL 810-5<sup>th</sup> edition

Single phase resistor, included in the extend of delivery



**Preliminary data**
**Single-phase capacitors –  $V_R = 220 \text{ V AC}$ , 50/60 Hz**

| Product / Type<br>Ordering code | 50 Hz          |            | 60 Hz          |            | $C_R$<br>$\mu\text{F}$ | Dimensions<br>d x h<br>mm | Weight<br>kg | Quantity<br>per<br>box |
|---------------------------------|----------------|------------|----------------|------------|------------------------|---------------------------|--------------|------------------------|
|                                 | Output<br>kvar | $I_R$<br>A | Output<br>kvar | $I_R$<br>A |                        |                           |              |                        |
| MKP220-I-0.7<br>B32340C2001A820 | 0.7            | 3.1        | 0.8            | 3.8        | 45                     | 63.5 × 105                | 0.30         | 12                     |
| MKP220-I-1.4<br>B32340C2011A720 | 1.4            | 6.3        | 1.7            | 7.6        | 91                     | 63.5 × 142                | 0.40         | 12                     |
| MKP220-I-1.7<br>B32340C2021A520 | 1.7            | 7.6        | 2.0            | 9.0        | 110                    | 63.5 × 142                | 0.40         | 12                     |
| MKP220-I-2.1<br>B32340C2021A020 | 2.1            | 9.5        | 2.5            | 11.4       | 137                    | 63.5 × 142                | 0.40         | 12                     |
| MKP220-I-2.3<br>B32340C2021A520 | 2.3            | 10.3       | 2.7            | 12.5       | 150                    | 63.5 × 142                | 0.50         | 12                     |
| MKP220-I-2.8<br>B32340C2031A320 | 2.8            | 12.5       | 3.3            | 15.0       | 183                    | 63.5 × 142                | 0.50         | 12                     |

**Single-phase capacitors –  $V_R = 230 \text{ V AC}$ , 50/60 Hz**

| Product / Type<br>Ordering code  | 50 Hz          |            | 60 Hz          |            | $C_R$<br>$\mu\text{F}$ | Dimensions<br>d x h<br>mm | Weight<br>kg | Quantity<br>per<br>box |
|----------------------------------|----------------|------------|----------------|------------|------------------------|---------------------------|--------------|------------------------|
|                                  | Output<br>kvar | $I_R$<br>A | Output<br>kvar | $I_R$<br>A |                        |                           |              |                        |
| MKP230-I-0.8<br>B32340C2002A830  | 0.8            | 3.6        | 1.0            | 4.3        | 50                     | 63.5 × 105                | 0.30         | 12                     |
| MKP230-I-1.7<br>B32340C2012A730  | 1.7            | 7.2        | 2.0            | 8.7        | 100                    | 63.5 × 142                | 0.40         | 12                     |
| MKP230-I-2.5<br>B32340C2022-A530 | 2.5            | 10.9       | 3.0            | 13.1       | 150                    | 63.5 × 142                | 0.50         | 12                     |

**Single-phase capacitors –  $V_R = 380 \text{ V AC}$ , 50/60 Hz**

| Product / Type<br>Ordering code | 50 Hz          |            | 60 Hz          |            | $C_R$<br>$\mu\text{F}$ | Dimensions<br>d x h<br>mm | Weight<br>kg | Quantity<br>per<br>box |
|---------------------------------|----------------|------------|----------------|------------|------------------------|---------------------------|--------------|------------------------|
|                                 | Output<br>kvar | $I_R$<br>A | Output<br>kvar | $I_R$<br>A |                        |                           |              |                        |
| MKP380-I-0.7<br>B32340C3002A680 | 0.7            | 1.8        | 0.8            | 2.2        | 15                     | 63.5 × 68                 | 0.30         | 12                     |
| MKP380-I-1.4<br>B32340C3011A780 | 1.4            | 3.6        | 1.7            | 4.4        | 31                     | 63.5 × 68                 | 0.30         | 12                     |
| MKP380-I-2.1<br>B32340C3021A580 | 2.1            | 5.5        | 2.5            | 6.6        | 46                     | 63.5 × 105                | 0.40         | 12                     |
| MKP380-I-2.8<br>B32340C3031A380 | 2.8            | 7.4        | 3.3            | 8.9        | 62                     | 63.5 × 105                | 0.40         | 12                     |
| MKP380-I-4.2<br>B32340C3051A080 | 4.2            | 10.9       | 5.0            | 13.1       | 91                     | 63.5 × 142                | 0.40         | 12                     |

**Preliminary data**
**Single-phase capacitors –  $V_R = 400 \text{ V AC}$ , 50/60 Hz**

| Product / Type<br>Ordering code | 50 Hz          |            | 60 Hz          |            | $C_R$<br>$\mu\text{F}$ | Dimensions<br>d × h<br>mm | Weight<br>kg | Quantity<br>per<br>box |
|---------------------------------|----------------|------------|----------------|------------|------------------------|---------------------------|--------------|------------------------|
|                                 | Output<br>kvar | $I_R$<br>A | Output<br>kvar | $I_R$<br>A |                        |                           |              |                        |
| MKP400-I-0.8<br>B32340C4002A800 | 0.8            | 2.0        | 1.0            | 2.3        | 15                     | 63.5 × 68                 | 0.30         | 12                     |
| MKP400-I-1.7<br>B32340C4012A700 | 1.7            | 4.2        | 2.0            | 5.0        | 33                     | 63.5 × 68                 | 0.30         | 12                     |
| MKP400-I-2.5<br>B32340C4022A500 | 2.5            | 6.3        | 3.0            | 7.5        | 50                     | 63.5 × 105                | 0.40         | 12                     |
| MKP400-I-3.3<br>B32340C4032A300 | 3.3            | 8.4        | 4.0            | 10.0       | 66                     | 63.5 × 105                | 0.40         | 12                     |
| MKP400-I-4.2<br>B32340C4051A000 | 4.2            | 10.4       | 5.0            | 12.5       | 83                     | 63.5 × 142                | 0.50         | 12                     |
| MKP400-I-5.0<br>B32340C4052A000 | 5.0            | 12.4       | 6.0            | 15.0       | 99                     | 63.5 × 142                | 0.50         | 12                     |

**Single-phase capacitors –  $V_R = 415 \text{ V AC}$ , 50/60 Hz**

| Product / Type<br>Ordering code | 50 Hz          |            | 60 Hz          |            | $C_R$<br>$\mu\text{F}$ | Dimensions<br>d × h<br>mm | Weight<br>kg | Quantity<br>per<br>box |
|---------------------------------|----------------|------------|----------------|------------|------------------------|---------------------------|--------------|------------------------|
|                                 | Output<br>kvar | $I_R$<br>A | Output<br>kvar | $I_R$<br>A |                        |                           |              |                        |
| MKP415-I-0.8<br>B32340C4002A810 | 0.8            | 2.0        | 1.0            | 2.4        | 15                     | 63.5 × 68                 | 0.35         | 12                     |
| MKP415-I-1.7<br>B32340C4012A710 | 1.7            | 4.0        | 2.0            | 4.8        | 31                     | 63.5 × 105                | 0.45         | 12                     |
| MKP415-I-2.5<br>B32340C4022A510 | 2.5            | 6.0        | 3.0            | 7.2        | 46                     | 63.5 × 142                | 0.50         | 12                     |
| MKP415-I-3.3<br>B32340C4032A310 | 3.3            | 8.0        | 4.0            | 9.7        | 62                     | 63.5 × 142                | 0.50         | 12                     |
| MKP415-I-5.0<br>B32340C4052A010 | 5.0            | 12.0       | 6.0            | 14.4       | 91                     | 63.5 × 142                | 0.50         | 12                     |

**Preliminary data**
**Single-phase capacitors –  $V_R = 440$  V AC, 50/60 Hz**

| Product / Type<br>Ordering code | 50 Hz          |            | 60 Hz          |            | $C_R$<br>$\mu F$ | Dimensions<br>d × h<br>mm | Weight<br>kg | Quantity<br>per<br>box |
|---------------------------------|----------------|------------|----------------|------------|------------------|---------------------------|--------------|------------------------|
|                                 | Output<br>kvar | $I_R$<br>A | Output<br>kvar | $I_R$<br>A |                  |                           |              |                        |
| MKP440-I-0.7<br>B32340C4001A840 | 0.7            | 1.6        | 0.8            | 1.9        | 11               | 63.5 × 68                 | 0.30         | 12                     |
| MKP440-I-1.4<br>B32340C4011A740 | 1.4            | 3.2        | 1.7            | 3.8        | 23               | 63.5 × 68                 | 0.30         | 12                     |
| MKP440-I-2.1<br>B32340C4021A540 | 2.1            | 4.7        | 2.5            | 5.7        | 34               | 63.5 × 105                | 0.40         | 12                     |
| MKP440-I-2.8<br>B32340C4031A340 | 2.8            | 6.4        | 3.3            | 7.6        | 46               | 63.5 × 105                | 0.40         | 12                     |
| MKP440-I-3.3<br>B32340C4032A340 | 3.3            | 7.6        | 4.0            | 9.1        | 55               | 63.5 × 142                | 0.50         | 12                     |
| MKP440-I-4.2<br>B32340C4051A040 | 4.2            | 9.5        | 5.0            | 11.4       | 68               | 63.5 × 142                | 0.50         | 12                     |
| MKP440-I-5.0<br>B32340C4052A040 | 5.0            | 11.4       | 6.0            | 13.6       | 82               | 63.5 × 142                | 0.50         | 12                     |

**Single-phase capacitors –  $V_R = 480$  V AC, 50/60 Hz**

| Product / Type<br>Ordering code | 50 Hz          |            | 60 Hz          |            | $C_R$<br>$\mu F$ | Dimensions<br>d × h<br>mm | Weight<br>kg | Quantity<br>per<br>box |
|---------------------------------|----------------|------------|----------------|------------|------------------|---------------------------|--------------|------------------------|
|                                 | Output<br>kvar | $I_R$<br>A | Output<br>kvar | $I_R$<br>A |                  |                           |              |                        |
| MKP480-I-0.7<br>B32340C4001A880 | 0.7            | 1.5        | 0.8            | 1.7        | 10               | 63.5 × 105                | 0.30         | 12                     |
| MKP480-I-1.4<br>B32340C4011A780 | 1.4            | 2.9        | 1.7            | 3.5        | 19               | 63.5 × 105                | 0.30         | 12                     |
| MKP480-I-2.1<br>B32340C4021A580 | 2.1            | 4.3        | 2.5            | 5.2        | 29               | 63.5 × 105                | 0.30         | 12                     |
| MKP480-I-2.8<br>B32340C4031A380 | 2.8            | 5.8        | 3.3            | 6.9        | 38               | 63.5 × 142                | 0.50         | 12                     |

**Preliminary data**
**Single-phase capacitors –  $V_R = 525 \text{ V AC}$ , 50/60 Hz**

| Product / Type<br>Ordering code | 50 Hz          |            | 60 Hz          |            | $C_R$<br>$\mu\text{F}$ | Dimensions<br>d × h<br>mm | Weight<br>kg | Quantity<br>per<br>box |
|---------------------------------|----------------|------------|----------------|------------|------------------------|---------------------------|--------------|------------------------|
|                                 | Output<br>kvar | $I_R$<br>A | Output<br>kvar | $I_R$<br>A |                        |                           |              |                        |
| MKP525-I-1.4<br>B32340C5011A720 | 1.4            | 2.6        | 1.7            | 3.1        | 16                     | 63.5 × 105                | 0.30         | 12                     |
| MKP525-I-2.8<br>B32340C5031A320 | 2.8            | 5.2        | 3.3            | 6.2        | 31                     | 63.5 × 142                | 0.50         | 12                     |
| MKP525-I-3.3<br>B32340C5032A320 | 3.3            | 6.3        | 4.0            | 7.6        | 38                     | 63.5 × 142                | 0.60         | 12                     |
| MKP525-I-4.2<br>B32340C5051A020 | 4.2            | 8.0        | 5.0            | 9.5        | 48                     | 63.5 × 142                | 0.60         | 12                     |

## Preliminary data

### Cautions and warnings

- In case of dents of more than 1 mm depth or any other mechanical damage, capacitors must not be used at all.
- This applies also in cases of oil leakages.
- To ensure the full functionality of the overpressure disconnecter, elastic elements must not be hindered and a minimum space of 12 mm has to be kept above each capacitor.
- Do not handle the capacitor before it is discharged.
- Resonance cases must be avoided by appropriate application design in any case.
- Handle capacitors carefully, because they may still be charged even after disconnection due to faulty discharging devices.
- Protect the capacitor properly against over current and short circuit.
- Failure to follow cautions may result, worst case, in premature failures, bursting and fire.

### Discharging

Capacitors must be discharged to a maximum of 10% of rated voltage before they are switched in again. This prevents an electric impulse discharge in the application, influences the capacitor's service life and protects against electric shock. The capacitor must be discharged to 75 V or less within 3 minutes. There must be not any switch, fuse or any other disconnecting device in the circuit between the power capacitor and the discharging device. Discharge resistors are included in the deliver; alternatively discharge reactors are available from EPCOS. Discharge and short circuit capacitor before handling!

### Service life expectancy

Electrical components do not have an unlimited service life expectancy; this applies to self-healing capacitors too. The maximum service life expectancy may vary depending on the application the capacitor is used in.

### Safety

Electrical or mechanical misapplication of capacitors may be hazardous. Personal injury or property damage may result from bursting of the capacitor or from expulsion of oil or melted material due to mechanical disruption of the capacitor.

- Ensure good, effective grounding for capacitor enclosures.
- Provide means of disconnecting and insulating a faulty component/bank.
- The terminals of capacitors, connected bus bars and cables as well as other devices may also be energized.
- Follow good engineering practice.

### Thermal load/over-temperature

After installation of the capacitor it is necessary to verify that maximum hot-spot temperature is not exceeded at extreme service conditions.

## Preliminary data

### Overpressure disconnecter

To ensure full functionality of an overpressure disconnecter, the following must be observed:

1. The elastic elements must not be hindered, i.e.
  - connecting lines must be flexible leads (cables),
  - there must be sufficient space (min. 12 mm) for expansion above the connections. This will enable a longitudinal extension of the can to secure the overpressure disconnecter work.
  - folding beads must not be retained by clamps.
2. Maximum allowed fault current of 10000 A in accordance with UL 810 standard must be assured by the application.
3. Stress parameters of the capacitor must be within the IEC 60831 specification.

### Overcurrent and short circuit protection

- Use HRC fuses or MCCBs for short circuit protection. Short circuit protection and connecting cables should be selected so that 1.5 times the rated capacitor current can be permanently handled.
- HRC fuses do not protect a capacitor against overload
  - they are only for short circuit protection.
- The HRC fuse rating should be 1.6 to 1.8 times rated capacitor current.
- Do not use HRC fuses to switch capacitors (risk of arcing).
- Use thermal magnetic over current relays for overload protection.

### Resonance cases

Resonance cases must be avoided by appropriate application design in any case. Maximum total RMS capacitor current (incl. fundamental harmonic current) specified in technical data must not be exceeded.

### Re-switching vs. phase-opposition

In case of voltage interruption, a sufficient discharge time has to be ensured to avoid phase-opposition and resulting high inrush currents.

### Vibration resistance

The resistance to vibration of capacitors corresponds to IEC 68, part 2–6.

Max. test conditions:

|                        |               |
|------------------------|---------------|
| Test duration          | 6 h*          |
| Frequency range 1      | 10 ... 55 Hz* |
| Displacement amplitude | 0.75 mm*      |

\*corresponding to max. 98.1 m/s" or 10 g

These figures apply to the capacitor alone. Because the fixing and the terminals may influence the vibration properties, it is necessary to check stability when a capacitor is built in and exposed to vibration. Irrespective of this, you are advised not to locate capacitors where vibration amplitude reaches the maximum in strongly vibrating equipment.

## Preliminary data

### Mechanical protection

The capacitor has to be installed in a way that mechanical damages and dents in the aluminium can are avoided.

### Grounding

The threaded bottom stud of the capacitor has to be used for grounding. In case grounding is done via metal chassis that the capacitor is mounted to, the layer of varnish beneath the washer and nut should be removed. The maximum tightening torque is 10 Nm.

### Maintenance

- Check tightness of the connections/terminals periodically.
- Take current reading twice a year and compare with nominal current. Use a harmonic analyser or true effective RMS-meter.
- In case of current above the nominal current check your application for modifications.
- If a significant increase in the amount of non-linear loads has been detected, then a consultant has to be called in for a harmonic study.
- In case of the presence of harmonics installation of a de-tuned capacitor bank (reactors) must be considered.
- Check the discharge resistors/reactors and in case of doubt, check their function:
  - (1) Power the capacitor up and down.
  - (2) After 90 seconds the voltage between the terminals must decline to less than 75 V.
- Check the temperature of capacitors directly after operation for a longer period, but make sure that the capacitors have been switched off. In case of excessive temperature of individual capacitors, it is recommended to replace these capacitors, as this should be an indication for loss factor increase, which is a sign for reaching end of life.

### Storage and operating conditions

Do not use or store capacitors in corrosive atmosphere, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. In dusty environments regular maintenance and cleaning especially of the terminals is required to avoid conductive path between phases and/or phases and ground.

### Note

For detailed information about PFC capacitors and cautions, refer to the latest version of EPCOS PFC Product Profile.

Important: Please note that the „General Safety Recommendations for Power Capacitors“ by ZVEI (German Electrical and Electronic Manufacturers' Association (ZVEI) have to be observed in addition to the caution guidelines stated in the data sheet (Internet: [www.epcos.com/pfc](http://www.epcos.com/pfc)).

## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSMP, CSSP, CTVS, DSSP, MiniBlue, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А