

# Photo Modules for PCM Remote Control Systems


## Available types for different carrier frequencies

| Type        | fo     | Type        | fo       |
|-------------|--------|-------------|----------|
| TSOP2830WE1 | 30 kHz | TSOP2833WE1 | 33 kHz   |
| TSOP2836WE1 | 36 kHz | TSOP2837WE1 | 36.7 kHz |
| TSOP2838WE1 | 38 kHz | TSOP2840WE1 | 40 kHz   |
| TSOP2856WE1 | 56 kHz |             |          |

## Description

The TSOP28..WE1 – series are miniaturized receivers for infrared remote control systems. PIN diode and preamplifier are assembled on lead frame, the epoxy package is designed as IR filter.

The demodulated output signal can directly be decoded by a microprocessor. The main benefit is the reliable function even in disturbed ambient and the protection against uncontrolled output pulses.

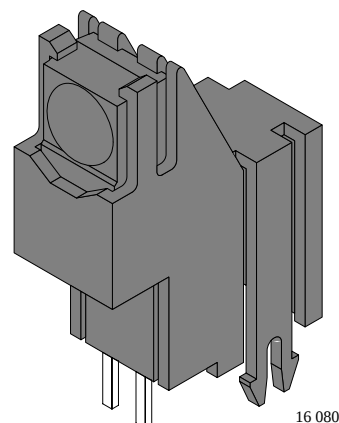

16 080


## Features

- Photo detector and preamplifier in one package
- Internal filter for PCM frequency
- TTL and CMOS compatibility
- Output active low
- Improved shielding against electrical field disturbance
- Suitable burst length  $\geq 6$  cycles/burst

## Special Features

- Small size package
- Enhanced immunity against all kinds of disturbance light
- No occurrence of disturbance pulses at the output
- Short settling time after power on ( $< 200\mu s$ )

## Block Diagram

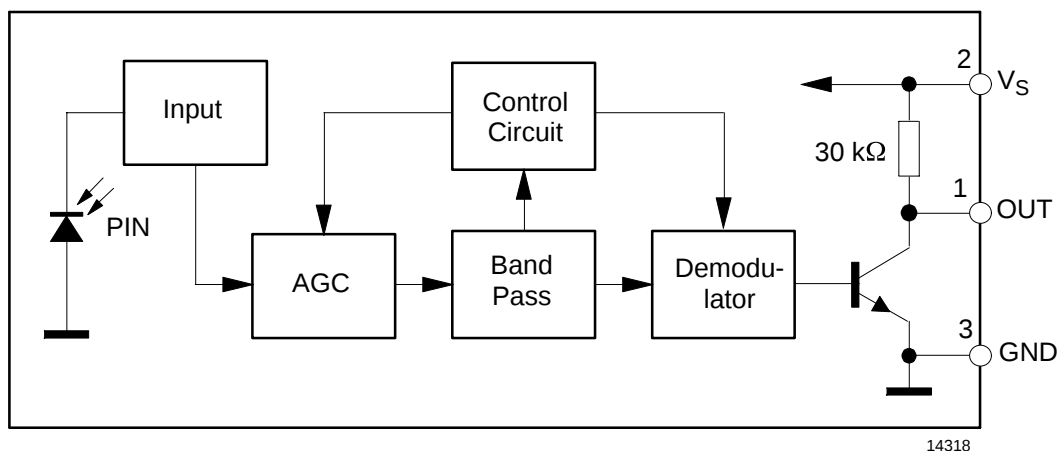

14318

## Absolute Maximum Ratings

 $T_{amb} = 25^{\circ}\text{C}$ 


| Parameter                   | Test Conditions                       | Symbol    | Value      | Unit               |
|-----------------------------|---------------------------------------|-----------|------------|--------------------|
| Supply Voltage              | (Pin 2)                               | $V_S$     | -0.3...6.0 | V                  |
| Supply Current              | (Pin 2)                               | $I_S$     | 5          | mA                 |
| Output Voltage              | (Pin 1)                               | $V_O$     | -0.3...6.0 | V                  |
| Output Current              | (Pin 1)                               | $I_O$     | 5          | mA                 |
| Junction Temperature        |                                       | $T_j$     | 100        | $^{\circ}\text{C}$ |
| Storage Temperature Range   |                                       | $T_{stg}$ | -25...+85  | $^{\circ}\text{C}$ |
| Operating Temperature Range |                                       | $T_{amb}$ | -25...+85  | $^{\circ}\text{C}$ |
| Power Consumption           | ( $T_{amb} \leq 85^{\circ}\text{C}$ ) | $P_{tot}$ | 50         | mW                 |
| Soldering Temperature       | $t \leq 10\text{ s}$ , 1 mm from case | $T_{sd}$  | 260        | $^{\circ}\text{C}$ |

## Basic Characteristics

 $T_{amb} = 25^{\circ}\text{C}$ 

| Parameter                  | Test Conditions                                                                                 | Symbol       | Min | Typ      | Max | Unit            |
|----------------------------|-------------------------------------------------------------------------------------------------|--------------|-----|----------|-----|-----------------|
| Supply Current (Pin 2)     | $V_S = 5\text{ V}$ , $E_v = 0$                                                                  | $I_{SD}$     | 0.9 | 1.2      | 1.5 | mA              |
|                            | $V_S = 5\text{ V}$ , $E_v = 40\text{ klx}$ , sunlight                                           | $I_{SH}$     |     | 1.2      |     | mA              |
| Supply Voltage (Pin 2)     |                                                                                                 | $V_{SH}$     | 4.5 |          | 5.5 | V               |
| Transmission Distance      | $E_v = 0$ , test signal see fig.6, IR diode TSAL6200, $I_F = 300\text{ mA}$                     | $d$          |     | 35       |     | m               |
| Output Voltage Low (Pin 1) | $I_{OL} = 0.5\text{ mA}$ , $E_e = 0.7\text{ mW/m}^2$ , $f = f_0$                                | $V_{OL}$     |     |          | 250 | mV              |
| Irradiance (30 – 40 kHz)   | Pulse width tolerance:<br>$t_{pi} - 4/f_0 < t_{po} < t_{pi} + 6/f_0$ ,<br>test signal see fig.6 | $E_{e\ min}$ |     | 0.3      | 0.5 | $\text{mW/m}^2$ |
| Irradiance (56 kHz)        |                                                                                                 |              |     | 0.4      | 0.7 |                 |
| Irradiance                 |                                                                                                 | $E_{e\ max}$ | 30  |          |     | $\text{W/m}^2$  |
| Directivity                | Angle of half transmission distance                                                             | $\phi_{1/2}$ |     | $\pm 45$ |     | deg             |

## Application Circuit

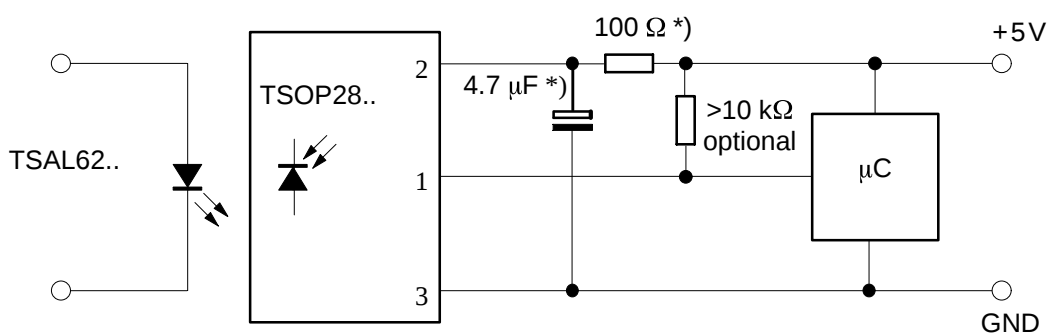

\*) recommended to suppress power supply disturbances

## Suitable Data Format

The circuit of the TSOP28..WE1 is designed in that way that unexpected output pulses due to noise or disturbance signals are avoided. A bandpassfilter, an integrator stage and an automatic gain control are used to suppress such disturbances.

The distinguishing mark between data signal (not suppressed) and disturbance signal (suppressed) are carrier frequency, burst length and Signal Gap Time (see diagram below).

The data signal should fulfill the following condition:

- Carrier frequency should be close to center frequency of the bandpass (e.g. 38kHz).
- Burst length should be 6 cycles/burst or longer.
- After each burst a gap time of at least 10 cycles is necessary.
- The data format should not make a continuous signal transmission. There must be a Signal Gap Time (longer than 15ms) at least each 90ms (see Figure A)

Some examples for suitable data format are:

NEC Code (repetitive pulse), NEC Code (repetitive data), Toshiba Micom Format, Sharp Code, RC5 Code, RECS-80 Code, R-2000 Code.

When a disturbance signal is applied to the TSOP28..WE1 it can still receive the data signal. However the sensitivity is reduced to that level that no unexpected pulses will occur.

Some examples for such disturbance signals which are suppressed by the TSOP28..WE1 are:

- DC light (e.g. from tungsten bulb or sunlight),
- Continuous signal at 38kHz or at any other frequency,
- Signals from fluorescent lamps (see Figure B).
- Continuous IR signal (e.g. 1ms burst, 2ms pause)

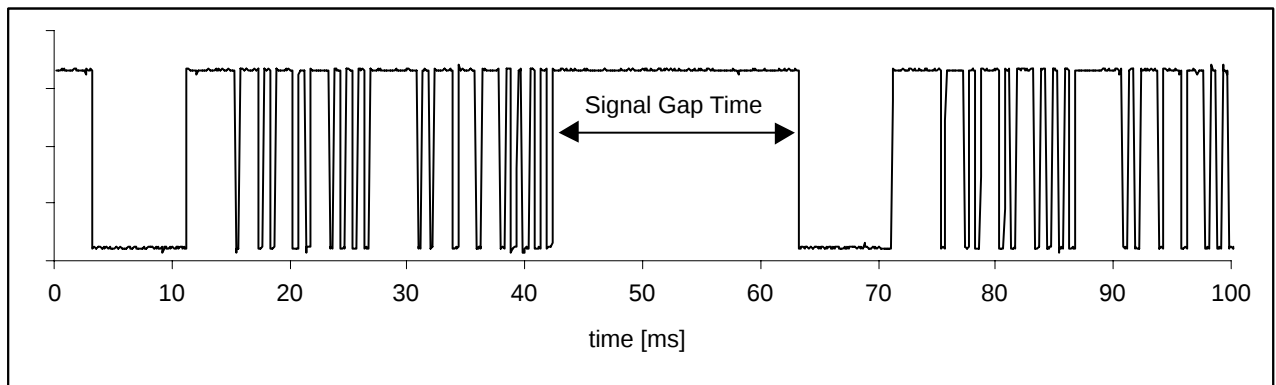


Figure A: Data Signal (Output of IR Receiver) with a Signal Gap Time of 20ms

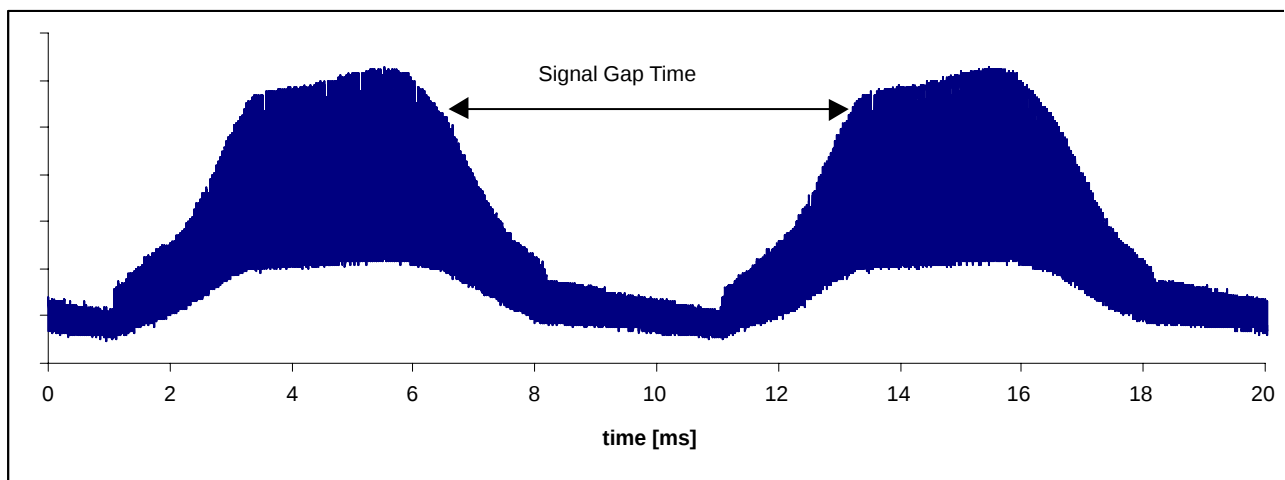


Figure B: Disturbance Signal from Fluorescent Lamp with Signal Gap Time of 7ms (suppressed by TSOP28..)

### Typical Characteristics ( $T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)

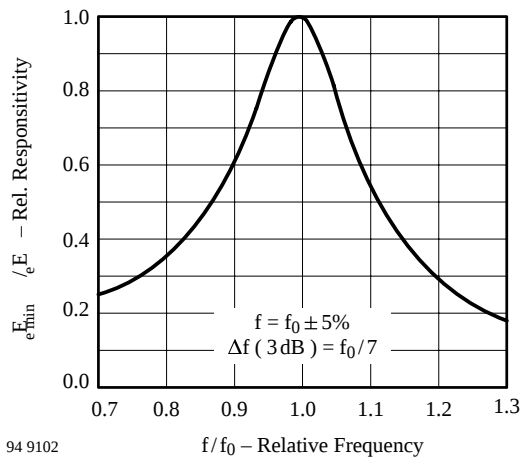


Figure 1. Frequency Dependence of Responsivity

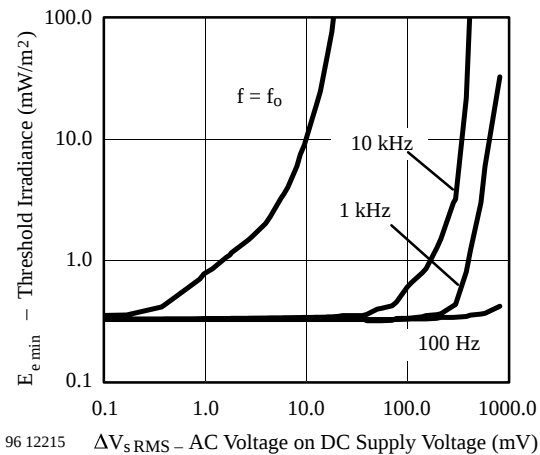


Figure 4. Sensitivity vs. Supply Voltage Disturbances

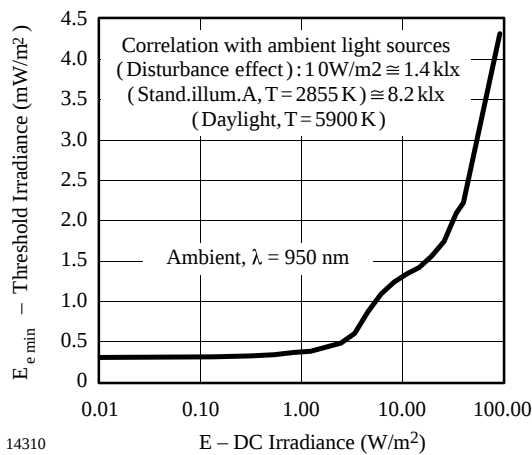


Figure 2. Sensitivity in Bright Ambient

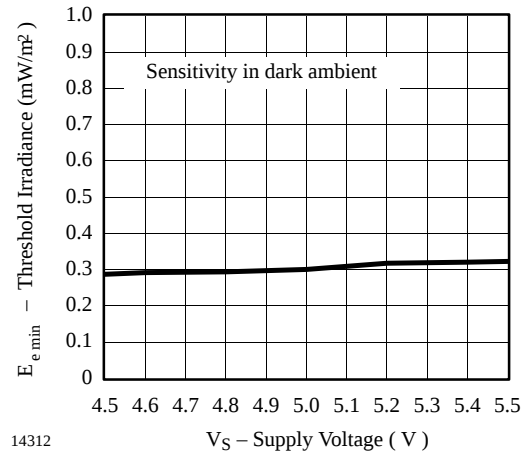


Figure 5. Sensitivity vs. Supply Voltage

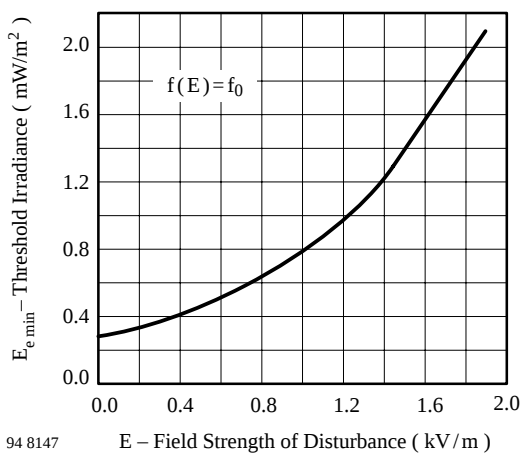


Figure 3. Sensitivity vs. Electric Field Disturbances

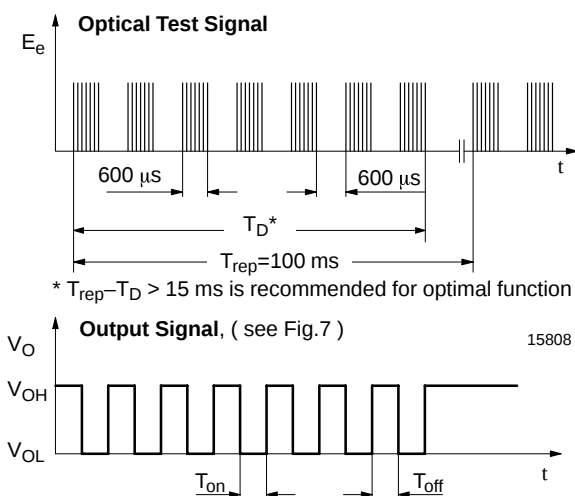


Figure 6. Output Function

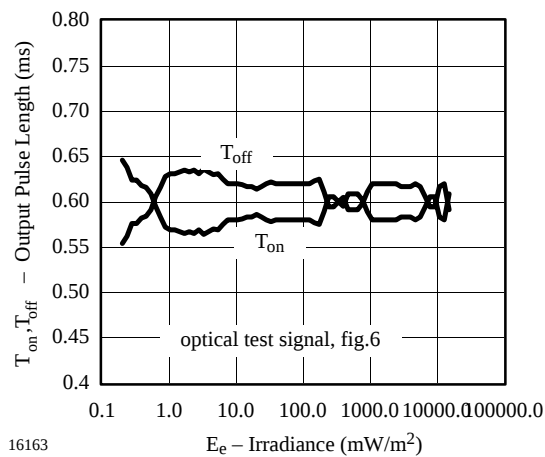


Figure 7. Output Pulse Diagram

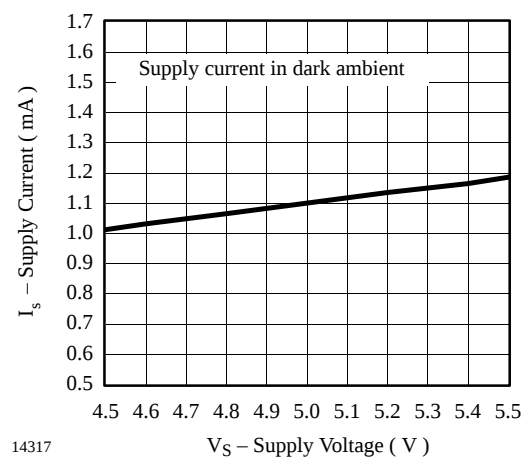


Figure 10. Supply Current vs. Supply Voltage

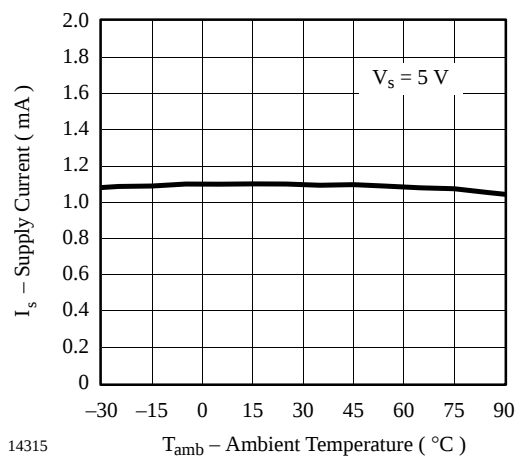


Figure 8. Supply Current vs. Ambient Temperature

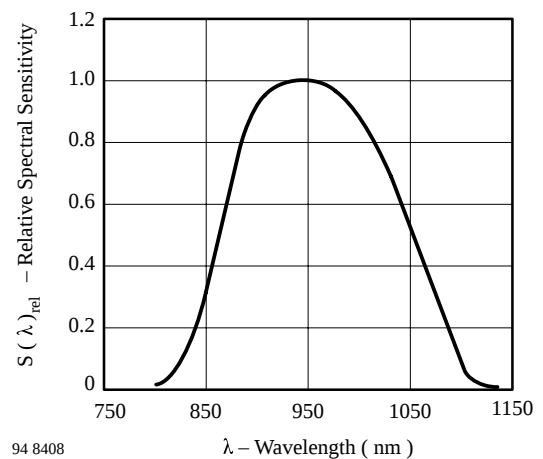


Figure 11. Relative Spectral Sensitivity vs. Wavelength

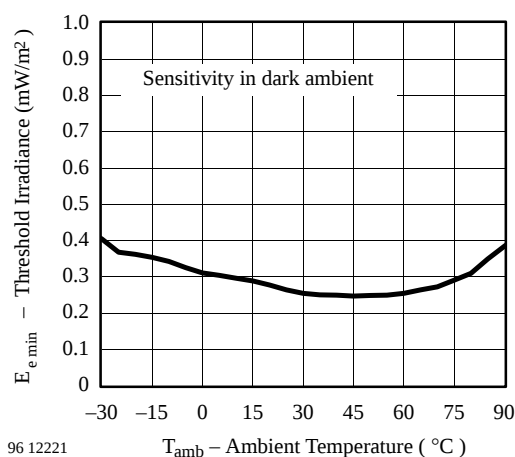


Figure 9. Sensitivity vs. Ambient Temperature



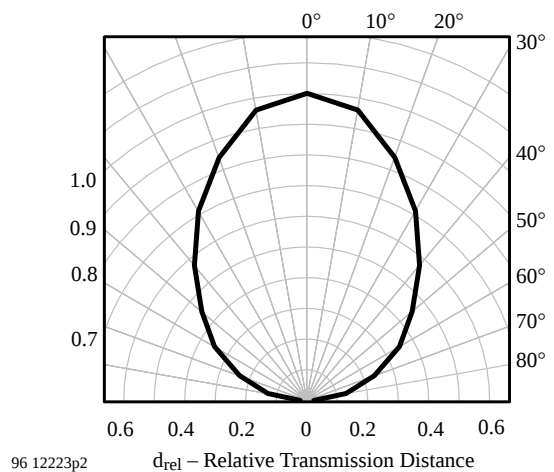


Figure 12. Directivity

## Dimensions in mm

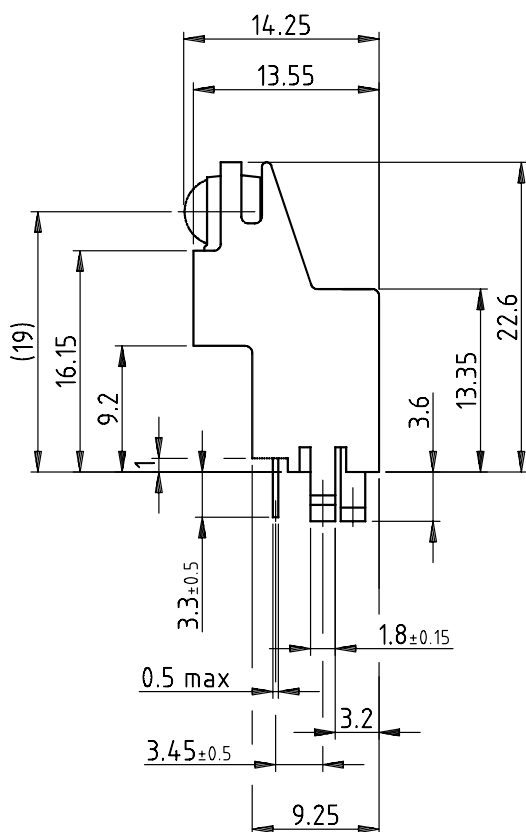


Not indicated tolerances ±0.3




technical drawings  
according to DIN  
specifications

15843

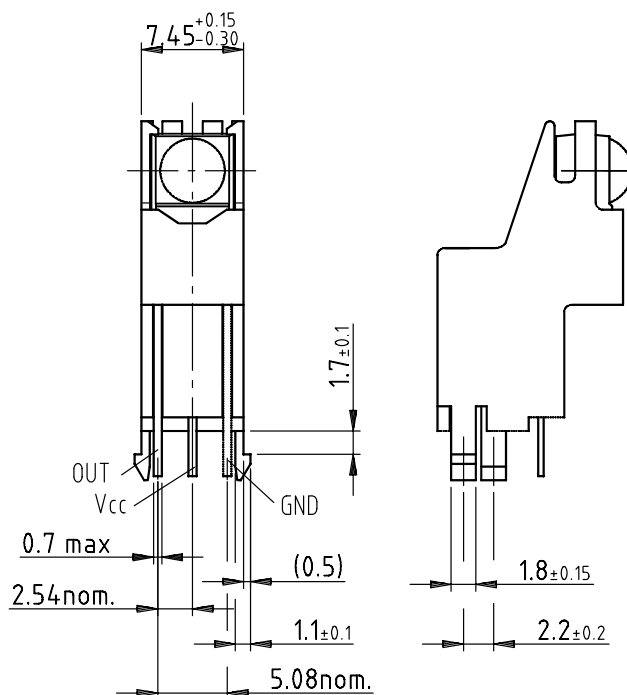

Proposed hole layout  
from component side  
(for Reference)

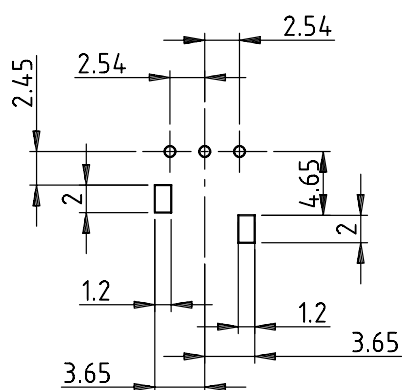



## **Ozone Depleting Substances Policy Statement**

It is the policy of **Vishay Semiconductor GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

**Vishay Semiconductor GmbH** has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

**Vishay Semiconductor GmbH** can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

**We reserve the right to make changes to improve technical design and may do so without further notice.**

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay-Telefunken products for any unintended or unauthorized application, the buyer shall indemnify Vishay-Telefunken against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany  
Telephone: 49 (0) 7131 67 2831, Fax number: 49 (0) 7131 67 2423

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А