


# High Voltage Planar Resistors

## HVP Series

- Excellent reliability
- Ideally suited for medical applications
- Voltages up to 20kV
- Resistance values up to 10G
- Small footprint
- Printed or powder coat protection
- Planar construction gives low inductance and capacitance

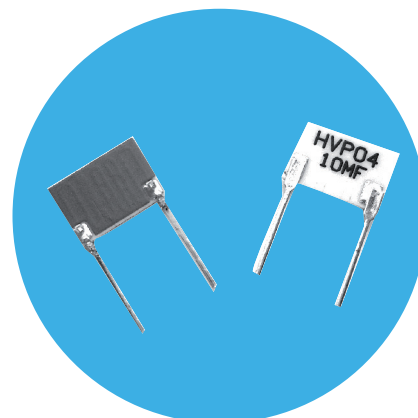

All parts are Pb-free and comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

## Electrical Data

|                                          |        | HVP04                                                 | HVP06           | HVP08      | HVP10      | HVP15      | HVP20      |
|------------------------------------------|--------|-------------------------------------------------------|-----------------|------------|------------|------------|------------|
| Power rating at 70°C                     | watts  | 0.4                                                   | 0.6             | 0.8        | 1          | 1.5        | 2          |
| Resistance range                         | ohms   | 1K0 to 250M                                           | 1K5 to 1G0      | 2K0 to 1G0 | 3K0 to 2G0 | 4K0 to 5G0 | 5K0 to 10G |
| Limiting element voltage (dc or ac peak) | kV     | 2                                                     | 5               | 7.5        | 10         | 15         | 20         |
| TCR (20°C to 70°C)                       | ppm/°C | 100                                                   | 100, 50, 25     |            |            |            |            |
| Resistance tolerance                     | %      | 0.5, 1, 5                                             | 0.25, 0.5, 1, 5 |            |            |            |            |
| Values                                   |        | E24 preferred                                         |                 |            |            |            |            |
| Ambient temperature range                | °C     | -55 to 155                                            |                 |            |            |            |            |
| Insulation resistance at 500V            | ohms   | >10G                                                  |                 |            |            |            |            |
| Dielectric strength of insulation        | volts  | Screen printed protection: >1000 Powder coated: >2000 |                 |            |            |            |            |

Other resistance, tolerance and TCR values are available on request.

| Size  | TCR(ppm/°C) | Tolerance (%) |             |
|-------|-------------|---------------|-------------|
|       |             | 0.25          | 0.5, 1, 5   |
| HVP04 | 100         | -             | 1K0 to 250M |
| HVP06 | 25          | 1K5 to 500M   |             |
|       | 50, 100     | 1K5 to 500M   | 1K5 to 1G0  |
| HVP08 | 25          | 2K0 to 500M   |             |
|       | 50, 100     | 2K0 to 500M   | 2K0 to 1G0  |
| HVP10 | 25          | 3K0 to 1G0    |             |
|       | 50, 100     | 3K0 to 1G0    | 3K0 to 2G0  |
| HVP15 | 25          | 4K0 to 1G0    |             |
|       | 50, 100     | 4K0 to 1G0    | 4K0 to 5G0  |
| HVP20 | 25          | 5K0 to 1G0    |             |
|       | 50, 100     | 5K0 to 1G0    | 5K0 to 10G  |

## Physical Data

| Dimensions (mm) |         |        |        |        |        |            |
|-----------------|---------|--------|--------|--------|--------|------------|
| Type            | L ±0.75 | H ±0.5 | T ±0.5 | P ±0.5 | Wt Nom | LL (±0.25) |
| HVP04           | 10.16   | 7.35   | 2      | 7.62   | 0.208g | 9.25       |
| HVP06           | 12.7    | 7.35   | 2      | 10.16  | 0.251g |            |
| HVP08           | 19.05   | 7.35   | 2      | 15.24  | 0.352g |            |
| HVP10           | 25.4    | 7.35   | 2      | 22.86  | 0.454g |            |
| HVP15           | 38.1    | 7.35   | 2      | 35.56  | 0.654g |            |
| HVP20           | 50.8    | 7.35   | 2      | 48.26  | 0.854g |            |

Technical drawing of the HVP series resistor showing dimensions L, H, T, P, LL, and 0.5. The drawing includes a top view and a side view. The top view shows a rectangular component with dimensions L (length) and P (width). The side view shows the height H and the thickness T. The dimension LL is indicated as the distance from the center of the component to the center of the mounting holes. The dimension 0.5 is indicated as the distance from the edge of the component to the center of the mounting holes.

For powder coat option add 0.25mm to L, H & T.

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.  
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

## HVP Series

### Construction

Conductor pads are printed to the rear and front faces of a 96% alumina substrate. A specially selected high voltage thick film resistor ink, based on a ruthenium oxide/glass system, is printed between the front face conductors and then covered in an overglaze before being protected either with powder coating or a special screen printed material which gives excellent high voltage and climatic performance.

### Marking

Type, resistance value and tolerance are legend marked in black ink on the rear of the component. The resistance value conforms to IEC 62.

### Solvent Resistance

The component protection and marking are resistant to all normal industrial cleaning solvents suitable for printed circuit boards

### Terminations

Solder coated phosphor bronze leadframe terminations are solder dipped in SnAgCu and meet the following IEC requirements:

IEC 68.2.21 – Strength

IEC 115-1, Clause 4.17.3.2 – Solderability

### Packaging

Packed in foam within a box. See Ordering Procedure for box quantities.

## Performance Data

|                                                                    |                     | Maximum       | Typical |
|--------------------------------------------------------------------|---------------------|---------------|---------|
| Load at rated power: 1000 hours at 70°C                            | ΔR%                 | 1             | 0.1     |
| Dry heat: 1000 hours at 155°C                                      | ΔR%                 | 1             | 0.1     |
| Shelf life: 12 months at room temperature                          | ΔR%                 | 0.3           | <0.1    |
| Derating from power at 70°C                                        |                     | Zero at 155°C |         |
| Climatic                                                           | ΔR%                 | 1             | 0.1     |
| Climatic category                                                  |                     | -55/155/56    |         |
| Biased humidity: 1000 hours, 85%RH, 85°C, 10%Pr                    | ΔR%                 | 0.25          | 0.1     |
| Temperature rapid change: 5 cycles -55/155°C                       | ΔR%                 | 0.25          | 0.1     |
| Resistance to solder heat                                          | ΔR%                 | 0.25          | 0.02    |
| Moisture resistance: MIL Std. 202, method 106 (powder coat option) | ΔR%                 | 0.25          | 0.1     |
| Solderability                                                      |                     | >95% coverage |         |
| Voltage coefficient of resistance                                  | HVP04, 06, 08 ppm/V | -2.5          | -1      |
|                                                                    | HVP10, 15, 20 ppm/V | -1.5          | -0.5    |

## Application Notes

Due to the high voltage which can appear between the resistor body and any adjacent metal part, resistors should be mounted at an adequate distance from other conducting parts.

Due to the possibility of surface condensation it is recommended that high voltages are not applied to resistors in areas of high humidity without the application of suitable moisture resistant lacquer

### Design Flexibility

The experience of Welwyn engineers has been used to design this generation of high voltage planar resistors to be suitable for a majority of applications. However, should an application require particular consideration, Welwyn designers are able to provide advice and where applicable, to recommend a non-standard product. Special sizes, designs etc, can be prototyped at short notice.

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.

All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

## HVP Series

## Ordering Procedure

Example: HVP06C-100MFB016 (HVP06 with screen printed protection, at 50ppm/°C TCR, 100 megohms, and 1% tolerance, Pb-free and packed in a box of 160 pieces)

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| H | V | P | 0 | 6 |   | C | - | 1 | 0 | 0 | M | F | B | 0 | 1 | 6 |
| 1 |   |   |   |   | 2 |   | 3 |   | 4 |   |   |   | 5 | 6 |   |   |

| 1     | 2                         | 3              | 4              | 5         | 6                  |
|-------|---------------------------|----------------|----------------|-----------|--------------------|
| Type  | Coating (optional)        | TCR (optional) | Value          | Tolerance | Packing            |
| HVP04 | screen printed protection | ±100 ppm/°C    | 3/4 characters | J ±5%     | B02 HVP04 200/box  |
| HVP06 |                           | C ±50 ppm/°C   | K = kilohms    | F ±1%     | B016 HVP06 160/box |
| HVP08 | powder coated protection  | D ±25 ppm/°C   | M = megohms    | D ±0.5%   | B012 HVP08 120/box |
| HVP10 |                           |                | G = gigohms    | C ±0.25%  | B008 HVP10 80/box  |
| HVP15 |                           |                |                |           | B006 HVP15 60/box  |
| HVP20 |                           |                |                |           | B004 HVP20 40/box  |

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.  
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А