


High Voltage Planar Resistors

HVP Series

- Excellent reliability
- Ideally suited for medical applications
- Voltages up to 20kV
- Resistance values up to 10G
- Small footprint
- Printed or powder coat protection
- Planar construction gives low inductance and capacitance

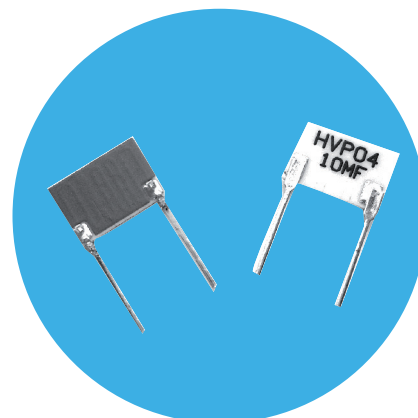

All parts are Pb-free and comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

Electrical Data

		HVP04	HVP06	HVP08	HVP10	HVP15	HVP20
Power rating at 70°C	watts	0.4	0.6	0.8	1	1.5	2
Resistance range	ohms	1K0 to 250M	1K5 to 1G0	2K0 to 1G0	3K0 to 2G0	4K0 to 5G0	5K0 to 10G
Limiting element voltage (dc or ac peak)	kV	2	5	7.5	10	15	20
TCR (20°C to 70°C)	ppm/°C	100	100, 50, 25				
Resistance tolerance	%	0.5, 1, 5	0.25, 0.5, 1, 5				
Values		E24 preferred					
Ambient temperature range	°C	-55 to 155					
Insulation resistance at 500V	ohms	>10G					
Dielectric strength of insulation	volts	Screen printed protection: >1000 Powder coated: >2000					

Other resistance, tolerance and TCR values are available on request.

Size	TCR(ppm/°C)	Tolerance (%)	
		0.25	0.5, 1, 5
HVP04	100	-	1K0 to 250M
HVP06	25	1K5 to 500M	
	50, 100	1K5 to 500M	1K5 to 1G0
HVP08	25	2K0 to 500M	
	50, 100	2K0 to 500M	2K0 to 1G0
HVP10	25	3K0 to 1G0	
	50, 100	3K0 to 1G0	3K0 to 2G0
HVP15	25	4K0 to 1G0	
	50, 100	4K0 to 1G0	4K0 to 5G0
HVP20	25	5K0 to 1G0	
	50, 100	5K0 to 1G0	5K0 to 10G

Physical Data

Dimensions (mm)						
Type	L ±0.75	H ±0.5	T ±0.5	P ±0.5	Wt Nom	LL (±0.25)
HVP04	10.16	7.35	2	7.62	0.208g	9.25
HVP06	12.7	7.35	2	10.16	0.251g	
HVP08	19.05	7.35	2	15.24	0.352g	
HVP10	25.4	7.35	2	22.86	0.454g	
HVP15	38.1	7.35	2	35.56	0.654g	
HVP20	50.8	7.35	2	48.26	0.854g	

Technical drawing of a high voltage planar resistor showing dimensions L, H, T, P, LL, and 0.5.

For powder coat option add 0.25mm to L, H & T.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

HVP Series

Construction

Conductor pads are printed to the rear and front faces of a 96% alumina substrate. A specially selected high voltage thick film resistor ink, based on a ruthenium oxide/glass system, is printed between the front face conductors and then covered in an overglaze before being protected either with powder coating or a special screen printed material which gives excellent high voltage and climatic performance.

Marking

Type, resistance value and tolerance are legend marked in black ink on the rear of the component. The resistance value conforms to IEC 62.

Solvent Resistance

The component protection and marking are resistant to all normal industrial cleaning solvents suitable for printed circuit boards

Terminations

Solder coated phosphor bronze leadframe terminations are solder dipped in SnAgCu and meet the following IEC requirements:

IEC 68.2.21 – Strength

IEC 115-1, Clause 4.17.3.2 – Solderability

Packaging

Packed in foam within a box. See Ordering Procedure for box quantities.

Performance Data

		Maximum	Typical
Load at rated power: 1000 hours at 70°C	ΔR%	1	0.1
Dry heat: 1000 hours at 155°C	ΔR%	1	0.1
Shelf life: 12 months at room temperature	ΔR%	0.3	<0.1
Derating from power at 70°C		Zero at 155°C	
Climatic	ΔR%	1	0.1
Climatic category		-55/155/56	
Biased humidity: 1000 hours, 85%RH, 85°C, 10%Pr	ΔR%	0.25	0.1
Temperature rapid change: 5 cycles -55/155°C	ΔR%	0.25	0.1
Resistance to solder heat	ΔR%	0.25	0.02
Moisture resistance: MIL Std. 202, method 106 (powder coat option)	ΔR%	0.25	0.1
Solderability		>95% coverage	
Voltage coefficient of resistance	HVP04, 06, 08 ppm/V	-2.5	-1
	HVP10, 15, 20 ppm/V	-1.5	-0.5

Application Notes

Due to the high voltage which can appear between the resistor body and any adjacent metal part, resistors should be mounted at an adequate distance from other conducting parts.

Due to the possibility of surface condensation it is recommended that high voltages are not applied to resistors in areas of high humidity without the application of suitable moisture resistant lacquer

Design Flexibility

The experience of Welwyn engineers has been used to design this generation of high voltage planar resistors to be suitable for a majority of applications. However, should an application require particular consideration, Welwyn designers are able to provide advice and where applicable, to recommend a non-standard product. Special sizes, designs etc, can be prototyped at short notice.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.

All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

HVP Series

Ordering Procedure

Example: HVP06C-100MFB016 (HVP06 with screen printed protection, at 50ppm/°C TCR, 100 megohms, and 1% tolerance, Pb-free and packed in a box of 160 pieces)

H	V	P	0	6		C	-	1	0	0	M	F	B	0	1	6
1					2 3		4					5	6			

1 Type	2 Coating (optional)	3 TCR (optional)	4 Value	5 Tolerance	6 Packing
HVP04	P powder coated protection		±100 ppm/°C	3/4 characters	J ±5%
HVP06		C	±50 ppm/°C	K = kilohms	F ±1%
HVP08		D	±25 ppm/°C	M = megohms	D ±0.5%
HVP10			G = gigohms	C ±0.25%	
HVP15					B006 HVP15 60/box
HVP20					B004 HVP20 40/box

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А