

## Sensor/Actuator cable - SAC-8P- 3,0-PUR/M 8FR - 1404192

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/Actuator cable, 8-position, PUR, Black RAL 9005, Free cable end, on Socket angled M8, Cable length: 3 m

### Product Features

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ Our standard: robust halogen-free PUR cable
- ✓ Save space – with high-pos. plug-in connectors



### Key commercial data

|                      |                                                                                                         |
|----------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit         | 1 PCE                                                                                                   |
| GTIN                 | <br>4 046356 681148 |
| Custom tariff number | 85444290                                                                                                |
| Country of origin    | GERMANY                                                                                                 |

### Technical data

#### General data

|                                 |                                  |
|---------------------------------|----------------------------------|
| Rated current at 40°C           | 1.5 A                            |
| Rated voltage                   | 30 V                             |
| Number of positions             | 8                                |
| Volume resistance               | ≤ 5 mΩ                           |
| Insulation resistance           | ≥ 100 MΩ                         |
| Length of cable                 | 3 m                              |
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |

#### General characteristics

|                       |                                      |
|-----------------------|--------------------------------------|
| Standards/regulations | M8 plug-in connector IEC 61076-2-104 |
| Coding                | A - standard                         |

## Sensor/Actuator cable - SAC-8P- 3,0-PUR/M 8FR - 1404192

### Technical data

#### General characteristics

|                             |                                             |
|-----------------------------|---------------------------------------------|
| Pollution degree            | 3                                           |
| Degree of protection        | IP65                                        |
| Degree of protection        | IP67                                        |
| Degree of protection        | IP68                                        |
| Insertion/withdrawal cycles | ≥ 100                                       |
| Torque                      | 0.2 Nm (M8 plug-in connectors)              |
| Contact material            | CuSn                                        |
| Contact surface material    | Ni/Au                                       |
| Contact carrier material    | TPU GF                                      |
| Material of grip body       | TPU, hardly inflammable, self-extinguishing |
| Material, knurls            | Zinc die-cast, nickel-plated                |
| Status display              | No                                          |

#### Conductor data

|                                               |                                                    |
|-----------------------------------------------|----------------------------------------------------|
| Cable abbreviation                            | Li9Y11Y                                            |
| UL AWM style                                  | 20549                                              |
| Conductor cross section                       | 8x 0.14 mm <sup>2</sup> (signal line)              |
| AWG signal line                               | 26                                                 |
| Conductor structure signal line               | 18x 0.10 mm                                        |
| Core diameter including insulation            | 1 mm ±0.02 mm (signal line)                        |
| Thickness, insulation                         | ≥ 0.21 mm (signal line)                            |
| Thickness, insulation                         | ≥ 0.38 mm (Outer cable sheath)                     |
| Wire colors                                   | white, brown, green, yellow, gray, pink, blue, red |
| Overall twist                                 | 8 wires around filler to the core                  |
| Length of twist, overall twist                | 58 mm                                              |
| External sheath, color                        | Black-gray RAL 7021                                |
| External cable diameter D                     | 5.1 mm ±0.15 mm                                    |
| Smallest bending radius, fixed installation   | 25.5 mm                                            |
| Smallest bending radius, movable installation | 51 mm                                              |
| Number of bending cycles                      | 4000000                                            |
| Bending radius                                | 51 mm                                              |
| Traversing path                               | 10 m                                               |
| Traversing rate                               | 3 m/s                                              |
| Acceleration                                  | 10 m/s <sup>2</sup>                                |
| Outer sheath, material                        | PUR                                                |
| Material, filler                              | PE                                                 |
| Material conductor insulation                 | PP                                                 |
| Conductor material                            | Bare Cu litz wires                                 |

## Sensor/Actuator cable - SAC-8P- 3,0-PUR/M 8FR - 1404192

### Technical data

#### Conductor data

|                                 |                                                 |
|---------------------------------|-------------------------------------------------|
| Insulation resistance           | 1 GΩ*km (at 20 °C)                              |
| Conductor resistance            | 139 Ω/km (at 20 °C)                             |
| Nominal voltage, conductor      | ≤ 300 V AC                                      |
| Test voltage, conductor         | ≥ 3000 V AC (Spark test)                        |
| Flame resistance                | according to UL 758/1581 (horizontal)           |
| Flame resistance                | In accordance with UL 758/1581 FT2              |
| Halogen-free                    | in accordance with DIN VDE 0472 part 815        |
| Halogen-free                    | in accordance with DIN EN 50267-2-1             |
| Resistance to oil               | According to DIN EN 60811-2-1, 168 h at 100°C   |
| Other resistance                | hydrolysis and microbe resistant                |
| Other resistance                | Resistant to salt water                         |
| Other resistance                | Low adhesion                                    |
| Other resistance                | abrasion-resistant                              |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation)    |
| Ambient temperature (operation) | -25 °C ... 80 °C (cable, flexible installation) |

### Classifications

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 31251501 |
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |

## Sensor/Actuator cable - SAC-8P- 3,0-PUR/M 8FR - 1404192

### Accessories

#### Accessories

#### Marking

##### Insert label - PABA WH/15 - 1013151



Insert label, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

---

##### Insert label - PABA YE/15 - 1013698



Insert label, Strip, yellow, Unlabeled, Can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

---

##### Insert label - PABA RD/15 - 1013944



Insert label, Strip, red, Unlabeled, Can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

---

##### Conductor marker carrier - PATG 2/23 - 1013850



Conductor marker carrier, transparent, Unlabeled, Mounting type: Slide on, Cable diameter: 2-4 mm, Lettering field: 4 x 23 mm

---

##### Conductor marker carrier - PATG 3/23 - 1013863



Conductor marker carrier, transparent, Unlabeled, Mounting type: Slide on, Cable diameter: 4-7 mm, Lettering field: 4 x 23 mm

## Sensor/Actuator cable - SAC-8P- 3,0-PUR/M 8FR - 1404192

### Accessories

---

#### Conductor marker carrier - PATG 4/23 - 0808011



Conductor marker carrier, transparent, Unlabeled, Mounting type: Slide on, Cable diameter: 6-10 mm, Lettering field: 4 x 23 mm

---

#### Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

### Protection and sealing elements

#### Screw plug - PROT-M 8 MS-PA-CHAIN - 1430860



M8 sealing cap made of plastic with fixing band for sensor cables, for M8 sockets

---

### Tools

#### Torque screwdriver - TSD 02 SAC - 1208487



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

## Sensor/Actuator cable - SAC-8P- 3,0-PUR/M 8FR - 1404192

### Accessories

Tool - SAC BIT M8-D10 - 1208461



Nut for assembling sensor/actuator cables with M8 connector and for M8 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive

---

Cable-cutting tool - CUTFOX-S VDE - 1212207



Diagonal cutter for copper and aluminum conductors, VDE-tested

---

Stripping tool - WIREFOX SAC - 1212623



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length

---

Stripping tool - WIREFOX 10 - 1212150




Stripping tool, for cables and conductors from 0.02 - 10 mm<sup>2</sup>, self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm<sup>2</sup> stranded/1.5 mm<sup>2</sup> solid, replaceable stripping blade

---

### Drawings

## Sensor/Actuator cable - SAC-8P- 3,0-PUR/M 8FR - 1404192

Schematic diagram




Connector pin assignment of M8 socket, 8-pos., view of socket side

Cable cross section



PUR halogen-free black [PUR]


Circuit diagram



Contact assignment of M8 socket

## Sensor/Actuator cable - SAC-8P- 3,0-PUR/M 8FR - 1404192

Dimensioned drawing

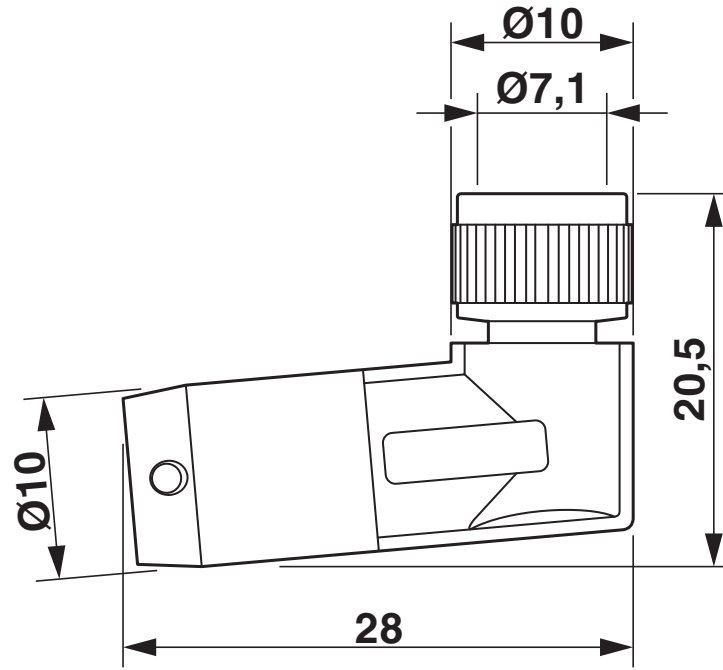





Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А