



## **MS5525DSO**

(Digital Small Outline)

### **SPECIFICATIONS**

- **Integrated Digital Pressure Sensor**  
(24-bit  $\Delta\Sigma$  ADC)
- **Fast Conversion Down to 1 ms**
- **Low Power, 1  $\mu$ A (standby < 0.15  $\mu$ A)**
- **Supply Voltage: 1.8 to 3.6V**
- **Pressure Range: 1 to 30 PSI**
- **I<sup>2</sup>C and SPI Interface**

The MS5525DSO is a new generation of Digital Small Outline pressure sensors from MEAS with SPI and I<sup>2</sup>C bus interface designed for high volume OEM users. The sensor module includes a pressure sensor and an ultra low power 24-bit  $\Delta\Sigma$  ADC with internal factory calibrated coefficients. It provides a 24-bit digital pressure and temperature value and different operation modes that allow the user to optimize for conversion speed and current consumption. The MS5525DSO can be interfaced to virtually any microcontroller. The communication protocol is simple, without the need of programming internal registers in the device.

This new sensor module generation is based on leading MEMS technology and latest benefits from MEAS proven experience and know-how in high volume manufacturing of pressure modules, which have been widely used for over a decade.

The rugged engineered thermoplastic transducer is available in single and dual port configurations, and can measure absolute, gauge, compound, and differential pressure from 1 to 30psi.

## FEATURES

- Small Outline IC Package
- Barbed Pressure Ports
- Low Power, High Resolution ADC
- Digital Pressure and Temperature Outputs

## APPLICATIONS

- Factory Automation
- Altitude and Airspeed Measurements
- Medical Instruments
- Leak Detection

## STANDARD RANGES (PSI)

| FS Pressure | Absolute  | Gauge             | Differential  |
|-------------|-----------|-------------------|---------------|
| 1           |           | DB, SB, ST, DH,FT | DB, SB,ST, DH |
| 2           |           | DB, SB, ST, DH,FT | DB, SB,ST, DH |
| 5           |           | DB, SB, ST, DH,FT | DB, SB,ST ,DH |
| 15          | DB, DH,FT | DB, SB, ST, DH,FT | DB, DH        |
| 30          | DB, DH,FT | DB, SB, ST, DH,FT | DB, DH        |

See Package Configurations: DB= Dual Barb, DH= Dual Hole, SB=Single Barb, ST=Single Tube, FT=Front Side Tube

## ABSOLUTE MAXIMUM RATING

| Parameter           | Conditions                         | Min  | Max | Unit | Symbol/Notes    |
|---------------------|------------------------------------|------|-----|------|-----------------|
| Supply Voltage      | T <sub>A</sub> = 25°C              | -0.3 | 3.6 | V    | V <sub>DD</sub> |
| Storage Temperature |                                    | -40  | 125 | °C   |                 |
| Overpressure        | T <sub>A</sub> = 25 °C, both Ports |      | 60  | psi  |                 |
| Burst Pressure      | T <sub>A</sub> = 25 °C, Port 1     |      |     | psi  | See Table 1     |
| ESD                 | HBM                                | -4   | +4  | kV   | EN 61000-4-2    |
| Solder Temperature  | 250°C, 5 sec max.                  |      |     |      |                 |

**Table 1- BURST PRESSURE BY RANGE AND PORT DESIGNATION.**

| Range | Port 1 | Port 2 | Unit |
|-------|--------|--------|------|
| 001   | 10     | 10     | psi  |
| 002   | 20     | 20     | psi  |
| 005   | 50     | 15     | psi  |
| 015   | 120    | 60     | psi  |
| 030   | 120    | 120    | psi  |

## ENVIRONMENTAL SPECIFICATIONS

| Parameter            | Conditions                                                |
|----------------------|-----------------------------------------------------------|
| Mechanical Shock     | Mil Spec 202F, Method 213B, Condition C, 3 Drops          |
| Mechanical Vibration | Mil Spec 202F, Method 214A, Condition 1E, 1Hr Each Axis   |
| Thermal Shock        | 100 Cycles over Storage Temperature, 30 minute dwell      |
| Life                 | 1 Million FS Cycles                                       |
| MTTF                 | >10Yrs, 70 °C, 1 Million Pressure Cycles, 120%FS Pressure |

## PERFORMANCE SPECIFICATIONS

**Supply Voltage<sup>1</sup> 3.0 Vdc**

**Reference Temperature: 25°C (unless otherwise specified)**

| PARAMETERS                                   | MIN                                                                                                                                                                      | TYP  | MAX  | UNITS | NOTES |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-------|-------|
| Operating Voltage                            | 1.8                                                                                                                                                                      |      | 3.6  |       |       |
| ADC                                          |                                                                                                                                                                          |      | 24   | bits  |       |
| Pressure Accuracy                            | See Table 2 Below                                                                                                                                                        |      |      | %FS   | 2,5   |
| Total Error Band (TEB)                       | -2.5                                                                                                                                                                     |      | 2.5  | %FS   | 3     |
| Temperature Accuracy (Reference Temperature) |                                                                                                                                                                          | ±1.5 |      | °C    | 4,5   |
| Temperature Accuracy                         |                                                                                                                                                                          | ±2.5 |      | °C    | 4,5   |
| Supply Current                               | See OSR Table Below                                                                                                                                                      |      |      | mA    |       |
| Compensated Temperature                      | 0                                                                                                                                                                        |      | 85   | °C    |       |
| Operating Temperature                        | -40                                                                                                                                                                      |      | +125 | °C    |       |
| Conversion Time                              | See OSR Table Below                                                                                                                                                      |      |      | mS    |       |
| Weight                                       |                                                                                                                                                                          | 3    |      | grams |       |
| Media                                        | Non-Corrosive Dry Gases Compatible with Silicon, Glass, LCP, RTV, Gold, Thermo-Epoxy, Silicone Gel, Aluminum and Epoxy. See "Wetted Material by Port Designation" chart. |      |      |       |       |

### Notes

1. Proper operation requires an external capacitor placed as shown in Application Circuit. Output is not ratiometric to supply voltage.
2. The maximum deviation from a best fit straight line(BFSL) fitted to the output measured over the pressure range at 25°C. Includes all errors due to pressure non linearity, hysteresis, and non repeatability.
3. The maximum deviation from ideal output with respect to input pressure and temperature over the compensated temperature range. Total error band (TEB) includes all accuracy errors, thermal errors over the compensated temperature range, span and offset calibration tolerances. TEB values are valid only at the calibrated supply voltage.
4. The deviation from a best fit straight line (BFSL) from 25°C. to 85°C.
5. Six coefficients must be read by microcontroller software and are used in a mathematical calculation for converting D1 and D2 into compensated pressure and temperature values.

**Table 2- TYPICAL ACCURACY SPECIFICATION BY PRESSURE RANGE**

| Range | Port 1 | Port 2 | Unit |
|-------|--------|--------|------|
| 001   | ±0.25  | ±1.0   | %FSS |
| 002   | ±0.25  | ±0.5   | %FSS |
| 005   | ±0.50  | ±1.0   | %FSS |
| 015   | ±0.25  | ±0.25  | %FSS |
| 030   | ±0.25  | ±0.25  | %FSS |

## OVERSAMPLING RATIO (OSR) PERFORMANCE CHARACTERISTICS

### SUPPLY CURRENT CHARACTERISTICS

| Parameter                             | Symbol          | Conditions        | Min. | Typ. | Max  | Unit |
|---------------------------------------|-----------------|-------------------|------|------|------|------|
| Supply current<br>(1 sample per sec.) | I <sub>DD</sub> | OSR 4096          |      | 12.5 |      | μA   |
|                                       |                 | 2048              |      | 6.3  |      |      |
|                                       |                 | 1024              |      | 3.2  |      |      |
|                                       |                 | 512               |      | 1.7  |      |      |
|                                       |                 | 256               |      | 0.9  |      |      |
| Peak supply current                   |                 | during conversion |      | 1.4  |      | mA   |
| Standby supply current                |                 | at 25°C           |      | 0.02 | 0.14 | μA   |

### ANALOG DIGITAL CONVERTER (ADC)

| Parameter       | Symbol         | Conditions | Min. | Typ. | Max  | Unit |
|-----------------|----------------|------------|------|------|------|------|
| Conversion time | t <sub>c</sub> | OSR 4096   | 7.40 | 8.22 | 9.04 | ms   |
|                 |                | 2048       | 3.72 | 4.13 | 4.54 |      |
|                 |                | 1024       | 1.88 | 2.08 | 2.28 |      |
|                 |                | 512        | 0.95 | 1.06 | 1.17 |      |
|                 |                | 256        | 0.48 | 0.54 | 0.60 |      |

## INPUT/OUTPUT SPECIFICATIONS

### DIGITAL INPUTS (CSB, I<sup>2</sup>C, DIN, SCLK)

| Parameter             | Symbol                | Conditions   | Min.                | Typ. | Max                  | Unit |
|-----------------------|-----------------------|--------------|---------------------|------|----------------------|------|
| Serial data clock     | SCLK                  | SPI protocol |                     |      | 20                   | MHz  |
| Serial data clock     | SCL                   | I2C protocol |                     |      | 400                  | kHz  |
| Input high voltage    | V <sub>IH</sub>       | Pins CSB     | 80% V <sub>DD</sub> |      | 100% V <sub>DD</sub> | V    |
| Input low voltage     | V <sub>IL</sub>       |              | 0% V <sub>DD</sub>  |      | 20% V <sub>DD</sub>  | V    |
| Input leakage current | I <sub>leak25°C</sub> | at 25°C      |                     |      | 0.15                 | μA   |
|                       | I <sub>leak85°C</sub> |              |                     |      |                      |      |
| Input capacitance     | C <sub>IN</sub>       |              |                     |      | 6                    | pF   |

### PRESSURE OUTPUTS (I<sup>2</sup>C, DOUT)

| Parameter           | Symbol            | Conditions                   | Min.                | Typ. | Max                  | Unit |
|---------------------|-------------------|------------------------------|---------------------|------|----------------------|------|
| Output high voltage | V <sub>OH</sub>   | I <sub>source</sub> = 0.6 mA | 80% V <sub>DD</sub> |      | 100% V <sub>DD</sub> | V    |
| Output low voltage  | V <sub>OL</sub>   | I <sub>sink</sub> = 0.6 mA   | 0% V <sub>DD</sub>  |      | 20% V <sub>DD</sub>  | V    |
| Load capacitance    | C <sub>LOAD</sub> |                              |                     |      | 16                   | pF   |

## FUNCTIONAL DESCRIPTION

### BLOCK DIAGRAM

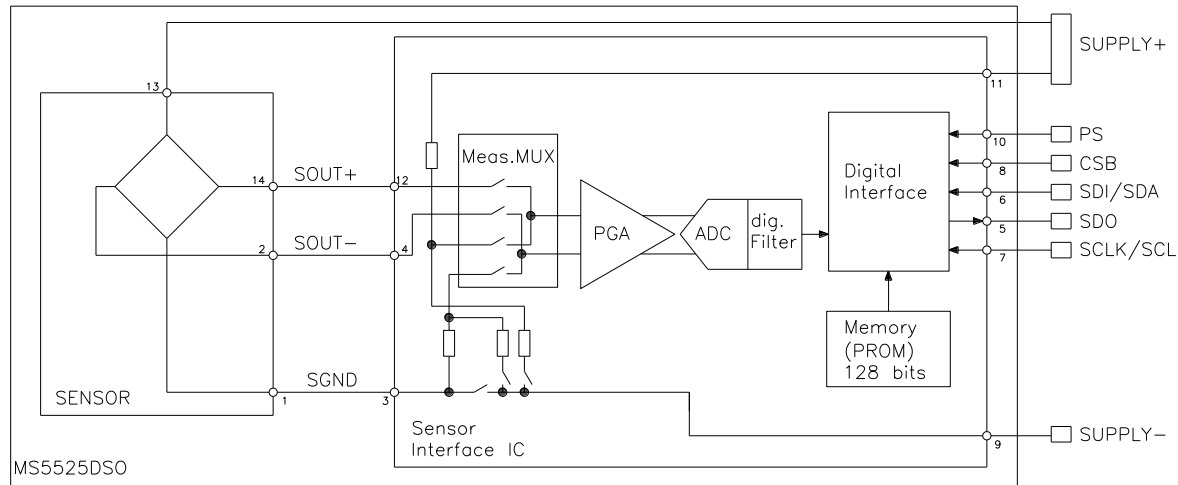


Figure 1: Block diagram of MS5525DSO

## GENERAL

The MS5525DSO consists of a piezo-resistive sensor and a sensor interface IC. The main function of the MS5525DSO is to convert the uncompensated analog output voltage from the piezo-resistive pressure sensor to a 24-bit digital value, as well as providing a 24-bit digital value for the temperature of the sensor.

## FACTORY CALIBRATION

Every module is individually factory calibrated at two temperatures and three pressures. As a result, six coefficients necessary to compensate for process variations and temperature variations are calculated and stored in the 128-bit PROM of each module. These bits, partitioned into six coefficients, C1 through C6, must be read by the microcontroller software and used in the program converting D1 and D2 into compensated pressure and temperature values.

The coefficients C0 and C7 are for factory calibration and CRC.

## SERIAL INTERFACE

The MS5525DSO has built in two types of serial interfaces: SPI and I<sup>2</sup>C. Pulling the Protocol Select pin PS to low selects the SPI protocol, pulling PS to high activates the I<sup>2</sup>C bus protocol.

| Pin PS | Mode             | Pins used           |
|--------|------------------|---------------------|
| High   | I <sup>2</sup> C | SDA, SCL CSB        |
| Low    | SPI              | SDI, SDO, SCLK, CSB |

## SPI MODE

The external microcontroller clocks in the data through the input SCLK (Serial CLock) and SDI (Serial Data In). In the SPI mode module can accept both mode 0 and mode 3 for the clock polarity and phase. The sensor responds on the output SDO (Serial Data Out). The pin CSB (Chip Select) is used to enable/disable the interface, so that other devices can talk on the same SPI bus. The CSB pin can be pulled high after the command is sent or after the end of the command execution (for example end of conversion). The best noise performance from the module is obtained when the SPI bus is idle and without communication to other devices during the ADC conversion.

## I<sup>2</sup>C MODE & ADDRESSING

The external microcontroller clocks in the data through the input SCL (Serial CLock) and SDA (Serial Data). The sensor responds on the same pin SDA which is bidirectional for the I<sup>2</sup>C bus interface. So this interface type uses only 2 signal lines and does not require a chip select, which can be favorable to reduce board space. In I<sup>2</sup>C -Mode the complement of the pin CSB (Chip Select) represents the LSB of the I<sup>2</sup>C address. It is possible to use two sensors with two different addresses on the I<sup>2</sup>C bus. The pin CSB must be connected to VDD or GND do not leave these pins unconnected.

| Pin CSB | Address (7 bits) |
|---------|------------------|
| High    | 0x76             |
| Low     | 0x77             |

## COMMANDS

The MS5525DSO has only five basic commands:

1. Reset
2. Read PROM (128 bit of calibration words)
3. D1 conversion
4. D2 conversion
5. Read ADC result (24 bit pressure / temperature)

Size of each command is 1 byte (8 bits) as described in the table below. After ADC read commands the device will return 24 bit result and after the PROM read 16bit result. The address of the PROM is embedded inside of the PROM read command using the Ad2, Ad1 and Ad0 bits.

|                       | Command byte |     |   |     |             |             |             |      | hex value       |
|-----------------------|--------------|-----|---|-----|-------------|-------------|-------------|------|-----------------|
| Bit number            | 0            | 1   | 2 | 3   | 4           | 5           | 6           | 7    |                 |
| Bit name              | PRM          | COV | - | Typ | Ad2/<br>Os2 | Ad1/<br>Os1 | Ad0/<br>Os0 | Stop |                 |
| Command               |              |     |   |     |             |             |             |      |                 |
| Reset                 | 0            | 0   | 0 | 1   | 1           | 1           | 1           | 0    | 0x1E            |
| Convert D1 (OSR=256)  | 0            | 1   | 0 | 0   | 0           | 0           | 0           | 0    | 0x40            |
| Convert D1 (OSR=512)  | 0            | 1   | 0 | 0   | 0           | 0           | 1           | 0    | 0x42            |
| Convert D1 (OSR=1024) | 0            | 1   | 0 | 0   | 0           | 1           | 0           | 0    | 0x44            |
| Convert D1 (OSR=2048) | 0            | 1   | 0 | 0   | 0           | 1           | 1           | 0    | 0x46            |
| Convert D1 (OSR=4096) | 0            | 1   | 0 | 0   | 1           | 0           | 0           | 0    | 0x48            |
| Convert D2 (OSR=256)  | 0            | 1   | 0 | 1   | 0           | 0           | 0           | 0    | 0x50            |
| Convert D2 (OSR=512)  | 0            | 1   | 0 | 1   | 0           | 0           | 1           | 0    | 0x52            |
| Convert D2 (OSR=1024) | 0            | 1   | 0 | 1   | 0           | 1           | 0           | 0    | 0x54            |
| Convert D2 (OSR=2048) | 0            | 1   | 0 | 1   | 0           | 1           | 1           | 0    | 0x56            |
| Convert D2 (OSR=4096) | 0            | 1   | 0 | 1   | 1           | 0           | 0           | 0    | 0x58            |
| ADC Read              | 0            | 0   | 0 | 0   | 0           | 0           | 0           | 0    | 0x00            |
| PROM Read             | 1            | 0   | 1 | 0   | Ad2         | Ad1         | Ad0         | 0    | 0xA0 to<br>0xAE |

Figure 4: Command structure

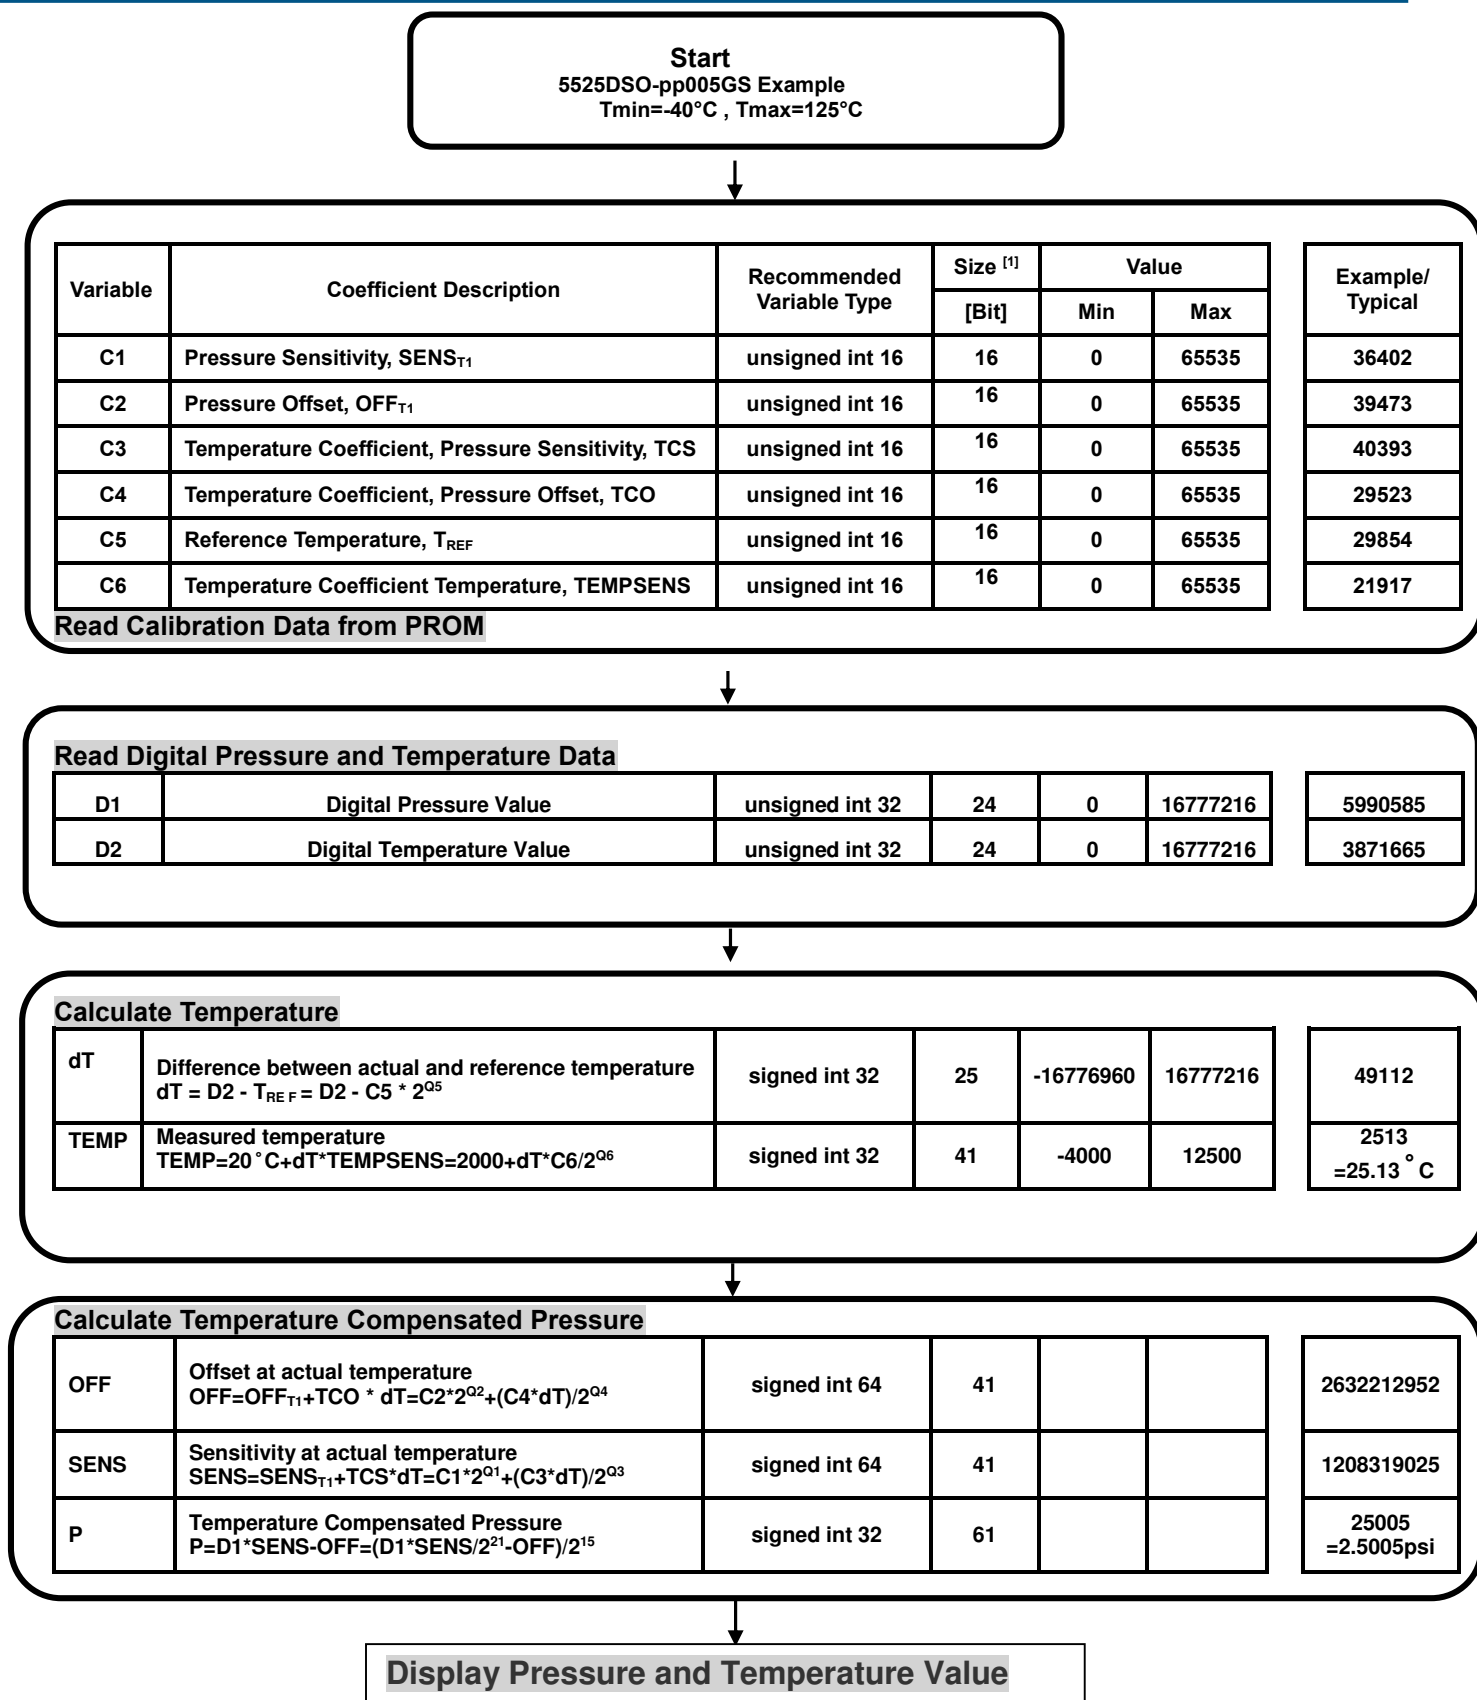


Figure 1: Flow chart for pressure and temperature reading and software compensation.

## Qx Coefficients Matrix by Pressure Range

| Part Number      | Pmin | Pmax | Q1 | Q2 | Q3 | Q4 | Q5 | Q6 | T <sub>RES</sub><br>(°C) | P <sub>RES</sub><br>(PSI) |
|------------------|------|------|----|----|----|----|----|----|--------------------------|---------------------------|
| 5525DSO-pp001GS  | 0    | 1    | 14 | 16 | 7  | 5  | 7  | 21 | 0.01                     | 0.0001                    |
| 5525DSO-pp001DS  | -1   | 1    | 15 | 17 | 7  | 5  | 7  | 21 | 0.01                     | 0.0001                    |
| 5525DSO-pp002GS  | 0    | 2    | 14 | 15 | 8  | 6  | 7  | 22 | 0.01                     | 0.0001                    |
| 5525DSO-pp002DS  | -2   | 2    | 16 | 18 | 6  | 4  | 7  | 22 | 0.01                     | 0.0001                    |
| 5525DSO-pp005GS  | 0    | 5    | 16 | 17 | 6  | 5  | 7  | 21 | 0.01                     | 0.0001                    |
| 5525DSO-pp005DS  | -5   | 5    | 17 | 19 | 5  | 3  | 7  | 22 | 0.01                     | 0.0001                    |
| 5525DSO-pp0015AS | 0    | 15   | 16 | 17 | 6  | 5  | 7  | 22 | 0.01                     | 0.0001                    |
| 5525DSO-pp0015GS | 0    | 15   | 16 | 17 | 6  | 5  | 7  | 22 | 0.01                     | 0.0001                    |
| 5525DSO-pp0015DS | -15  | 15   | 17 | 19 | 5  | 3  | 7  | 22 | 0.01                     | 0.0001                    |
| 5525DSO-pp0030AS | 0    | 30   | 17 | 18 | 5  | 4  | 7  | 22 | 0.01                     | 0.0001                    |
| 5525DSO-pp0030GS | 0    | 30   | 17 | 18 | 5  | 4  | 7  | 22 | 0.01                     | 0.0001                    |
| 5525DSO-pp0030DS | -30  | 30   | 18 | 20 | 4  | 1  | 7  | 22 | 0.01                     | 0.0001                    |

## MEMORY MAPPING

### Memory Mapping

| Address | 15                        | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0   |
|---------|---------------------------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|-----|
| 0       | Reserved for Manufacturer |    |    |    |    |    |   |   |   |   |   |   |   |   |   |     |
| 1       | Coefficient 1 (C1)        |    |    |    |    |    |   |   |   |   |   |   |   |   |   |     |
| 2       | Coefficient 2 (C2)        |    |    |    |    |    |   |   |   |   |   |   |   |   |   |     |
| 3       | Coefficient 3 (C3)        |    |    |    |    |    |   |   |   |   |   |   |   |   |   |     |
| 4       | Coefficient 4 (C4)        |    |    |    |    |    |   |   |   |   |   |   |   |   |   |     |
| 5       | Coefficient 5 (C5)        |    |    |    |    |    |   |   |   |   |   |   |   |   |   |     |
| 6       | Coefficient 6 (C6)        |    |    |    |    |    |   |   |   |   |   |   |   |   |   |     |
| 7       |                           |    |    |    |    |    |   |   |   |   |   |   |   |   |   | CRC |

Figure 2: Memory PROM Mapping

### Notes

- [1] Maximal size of intermediate result during evaluation of variable.

## SPI INTERFACE

### RESET SEQUENCE

The Reset sequence shall be sent once after power-on to make sure that the calibration PROM gets loaded into the internal register. It can be also used to reset the device ROM from an unknown condition

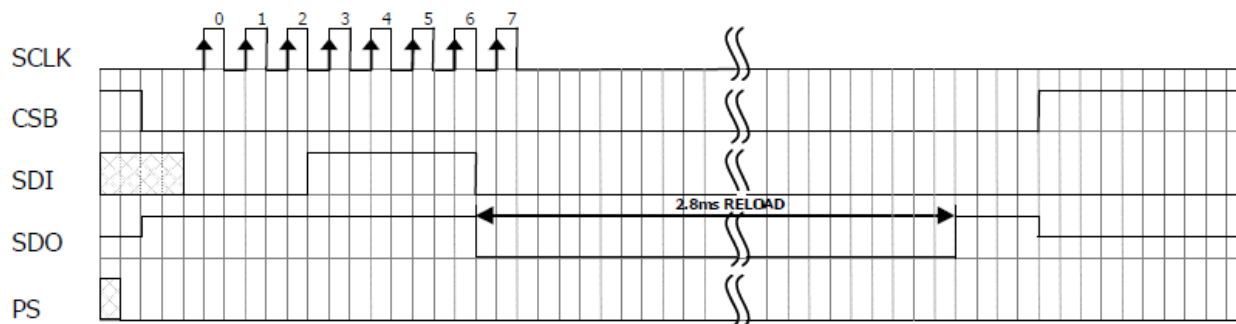


Figure 5: Reset command sequence SPI mode 0

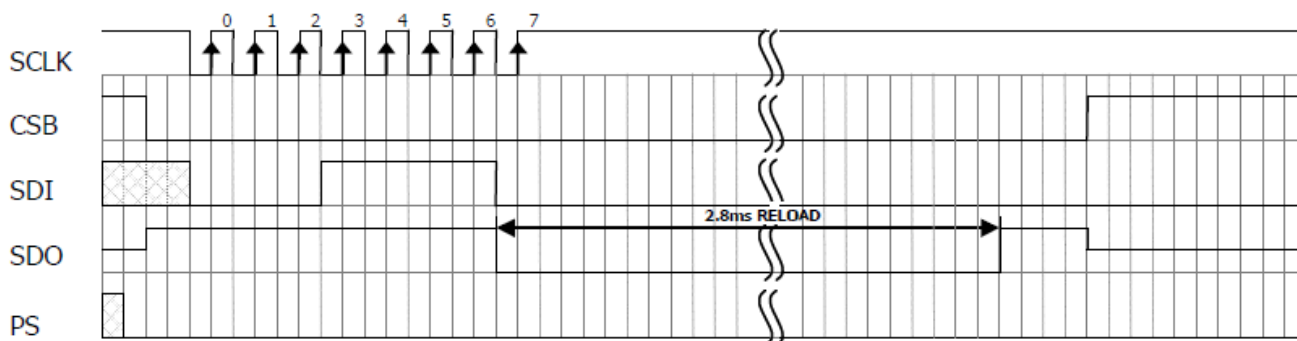


Figure 6: Reset command sequence SPI mode 3

## CONVERSION SEQUENCE

The conversion command is used to initiate uncompensated pressure (D1) or uncompensated temperature (D2) conversion. The chip select can be disabled during this time to communicate with other devices.

After the conversion, using ADC read command the result is clocked out with the MSB first. If the conversion is not executed before the ADC read command, or the ADC read command is repeated, it will give 0 as the output result. If the ADC read command is sent during conversion the result will be 0, the conversion will not stop and the final result will be wrong. Conversion sequence sent during the already started conversion process will yield incorrect result as well.

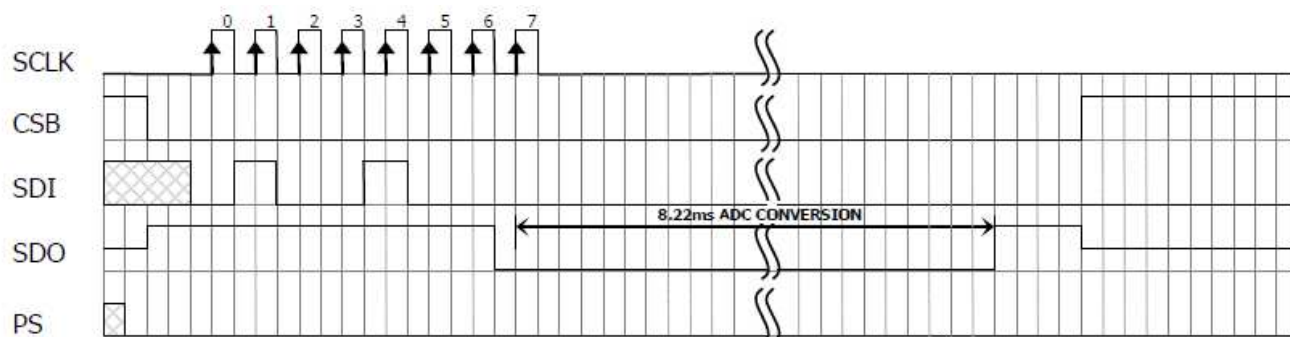


Figure 7: Conversion out sequence, Typ=d1, OSR = 4096

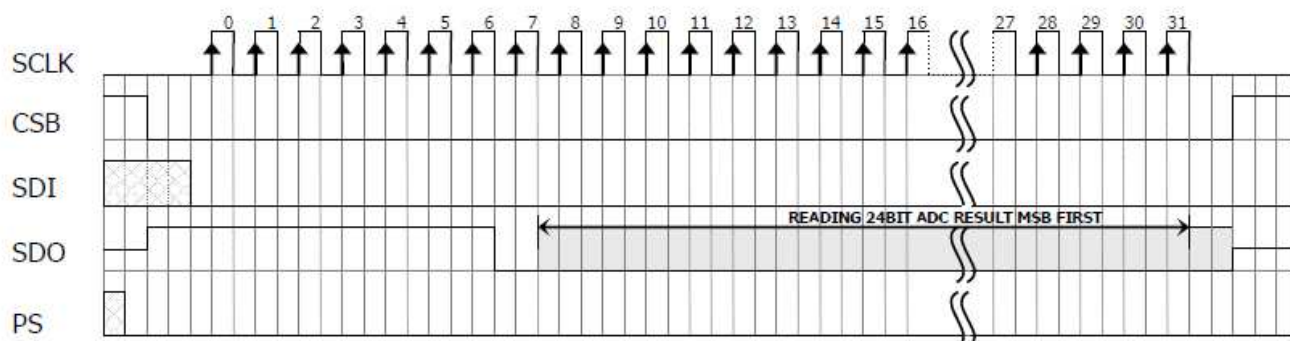


Figure 8: ADC Read sequence

## PROM READ SEQUENCE

The read command for PROM shall be executed once after reset by the user to read the content of the calibration PROM and to calculate the calibration coefficients. There are in total 8 addresses resulting in a total memory of 128 bit. Address 0 contains factory data and the setup, addresses 1-6 calibration coefficients and address 7 contains the serial code and CRC. The command sequence is 8 bits long with a 16 bit result which is clocked with the MSB first.

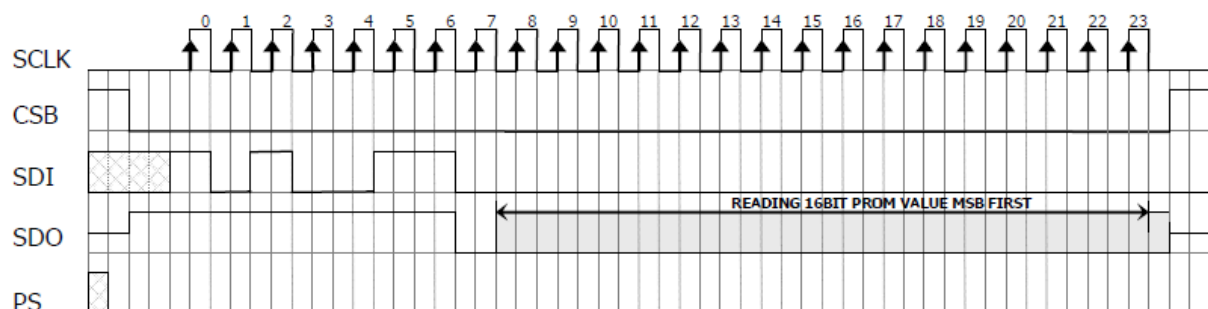


Figure 9: PROM Read sequence, address = 011 (Coefficient 3).

## I<sup>2</sup>C INTERFACE

### COMMANDS

Each I<sup>2</sup>C communication message starts with the start condition and it is ended with the stop condition. The MS5525DSO address is 111011Cx, where C is the complementary value of the pin CSB. Since the IC does not have a microcontroller inside, the commands for I<sup>2</sup>C and SPI are quite similar.

### RESET SEQUENCE

The reset can be sent at any time. In the event that there is not a successful power on reset this may be caused by the SDA being blocked by the module in the acknowledge state. The only way to get the MS5525DSO to function is to send several SCLKs followed by a reset sequence or to repeat power on reset.

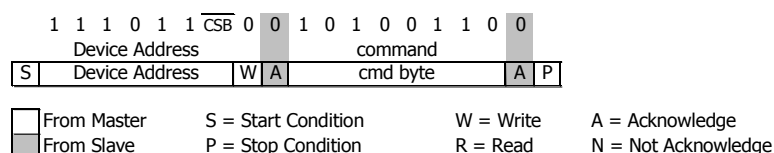


Figure 10: I2C Reset Command

### PROM READ SEQUENCE

The PROM Read command consists of two parts. First command sets up the system into PROM read mode. The second part gets the data from the system.

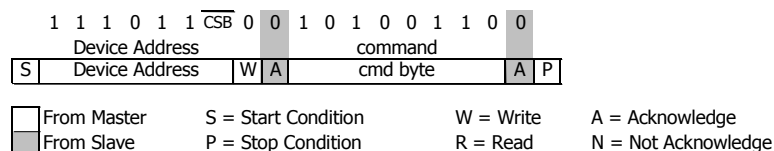


Figure 11: I2C Command to read memory address= 011 (Coefficient 3)

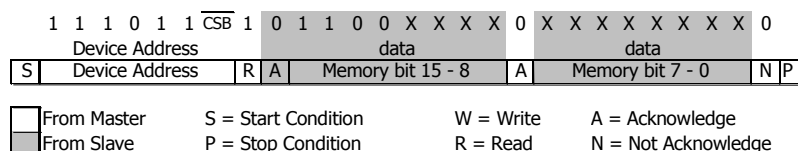


Figure 12: I2C response from MS5525DSO

## CONVERSION SEQUENCE

A conversion can be started by sending the command to MS5525DSO. When command is sent to the system it stays busy until conversion is done. When conversion is finished the data can be accessed by sending a Read command, when an acknowledge appears from the MS5525DSO, 24 SCLK cycles may be sent to receive all result bits. Every 8-bit the system waits for an acknowledge signal.

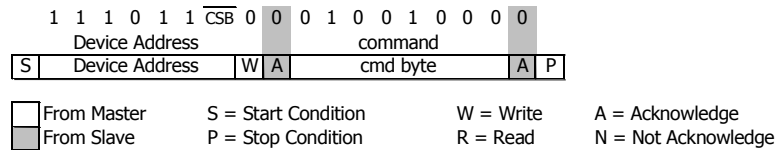


Figure 13: I<sup>2</sup>C Command to initiate a pressure conversion (OSR=4096, typ=D1)

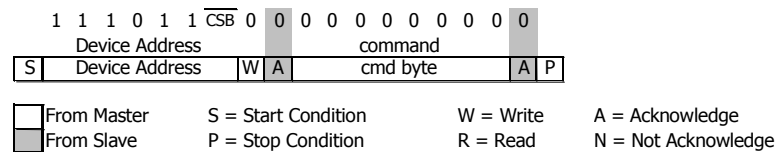


Figure 14: I<sup>2</sup>C ADC read sequence


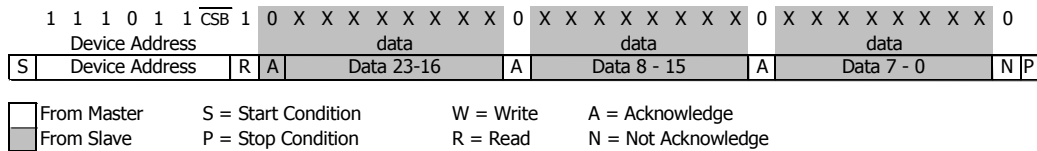


Figure 15: I<sup>2</sup>C response from MS5525DSO

## CYCLIC REDUNDANCY CHECK (CRC)

MS5525DSO contains a PROM memory with 128-Bit. A 4-bit CRC has been implemented to check the data validity in memory. The application note AN520 describes in detail CRC-4 code used.

PINOUT, MARKING, AND PRESSURE TYPE CONFIGURATION

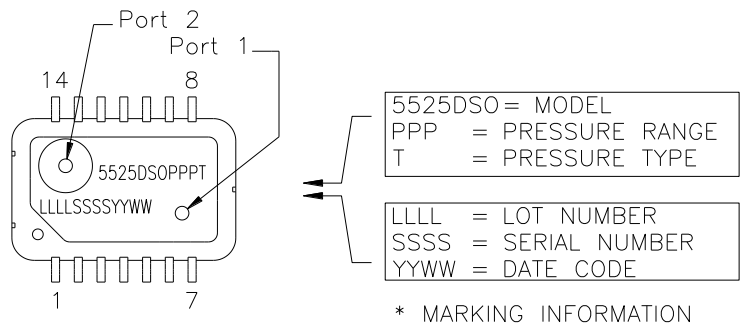

| Pressure Type                  | Pmin    | Pmax    | Description                                                                                                                                                       |
|--------------------------------|---------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Absolute                       | 0psiA   | +Prange | Output is proportional to the difference between 0psiA (Pmin) and pressure applied to Port 1.                                                                     |
| Differential/<br>Bidirectional | -Prange | +Prange | Output is proportional to the difference between Port 1 and Port 2. Output swings positive when Port 2> Port 1. Output is 50% of total counts when Port 1=Port 2. |
| Gauge                          | 0psiG   | +Prange | Output is proportional to the difference between 0psiG (Pmin) and Port 1. Output swings positive when Port 2> Port 1.                                             |


| Pin Name | Pin   | Function                                                                                                                                                                    |                                     |
|----------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| SGND     | 1,3   | Sensor Ground                                                                                                                                                               |                                     |
| SOUT-    | 2,4   | Sensor Outputs, Negative                                                                                                                                                    |                                     |
| SDO      | 5     |                                                                                                                                                                             | Serial Data Output                  |
| SDA/SDI  | 6     | I <sup>2</sup> C Data Input and Output                                                                                                                                      | SPI Serial Data Input               |
| SCL/SCLK | 7     | I <sup>2</sup> C Clock                                                                                                                                                      | SPI Clock                           |
| CSB      | 8     | Defines I <sup>2</sup> C Address                                                                                                                                            | Chip Select (Active Low)            |
| GND      | 9     | Ground                                                                                                                                                                      |                                     |
| PS       | 10    | Protocol Select                                                                                                                                                             |                                     |
|          |       | PS = (VDD)<br>I <sup>2</sup> C Protocol Selected<br>CSB= (VDD) I <sup>2</sup> C Address =1110110X (0xEC, 0xED)<br>CSB= (GND) I <sup>2</sup> C Address=1110111X (0xEE, 0xEF) | PS = (GND)<br>SPI Protocol Selected |
| Supply+  | 11,13 | Positive Supply Voltage                                                                                                                                                     |                                     |
| SOUT+    | 12,14 | Sensor Outputs, Positive                                                                                                                                                    |                                     |

WETTED MATERIAL BY PORT DESIGNATION

| Material |        |     |                    |       |     |       |         |              |
|----------|--------|-----|--------------------|-------|-----|-------|---------|--------------|
| Style    | Port   | LCP | Thermo-Epoxy Resin | Epoxy | RTV | Glass | Silicon | Silicone Gel |
| All      | Port 1 | X   | X                  | X     |     |       |         | X            |
|          | Port 2 | X   | X                  | X     | X   | X     | X       |              |

"X" Indicates Wetted Materials


## RECOMMEND PCB LAYOUT

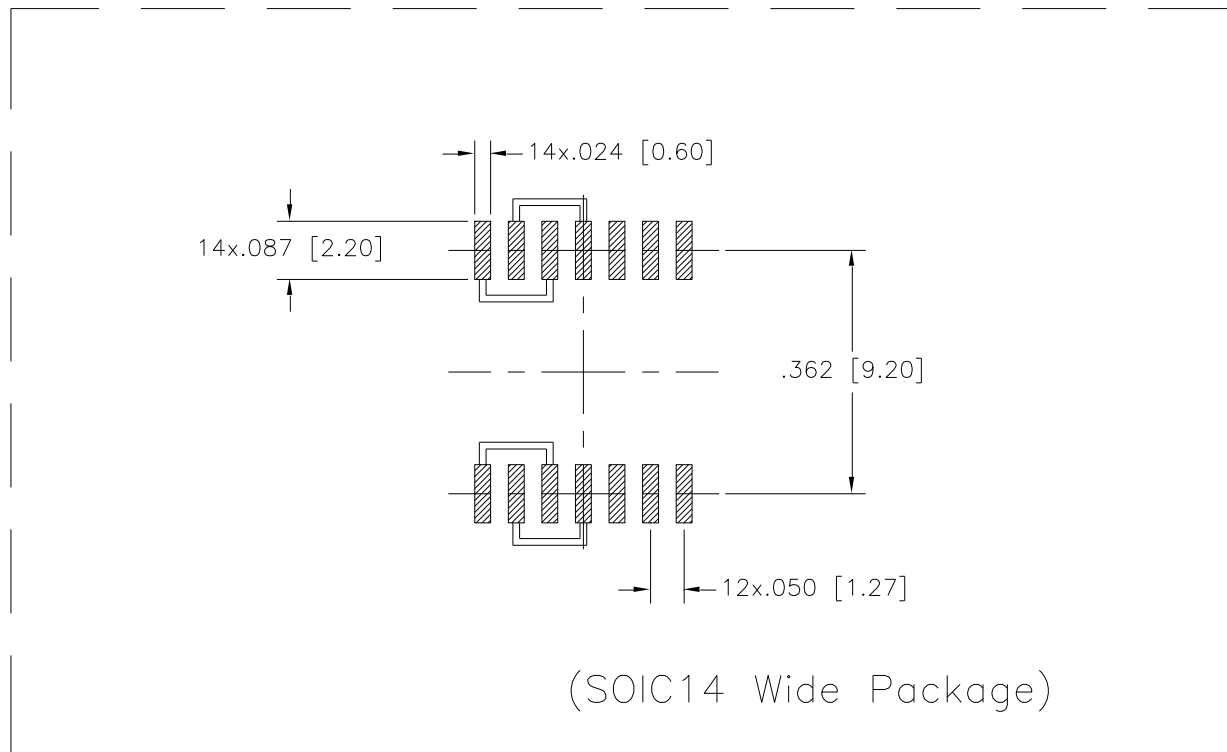

| PAD NO. | FUNCTION | PAD NO. | FUNCTION |
|---------|----------|---------|----------|
| 1       | SGND     | 8       | CSB      |
| 2       | SOUT-    | 9       | SUPPLY-  |
| 3       | SGND     | 10      | PS       |
| 4       | SOUT-    | 11      | SUPPLY+  |
| 5       | SDO      | 12      | SOUT+    |
| 6       | SDI/SDA  | 13      | SUPPLY+  |
| 7       | SCLK/SCL | 14      | SOUT+    |

FUNCTION PINS THAT SHARE THE SAME NAME (SGND, SOUT+, SOUT-, SUPPLY+) MUST BE CONNECTED TOGETHER ON PCB FOR PROPER OPERATION.


NEED TO PLACE 0.1uF DECOUPLING CAPACITOR BETWEEN SUPPLY+ AND SUPPLY- ON PCB AND AS CLOSE AS POSSIBLE TO SENSOR

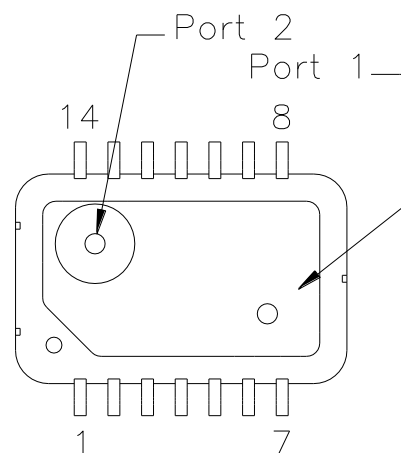

## APPLICATION CIRCUIT

The MS5525DSO is a circuit that can be used in conjunction with a microcontroller. It is designed for low-voltage systems with a supply voltage of 3 V.

### SPI protocol communication

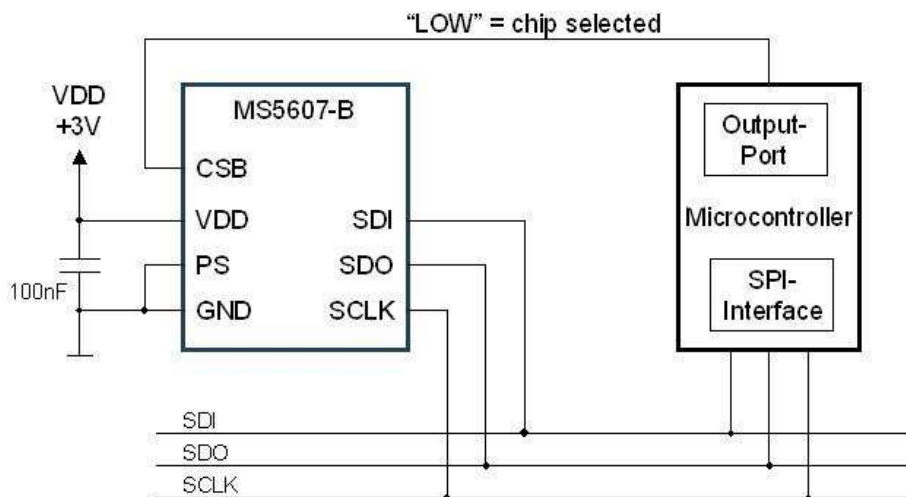

### I<sup>2</sup>C protocol communication

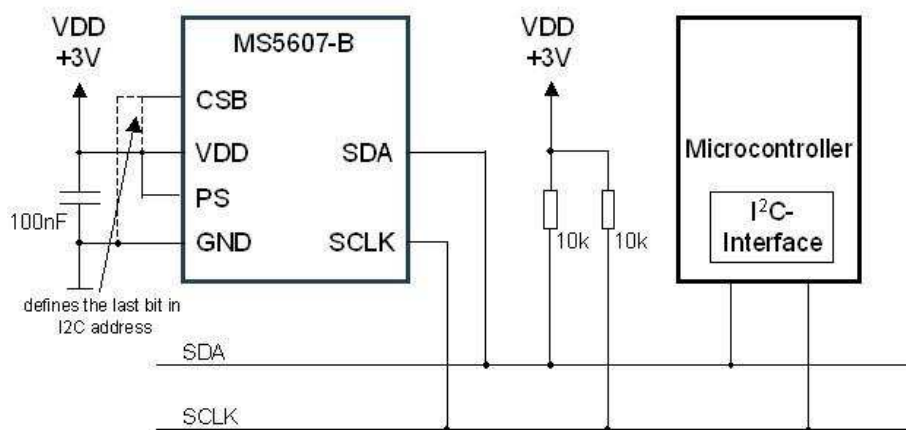



Figure 17: Typical application circuit with SPI / I<sup>2</sup>C protocol communication

#### Note


1. Place 100nF capacitor between Supply and GND to within 2 cm of sensor.

## DIMENSIONS


### MS5525DSO-DBxxxS

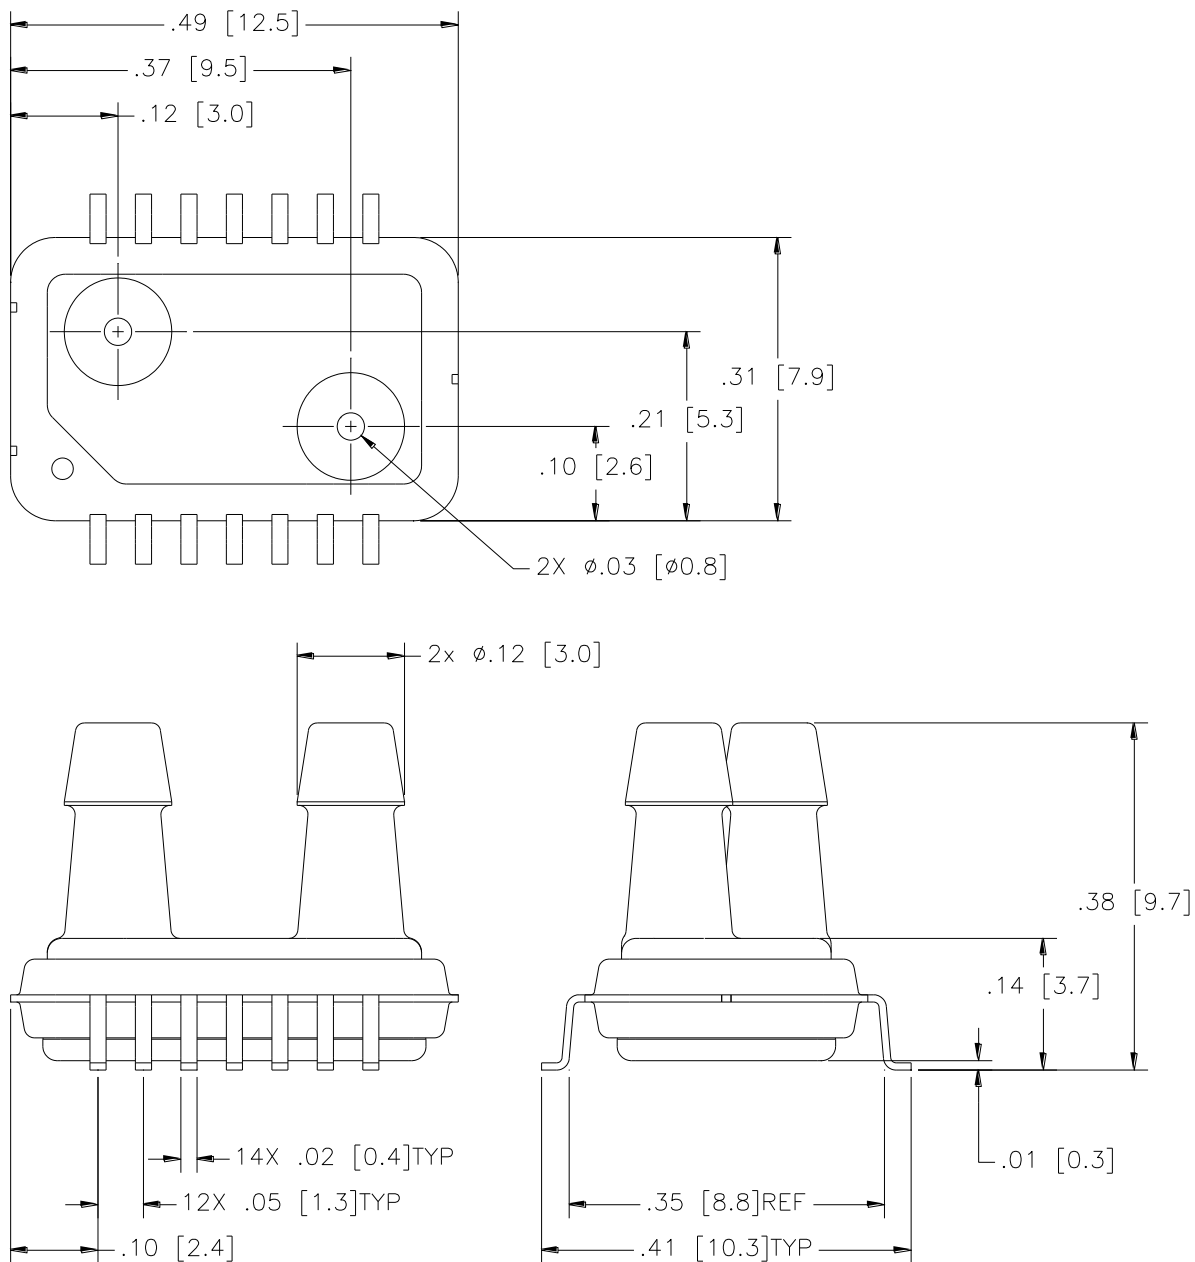


**MS5525DSO-STxxxS**

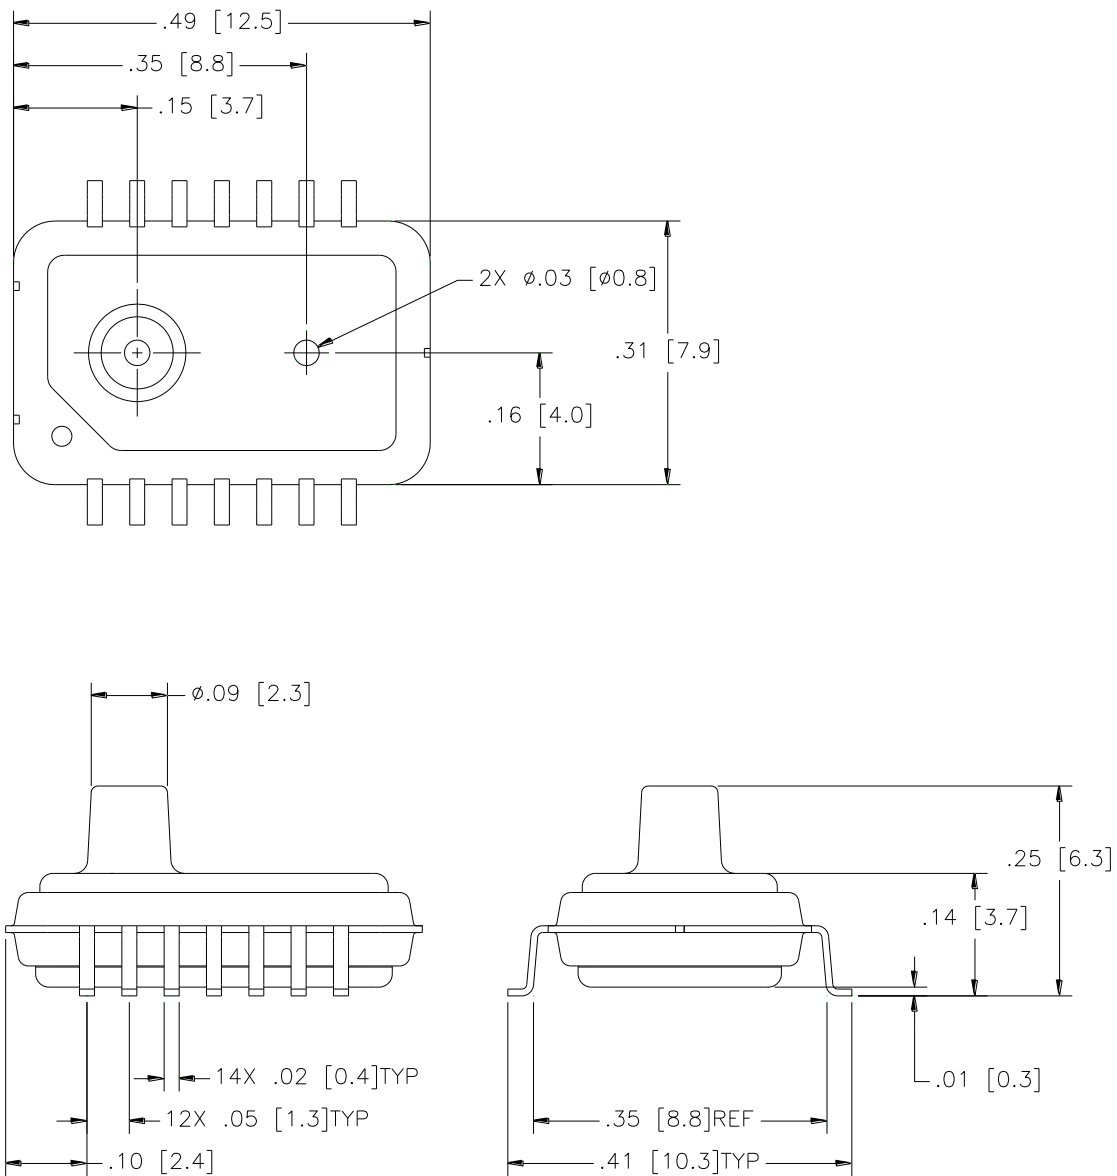




**MS5525DSO-SBxxxS**

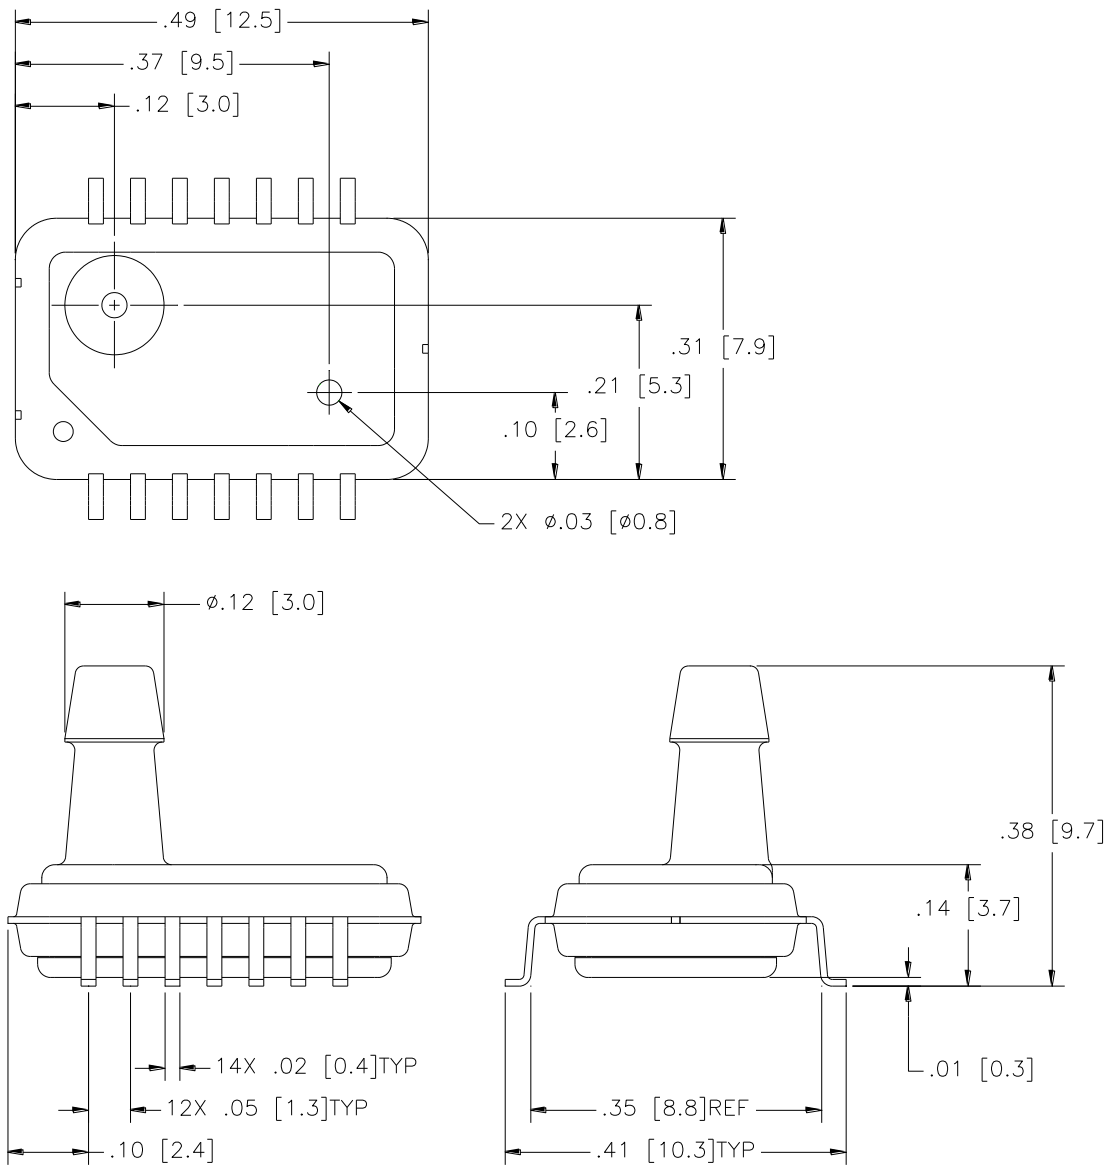

**MS5525DSO-DHxxxS**

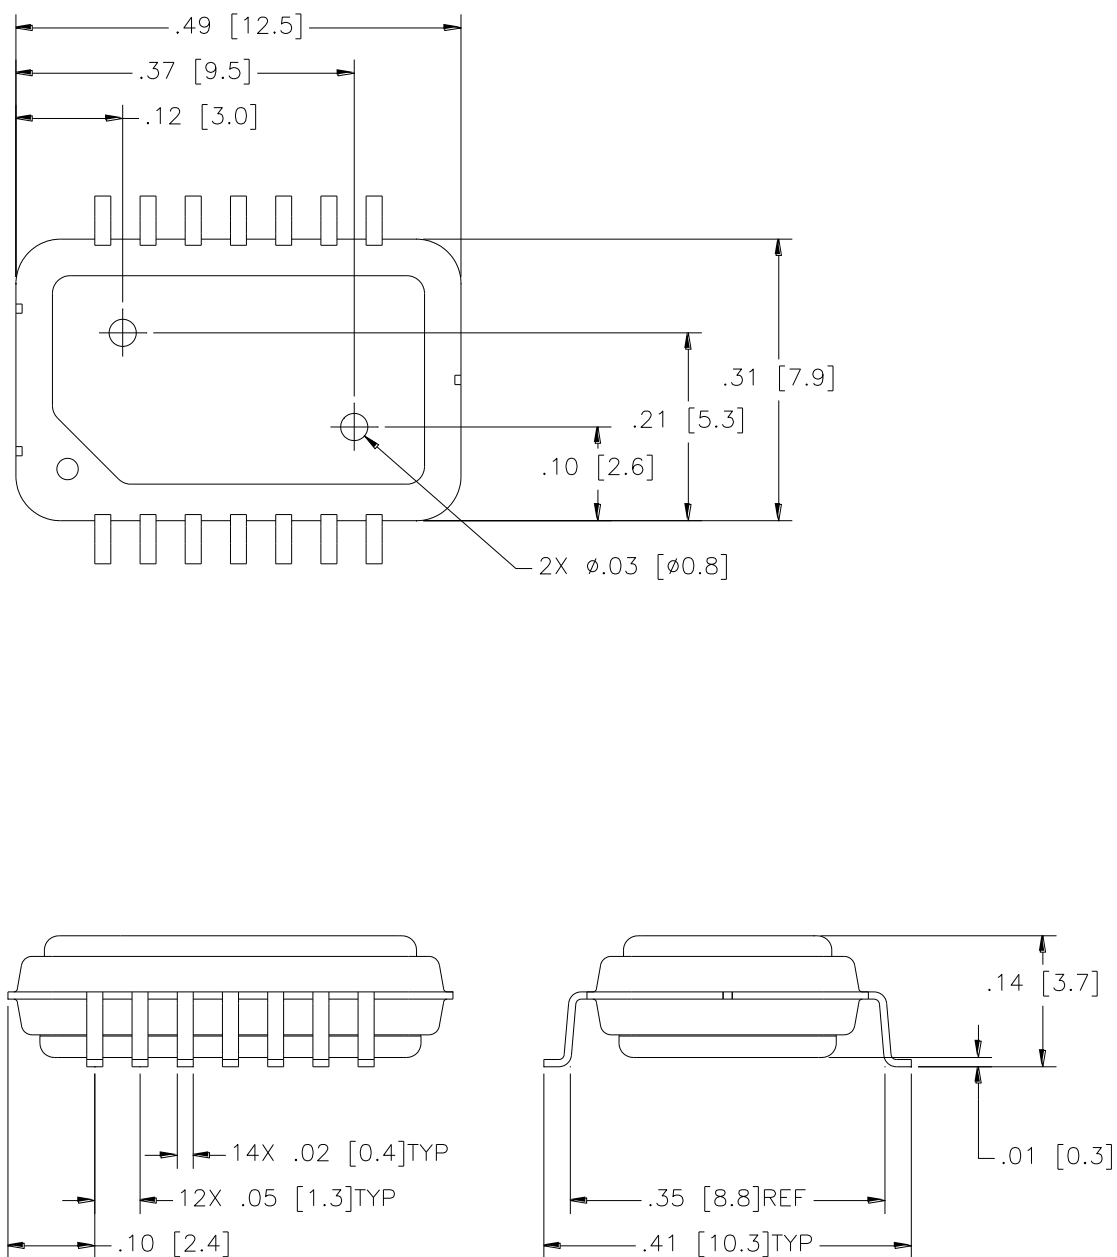

**MS5525DSO-FTxxxS**

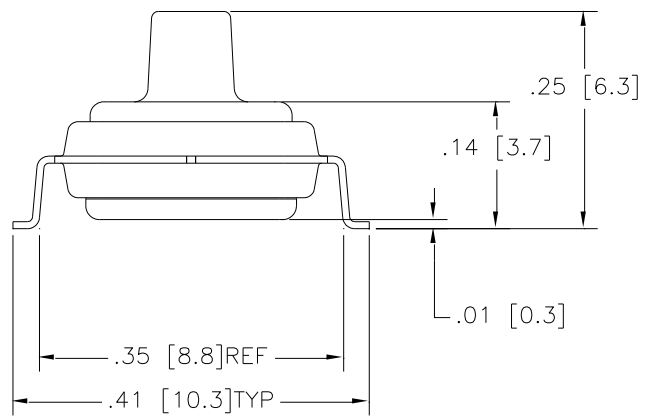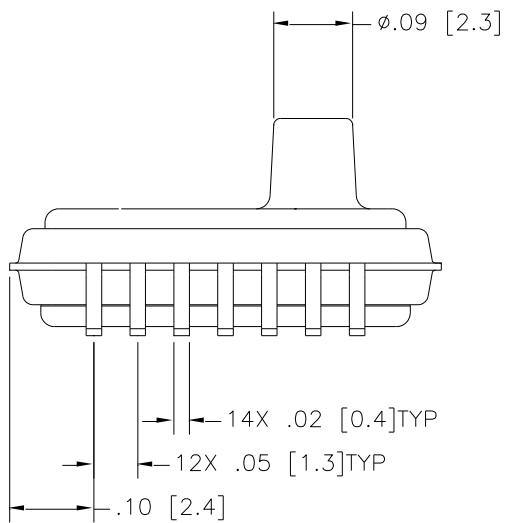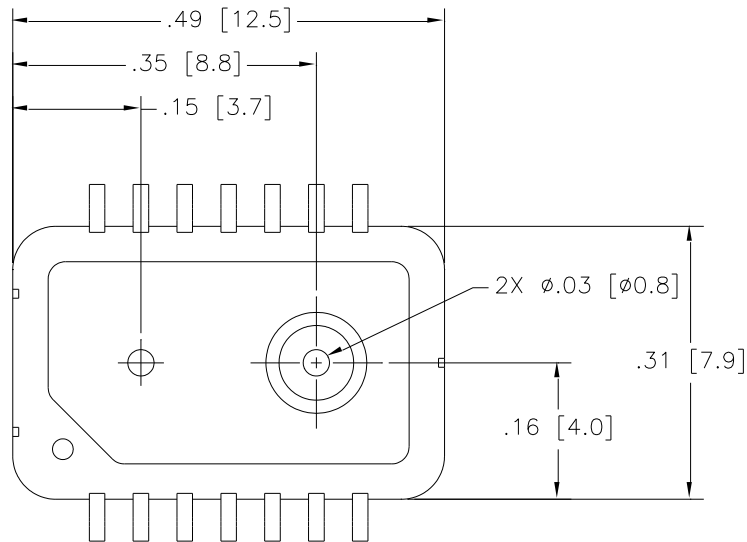

## ORDERING INFORMATION

|                  |   |                                                                                                                                |                                                                    |                                                                    |                      |
|------------------|---|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------|----------------------|
| 5525DSO          | - | DB                                                                                                                             | 005                                                                | G                                                                  | S                    |
| <b>Model</b>     | - | <b>Package Style</b>                                                                                                           | <b>Pressure Range</b>                                              | <b>Pressure Type</b>                                               | <b>Pin Style</b>     |
| <b>MS5525DSO</b> | - | <b>DB</b> = Dual Barb<br><b>SB</b> = Single Barb<br><b>ST</b> = Single Tube<br><b>DH</b> = Dual Hole<br><b>FT</b> = Front Tube | <b>001</b><br><b>002</b><br><b>005</b><br><b>015</b><br><b>030</b> | <b>A</b> = Absolute<br><b>D</b> = Differential<br><b>G</b> = Gauge | <b>S</b> = Gull Wing |

### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
45738 Northport Loop West  
Fremont, CA 94538  
Tel: 1-800-767-1888  
Fax: 1-510-498-1578  
Sales: pfg.cs.amer@meas-spec.com

### EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
26 Rue des Dames  
78340 Les Clayes-sous-Bois, France  
Tel: +33 (0) 130 79 33 00  
Fax: +33 (0) 134 81 03 59  
Sales: pfg.cs.emea@meas-spec.com

### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Tel: +86 755 3330 5088  
Fax: +86 755 3330 5099  
Sales: pfg.cs.asia@meas-spec.com

### TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А