

# MAX15020

## 2A, 40V Step-Down DC-DC Converter with Dynamic Output-Voltage Programming

### General Description

The MAX15020 high-voltage step-down DC-DC converter operates over an input voltage range of 7.5V to 40V. The device integrates a 0.2Ω high-side switch and is capable of delivering 2A load current with excellent load and line regulation. The output is dynamically adjustable from 0.5V to 36V through the use of an external reference input (REFIN). The MAX15020 consumes only 6μA in shutdown mode.

The device utilizes feed-forward voltage-mode architecture for good noise immunity in the high-voltage switching environment and offers external compensation for maximum flexibility. The switching frequency is selectable to 300kHz or 500kHz and can be synchronized to an external clock signal of 100kHz to 500kHz by using the SYNC input. The IC features a maximum duty cycle of 95% (typ) at 300kHz.

The device includes configurable undervoltage lockout (UVLO) and soft-start. Protection features include cycle-by-cycle current limit, hiccup-mode for output short-circuit protection, and thermal shutdown. The MAX15020 is available in a 20-pin TQFN 5mm x 5mm package and is rated for operation over the -40°C to +125°C temperature range.

### Applications

- Printer Head Driver Power Supply
- Industrial Power Supply
- Step-Down Power Supply

### Features

- Wide 7.5V to 40V Input Voltage Range
- 2A Output Current, Up to 96% Efficiency
- Dynamic Programmable Output Voltage (0.5V to 36V)
- Maximum Duty Cycle of 95% (typ) at 300kHz
- 100kHz to 500kHz Synchronizable SYNC Frequency Range
- Configurable UVLO and Soft-Start
- Low-Noise, Voltage-Mode Step-Down Converter
- Programmable Output-Voltage Slew Rate
- Lossless Constant Current Limit with Fixed
- Timeout to Hiccup Mode
- Extremely Low-Power Consumption (< 6μA typ) in Shutdown Mode
- 20-Pin (5mm x 5mm) Thin QFN Package

### Ordering Information

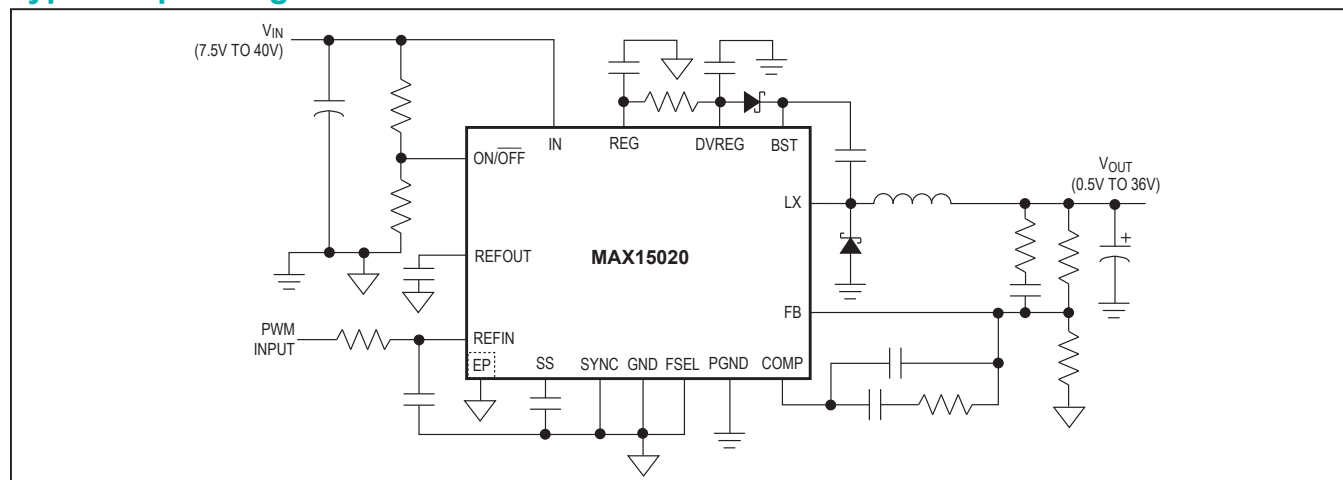
| PART         | TEMP RANGE      | PIN-PACKAGE |
|--------------|-----------------|-------------|
| MAX15020ATP+ | -40°C to +125°C | 20 TQFN-EP* |

+Denotes a lead(Pb)-free/RoHS-compliant package.

\*EP = Exposed pad.

Pin Configuration appears at end of data sheet.

### Typical Operating Circuit



## Absolute Maximum Ratings

|   |                                |
|---|--------------------------------|
| IN, ON/OFF to GND.....                            | -0.3V to +45V                  |
| LX to GND.....                                    | -0.715V to ( $V_{IN} + 0.3V$ ) |
| BST to GND .....                                  | -0.3V to ( $V_{IN} + 12V$ )    |
| BST to LX.....                                    | -0.3V to +12V                  |
| PGND, EP to GND.....                              | -0.3V to +0.3V                 |
| REG, DVREG, SYNC to GND .....                     | -0.3V to +12V                  |
| FB, COMP, FSEL, REFIN, REFOUT,<br>SS to GND ..... | -0.3V to ( $V_{REG} + 0.3V$ )  |
| Continuous Current through Internal Power MOSFET  |                                |
| $T_J = +125^{\circ}\text{C}$ .....                | 4A                             |
| $T_J = +150^{\circ}\text{C}$ .....                | 2.7A                           |

|  |   |
|--|---|
| Continuous Power Dissipation ( $T_A = +70^{\circ}\text{C}$ )   |   |
| 20-Pin Thin QFN, single-layer board (5mm x 5mm)<br>(derate 21.3mW/ $^{\circ}\text{C}$ above $+70^{\circ}\text{C}$ )..... | 1702.1mW  |
| 20-Pin Thin QFN, multilayer board (5mm x 5mm)<br>(derate 34.5mW/ $^{\circ}\text{C}$ above $+70^{\circ}\text{C}$ ).....   | 2758.6mW  |
| Maximum Junction Temperature .....   | $+150^{\circ}\text{C}$                          |
| Storage Temperature Range .....  | $-60^{\circ}\text{C}$ to $+150^{\circ}\text{C}$ |
| Lead Temperature (soldering, 10s) .....  | $+300^{\circ}\text{C}$                          |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## Electrical Characteristics

( $V_{IN} = 36V$ ,  $V_{REG} = V_{DVREG}$ ,  $V_{PGND} = V_{GND} = V_{EP} = 0V$ ,  $V_{SYNC} = 0V$ ,  $C_{REFOUT} = 0.1\mu F$ ,  $T_A = T_J = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ,  $FSEL = REG$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}\text{C}$ .) (Note 1)

| PARAMETER                               | SYMBOL           | CONDITIONS                           | MIN   | TYP   | MAX   | UNITS   |
|---|------------------|--------------------------------------|-------|-------|-------|---------|
| Input Voltage Range                     | $V_{IN}$         |                                      | 7.5   |       | 40.0  | V       |
| UVLO Rising Threshold                   | $UVLO_{RISING}$  |                                      | 6.80  | 7.20  | 7.45  | V       |
| UVLO Falling Threshold                  | $UVLO_{FALLING}$ |                                      | 6.0   | 6.5   | 7.0   | V       |
| UVLO Hysteresis                         | $UVLO_{HYST}$    |                                      |       | 0.7   |       | V       |
| Quiescent Supply Current                |                  | $V_{IN} = 40V$ , $V_{FB} = 1.3V$     |       | 1.6   | 2.8   | mA      |
| Switching Supply Current                |                  | $V_{IN} = 40V$ , $V_{FB} = 0V$       |       | 14.5  |       | mA      |
| Shutdown Current                        | $I_{SHDN}$       | $V_{ON/OFF} = 0.2V$ , $V_{IN} = 40V$ |       | 6     | 15    | $\mu A$ |
| <b>ON/OFF CONTROL</b>                   |                  |                                      |       |       |       |         |
| Input-Voltage Threshold                 | $V_{ON/OFF}$     | $V_{ON/OFF}$ rising                  | 1.200 | 1.225 | 1.270 | V       |
| Input-Voltage Threshold Hysteresis      |                  |                                      |       | 120   |       | mV      |
| Input Bias Current                      |                  | $V_{ON/OFF} = 0V$ to $V_{IN}$        | -250  |       | +250  | nA      |
| Shutdown Threshold Voltage              | $V_{SD}$         |                                      |       |       | 0.2   | V       |
| <b>INTERNAL VOLTAGE REGULATOR (REG)</b> |                  |                                      |       |       |       |         |
| Output Voltage                          |                  | $I_{REG} = 0$ to 20mA                | 7.1   |       | 8.3   | V       |
| <b>OSCILLATOR</b>                       |                  |                                      |       |       |       |         |
| Frequency                               | $f_{SW}$         | $V_{FSEL} = 0V$                      | 450   |       | 550   | kHz     |
|   |                  | $V_{FSEL} = V_{REG}$                 | 270   |       | 330   |         |
| Maximum Duty Cycle                      | $D_{MAX}$        | $V_{FSEL} = 0V$                      | 85    |       |       | %       |
|   |                  | $V_{FSEL} = V_{REG}$                 | 90    |       |       |         |
| SYNC/FSEL High-Level Voltage            |                  |                                      | 2     |       |       | V       |
| SYNC/FSEL Low-Level Voltage             |                  |                                      |       |       | 0.8   | V       |
| SYNC Frequency Range                    | $f_{SYNC}$       | $V_{FSEL} = V_{REG}$                 | 100   |       | 550   | kHz     |

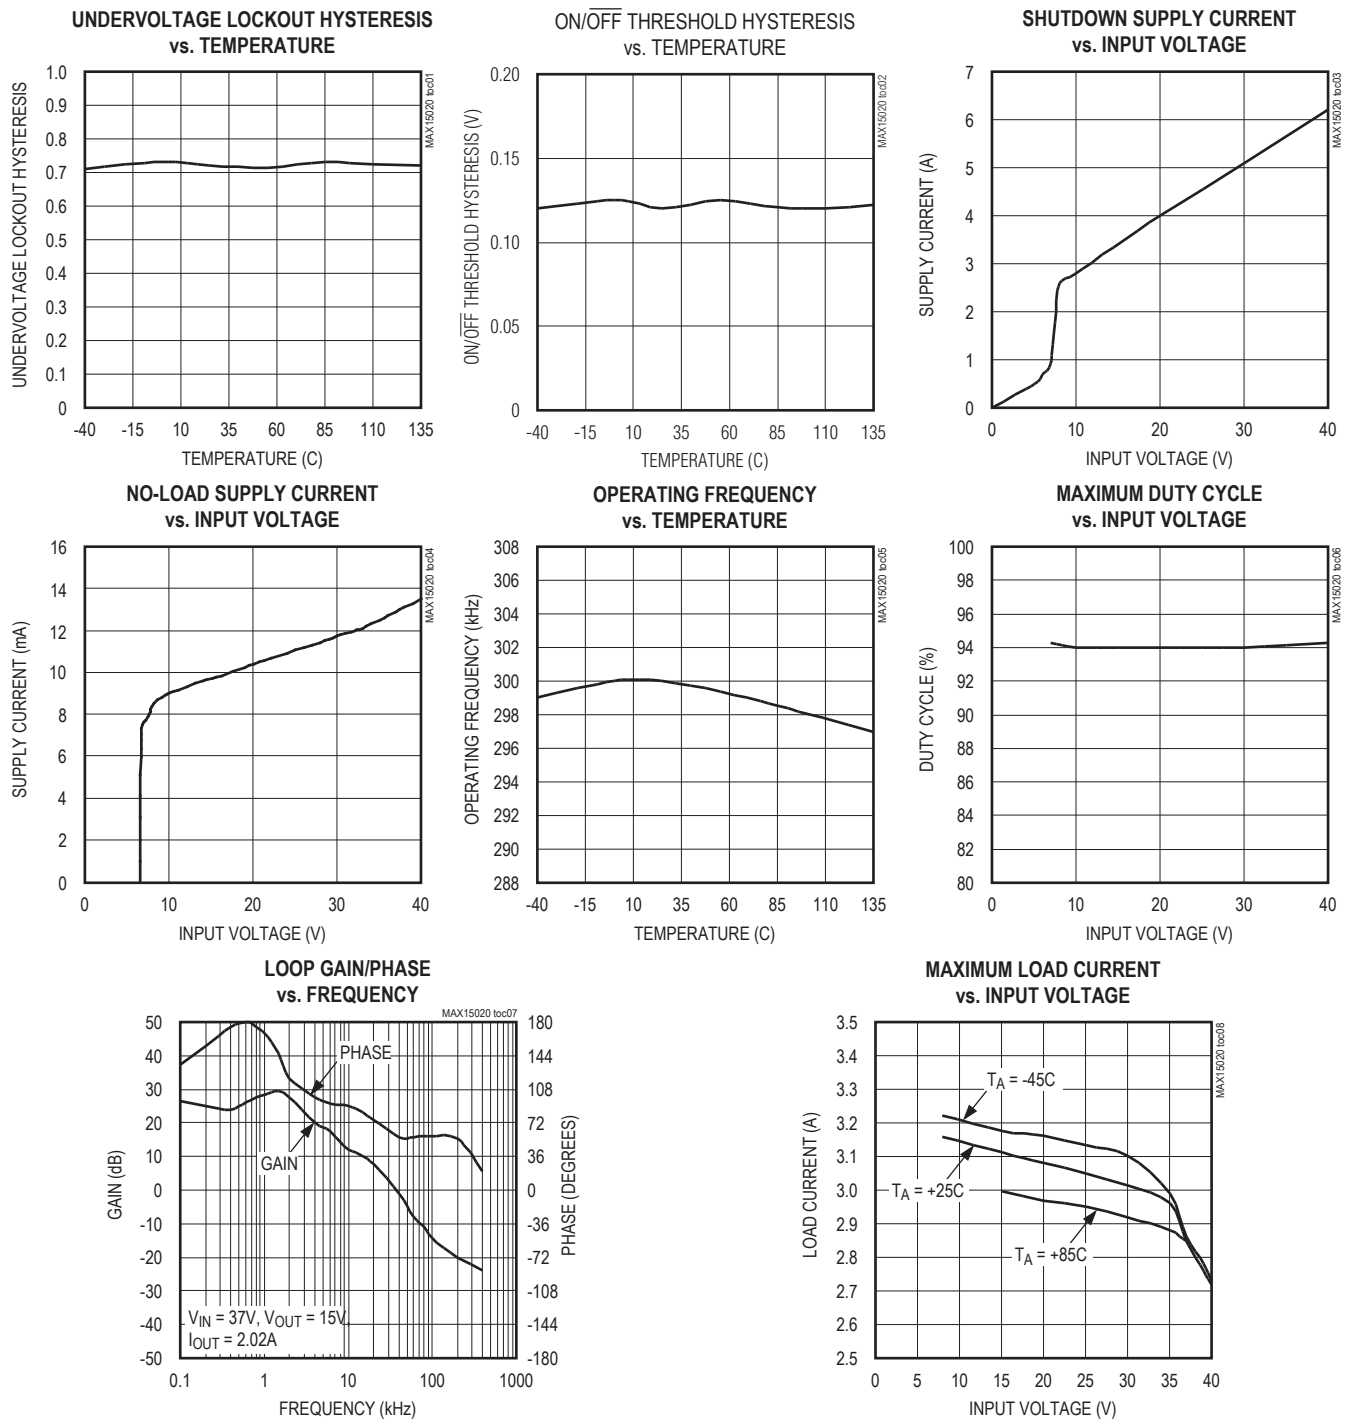
**Electrical Characteristics (continued)**

( $V_{IN} = 36V$ ,  $V_{REG} = V_{DVREG}$ ,  $V_{PGND} = V_{GND} = V_{EP} = 0V$ ,  $V_{SYNC} = 0V$ ,  $C_{REFOUT} = 0.1\mu F$ ,  $T_A = T_J = -40^\circ C$  to  $+125^\circ C$ ,  $FSEL = REG$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .) (Note 1)

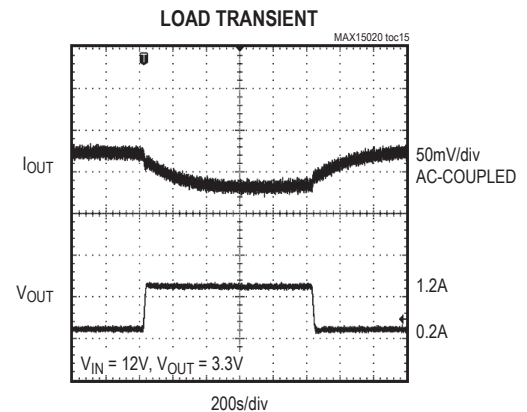
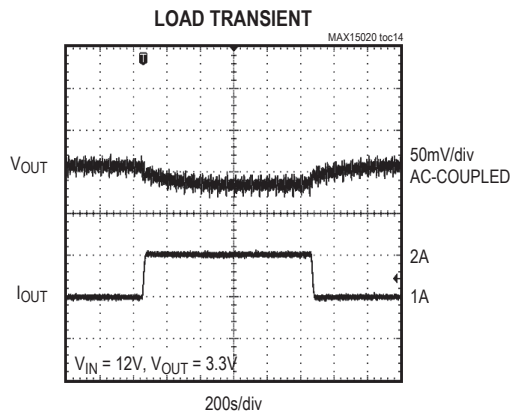
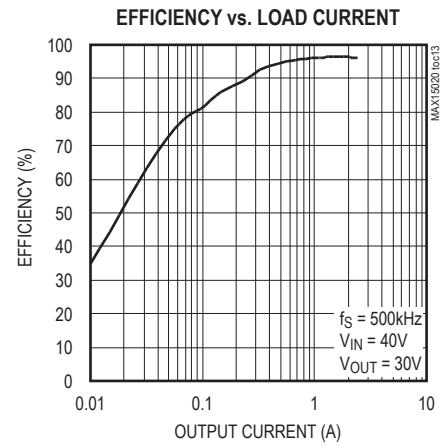
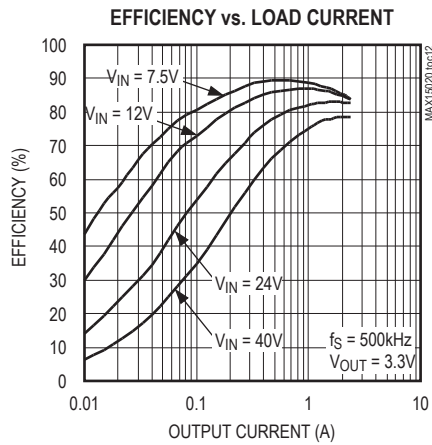
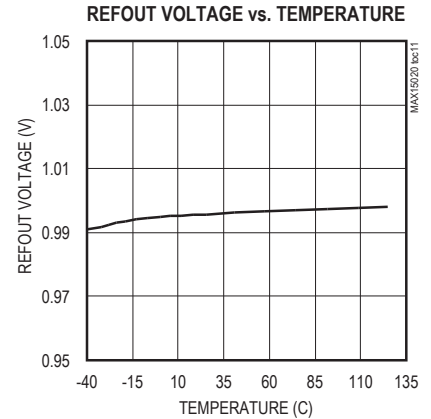
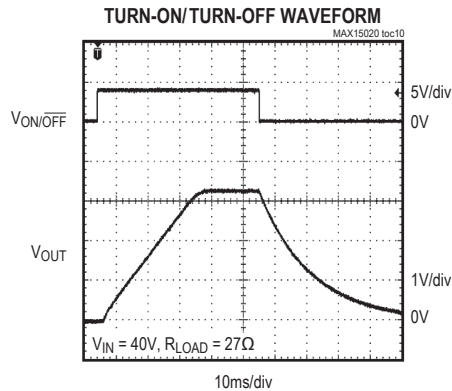
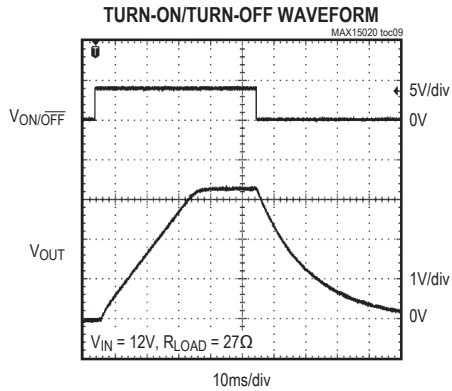
| PARAMETER   | SYMBOL            | CONDITIONS   | MIN                      | TYP                | MAX                      | UNITS         |
|---|-------------------|--|--------------------------|--------------------|--------------------------|---------------|
| SOFT-START/REFIN/REFOUT/FB                                  |                   |  |                          |                    |                          |               |
| Soft-Start Current  | I <sub>SS</sub>   |  | 8                        | 15                 | 26                       | μA            |
| REFOUT Output Voltage                                       |                   |  | 0.97                     | 0.98               | 1.01                     | V             |
| REFIN Input Range   |                   |  | 0                        |                    | 3.6                      | V             |
| FB Accuracy   |                   | REFIN = REFOUT   | 0.97                     | 0.98               | 1.01                     | V             |
|   |                   | F <sub>B</sub> = COMP, V <sub>REFIN</sub> = 0.2V to 3.6V       | V <sub>REFIN</sub> - 5mV | V <sub>REFIN</sub> | V <sub>REFIN</sub> + 5mV | mV            |
| FB Input Current  |                   | V <sub>SS</sub> = 0.2V, V <sub>FB</sub> = 0V                   | -250                     |                    | +250                     | nA            |
| Open-Loop Gain  |                   |  |                          | 80                 |                          | dB            |
| Unity-Gain Bandwidth  |                   |  |                          | 1.8                |                          | MHz           |
| PWM Modulator Gain<br>(V <sub>IN</sub> /V <sub>RAMP</sub> ) |                   | f <sub>SYNC</sub> = 100kHz, V <sub>IN</sub> = 7.5V             |                          | 9.4                |                          | V/V           |
|   |                   | f <sub>SYNC</sub> = 500kHz, V <sub>IN</sub> = 40V              |                          | 8.9                |                          |               |
| CURRENT-LIMIT COMPARATOR                                    |                   |  |                          |                    |                          |               |
| Cycle-by-Cycle Switch Current Limit                         | I <sub>ILIM</sub> |  | 2.5                      | 3.5                | 4.5                      | A             |
| Number of ILIM Events to Hiccup                             |                   |  |                          | 4                  |                          | —             |
| Hiccup Timeout  |                   |  |                          | 512                |                          | Clock periods |
| POWER SWITCH  |                   |  |                          |                    |                          |               |
| Switch On-Resistance  |                   | V <sub>BST</sub> - V <sub>LX</sub> = 6V                        |                          | 0.18               | 0.35                     | Ω             |
| BST Leakage Current   |                   | V <sub>BST</sub> = V <sub>LX</sub> = V <sub>IN</sub> = 40V     |                          |                    | 10                       | μA            |
| Switch Leakage Current                                      |                   | V <sub>IN</sub> = 40V, V <sub>LX</sub> = V <sub>BST</sub> = 0V |                          |                    | 10                       | μA            |
| Switch Gate Charge  |                   | V <sub>BST</sub> - V <sub>LX</sub> = 6V                        |                          | 10                 |                          | nC            |
| THERMAL SHUTDOWN  |                   |  |                          |                    |                          |               |
| Thermal Shutdown Temperature                                | T <sub>SHDN</sub> |  |                          | +160               |                          | °C            |
| Thermal Shutdown Hysteresis                                 |                   |  |                          | 20                 |                          | °C            |

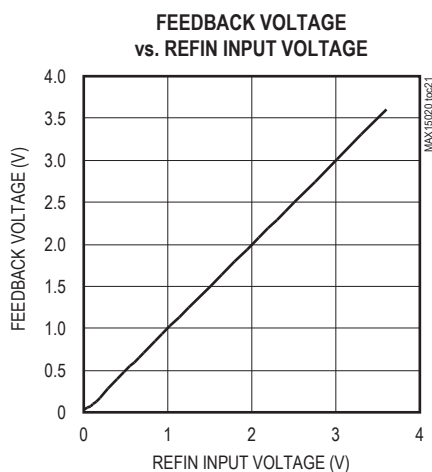
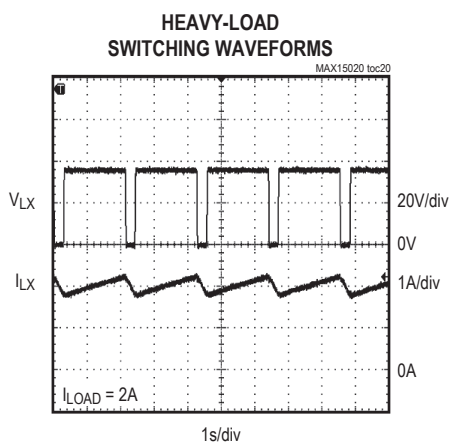
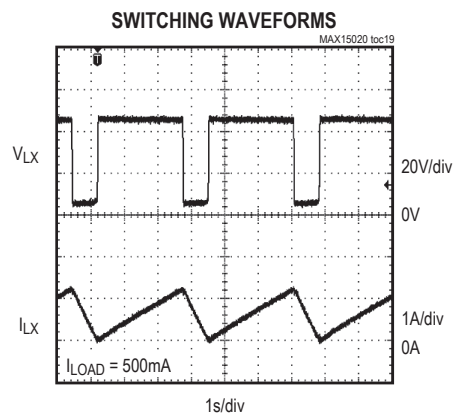
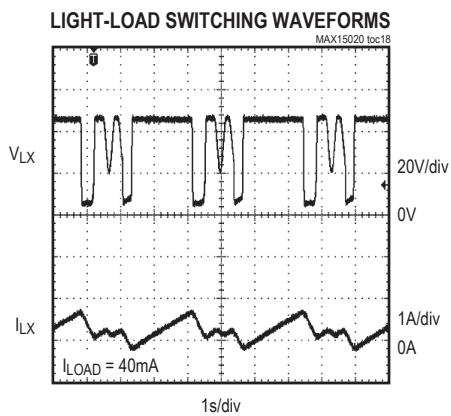
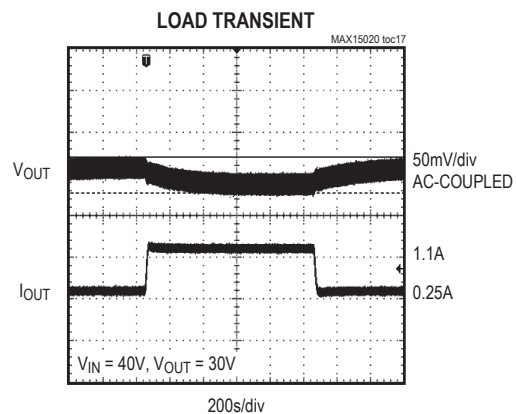
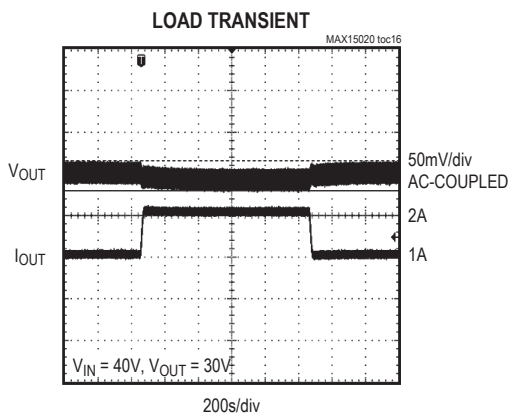
**Note 1:** Limits are 100% production tested at  $T_A = T_J = +25^\circ C$ . Limits at  $-40^\circ C$  and  $+125^\circ C$  are guaranteed by design.

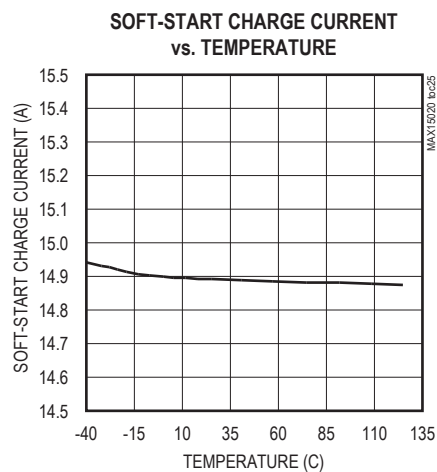
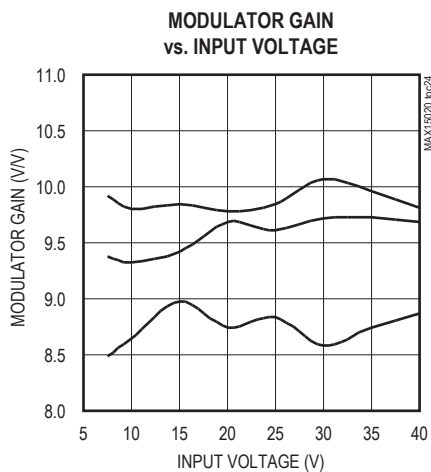
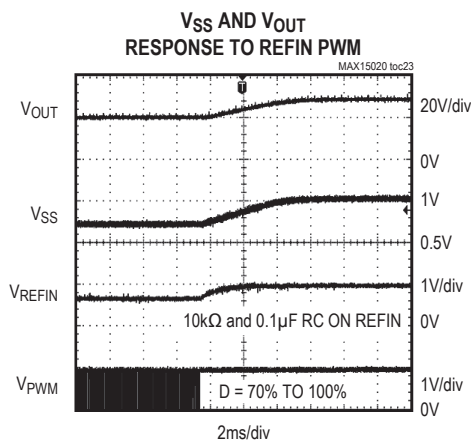
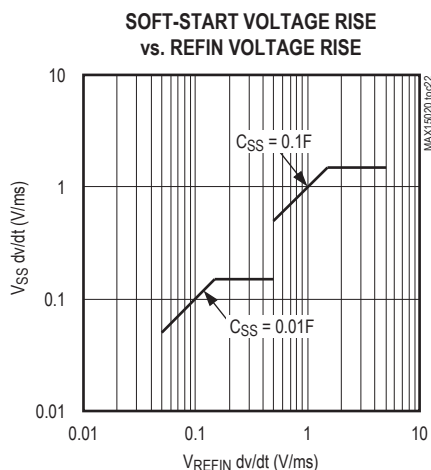
## Typical Operating Characteristics

(V<sub>IN</sub> = 36V, Circuit of Figure 2, T<sub>A</sub> = +25°C, unless otherwise noted.)

## Typical Operating Characteristics (continued)

(V<sub>IN</sub> = 36V, Circuit of Figure 2, T<sub>A</sub> = +25°C, unless otherwise noted.)

**Typical Operating Characteristics (continued)**(V<sub>IN</sub> = 36V, Circuit of Figure 2, T<sub>A</sub> = +25°C, unless otherwise noted.)

**Typical Operating Characteristics (continued)**(V<sub>IN</sub> = 36V, Circuit of Figure 2, T<sub>A</sub> = +25°C, unless otherwise noted.)

## Pin Description

| PIN        | NAME   | FUNCTION   |
|------------|--------|--|
| 1          | COMP   | Voltage-Error-Amplifier Output. Connect COMP to the necessary compensation feedback network.   |
| 2          | FB     | Feedback Regulation Point. Connect to the center tap of an external resistor-divider connected between the output and GND to set the output voltage. The FB voltage regulates to the voltage applied to REFIN.   |
| 3          | ON/OFF | ON/OFF Control. The ON/OFF rising threshold is set to approximately 1.225V. Connect to the center tap of a resistive divider connected between IN and GND to set the turn-on (rising) threshold. Connect ON/OFF to GND to shut down the IC. Connect ON/OFF to IN for always-on operation given that $V_{IN}$ has risen above the UVLO threshold. ON/OFF can be used for power-supply sequencing. |
| 4          | REFOUT | 0.98V Reference Voltage Output. Bypass REFOUT to GND with a 0.1 $\mu$ F ceramic capacitor. REFOUT is to be used only with REFIN. It is not to be used to power any other external circuitry.   |
| 5          | SS     | Soft-Start. Connect a 0.01 $\mu$ F or greater ceramic capacitor from SS to GND. See the Soft-Start (SS) section.   |
| 6          | REFIN  | External Reference Input. Connect to an external reference. $V_{FB}$ regulates to the voltage applied to REFIN. Connect REFIN to REFOUT to use the internal 1V reference. See the <i>Reference Input and Output (REFIN, REFOUT)</i> section.   |
| 7          | FSEL   | Internal Switching Frequency Selection Input. Connect FSEL to REG to select $f_{SW} = 300\text{kHz}$ . Connect FSEL to GND to select $f_{SW} = 500\text{kHz}$ . When an external clock is connected to SYNC connect FSEL to REG.   |
| 8          | SYNC   | Oscillator Synchronization Input. SYNC can be driven by an external 100kHz to 500kHz clock to synchronize the MAX15020's switching frequency. Connect SYNC to GND to disable the synchronization function. When using SYNC, connect FSEL to REG.   |
| 9          | DVREG  | Power Supply for Internal Digital Circuitry. Connect a 10 $\Omega$ resistor from REG to DVREG. Connect DVREG to the anode of the boost diode, D2 in Figure 2. Bypass DVREG to GND with at least a 1 $\mu$ F ceramic capacitor.   |
| 10         | PGND   | Power-Ground Connection. Connect the input filter capacitor's negative terminal, the anode of the freewheeling diode, and the output filter capacitor's return to PGND. Connect externally to GND at a single point near the input bypass capacitor's return terminal.   |
| 11         | N.C.   | No Connection. Leave unconnected or connect to GND   |
| 12         | BST    | High-Side Gate Driver Supply. Connect BST to the cathode of the boost diode and to the positive terminal of the boost capacitor.   |
| 13, 14, 15 | LX     | Source Connection of Internal High-Side Switch. Connect the inductor and rectifier diode's cathode to LX.  |
| 16, 17, 18 | IN     | Supply Input Connection. Connect to an external voltage source from 7.5V to 40V.   |
| 19         | REG    | 8V Internal Regulator Output. Bypass to GND with at least a 1 $\mu$ F ceramic capacitor. Do not use REG to power external circuitry.   |
| 20         | GND    | Ground Connection. Solder the exposed pad to a large GND plane. Connect GND and PGND together at one point near the input bypass capacitor return terminal.  |
| —          | EP     | Exposed Pad. Connect EP to GND. Connecting EP does not remove the requirement for proper ground connections to the appropriate pins. See the <i>PCB Layout and Routing</i> section.  |



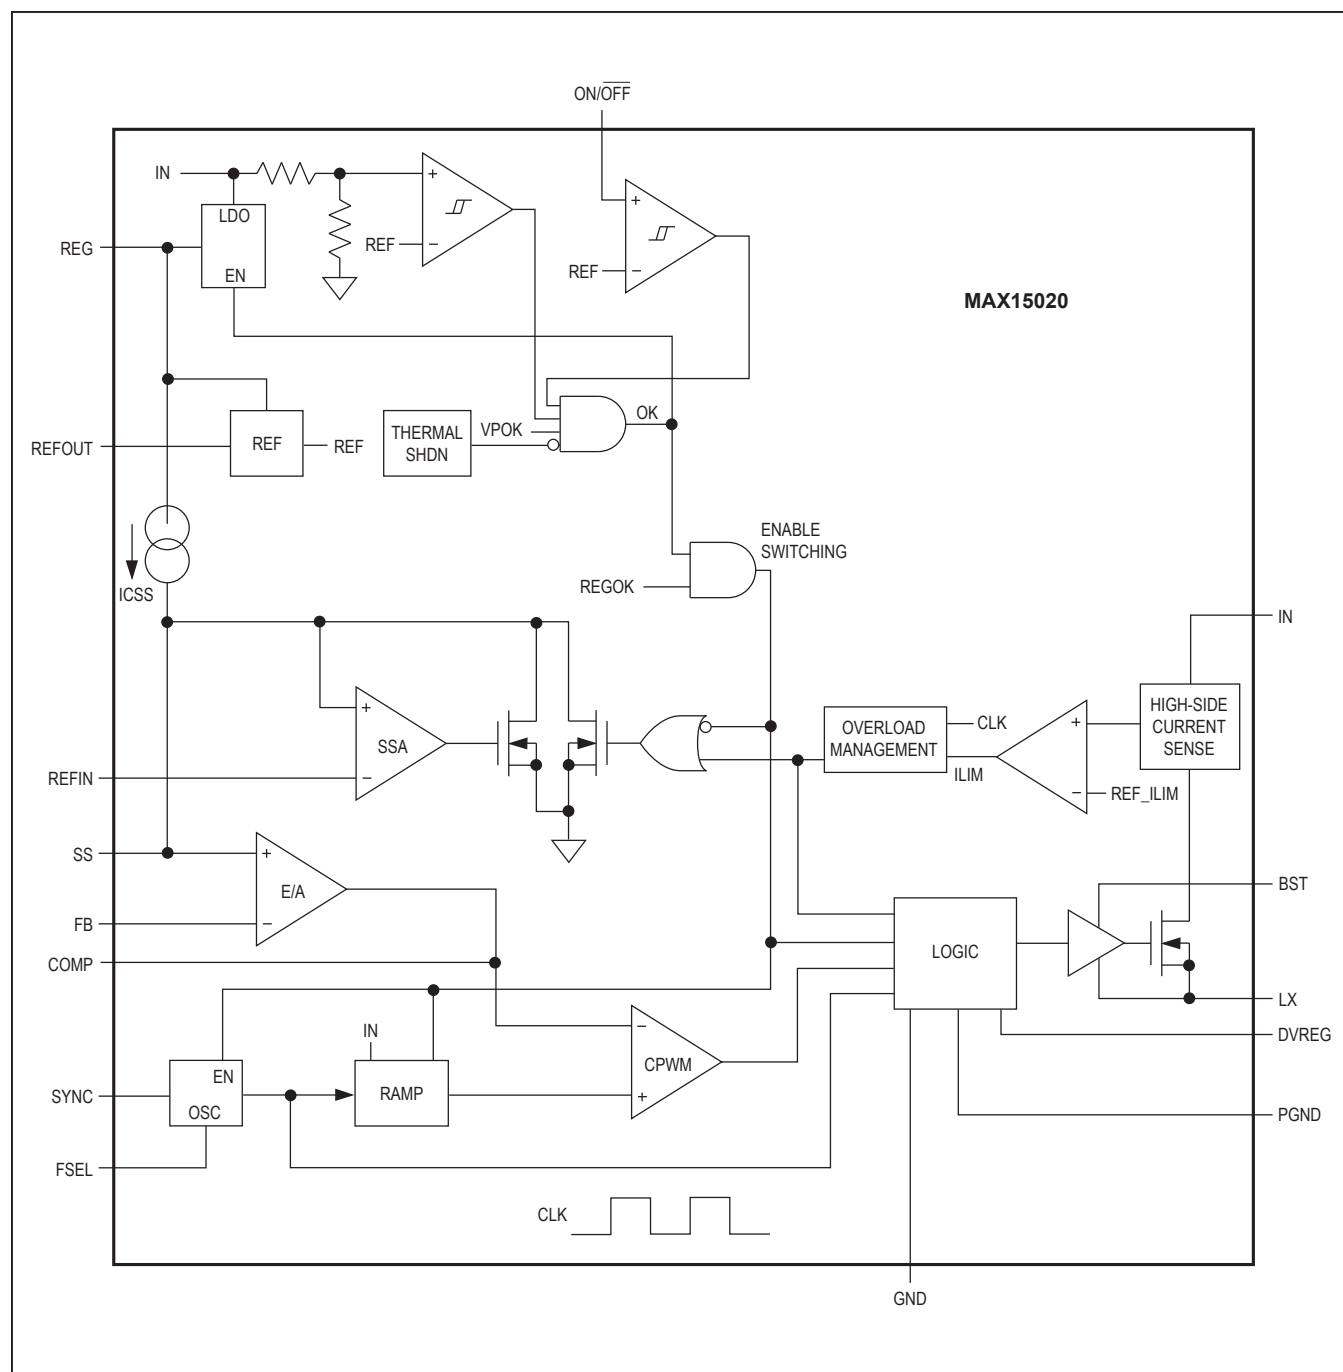


Figure 1. Functional Diagram

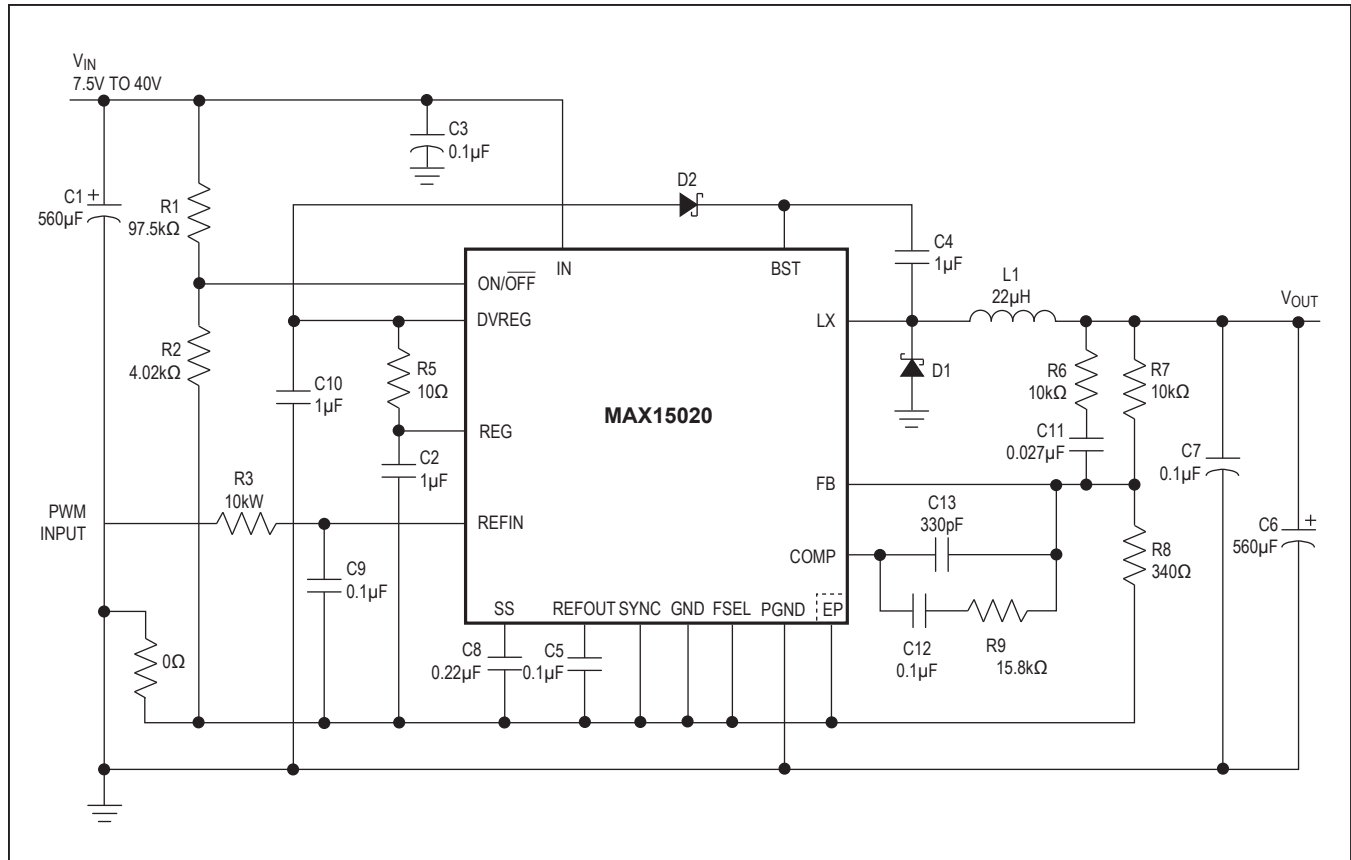


Figure 2. Typical Application Circuit

## Detailed Description

The MAX15020 voltage-mode step-down converter contains an internal 0.2Ω power MOSFET switch. The MAX15020 input voltage range is 7.5V to 40V. The internal low  $R_{DS(ON)}$  switch allows for up to 2A of output current. The external compensation, voltage feedforward, and automatically adjustable maximum ramp amplitude simplify the loop compensation design allowing for a variety of L and C filter components. In shutdown, the supply current is typically 6µA. The output voltage is dynamically adjustable from 0.5V to 36V. Additional features include an externally programmable UVLO through the ON/OFF pin, a programmable softstart, cycle-by-cycle current limit, hiccup-mode output short-circuit protection, and thermal shutdown.

### Internal Linear Regulator (REG)

REG is the output terminal of the 8V LDO powered from IN and provides power to the IC. Connect REG externally to DVREG to provide power for the internal digital circuitry. Place a 1µF ceramic bypass capacitor, C2, next to the

IC from REG to GND. During normal operation, REG is intended for powering up only the internal circuitry and should not be used to supply power to the external loads.

### UVLO/ON/OFF Threshold

The MAX15020 provides a fixed 7V UVLO function which monitors the input voltage ( $V_{IN}$ ). The device is held off until  $V_{IN}$  rises above the UVLO threshold.

ON/OFF provides additional turn-on/turn-off control. Program the ON/OFF threshold by connecting a resistive divider from IN to ON/OFF to GND. The device turns on when  $V_{ON/OFF}$  rises above the ON/OFF threshold (1.225V), given that  $V_{IN}$  has risen above the UVLO threshold.

Driving ON/OFF to ground places the IC in shutdown. When in shutdown the internal power MOSFET turns off, all internal circuitry shuts down, and the quiescent supply current reduces to 6µA (typ.). Connect an RC network from ON/OFF to GND to set a turn-on delay that can be used to sequence the output voltages of multiple devices.

**Soft-Start (SS)**

At startup, after  $V_{IN}$  is applied and the UVLO threshold is reached, a  $15\mu\text{A}$  (typ) current is sourced into the capacitor ( $C_{SS}$ ) connected from SS to GND forcing the  $V_{SS}$  voltage to ramp up slowly. If  $V_{REFIN}$  is set to a DC voltage or has risen faster than the  $C_{SS}$  charge rate, then  $V_{SS}$  will stop rising once it reaches  $V_{REFIN}$ . If  $V_{REFIN}$  rises at a slower rate,  $V_{SS}$  will follow the  $V_{REFIN}$  voltage rise rate.  $V_{OUT}$  rises at the same rate as  $V_{SS}$  since  $V_{FB}$  follows  $V_{SS}$ .

Set the soft-start time ( $t_{SS}$ ) using following equation:

$$t_{SS} = \frac{V_{REFIN} \times C_{SS}}{15\mu\text{A}}$$

where  $t_{SS}$  is in seconds and  $C_{SS}$  is in Farads.

**Reference Input and Output (REFIN, REFOUT)**

The MAX15020 features a reference input for the internal error amplifier. The IC regulates FB to the SS voltage which is driven by the DC voltage applied to REFIN. Connect REFIN to REFOUT to use the internal 0.98V reference. Connect REFIN to a variable DC voltage source to dynamically control the output voltage. Alternatively, REFIN can also be driven by a duty-cycle control PWM source through a lowpass RC filter (Figure 2).

**Internal Digital Power Supply (DVREG)**

DVREG is the supply input for the internal digital power supply. The power for DVREG is derived from the output of the internal regulator (REG). Connect a  $10\Omega$  resistor from REG to DVREG. Bypass DVREG to GND with at least a  $1\mu\text{F}$  ceramic capacitor.

**Error Amplifier**

The output of the internal error amplifier (COMP) is available for frequency compensation (see the *Compensation Design* section). The inverting input is FB, the noninverting input is SS, and the output is COMP. The error amplifier has an 80dB open-loop gain and a 1.8MHz GBW product. When an external clock is used, connect FSEL to REG.

**Oscillator/Synchronization Input (SYNC)**

With SYNC connected to GND, the IC uses the internal oscillator and switches at a fixed frequency of 300kHz or 500kHz based upon the selection of FSEL. For external

synchronization, drive SYNC with an external clock from 100kHz to 500kHz and connect FSEL to REG. When driven with an external clock, the device synchronizes to the rising edge of SYNC.

**PWM Comparator/Voltage Feed-Forward**

An internal ramp generator is compared against the output of the error amplifier to generate the PWM signal. The maximum amplitude of the ramp ( $V_{RAMP}$ ) automatically adjusts to compensate for input voltage and oscillator frequency changes. This causes the  $V_{IN}/V_{RAMP}$  to be a constant 9V/V across the input voltage range of 7.5V to 40V and the SYNC frequency range of 100kHz to 500kHz. This simplifies loop compensation design by allowing large input voltage ranges and large frequency range selection.

**Output Short-Circuit Protection (Hiccup Mode)**

The MAX15020 protects against an output short circuit by utilizing hiccup-mode protection. In hiccup mode, a series of sequential cycle-by-cycle current-limit events cause the part to shut down and restart with a soft-start sequence. This allows the device to operate with a continuous output short circuit.

During normal operation, the switch current is measured cycle-by-cycle. When the current limit is exceeded, the internal power MOSFET turns off until the next on-cycle and the hiccup counter increments. If the counter counts four consecutive overcurrent limit events, the device discharges the soft-start capacitor and shuts down for 512 clock periods before restarting with a softstart sequence. Each time the power MOSFET turns on and the device does not exceed the current limit, the counter is reset.

**Thermal-Overload Protection**

The MAX15020 features an integrated thermal-overload protection. Thermal-overload protection limits the total power dissipation in the device and protects it in the event of an extended thermal fault condition. When the die temperature exceeds  $+160^{\circ}\text{C}$ , an internal thermal sensor shuts down the part, turning off the power MOSFET and allowing the IC to cool. After the temperature falls by  $20^{\circ}\text{C}$ , the part restarts beginning with the soft-start sequence.

## Applications Information

### Setting the ON/OFF Threshold

When the voltage at ON/OFF rises above 1.225V, the MAX15020 turns on. Connect a resistive divider from IN to ON/OFF to GND to set the turn-on voltage (see Figure 2). First select the ON/OFF to the GND resistor (R2), then calculate the resistor from IN to ON/OFF (R1) using the following equation:

$$R1 = R2 \times \left[ \frac{V_{IN}}{V_{ON/OFF}} - 1 \right]$$

where  $V_{IN}$  is the input voltage at which the converter turns on,  $V_{ON/OFF} = 1.225V$  and R2 is chosen to be less than 600kΩ.

If ON/OFF is connected to IN directly, the UVLO feature monitors the supply voltage at IN and allows operation to start when  $V_{IN}$  rises above 7.2V.

### Setting the Output Voltage

Connect a resistor-divider from OUT to FB to GND to set the output voltage (see Figure 2). First calculate the resistor (R7) from OUT to FB using the guidelines in the *Compensation Design* section. Once R7 is known, calculate R8 using the following equation:

$$R8 = \frac{R7}{\left[ \frac{V_{OUT}}{V_{FB}} - 1 \right]}$$

where  $V_{FB} = \text{REFIN}$  and  $\text{REFIN} = 0$  to 3.6V.

### Setting the Output-Voltage Slew Rate

The output-voltage rising slew rate tracks the  $V_{SS}$  slew rate, given that the control loop is relatively fast compared with the  $V_{SS}$  slew rate. The maximum  $V_{SS}$  upswing slew rate is controlled by the soft-start current charging the capacitor connected from SS to GND according to the formula below:

$$\frac{dV_{OUT}}{dt} = \frac{R7 + R8}{R8} \times \frac{dV_{SS}}{dt} = \frac{R7 + R8}{R8} \frac{I_{SS}}{C_{SS}}$$

when driving  $V_{SS}$  with a slow-rising voltage source at  $\text{REFIN}$ ,  $V_{OUT}$  will slowly rise according to the  $V_{\text{REFIN}}$  slew rate.

The output-voltage falling slew rate is limited to the discharge rate of  $C_{SS}$  assuming there is enough load current to discharge the output capacitor at this rate. The  $C_{SS}$  discharge current is 15μA. If there is no load, then the output voltage falls at a slower rate based upon leakage and additional current drain from  $C_{OUT}$ .

### Inductor Selection

Three key inductor parameters must be specified for operation with the MAX15020: inductance value (L), peak inductor current ( $I_{PEAK}$ ), and inductor saturation current ( $I_{SAT}$ ). The minimum required inductance is a function of operating frequency, input-to-output voltage differential, and the peak-to-peak inductor current ( $\Delta I_L$ ). Higher  $\Delta I_L$  allows for a lower inductor value while a lower  $\Delta I_L$  requires a higher inductor value. A lower inductor value minimizes size and cost and improves large-signal and transient response, but reduces efficiency due to higher peak currents and higher peak-to-peak output voltage ripple for the same output capacitor. Higher inductance increases efficiency by reducing the ripple current. Resistive losses due to extra wire turns can exceed the benefit gained from lower ripple current levels especially when the inductance is increased without also allowing for larger inductor dimensions. A good compromise is to choose  $\Delta I_{P-P}$  equal to 40% of the full load current.

Calculate the inductor using the following equation:

$$L = \frac{(V_{IN} - V_{OUT}) \times V_{OUT}}{V_{IN} \times f_{SW} \times \Delta I_L}$$

$V_{IN}$  and  $V_{OUT}$  are typical values so that efficiency is optimum for typical conditions. The switching frequency ( $f_{SW}$ ) is fixed at 300kHz or 500kHz and can vary between 100kHz and 500kHz when synchronized to an external clock (see the *Oscillator/Synchronization Input (SYNC)* section). The peak-to-peak inductor current, which reflects the peak-to-peak output ripple, is worst at the maximum input voltage. See the *Output Capacitor Selection* section to verify that the worst-case output ripple is acceptable. The inductor saturating current ( $I_{SAT}$ ) is also important to avoid runaway current during continuous output short circuit. Select an inductor with an  $I_{SAT}$  specification higher than the maximum peak current limit of 4.5A.

### Input Capacitor Selection

The discontinuous input current of the buck converter causes large input ripple currents and therefore the input capacitor must be carefully chosen to keep the input-voltage ripple within design requirements. The input-voltage ripple is comprised of  $\Delta V_Q$  (caused by the capacitor discharge) and  $\Delta V_{ESR}$  (caused by the ESR (equivalent series resistance) of the input capacitor). The total voltage ripple is the sum of  $\Delta V_Q$  and  $\Delta V_{ESR}$ . Calculate the input capacitance and ESR required for a specified ripple using the following equations:

$$ESR = \frac{\Delta V_{ESR}}{\left( I_{OUT\_MAX} + \frac{\Delta I_L}{2} \right)}$$

$$C_{IN} = \frac{I_{OUT\_MAX} \times D(1-D)}{\Delta V_Q \times f_{SW}}$$

where:

$$\Delta I_L = \frac{(V_{IN} - V_{OUT}) \times V_{OUT}}{V_{IN} \times f_{SW} \times L}$$

$$D = \frac{V_{OUT}}{V_{IN}}$$

$I_{OUT\_MAX}$  is the maximum output current,  $D$  is the duty cycle, and  $f_{SW}$  is the switching frequency.

The MAX15020 includes internal and external UVLO hysteresis and soft-start to avoid possible unintentional chattering during turn-on. However, use a bulk capacitor if the input source impedance is high. Use enough input capacitance at lower input voltages to avoid possible undershoot below the UVLO threshold during transient loading.

### Output Capacitor Selection

The allowable output-voltage ripple and the maximum deviation of the output voltage during load steps determine the output capacitance and its ESR. The output ripple is mainly composed of  $\Delta V_Q$  (caused by the capacitor discharge) and  $\Delta V_{ESR}$  (caused by the voltage drop across the ESR of the output capacitor). The equations for calculating the peak-to-peak output voltage ripple are:

$$\Delta V_Q = \frac{\Delta I_L}{16 \times C_{OUT} \times f_{SW}}$$

$$\Delta V_{ESR} = ESR \times \Delta I_L$$

Normally, a good approximation of the output-voltage ripple is  $\Delta V_{RIPPLE} \approx \Delta V_{ESR} + \Delta V_Q$ . If using ceramic capacitors, assume the contribution to the output-voltage ripple from ESR and the capacitor discharge to be equal to 20% and 80%, respectively.  $\Delta I_L$  is the peak-to-peak inductor current (see the *Input Capacitor Selection* section) and  $f_{SW}$  is the converter's switching frequency.

The allowable deviation of the output voltage during fast load transients also determines the output capacitance, its ESR, and its equivalent series inductance (ESL). The output capacitor supplies the load current during a load step until the controller responds with a greater duty cycle. The response time ( $t_{RESPONSE}$ ) depends on the closed-loop bandwidth of the converter (see the *Compensation Design* section). The resistive drop across the output capacitor's ESR, the drop across the capacitor's ESL ( $\Delta V_{ESL}$ ), and the capacitor discharge cause a voltage droop during the load step. Use a combination of low-ESR tantalum/aluminum electrolytic and ceramic capacitors for better transient load and voltage ripple performance. Surface-mount capacitors and capacitors in parallel help reduce the ESL. Keep the maximum output-voltage deviations below the tolerable limits of the electronics powered. Use the following equations to calculate the required ESR, ESL, and capacitance value during a load step:

$$ESR = \frac{V_{ESR}}{I_{STEP}}$$

$$C_{OUT} = \frac{I_{STEP} \times t_{RESPONSE}}{\Delta V_Q}$$

$$ESL = \frac{\Delta V_{ESL} \times t_{STEP}}{I_{STEP}}$$

where  $I_{STEP}$  is the load step,  $t_{STEP}$  is the rise time of the load step, and  $t_{RESPONSE}$  is the response time of the controller.

### Compensation Design

The MAX15020 uses a voltage-mode control scheme that regulates the output voltage by comparing the error-amplifier output (COMP) with an internal ramp to produce the required duty cycle. The output lowpass LC filter creates a double pole at the resonant frequency, which has a gain drop of -40dB/decade. The error amplifier must compensate for this gain drop and phase shift to achieve a stable closed-loop system.

The basic regulator loop consists of a power modulator, an output feedback divider, and a voltage error amplifier. The power modulator has a DC gain set by  $V_{IN}/V_{RAMP}$ , with a double pole and a single zero set by the output inductance (L), the output capacitance ( $C_{OUT}$ ) (C6 in the Figure 2) and its ESR. The power modulator incorporates a voltage feed-forward feature, which automatically adjusts for variations in the input voltage resulting in a DC gain of 9. The following equations define the power modulator:

$$G_{MOD(DC)} = \frac{V_{IN}}{V_{RAMP}} = 9$$

$$f_{LC} = \frac{1}{2\pi\sqrt{L \times C}}$$

$$f_{ESR} = \frac{1}{2\pi \times C_{OUT} \times ESR}$$

The switching frequency is internally set at 300kHz or 500kHz, or can vary from 100kHz to 500kHz when driven with an external SYNC signal. The crossover frequency ( $f_C$ ), which is the frequency when the closed-loop gain is equal to unity, should be set as  $f_{SW}/2\pi$  or lower.

The error amplifier must provide a gain and phase bump to compensate for the rapid gain and phase loss from the LC double pole. This is accomplished by utilizing a Type 3 compensator that introduces two zeros and three poles into the control loop. The error amplifier has a low-frequency pole ( $f_{P1}$ ) near the origin.

In reference to Figures 3 and 4, the two zeros are at:

$$f_{Z1} = \frac{1}{2\pi \times R9 \times C12} \text{ and } f_{Z2} = \frac{1}{2\pi \times (R6 + R7) \times C11}$$

And the higher frequency poles are at:

$$f_{P2} = \frac{1}{2\pi \times R6 \times C11} \text{ and } f_{P3} = \frac{1}{2\pi \times R9 \times \left( \frac{C12 \times C13}{C12 + C13} \right)}$$

### Compensation when $f_C < f_{ESR}$

Figure 3 shows the error-amplifier feedback as well as its gain response for circuits that use low-ESR output capacitors (ceramic). In this case  $f_{ZESR}$  occurs after  $f_C$ .

$f_{Z1}$  is set to  $0.8 \times f_{LC(MOD)}$  and  $f_{Z2}$  is set to  $f_{LC}$  to compensate for the gain and phase loss due to the double pole. Choose the inductor (L) and output capacitor ( $C_{OUT}$ ) as described in the *Inductor Selection and Output Capacitor Selection* sections.

Choose a value for the feedback resistor R6 in Figure 3 (values between 1kΩ and 10kΩ are adequate). C12 is then calculated as:

$$C12 = \frac{1}{2\pi \times 0.8 \times f_{LC} \times R9}$$

$f_C$  occurs between  $f_{Z2}$  and  $f_{P2}$ . The error-amplifier gain ( $G_{EA}$ ) at  $f_C$  is due primarily to C11 and R9.

Therefore,  $G_{EA}(f_C) = 2\pi \times f_C \times C11 \times R9$  and the modulator gain at  $f_C$  is:

$$G_{MOD}(f_C) = \frac{G_{MOD(DC)}}{(2\pi)^2 \times L \times C_{OUT} \times f_C^2}$$

Since  $G_{EA}(f_C) \times G_{MOD}(f_C) = 1$ , C11 is calculated by:

$$C11 = \frac{f_C \times L \times C_{OUT} \times 2\pi}{R9 \times G_{MOD(DC)}}$$

$f_{P2}$  is set at 1/2 the switching frequency ( $f_{SW}$ ). R6 is then calculated by:

$$R6 = \frac{1}{2\pi \times C11 \times 0.5 \times f_{SW}}$$

Since  $R7 \gg R6$ ,  $R7 + R6$  can be approximated as R7. R7 is then calculated as:

$$R7 = \frac{1}{2\pi \times f_{LC} \times C11}$$

$f_{P3}$  is set at  $5 \times f_C$ . Therefore, C13 is calculated as:

$$C13 = \frac{C12}{2\pi \times C12 \times R9 \times f_{P3} - 1}$$



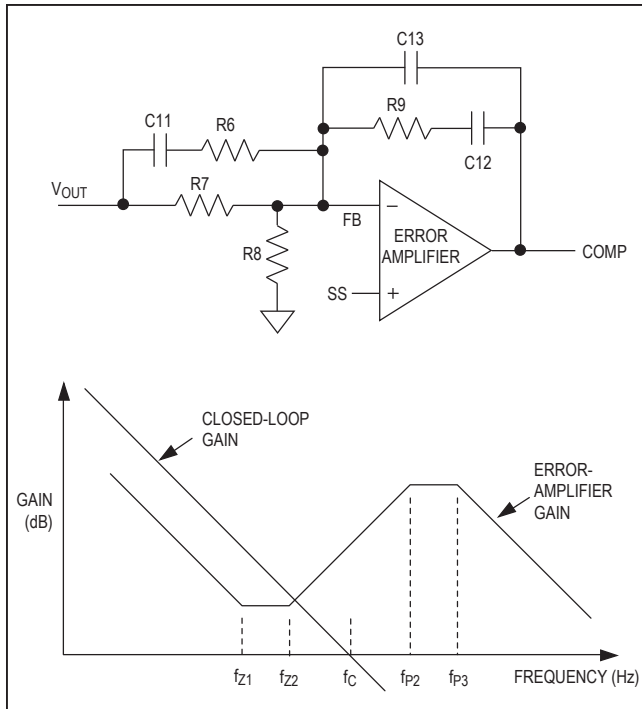


Figure 3. Error-Amplifier Compensation Circuit (Closed-Loop and Error-Amplifier Gain Plot) for Ceramic Capacitors

### Compensation when $f_C > f_{ZESR}$

For larger ESR capacitors such as tantalum and aluminum electrolytics,  $f_{ZESR}$  can occur before  $f_C$ . If  $f_{ZESR} < f_C$ , then  $f_C$  occurs between  $f_{p2}$  and  $f_{p3}$ .  $f_{z1}$  and  $f_{z2}$  remain the same as before, however,  $f_{p2}$  is now set equal to  $f_{ZESR}$ . The output capacitor's ESR zero frequency is higher than  $f_{LC}$  but lower than the closed-loop crossover frequency. The equations that define the error amplifier's poles and zeros ( $f_{z1}$ ,  $f_{z2}$ ,  $f_{p1}$ ,  $f_{p2}$ , and  $f_{p3}$ ) are the same as before. However,  $f_{p2}$  is now lower than the closed-loop crossover frequency. Figure 4 shows the error-amplifier feedback as well as its gain response for circuits that use higher-ESR output capacitors (tantalum or aluminum electrolytic).

Pick a value for the feedback resistor R9 in Figure 4 (values between 1kΩ and 10kΩ are adequate). C12 is then calculated as:

$$C12 = \frac{1}{2\pi \times 0.8 \times f_{LC} \times R9}$$

The error-amplifier gain between  $f_{p2}$  and  $f_{p3}$  is approximately equal to  $R9 / R6$  (given that  $R6 \ll R7$ ). R6 can then be calculated as:

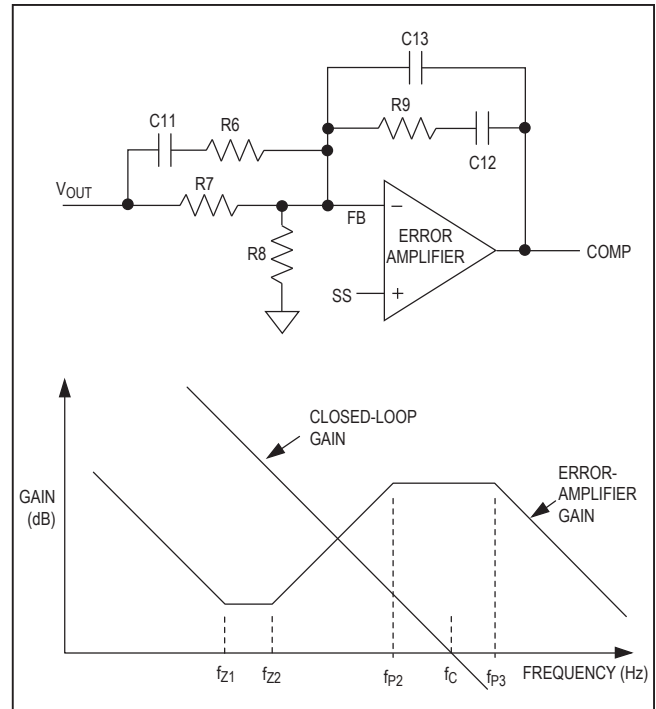


Figure 4. Error-Amplifier Compensation Circuit (Closed-Loop and Error-Amplifier Gain Plot) for Higher ESR Output Capacitors

$$R6 = \frac{R9 \times 10 \times f_{LC}^2}{f_C^2}$$

C11 is then calculated as:

$$C11 = \frac{C_{OUT} \times ESR}{R6}$$

Since  $R7 \gg R6$ ,  $R7 + R6$  can be approximated as  $R7$ . R7 is then calculated as:

$$R7 = \frac{1}{2\pi \times f_{LC} \times C11}$$

$f_{p3}$  is set at  $5 \times f_C$ . Therefore, C13 is calculated as:

$$C13 = \frac{C12}{2\pi \times C12 \times R9 \times f_{p3} - 1}$$

Based on the calculations above, the following compensation values are recommended when the switching frequency of DC-DC converter ranges from 100kHz to 500kHz. (**Note: The compensation parameters in Figure 2 are strongly recommended if the switching frequency is from 300kHz to 500kHz.**)

**Power Dissipation**

The MAX15020 is available in a thermally enhanced package and can dissipate up to 2.7W at  $T_A = +70^\circ\text{C}$ . When the die temperature reaches  $+160^\circ\text{C}$ , the part shuts down and is allowed to cool. After the parts cool by  $20^\circ\text{C}$ , the device restarts with a soft-start.

The power dissipated in the device is the sum of the power dissipated from supply current ( $P_Q$ ), transition losses due to switching the internal power MOSFET ( $P_{SW}$ ), and the power dissipated due to the RMS current through the internal power MOSFET ( $P_{MOSFET}$ ). The total power dissipated in the package must be limited such that the junction temperature does not exceed its absolute maximum rating of  $+150^\circ\text{C}$  at maximum ambient temperature. Calculate the power lost in the MAX15020 using the following equations:

**The power loss through the switch:**

$$P_{MOSFET} = I_{RMS\_MOSFET}^2 \times R_{ON}$$

$$I_{RMS\_MOSFET} = \sqrt{\left[ I_{PK+}^2 + (I_{PK+} \times I_{PK-}) + I_{PK-}^2 \right] \times \frac{D}{3}}$$

$$I_{PK+} = I_{OUT} + \frac{\Delta I_L}{2}$$

$$I_{PK-} = I_{OUT} - \frac{\Delta I_L}{2}$$

$R_{ON}$  is the on-resistance of the internal power MOSFET (see the *Electrical Characteristics* table).

**The power loss due to switching the internal MOSFET:**

$$P_{SW} = \frac{V_{IN} \times I_{OUT} \times (t_R + t_F) \times f_{SW}}{4}$$

where  $t_R$  and  $t_F$  are the rise and fall times of the internal power MOSFET measured at LX.

**The power loss due to the switching supply current ( $I_{SW}$ ):**

$$P_Q = V_{IN} \times I_{SW}$$

The total power dissipated in the device is:

$$P_{TOTAL} = P_{MOSFET} + P_{SW} + P_Q$$

**PCB Layout and Routing**

Use the following guidelines to layout the switching voltage regulator:

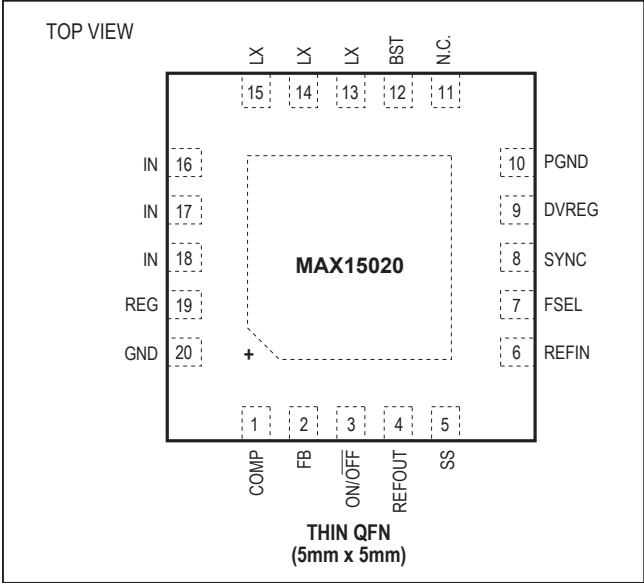
- 1) Place the IN and DVREG bypass capacitors close to the MAX15020 PGND pin. Place the REG bypass capacitor close to the GND pin.
- 2) Minimize the area and length of the high-current loops from the input capacitor, switching MOSFET, inductor, and output capacitor back to the input capacitor negative terminal.
- 3) Keep short the current loop formed by the switching MOSFET, Schottky diode, and input capacitor.
- 4) Keep GND and PGND isolated and connect them at one single point close to the negative terminal of the input filter capacitor.
- 5) Place the bank of output capacitors close to the load.
- 6) Distribute the power components evenly across the board for proper heat dissipation.
- 7) Provide enough copper area at and around the MAX15020 and the inductor to aid in thermal dissipation.
- 8) Use 2oz copper to keep the trace inductance and resistance to a minimum. Thin copper PCBs can compromise efficiency since high currents are involved in the application. Also, thicker copper conducts heat more effectively, thereby reducing thermal impedance.
- 9) Place enough vias in the pad for the EP of the MAX15020 so that the heat generated inside can be effectively dissipated by PCB copper.



# MAX15020

# 2A, 40V Step-Down DC-DC Converter with Dynamic Output-Voltage Programming

## Pin Configuration



## Chip Information

PROCESS: BiCMOS

## Package Information

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 20 TQFN      | T2055+5      | <a href="#">21-0140</a> | <a href="#">90-0010</a> |

## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION   | PAGES<br>CHANGED |
|--------------------|------------------|---|------------------|
| 0                  | 4/07             | Initial release   | —                |
| 1                  | 5/11             | Corrected the feedback resistor reference from R6 to R9 in the <i>Compensation When <math>f_C &lt; f_{ESR}</math></i> section | 14               |
| 2                  | 4/14             | No /V OPNs; removed Automotive reference from <i>Applications</i> section   | 1                |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А