


# PXAC210552FC


## Thermally-Enhanced High Power RF LDMOS FET 55 W, 28 V, 1805 – 2170 MHz

### Description

The PXAC210552FC is a 55-watt LDMOS FET with an asymmetric design for use in multi-standard cellular power amplifier applications in the 1805 to 2170 MHz frequency band. It features dual-path design, input and output matching, and a thermally-enhanced package with earless flange. Manufactured with Wolfspeed's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.



PXAC210552FC  
Package H-37248-4

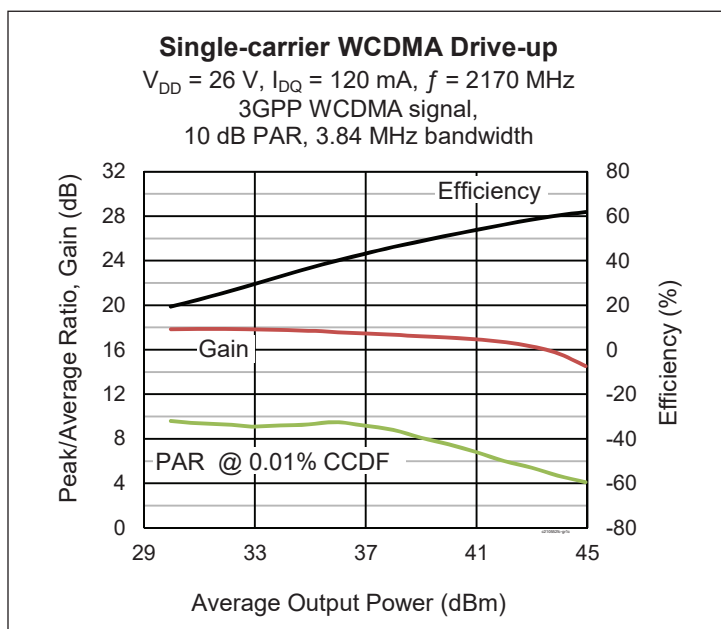

### Features

- Broadband internal matching
- Asymmetric Doherty design
  - Main: P1dB = 20 W Typ
  - Peak: P1dB = 35 W Typ
- CW performance, 2170 MHz, 26 V
  - Output power at P<sub>1dB</sub> = 27 W
  - Gain = 17 dB
  - Efficiency = 59%
- Integrated ESD protection
- ESD: Human Body Model, Class 1B (per ANSI/ESDA/JEDEC JS-001)
- Capable of handling 10:1 VSWR @28 V, 55 W (CW) output power
- Low thermal resistance
- Pb-free and RoHS compliant

### RF Characteristics

#### Single-carrier WCDMA Specifications (tested in Wolfspeed Doherty test fixture)

$V_{DD} = 26\text{ V}$ ,  $V_{GS(peak)} = 1.5\text{ V}$ ,  $I_{DQ} = 120\text{ mA}$ ,  $P_{OUT} = 39\text{ dBm}$  average,  $f = 2170\text{ MHz}$ . 3GPP WCDMA signal: 3.84 MHz bandwidth, 10 dB PAR @0.01% CCDF.

Characteristic	Symbol	Min	Typ	Max	Unit
Linear Gain	$G_{ps}$	16	17.2	—	dB
Drain Efficiency	$\eta_D$	46	49	—	%
Adjacent Channel Power Ratio	ACPR	—	-29	-25	dBc

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

## DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current (main and peak)	$V_{DS} = 28\text{ V}, V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	0.1	$\mu\text{A}$
	$V_{DS} = 63\text{ V}, V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	1.0	$\mu\text{A}$
Gate Leakage Current	$V_{GS} = 10\text{ V}, V_{DS} = 0\text{ V}$	$I_{GSS}$	—	—	0.1	$\mu\text{A}$
On-state Resistance	(main) $V_{GS} = 10\text{ V}, V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.38	—	$\Omega$
	(peak) $V_{GS} = 10\text{ V}, V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.19	—	$\Omega$
Operating Gate Voltage	(main) $V_{DS} = 26\text{ V}, I_{DQ} = 120\text{ mA}$	$V_{GS}$	2.16	2.65	3.15	V
	(peak) $V_{DS} = 26\text{ V}, I_{DQ} = 0\text{ mA}$	$V_{GS}$	1.00	1.50	2.00	V





## Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source Voltage	$V_{DSS}$	65	V
Gate-source Voltage	$V_{GS}$	-6 to +10	V
Operating Voltage	$V_{DD}$	0 to +32	V
Junction Temperature	$T_J$	225	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance ( $T_{CASE} = 70^{\circ}\text{C}, 26\text{ V}, 8\text{ W CW}$ )	$R_{\theta JC}$	1.44	$^{\circ}\text{C/W}$





## Ordering Information

Type and Version	Order Code	Package and Description	Shipping
PXAC210552FC V1 R0	PXAC210552FC-V1-R0	H-37248-4, ceramic open-cavity, earless	Tape & Reel, 50 pcs
PXAC210552FC V1 R2	PXAC210552FC-V1-R2	H-37248-4, ceramic open-cavity, earless	Tape & Reel, 250 pcs



**Typical Performance** (data taken in Wolfspeed Doherty reference test fixture)

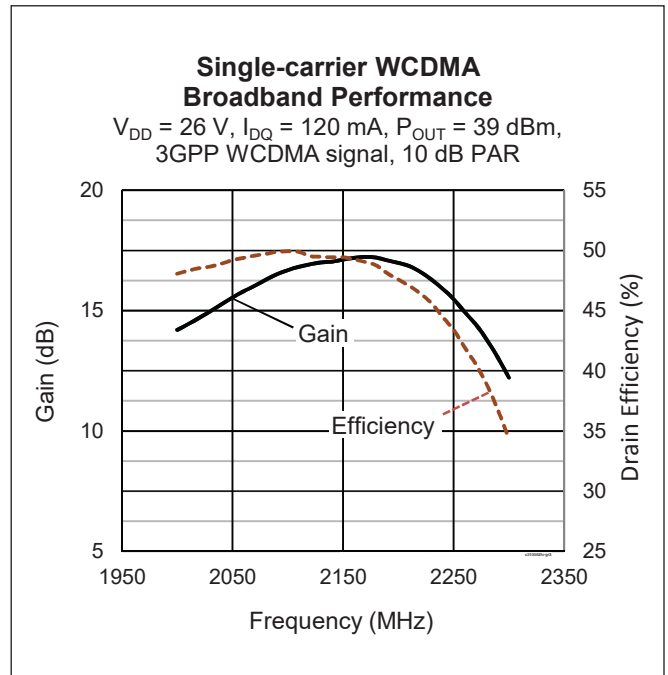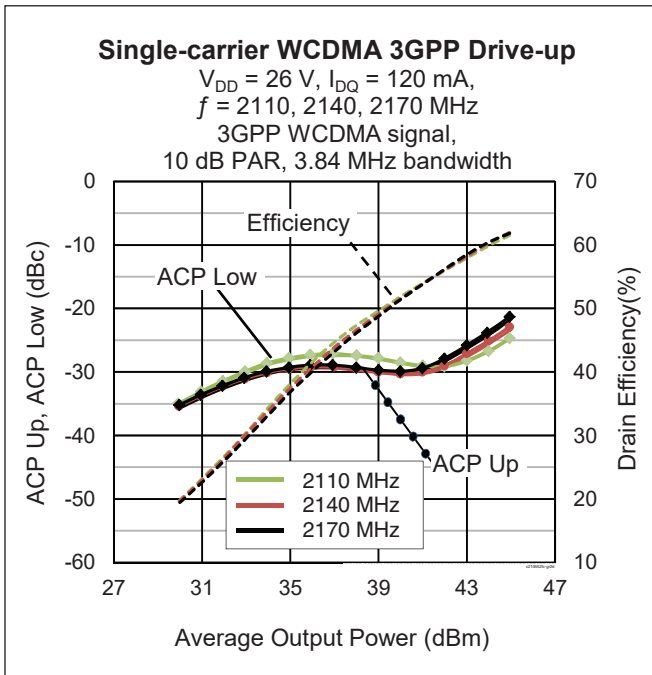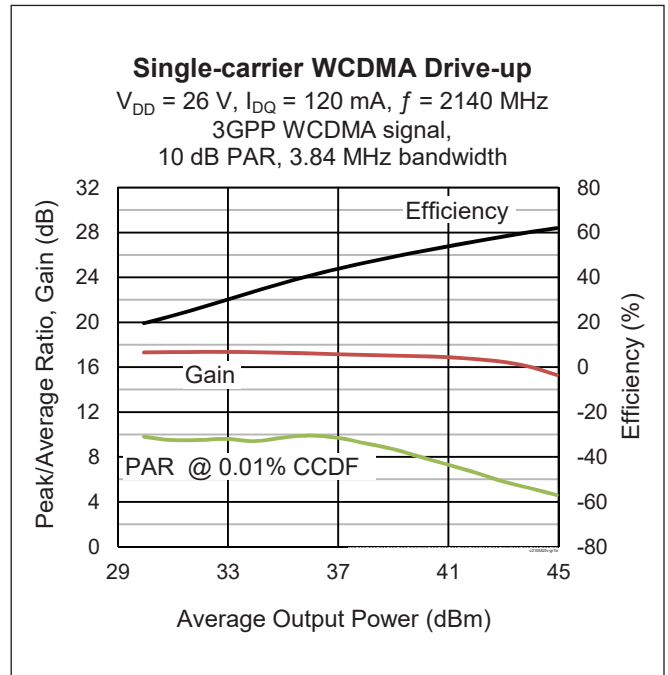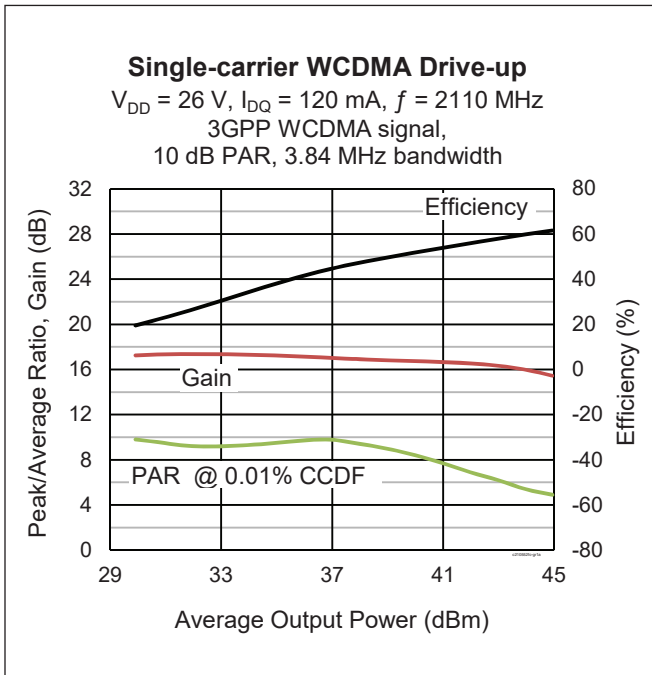

Typical Performance (cont.)

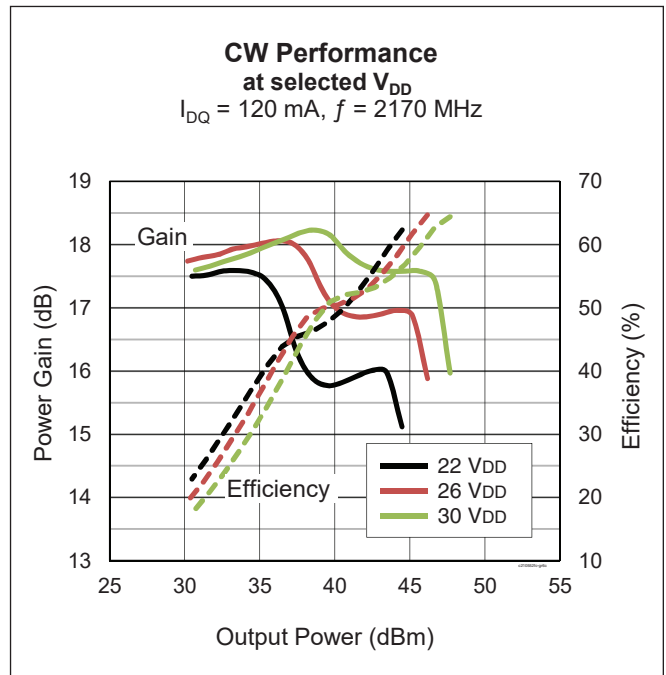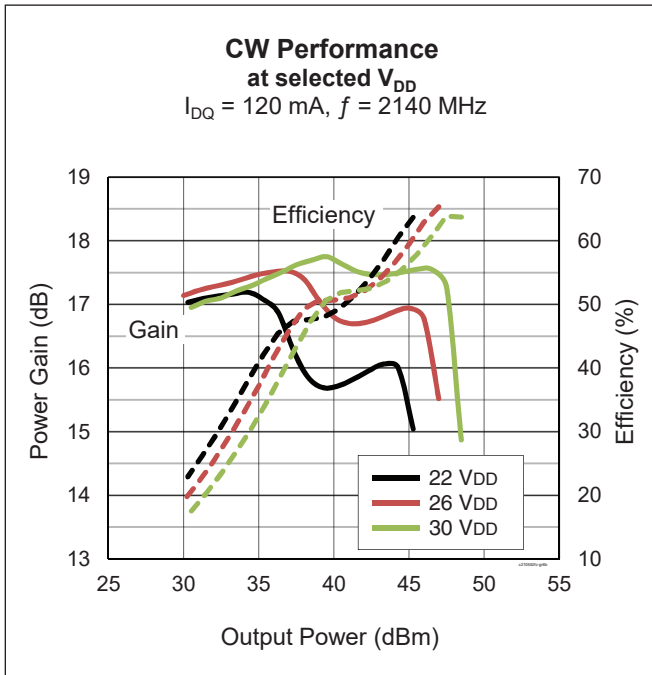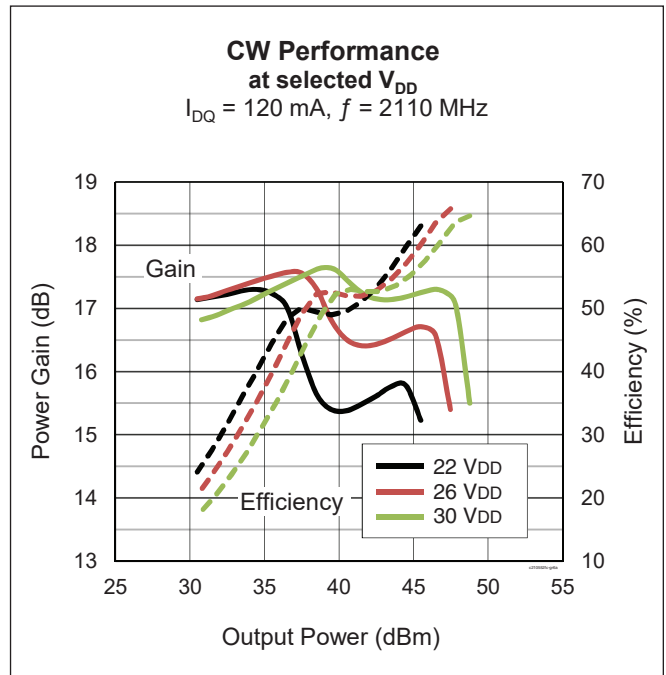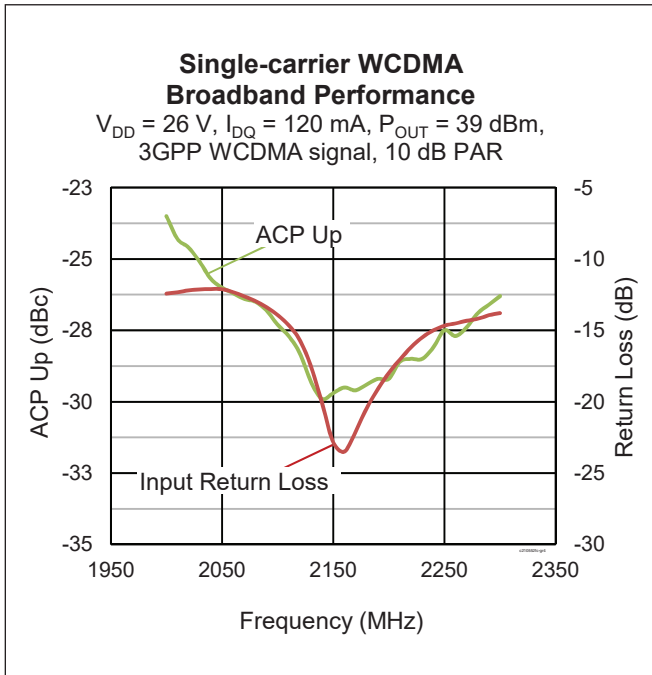


**Typical Performance (cont.)**

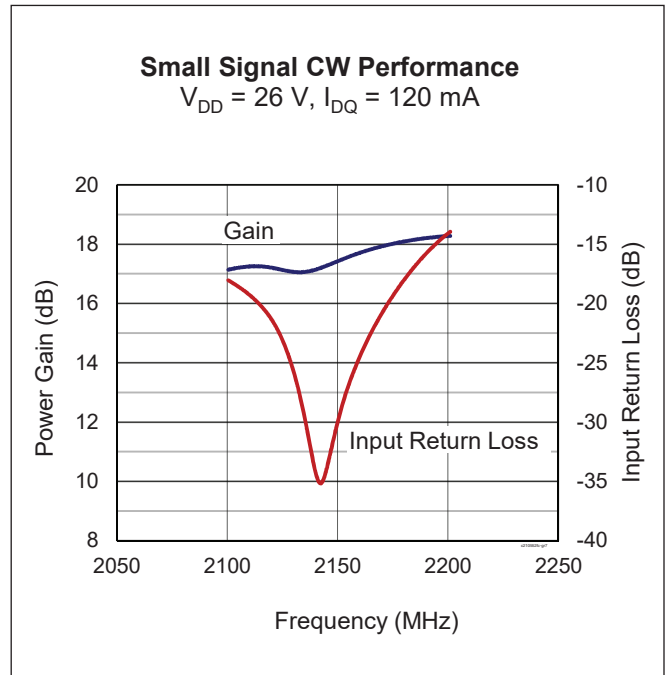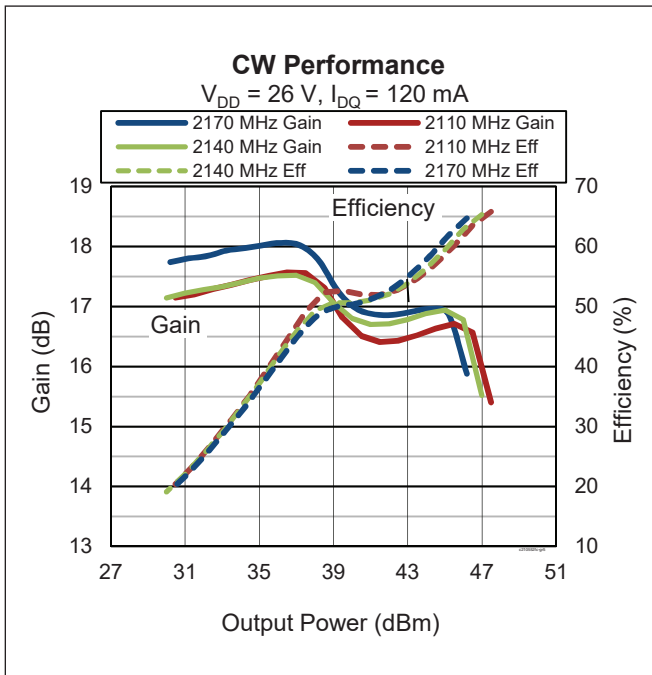

See next page for load pull information



### Load Pull Performance

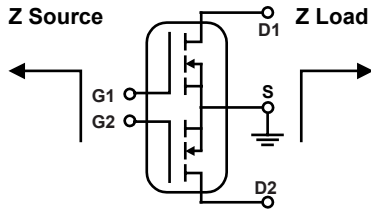

Main side pulsed CW signal: 160  $\mu$ sec, 10% duty cycle,  $V_{DD} = 26$  V,  $I_{DQ} = 120$  mA

Class AB		P <sub>1dB</sub>									
		Max Output Power					Max PAE				
Freq [MHz]	Z <sub>s</sub> [ $\Omega$ ]	Z <sub>l</sub> [ $\Omega$ ]	Gain [dB]	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	PAE [%]	Z <sub>l</sub> [ $\Omega$ ]	Gain [dB]	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	PAE [%]
2110	19.70 – j30.49	11.34 – j3.06	20.9	43.74	23.7	59.4	11.02 – j3.49	22.3	42.70	18.6	66.0
2140	17.03 – j36.14	9.73 – j2.15	20.9	43.48	22.3	58.6	9.78 – j3.58	22.9	42.26	16.8	64.6
2170	34.36 – j32.08	10.27 – j2.68	20.8	43.71	23.5	58.4	9.47 – j3.32	22.5	42.53	17.9	64.6

Peak side pulsed CW signal: 160  $\mu$ sec, 10% duty cycle,  $V_{DD} = 26$  V,  $V_{GS(peak)} = 1.5$  V


Class C		P <sub>1dB</sub>									
		Max Output Power					Max PAE				
Freq [MHz]	Z <sub>s</sub> [ $\Omega$ ]	Z <sub>l</sub> [ $\Omega$ ]	Gain [dB]	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	PAE [%]	Z <sub>l</sub> [ $\Omega$ ]	Gain [dB]	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	PAE [%]
2110	9.80 – j12.90	3.28 – j4.71	15.5	47.56	57.0	60.7	4.00 – j1.52	16.5	45.6	36.3	71.8
2140	10.71 – j17.59	3.51 – j5.03	16.0	47.50	56.2	60.7	3.88 – j1.93	17.0	45.9	38.7	71.3
2170	15.51 – j13.51	3.58 – j5.14	15.6	47.53	56.6	60.0	3.69 – j1.47	16.6	45.4	34.9	70.9

### Reference Circuit, tuned for 2110 – 2170 MHz

DUT	PXAC210552FC
Test Fixture Part No.	LTA/PXAC210552FC V1
PCB	Rogers 4350, 0.508 mm [.020"] thick, 2 oz. copper, $\epsilon_r = 3.66$

Find Gerber files for this reference fixture on the Wolfspeed Web site at [www.wolfspeed.com/RF](http://www.wolfspeed.com/RF)

**Reference Circuit** (cont.)

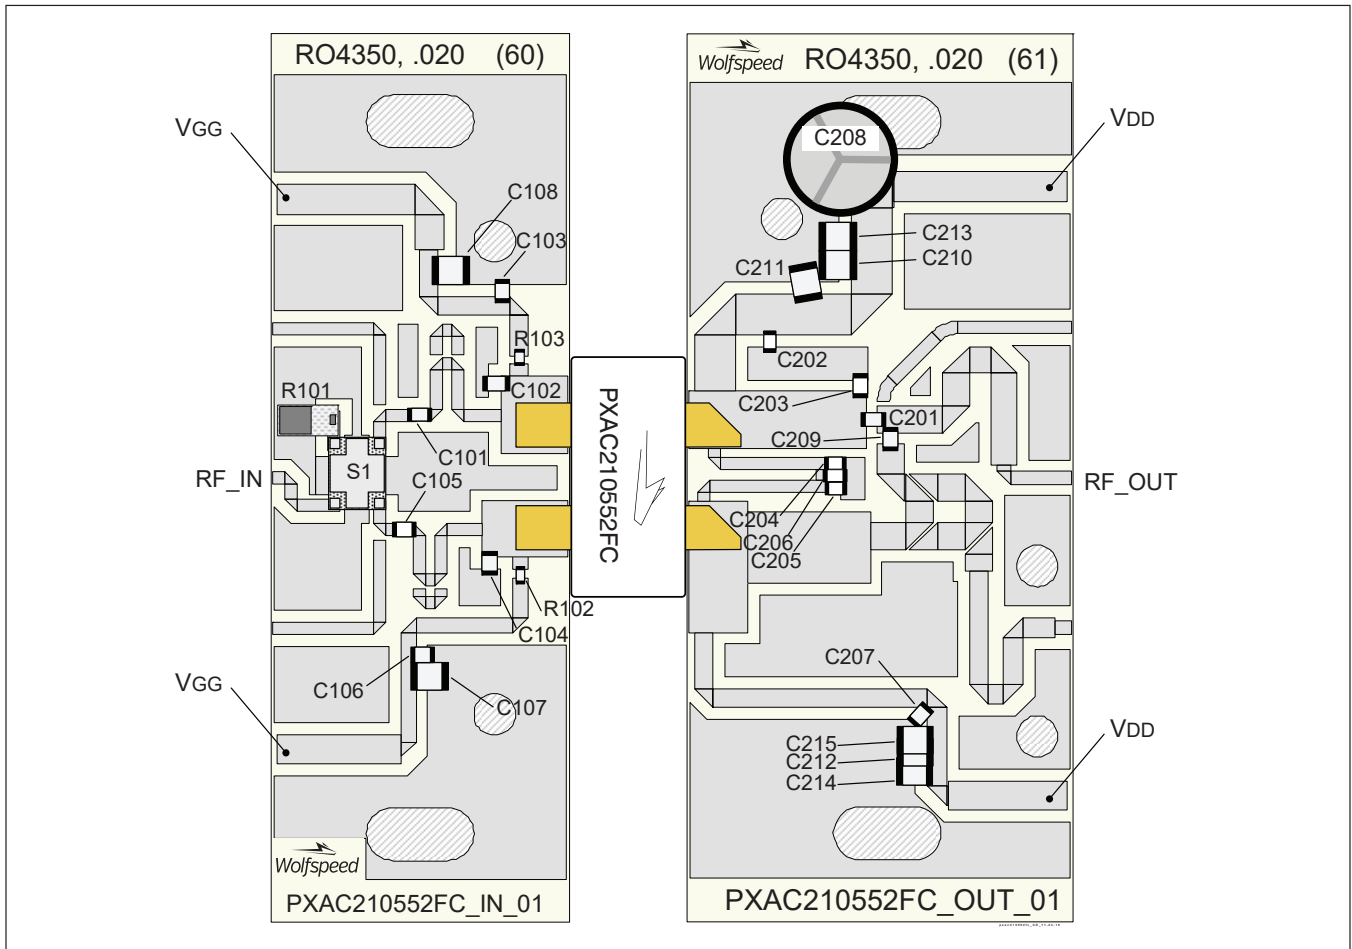

Reference circuit assembly diagram (not to scale)

**Component Information**

Component	Description	Manufacturer	P/N
<b>Input</b>			
C101, C103, C105, C106	Capacitor, 18 pF	ATC	ATC600F180GW250T
C102	Capacitor, 0.5 pF	ATC	ATC600F0R5CW250T
C104	Capacitor, 0.8 pF	ATC	ATC600F0R8CW250T
C107, C108	Capacitor, 10 $\mu$ F	Taiyo Yuden	UMK325C7106MM-T
R101	Termination, 50 ohms	Anaren	C8A50Z4A
R102, R103	Resistor, 10 ohms	Panasonic	ERJ-3GEYJ100V
U1	Hybrid coupler	Anaren	X3C21P1-03S

*table continued next page*




**Reference Circuit** (cont.)

**Component Information** (cont.)


Component	Description	Manufacturer	P/N
<b>Output</b>			
C201	Capacitor, 5.1 pF	ATC	ATC600F5R1BW250T
C202, C204, C205, C207, C209	Capacitor, 18 pF	ATC	ATC600F180GW250T
C203	Capacitor, 0.8 pF	ATC	ATC600F0R8CW250T
C206	Capacitor, 0.1 $\mu$ F	Panasonic	ECJ-3VB1H104K
C208	Capacitor, 220 $\mu$ F	Cornell Dubilier Electronics (CDE)	SK221M050ST
C210, C211, C212 C213, C214, C215	Capacitor, 10 $\mu$ F	Taiyo Yuden	UMK325C7106MM-T

**Pinout Diagram** (top view)

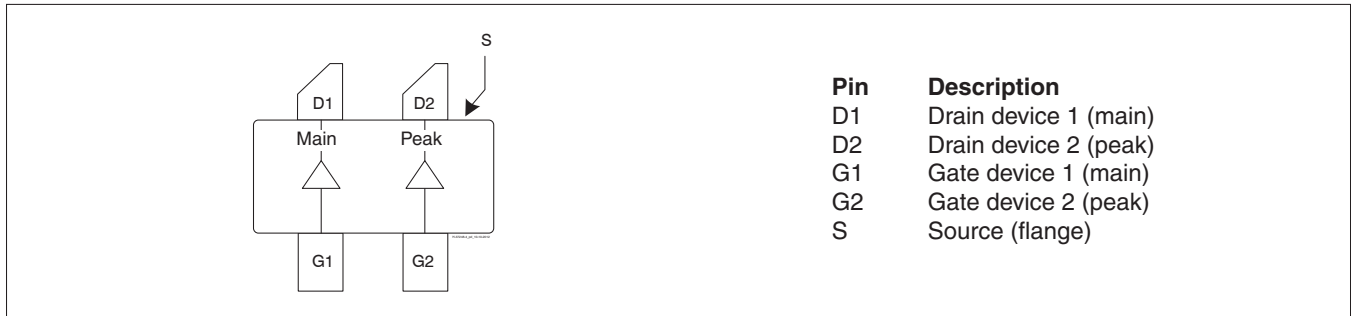



Package Outline Specifications

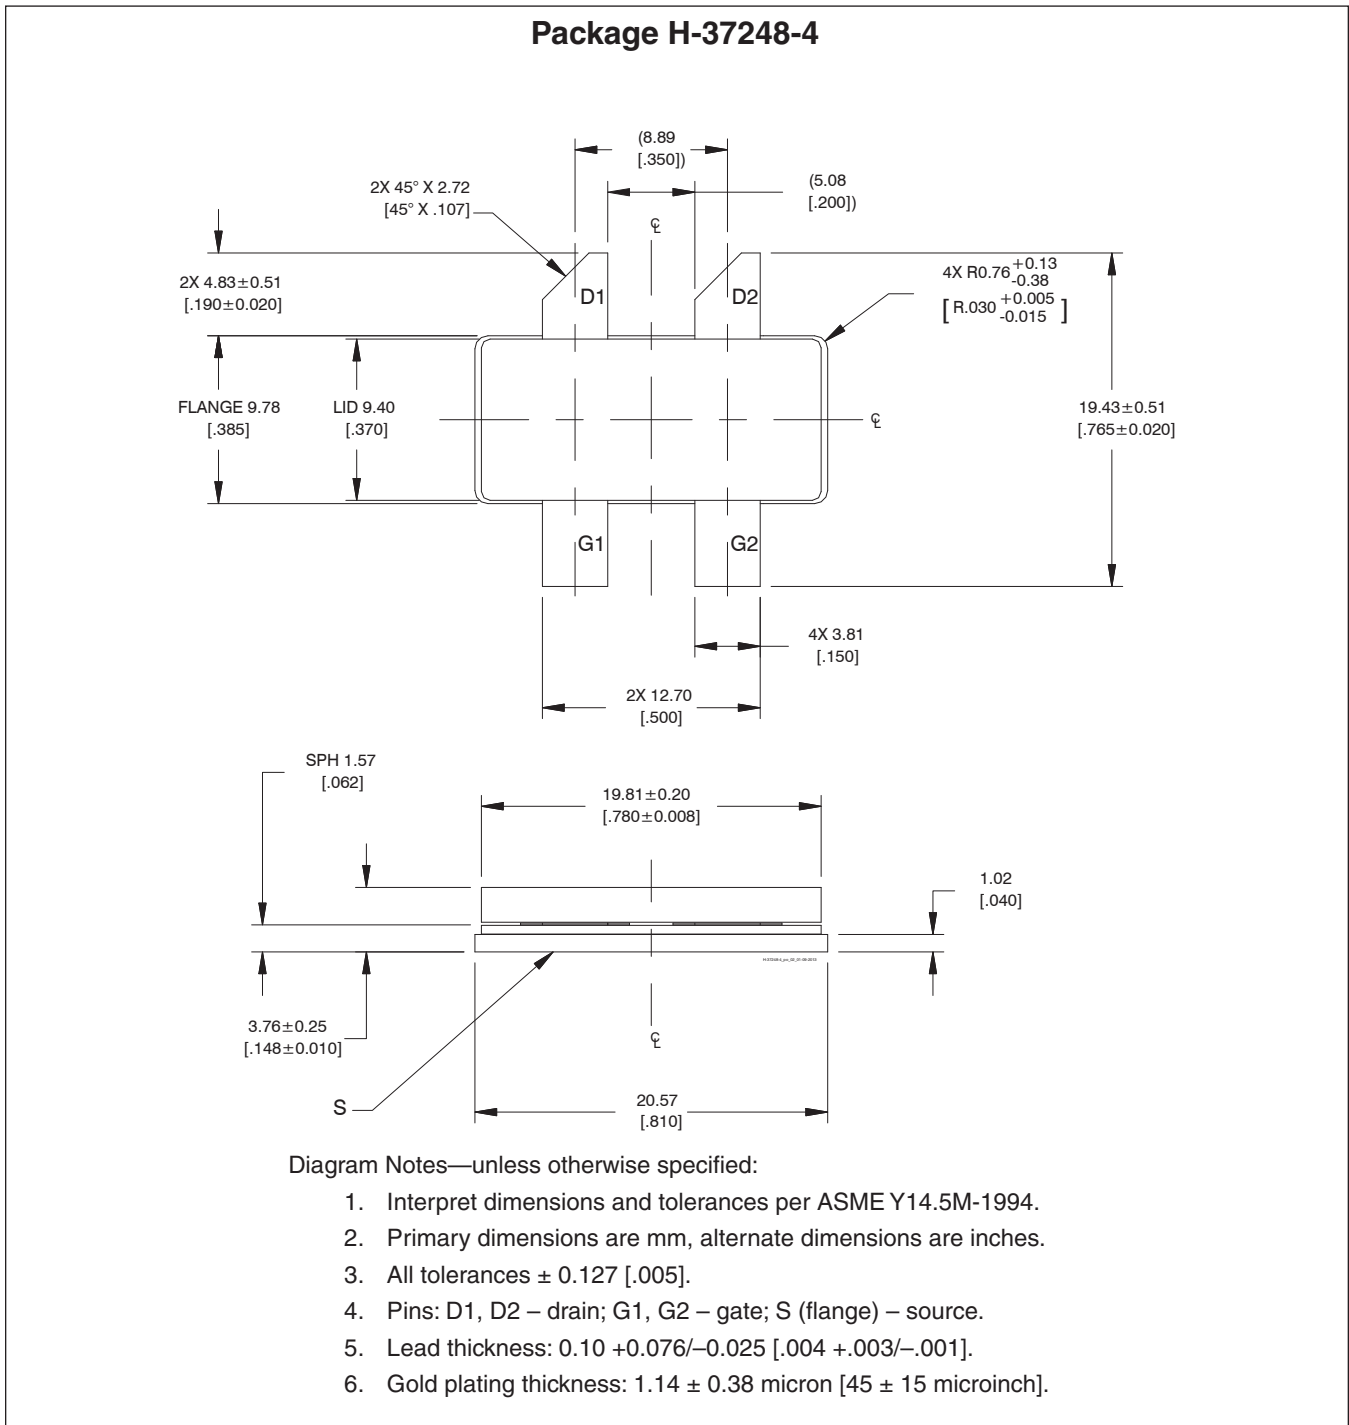

## Revision History

Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2015-03-02	Advance	All	Proposed specification for new product development.
02	2015-12-04	Production	All	Information for production-released product, including firm specifications, operating performance, and reference circuit specifications.
03	2018-07-02	Production	All	Converted to Wolfspeed Data Sheet

For more information, please contact:

4600 Silicon Drive  
Durham, North Carolina, USA 27703  
[www.wolfspeed.com/RF](http://www.wolfspeed.com/RF)

Sales Contact  
[RFSales@wolfspeed.com](mailto:RFSales@wolfspeed.com)

RF Product Marketing Contact  
[RFMarketing@wolfspeed.com](mailto:RFMarketing@wolfspeed.com)  
919.407.7816

## Notes

---

### Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А