

# Type 950 Metallized Polypropylene Film Capacitors

AC Rated, Round, Axial Leaded

Motor Run, HID Lighting




**Type 950** axial-leaded, metallized polypropylene capacitors with high capacitance values are ideal for high intensity discharge lighting and motor run applications. Flame retardant outer wrap and epoxy end seals provide moisture resistance. Type 950 features operating temperatures to 90°C without derating and very low ESR characteristics. This non-protected film capacitor has Underwriters Laboratories, Inc. recognition for construction only under U.L. File Number E128034(N).


## Specifications

<b>Capacitance Range:</b>	5 $\mu$ F to 150 $\mu$ F
<b>Voltage Range:</b>	250 Vac, 50/60 Hz
<b>Capacitance Tolerance:</b>	$\pm$ 10% (K) standard $\pm$ 6% (H) optional
<b>Operating Temperature Range:</b>	-55 °C to +90 °C
<b>Dielectric Strength:</b>	160% rated voltage for 1 minute
<b>Dissipation Factor (DF):</b>	.15% Max. @ 120 Hz
<b>Insulation Resistance (IR):</b>	100,000 M $\Omega$ x $\mu$ F
<b>Life Test:</b>	1,000 hours at 90 °C at 125% rated voltage

SOLID LEADS #18 AWG (.040 DIA.)

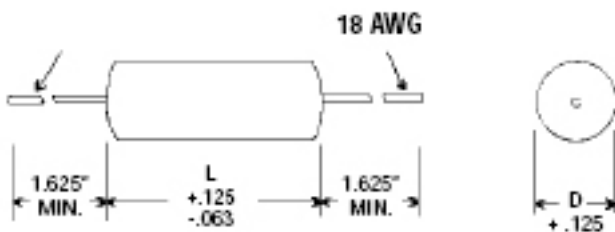

FLEXIBLE LEADS #18 AWG (.040 DIA.)

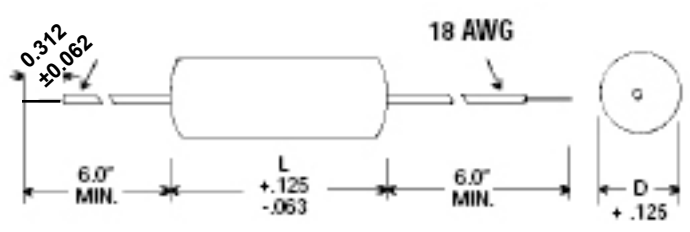

Complies with the EU Directive 2002/95/EC requirement restricting the use of Lead (Pb), Mercury (Hg), Cadmium (Cd), Hexavalent chromium (Cr(VI)), PolyBrominated Biphenyls (PBB) and PolyBrominated Diphenyl Ethers (PBDE).

# Type 950 Metallized Polypropylene Film Capacitors

## Ratings

## RoHS Compliant

Cap. ( $\mu$ F)	Catalog Part Number Solid Leads	Catalog Part Number Flexible Leads	D (inches)(mm)	L (inches)(mm)	dV/dt (V/ $\mu$ s)
<b>250 Vac</b>					
5.0	950CQW5K-F	950FQW5K-F	0.906(23.0)	1.752(44.5)	9
7.0	950CQW7K-F	950FQW7K-F	1.035(26.3)	1.755(44.5)	9
8.0	950CQW8K-F	950FQW8K-F	1.094(27.8)	1.752(44.5)	9
10.0	950CQW10K-F	950FQW10K-F	0.996(25.3)	2.500(63.5)	6
12.0	950CQW12K-F	950FQW12K-F	1.075(27.3)	2.500(63.5)	6
13.0	950CQW13K-F	950FQW13K-F	1.110(28.2)	2.500(63.5)	6
14.0	950CQW14K-F	950FQW14K-F	1.146(29.1)	2.500(63.5)	6
15.0	950CQW15K-F	950FQW15K-F	1.181(30.0)	2.500(63.5)	6
16.0	950CQW16K-F	950FQW16K-F	1.213(30.8)	2.500(63.5)	6
17.0	950CQW17K-F	950FQW17K-F	1.248(31.7)	2.500(63.5)	6
17.5	950CQW17P5K-F	950FQW17P5K-F	1.264(32.1)	2.500(63.5)	6
20.0	950CQW20K-F	950FQW20K-F	1.339(34.0)	2.500(63.5)	6
22.5	950CQW22P5K-F	950FQW22P5K-F	1.413(35.9)	2.500(63.5)	6
24.0	950CQW24K-F	950FQW24K-F	1.457(37.0)	2.500(63.5)	6
26.0	950CQW26K-F	950FQW26K-F	1.508(38.3)	2.500(63.5)	6
28.0	950CQW28K-F	950FQW28K-F	1.559(39.6)	2.500(63.5)	6
30.0	950CQW30K-F	950FQW30K-F	1.610(40.9)	2.500(63.5)	6
32.0	950CQW32K-F	950FQW32K-F	1.575(40.0)	2.894(73.5)	6
34.0	950CQW34K-F	950FQW34K-F	1.614(41.0)	2.894(73.5)	6
35.0	950CQW35K-F	950FQW35K-F	1.654(42.0)	2.894(73.5)	6
36.0	950CQW36K-F	950FQW36K-F	1.693(43.0)	2.894(73.5)	6
40.0	950CQW40K-F	950FQW40K-F	1.713(43.5)	2.894(73.5)	6
42.0	950CQW42K-F	950FQW42K-F	1.752(44.5)	2.894(73.5)	6
45.0	950CQW45K-F	950FQW45K-F	1.811(46.0)	2.894(73.5)	6
48.0	950CQW48K-F	950FQW48K-F	1.850(47.0)	2.894(73.5)	6
50.0	950CQW50K-F	950FQW50K-F	1.890(48.0)	2.894(73.5)	6

Cap. ( $\mu$ F)	Catalog Part Number Solid Leads	Catalog Part Number Flexible Leads	D (inches)(mm)	L (inches)(mm)	dV/dt (V/ $\mu$ s)
<b>250 Vac</b>					
52.0	950CQW52K-F	950FQW52K-F	1.969(50.0)	2.894(73.5)	6
55.0	950CQW55K-F	950FQW55K-F	2.008(51.0)	2.894(73.5)	6
56.0	950CQW56K-F	950FQW56K-F	2.028(51.5)	2.894(73.5)	6
60.0	950CQW60K-F	950FQW60K-F	1.890(48.0)	3.386(86.0)	5
65.0	950CQW65K-F	950FQW65K-F	1.929(49.0)	3.386(86.0)	5
68.0	950CQW68K-F	950FQW68K-F	2.008(51.0)	3.386(86.0)	5
70.0	950CQW70K-F	950FQW70K-F	2.047(52.0)	3.386(86.0)	5
72.0	950CQW72K-F	950FQW72K-F	2.087(53.0)	3.386(86.0)	5
75.0	950CQW75K-F	950FQW75K-F	2.126(54.0)	3.386(86.0)	5
78.0	950CQW78K-F	950FQW78K-F	2.146(54.5)	3.386(86.0)	5
80.0	950CQW80K-F	950FQW80K-F	2.165(55.0)	3.386(86.0)	5
82.0	950CQW82K-F	950FQW82K-F	2.185(55.5)	3.386(86.0)	5
85.0	950CQW85K-F	950FQW85K-F	2.224(56.5)	3.386(86.0)	5
90.0	950CQW90K-F	950FQW90K-F	1.969(50.0)	4.409(112.0)	4
92.0	950CQW92K-F	950FQW92K-F	2.008(51.0)	4.409(112.0)	4
95.0	950CQW95K-F	950FQW95K-F	2.047(52.0)	4.409(112.0)	4
100.0	950CQW100K-F	950FQW100K-F	2.087(53.0)	4.409(112.0)	4
105.0	950CQW105K-F	950FQW105K-F	2.126(54.0)	4.409(112.0)	4
110.0	950CQW110K-F	950FQW110K-F	2.185(55.5)	4.409(112.0)	4
115.0	950CQW115K-F	950FQW115K-F	2.224(56.5)	4.409(112.0)	4
120.0	950CQW120K-F	950FQW120K-F	2.283(58.0)	4.409(112.0)	4
125.0	950CQW125K-F	950FQW125K-F	2.323(59.0)	4.409(112.0)	4
130.0	950CQW130K-F	950FQW130K-F	2.362(60.0)	4.409(112.0)	4
135.0	950CQW135K-F	950FQW135K-F	2.362(60.0)	4.409(112.0)	4
140.0	950CQW140K-F	950FQW140K-F	2.362(60.0)	4.409(112.0)	4
145.0	950CQW145K-F	950FQW145K-F	2.362(60.0)	4.409(112.0)	4
150.0	950CQW150K-F	950FQW150K-F	2.402(61.0)	4.409(112.0)	4

Other capacitance values, sizes and performance specifications are available. Contact us.

## Type 950 Metallized Polypropylene Film Capacitors

---

**Notice and Disclaimer:** All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



## JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А