

OCRZ Series

Features

- 105°C, 2000 hours assured
- Ultra low ESR with large permissible ripple current
- RoHS Compliance



Marking color: Blue


Specifications

| Items | Performance | | | | | | | | | | |
|--|--|-----------------------------------|------------------------------|--------------------|------------------------------|-----------------|-----------------------------------|-----------------|-----------------------------------|-----------------|------------------------|
| Category Temperature Range | -55°C ~ +105°C | | | | | | | | | | |
| Capacitance Tolerance | ±20% (at 120Hz, 20°C) | | | | | | | | | | |
| Leakage Current (at 20°C)* | Rated voltage applied, after 2 minutes at 20°C. See Standard Ratings | | | | | | | | | | |
| Tanδ (at 120Hz, 20°C) | See Standard Ratings | | | | | | | | | | |
| ESR (at 100k ~ 300k Hz, 20°C) | See Standard Ratings | | | | | | | | | | |
| Endurance | <table border="1"> <tr> <td>Test Time</td> <td>2,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>ESR</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> | Test Time | 2,000 Hrs | Capacitance Change | Within ±20% of initial value | Tanδ | Less than 150% of specified value | ESR | Less than 150% of specified value | Leakage Current | Within specified value |
| | Test Time | 2,000 Hrs | | | | | | | | | |
| | Capacitance Change | Within ±20% of initial value | | | | | | | | | |
| | Tanδ | Less than 150% of specified value | | | | | | | | | |
| | ESR | Less than 150% of specified value | | | | | | | | | |
| Leakage Current | Within specified value | | | | | | | | | | |
| * The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2000 hours at 105°C. | | | | | | | | | | | |
| Moisture Resistance | <table border="1"> <tr> <td>Test Time</td> <td>1,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>ESR</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> | Test Time | 1,000 Hrs | Capacitance Change | Within ±20% of initial value | Tanδ | Less than 150% of specified value | ESR | Less than 150% of specified value | Leakage Current | Within specified value |
| | Test Time | 1,000 Hrs | | | | | | | | | |
| | Capacitance Change | Within ±20% of initial value | | | | | | | | | |
| | Tanδ | Less than 150% of specified value | | | | | | | | | |
| | ESR | Less than 150% of specified value | | | | | | | | | |
| Leakage Current | Within specified value | | | | | | | | | | |
| * The above specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them at 60°C, 90 to 95% RH for 1,000 hours. Leakage current should be tested after voltage treatment*. | | | | | | | | | | | |
| Resistance to Soldering Heat * (Please refer to page 11 for soldering conditions) | <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±10% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Within specified value</td> </tr> <tr> <td>ESR</td> <td>Within specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> | Capacitance Change | Within ±10% of initial value | Tanδ | Within specified value | ESR | Within specified value | Leakage Current | Within specified value | | |
| | Capacitance Change | Within ±10% of initial value | | | | | | | | | |
| | Tanδ | Within specified value | | | | | | | | | |
| | ESR | Within specified value | | | | | | | | | |
| Leakage Current | Within specified value | | | | | | | | | | |
| * For any doubt about measured values, measure the leakage current again after the following voltage treatment. Voltage treatment: DC rated voltage is applied to the capacitors for 2 hours at 105 °C. | | | | | | | | | | | |
| Ripple Current and Frequency Multipliers | <table border="1"> <tr> <th>Frequency (Hz)</th> <th>120 ≤ f < 1k</th> <th>1k ≤ f < 10k</th> <th>10k ≤ f < 100k</th> <th>100k ≤ f < 500k</th> </tr> <tr> <td>Multiplier</td> <td>0.05</td> <td>0.3</td> <td>0.7</td> <td>1.0</td> </tr> </table> | Frequency (Hz) | 120 ≤ f < 1k | 1k ≤ f < 10k | 10k ≤ f < 100k | 100k ≤ f < 500k | Multiplier | 0.05 | 0.3 | 0.7 | 1.0 |
| | Frequency (Hz) | 120 ≤ f < 1k | 1k ≤ f < 10k | 10k ≤ f < 100k | 100k ≤ f < 500k | | | | | | |
| Multiplier | 0.05 | 0.3 | 0.7 | 1.0 | | | | | | | |

* For any doubt about measured values, measure the leakage current again after the following voltage treatment.
Voltage treatment: DC rated voltage is applied to the capacitors for 2 hours at 105 °C.

Diagram of Dimensions


5 φ, 6.3 φ × 6 ~ 8L and 8 φ × 8L

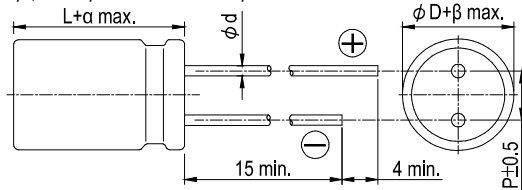

Lead Spacing and Diameter Unit: mm


| φ D | 5 | 6.3 | 6.3 | 8 | 8 | 10 |
|-----|-----|------|-----|-----|----|-----|
| L | 8 | 6 | 8 | 8 | 12 | 12 |
| P | 2.0 | 2.5 | | 3.5 | | 5.0 |
| φ d | 0.5 | 0.45 | 0.6 | | | |
| α | 1.0 | | | | | |
| β | 0.5 | | | | | |

8 φ × 12L and 10 φ × 12L

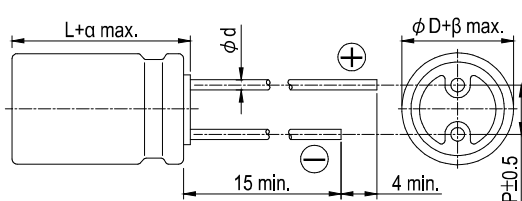


Marking

φ D = 5 ~ 6.3

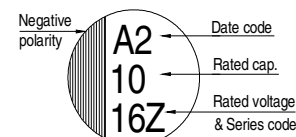

φ D = 8 ~ 10

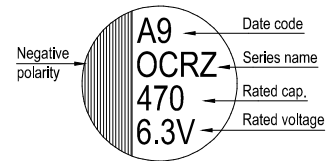



Dimension: ϕ DxL(mm)
Ripple Current: mA/rms at 100k Hz, 105°C

Standard Ratings

| Rated Volt. (V) | Surge Voltage (V) | Capacitance (μ F) | Size ϕ DxL(mm) | Tan δ (120Hz, 20°C) | LC (μ A) | E S R (m Ω /at 100k ~ 300k Hz, 20°C max.) | Rated R. C. (mA/rms at 100k Hz, 105°C) |
|-----------------|-------------------|------------------------|---------------------|----------------------------|---------------|--|--|
| 2.5V (0E) | 2.9 | 330 | 6.3 x 8 | 0.10 | 500 | 7 | 5,600 |
| | | 390 | 6.3 x 6* | 0.10 | 500 | 10 | 3,900 |
| | | 470 | 5 x 8 | 0.10 | 500 | 7 | 4,200 |
| | | | 8 x 8 | 0.10 | 235 | 7 | 5,000 |
| | | 560 | 5 x 8 | 0.10 | 500 | 7 | 4,200 |
| | | | 6.3 x 6* | 0.10 | 500 | 10 | 4,000 |
| | | | 6.3 x 8 | 0.10 | 500 | 7 | 5,600 |
| | | 820 | 8 x 8 | 0.12 | 280 | 7 | 6,200 |
| | | | 6.3 x 8 | 0.10 | 500 | 7 | 5,600 |
| | | | 8 x 8 | 0.10 | 410 | 7 | 6,200 |
| | | 1,000 | 8 x 12 | 0.12 | 410 | 7 | 6,200 |
| | | | 8 x 8 | 0.12 | 500 | 7 | 6,200 |
| 8 x 12 | 0.12 | | 500 | 7 | 6,200 | | |
| 1,200 | 8 x 8 | 0.12 | 600 | 7 | 6,200 | | |
| 1,500 | 10 x 12 | 0.12 | 750 | 7 | 6,500 | | |
| 2,700 | 10 x 12 | 0.12 | 1,350 | 7 | 7,200 | | |
| 4V (0G) | 4.6 | 560 | 6.3 x 8 | 0.10 | 500 | 7 | 5,600 |
| | | | 8 x 8 | 0.10 | 448 | 7 | 6,200 |
| | | | 8 x 12 | 0.12 | 448 | 7 | 6,200 |
| | | 820 | 8 x 8 | 0.10 | 656 | 7 | 6,200 |
| | | 1,000 | 8 x 8 | 0.10 | 800 | 7 | 6,200 |
| | | | 8 x 12 | 0.12 | 960 | 7 | 6,200 |
| | | 1,200 | 10 x 12 | 0.12 | 960 | 7 | 6,200 |
| | | | 1,500 | 10 x 12 | 0.12 | 1,200 | 7 |
| 2,200 | 10 x 12 | 0.12 | 1,760 | 8 | 7,200 | | |
| 6.3V (0J) | 7.2 | 270 | 5 x 8 | 0.10 | 680 | 8 | 3,900 |
| | | 470 | 6.3 x 8 | 0.10 | 592 | 7 | 5,600 |
| | | | 8 x 8 | 0.12 | 592 | 7 | 6,200 |
| | | | 8 x 12 | 0.12 | 592 | 7 | 6,200 |
| | | 560 | 6.3 x 8 | 0.10 | 706 | 7 | 5,600 |
| | | | 8 x 8 | 0.10 | 706 | 7 | 6,200 |
| | | | 8 x 12 | 0.12 | 706 | 7 | 6,200 |
| | | 820 | 8 x 8 | 0.10 | 1,033 | 7 | 6,200 |
| | | | 8 x 12 | 0.10 | 1,033 | 8 | 5,500 |
| | | | 10 x 12 | 0.12 | 1,033 | 7 | 6,200 |
| | | 1,000 | 8 x 8 | 0.10 | 1,260 | 7 | 6,200 |
| 8 x 12 | 0.12 | | 1,260 | 8 | 5,500 | | |
| 1,500 | 10 x 12 | 0.12 | 1,890 | 7 | 6,200 | | |

Remark: The case size with "*" of case length is 6.0 mm maximum.



Dimension: ϕ D×L(mm)
Ripple Current: mA/rms at 100k Hz, 105°C

Standard Ratings

| Rated Volt. (V) | Surge Voltage (V) | Capacitance (μF) | Size ϕ D×L(mm) | Tanδ (120Hz, 20°C) | LC (μA) | E S R (mΩ/at 100k ~ 300k Hz, 20°C max.) | Rated R. C. (mA/rms at 100k Hz, 105°C) |
|-----------------|-------------------|------------------|---------------------|--------------------|---------|---|--|
| 10V (1A) | 12.0 | 390 | 8 × 12 | 0.12 | 780 | 8 | 5,000 |
| | | 470 | 10 × 12 | 0.12 | 940 | 8 | 6,000 |
| | | 560 | 10 × 12 | 0.12 | 1,120 | 8 | 6,000 |
| | | 820 | 10 × 12 | 0.12 | 1,640 | 8 | 6,000 |
| 16V (1C) | 18.0 | 100 | 6.3 × 6* | 0.10 | 320 | 24 | 2,490 |
| | | | 6.3 × 8 | 0.10 | 500 | 10 | 4,680 |
| | | 180 | 6.3 × 8 | 0.10 | 576 | 10 | 4,680 |
| | | | 8 × 8 | 0.10 | 576 | 10 | 5,000 |
| | | 270 | 8 × 8 | 0.10 | 864 | 10 | 5,000 |
| | | | 8 × 12 | 0.12 | 864 | 8 | 5,000 |
| | | 330 | 8 × 8 | 0.10 | 1,056 | 10 | 5,000 |
| | | | 10 × 12 | 0.12 | 1,056 | 8 | 6,000 |
| | | 470 | 8 × 12 | 0.12 | 1,504 | 10 | 5,400 |
| | | | 10 × 12 | 0.12 | 1,504 | 8 | 6,000 |
| | | 820 | 10 × 12 | 0.10 | 2,624 | 10 | 6,100 |
| | | | 1,000 | 10 × 12 | 0.10 | 3,200 | 10 |
| 20V (1D) | 23.0 | 330 | 8 × 8 | 0.12 | 1,320 | 17 | 3,880 |
| | | 390 | 8 × 12 | 0.12 | 1,560 | 14 | 4,970 |
| | | 680 | 10 × 12 | 0.12 | 2,720 | 12 | 5,400 |
| 25V (1E) | 29.0 | 180 | 8 × 8 | 0.12 | 900 | 18 | 3,770 |
| | | 220 | 8 × 12 | 0.12 | 1,100 | 16 | 4,650 |
| | | 390 | 10 × 12 | 0.12 | 1,950 | 14 | 5,000 |

Remark: The case size with "*" of case length is 6.0 mm maximum.

Part Numbering System

OCRZ Series 470μF ±20% 6.3V Bulk Package Gas Type 6.3φ x8L Pb-free and PET coating case

ORZ **471** **M** **OJ** **BK** - **0608**

Series Name Capacitance Capacitance Tolerance Rated Voltage Lead Configuration & Package Rubber Type Case Size Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 13.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А