


# LE RTDUW S2WN

## OSRAM OSTAR® Stage

Compact lightsource in SMT technology, glass window on top, RoHS compliant



## Applications

- Architecture
- Mood Lighting
- Stage Lighting (LED & Laser)

## Features:

- Package: compact lightsource in multi chip SMT technology with glass window on top
- Chip technology: Thinfilm / UX:3
- Typ. Radiation: 120° (Lambertian emitter)
- Color:  $\lambda_{\text{dom}} = 625 \text{ nm}$  (● red);  $\lambda_{\text{dom}} = 525 \text{ nm}$  (● true green);  $\lambda_{\text{dom}} = 453 \text{ nm}$  (● deep blue);  $C_x = 0.31$ ,  $C_y = 0.32$  acc. to CIE 1931 (● ultra white)
- Corrosion Robustness Class: 3B
- ESD: 2 kV acc. to ANSI/ESDA/JEDEC JS-001 (HBM, Class 2)

## Ordering Information

| Type                                     | Brightness <sup>1)</sup>                                            | Ordering Code |
|------------------------------------------|---------------------------------------------------------------------|---------------|
| LERTDUWS2WN-KBLA-1+MANA-P+AXAZ-P+MBNB-CQ |                                                                     | Q65112A5474   |
| ● red                                    | ● $\Phi_V = 90 \dots 140 \text{ lm}$ ( $I_F = 1000 \text{ mA}$ )    |               |
| ● true green                             | ● $\Phi_V = 180 \dots 355 \text{ lm}$ ( $I_F = 1000 \text{ mA}$ )   |               |
| ● deep blue                              | ● $\Phi_E = 1120 \dots 1800 \text{ mW}$ ( $I_F = 1000 \text{ mA}$ ) |               |
| ● ultra white                            | ● $\Phi_V = 224 \dots 450 \text{ lm}$ ( $I_F = 1000 \text{ mA}$ )   |               |

## Maximum Ratings

| Parameter                                                                     | Symbol    |      | Values  | Values       | Values      | Values        |
|-------------------------------------------------------------------------------|-----------|------|---------|--------------|-------------|---------------|
|                                                                               |           |      | ● red   | ● true green | ● deep blue | ● ultra white |
| Operating Temperature                                                         | $T_{op}$  | min. | -40 °C  | -40 °C       | -40 °C      | -40 °C        |
|                                                                               |           | max. | 85 °C   | 85 °C        | 85 °C       | 85 °C         |
| Storage Temperature                                                           | $T_{stg}$ | min. | -40 °C  | -40 °C       | -40 °C      | -40 °C        |
|                                                                               |           | max. | 85 °C   | 85 °C        | 85 °C       | 85 °C         |
| Junction Temperature                                                          | $T_j$     | max. | 125 °C  | 150 °C       | 150 °C      | 150 °C        |
| Forward Current<br>$T_s = 25\text{ °C}$                                       | $I_F$     | min. | 40 mA   | 40 mA        | 40 mA       | 40 mA         |
|                                                                               |           | max. | 2500 mA | 3000 mA      | 3000 mA     | 3000 mA       |
| ESD withstand voltage<br>acc. to ANSI/ESDA/<br>JEDEC JS-001 (HBM,<br>Class 2) | $V_{ESD}$ |      | 2 kV    | 2 kV         | 2 kV        | 2 kV          |
| Reverse current <sup>2)</sup>                                                 | $I_R$     | max. | 200 mA  | 200 mA       | 200 mA      | 200 mA        |

## Characteristics

$I_F = 1000 \text{ mA}$ ;  $T_S = 25 \text{ }^\circ\text{C}$

| Parameter                                                                                                         | Symbol                          |                      | Values<br>● red            | Values<br>● true green                     | Values<br>● deep blue                      | Values<br>● ultra white                    |
|-------------------------------------------------------------------------------------------------------------------|---------------------------------|----------------------|----------------------------|--------------------------------------------|--------------------------------------------|--------------------------------------------|
| Chromaticity Coordinate                                                                                           |                                 |                      |                            |                                            |                                            | 0.31<br>0.32                               |
| Peak Wavelength                                                                                                   | $\lambda_{\text{peak}}$         | typ.                 | 633 nm                     | 519 nm                                     | 448 nm                                     |                                            |
| Dominant Wavelength <sup>3)</sup>                                                                                 | $\lambda_{\text{dom}}$          | min.<br>typ.<br>max. | 620 nm<br>625 nm<br>632 nm | 519 nm<br>525 nm<br>531 nm                 | 449 nm<br>453 nm<br>458 nm                 |                                            |
| Spectral bandwidth at 50% $I_{\text{rel,max}}$                                                                    | $\Delta\lambda$                 | typ.                 | 18 nm                      | 33 nm                                      | 25 nm                                      |                                            |
| Viewing angle at 50% $I_V$                                                                                        | $2\phi$                         | typ.                 | 120 °                      | 120 °                                      | 120 °                                      | 130 °                                      |
| Radiating surface                                                                                                 | $A_{\text{color}}$              | typ.                 | 2.1 x 2.1 mm <sup>2</sup>  | for total radiating surface see red column | for total radiating surface see red column | for total radiating surface see red column |
| Partial Flux acc. CIE 127:2007 <sup>4)</sup><br>$\Phi_{\text{E/V } 120^\circ} = x * \Phi_{\text{E/V } 180^\circ}$ | $\Phi_{\text{E/V, } 120^\circ}$ | typ.                 | 0.82                       | 0.82                                       | 0.82                                       | 0.77                                       |
| Forward Voltage <sup>5)</sup><br>$I_F = 1000 \text{ mA}$                                                          | $V_F$                           | min.<br>typ.<br>max. | 1.85 V<br>2.35 V<br>2.80 V | 3.00 V<br>3.60 V<br>4.10 V                 | 2.70 V<br>3.00 V<br>3.40 V                 | 2.70 V<br>3.00 V<br>3.40 V                 |
| Reverse voltage (ESD device)                                                                                      | $V_{\text{R ESD}}$              | min.                 | 45 V                       | 45 V                                       | 45 V                                       | 45 V                                       |
| Reverse voltage <sup>2)</sup><br>$I_R = 20 \text{ mA}$                                                            | $V_R$                           | max.                 | 1.2 V                      | 1.2 V                                      | 1.2 V                                      | 1.2 V                                      |
| Real thermal resistance junction/solder-point <sup>6)</sup>                                                       | $R_{\text{thJS real}}$          | typ.<br>max.         | 1.20 K / W<br>1.40 K / W   | 1.20 K / W<br>1.40 K / W                   | 1.20 K / W<br>1.40 K / W                   | 1.20 K / W<br>1.40 K / W                   |
| Electrical thermal resistance junction/solderpoint <sup>6)</sup><br>with efficiency $\eta_e = 26 \text{ } \%$     | $R_{\text{thJS elec.}}$         | typ.<br>max.         | 0.89 K / W<br>1.04 K / W   | 0.89 K / W<br>1.04 K / W                   | 0.89 K / W<br>1.04 K / W                   | 0.89 K / W<br>1.04 K / W                   |

## Brightness Groups

| Color of emission | Group | Luminous Flux <sup>1)</sup><br>$I_F = 1000 \text{ mA}$<br>min.<br>$\Phi_V$ | Luminous Flux <sup>1)</sup><br>$I_F = 1000 \text{ mA}$<br>max.<br>$\Phi_V$ |
|-------------------|-------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|
| • red             | KB    | 90 lm                                                                      | 112 lm                                                                     |
| • red             | LA    | 112 lm                                                                     | 140 lm                                                                     |
| • true green      | MA    | 180 lm                                                                     | 224 lm                                                                     |
| • true green      | MB    | 224 lm                                                                     | 280 lm                                                                     |
| • true green      | NA    | 280 lm                                                                     | 355 lm                                                                     |
| • deep blue       | AX    | 1120 mW                                                                    | 1300 mW                                                                    |
| • deep blue       | AY    | 1300 mW                                                                    | 1500 mW                                                                    |
| • deep blue       | AZ    | 1500 mW                                                                    | 1800 mW                                                                    |
| • ultra white     | MB    | 224 lm                                                                     | 280 lm                                                                     |
| • ultra white     | NA    | 280 lm                                                                     | 355 lm                                                                     |
| • ultra white     | NB    | 355 lm                                                                     | 450 lm                                                                     |

## Wavelength Groups

- true green


| Group | Dominant Wavelength <sup>3)</sup><br>min.<br>$\lambda_{\text{dom}}$ | Dominant Wavelength <sup>3)</sup><br>max.<br>$\lambda_{\text{dom}}$ |
|-------|---------------------------------------------------------------------|---------------------------------------------------------------------|
| 3     | 519 nm                                                              | 525 nm                                                              |
| 4     | 525 nm                                                              | 531 nm                                                              |

## Wavelength Groups

- deep blue

| Group | Dominant Wavelength <sup>3)</sup><br>min.<br>$\lambda_{\text{dom}}$ | Dominant Wavelength <sup>3)</sup><br>max.<br>$\lambda_{\text{dom}}$ |
|-------|---------------------------------------------------------------------|---------------------------------------------------------------------|
| 3     | 449 nm                                                              | 453 nm                                                              |
| 4     | 453 nm                                                              | 458 nm                                                              |

## Chromaticity Coordinate Groups

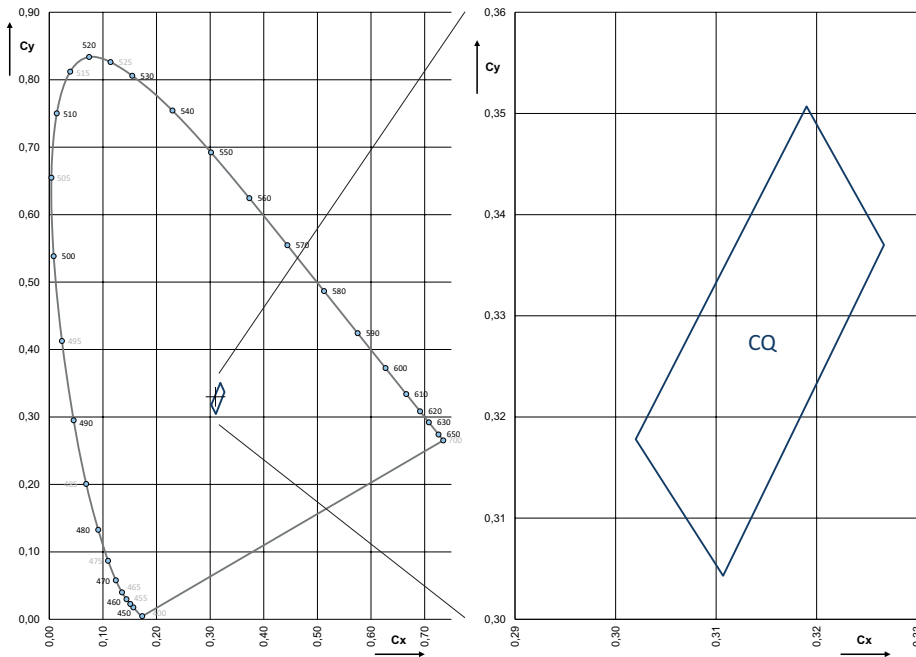


## Color Chromaticity Groups <sup>7)</sup>

- ultra white

| Group | $C_x$  | $C_y$  |
|-------|--------|--------|
| CQ    | 0.3190 | 0.3507 |
|       | 0.3267 | 0.3370 |
|       | 0.3107 | 0.3043 |
|       | 0.3020 | 0.3178 |


**Relative Spectral Emission** <sup>4)</sup>

$$\Phi_{\text{rel}} = f(\lambda); I_F = 1000 \text{ mA}; T_J = 25 \text{ }^\circ\text{C}$$

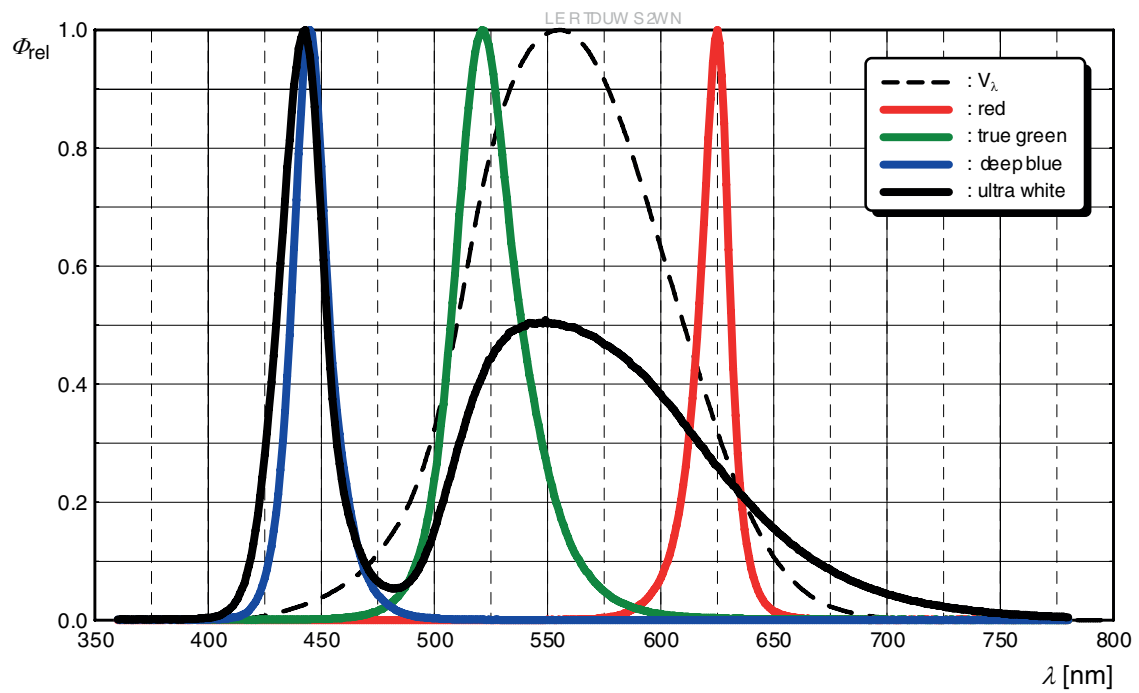


## Radiation Characteristics <sup>4)</sup>



$I_{\text{rel}} = f(\phi)$ ;  $T_J = 25\text{ °C}$ ; red; ture green; blue

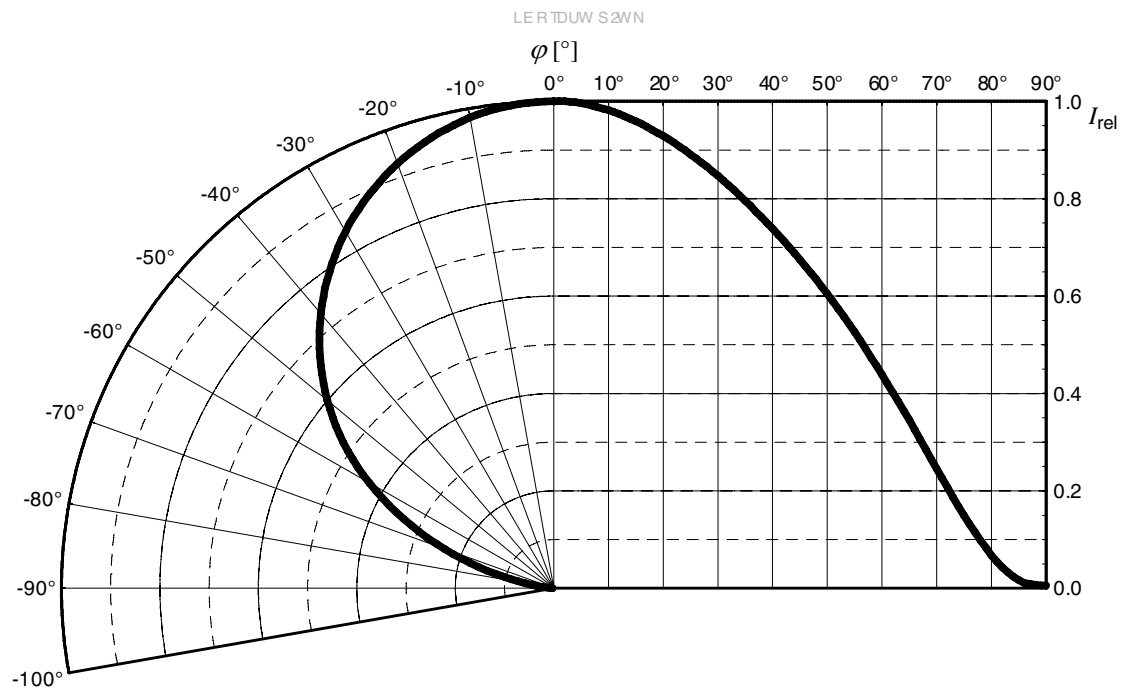

## Radiation Characteristics <sup>4)</sup>

$I_{\text{rel}} = f(\phi)$ ;  $T_J = 25\text{ °C}$ ; ultra white

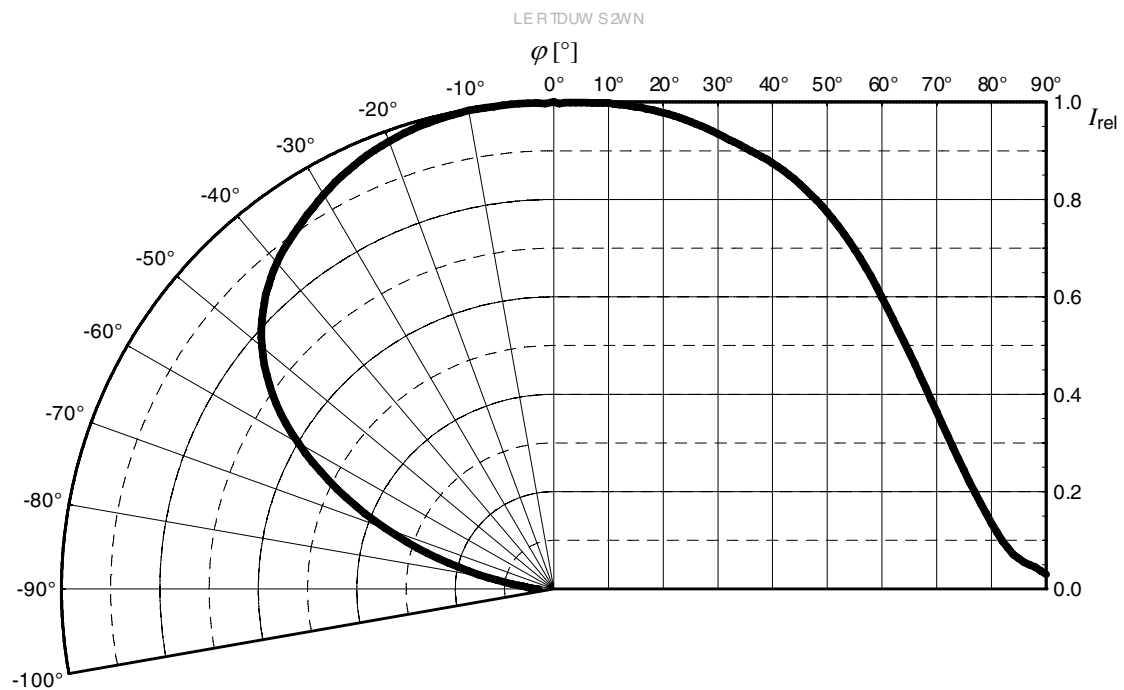


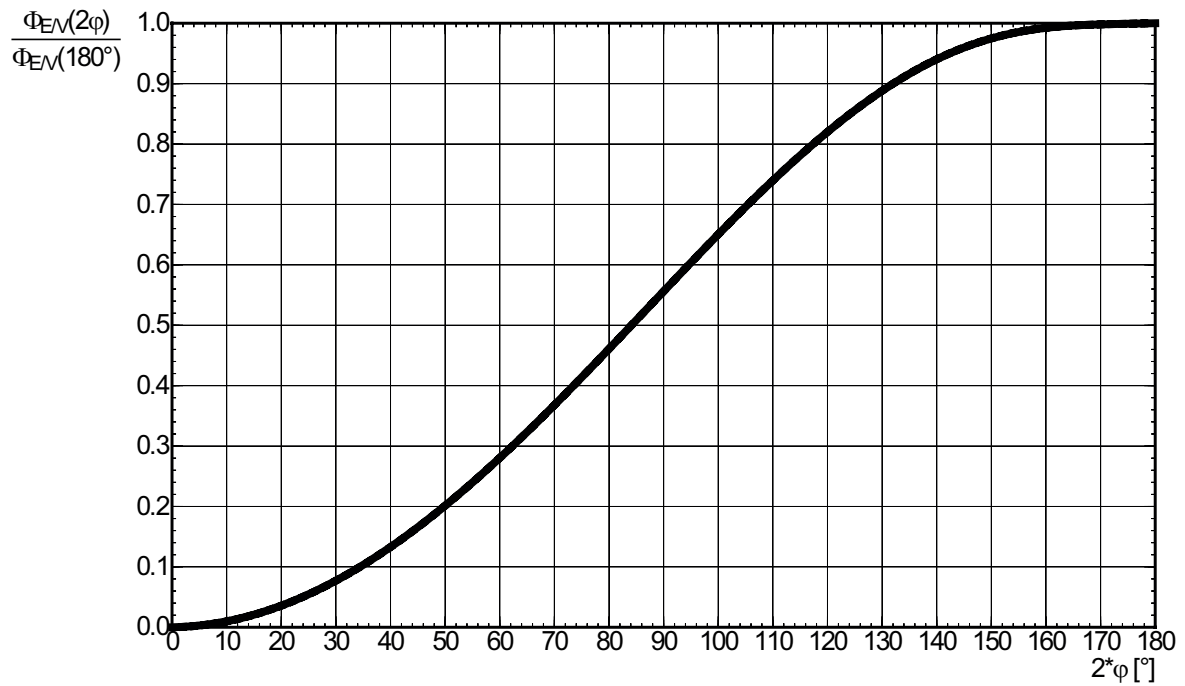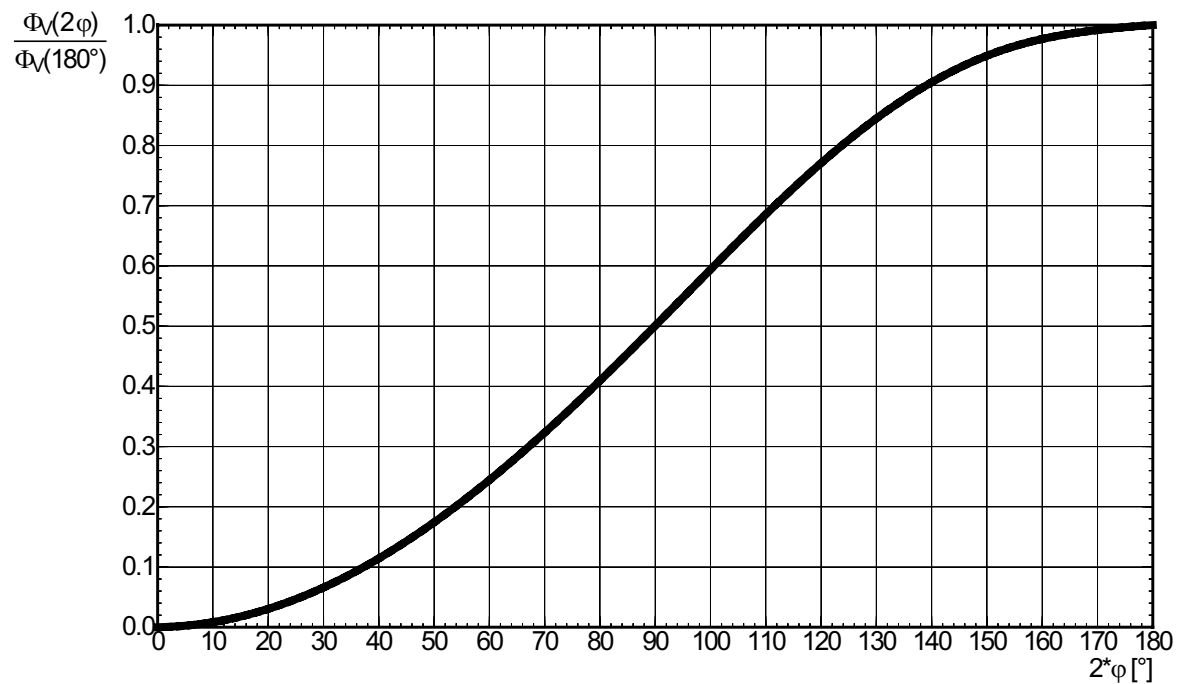**Relative Partial Flux** <sup>4)</sup>
 $\Phi_{EV}(2\varphi)/\Phi_{EV}(180^\circ) = f(\varphi); T_J = 25^\circ\text{C}; \text{red; true green; blue}$ 
**Relative Partial Flux** <sup>4)</sup>
 $\Phi_V(2\varphi)/\Phi_V(180^\circ) = f(\varphi); T_J = 25^\circ\text{C}; \text{ultra white}$ 


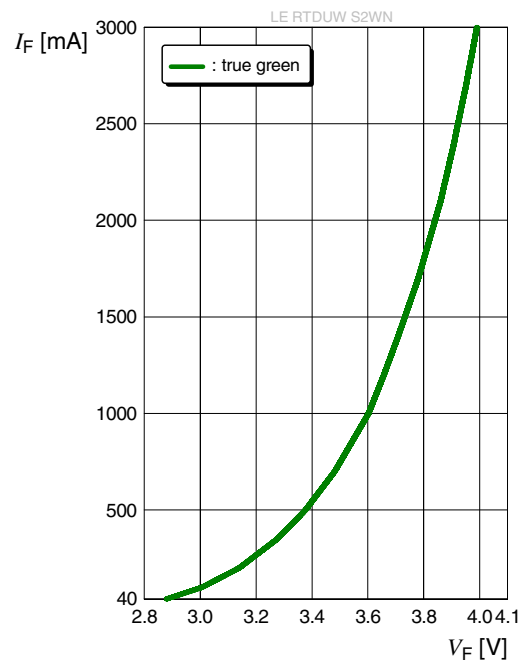


**Forward current** 4), 8)


$$I_F = f(V_F); T_J = 25\text{ °C}$$

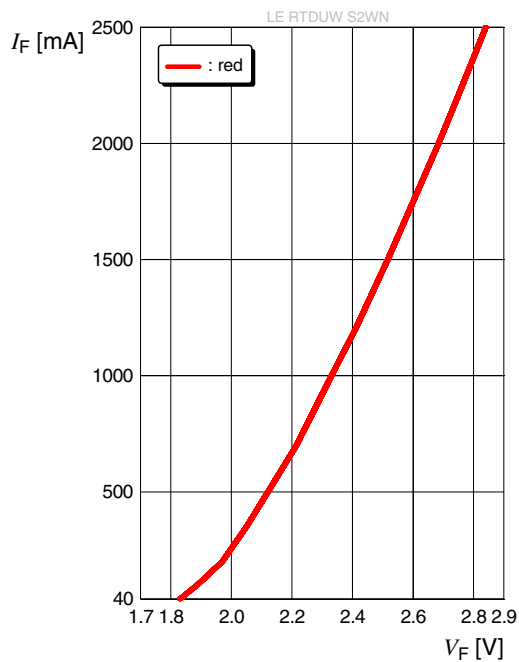**Forward current** 4), 8)


$$I_F = f(V_F); T_J = 25\text{ °C}$$

**Forward current** 4), 8)

$$I_F = f(V_F); T_J = 25\text{ °C}$$

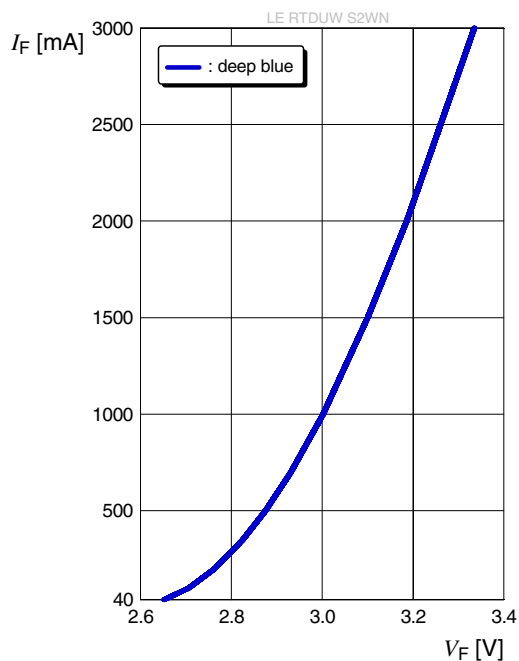
**Forward current** 4), 8)

$$I_F = f(V_F); T_J = 25\text{ °C}$$

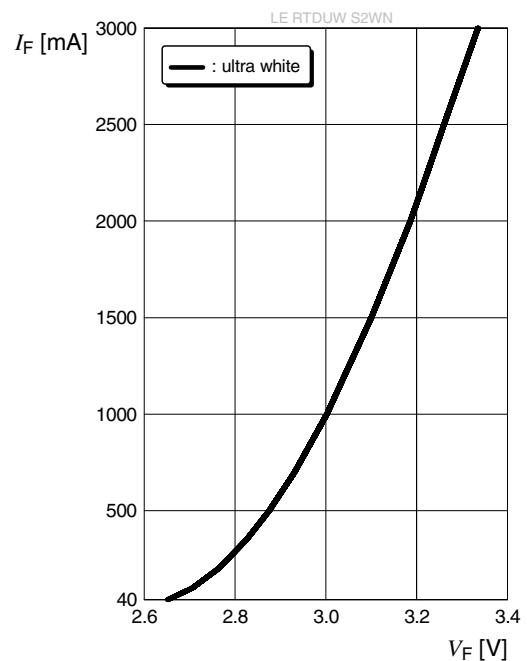


**Relative Luminous Flux** 4), 8)


$$\Phi_V / \Phi_V(1000 \text{ mA}) = f(I_F); T_J = 25^\circ \text{C}$$

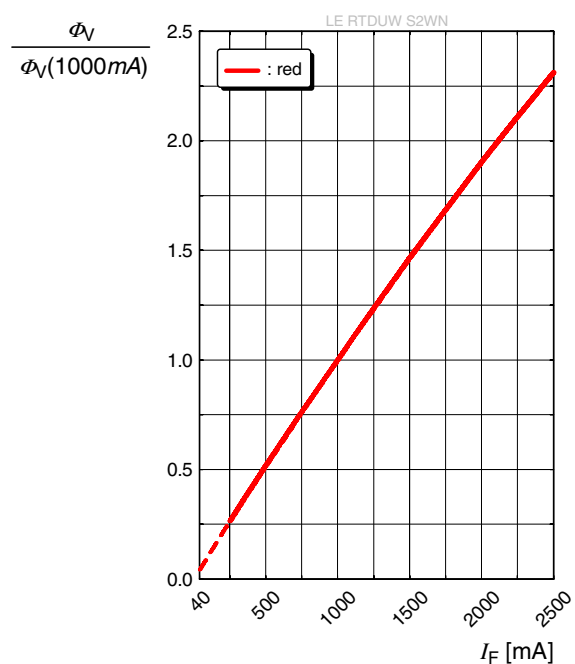**Relative Luminous Flux** 4), 8)


$$\Phi_V / \Phi_V(1000 \text{ mA}) = f(I_F); T_J = 25^\circ \text{C}$$

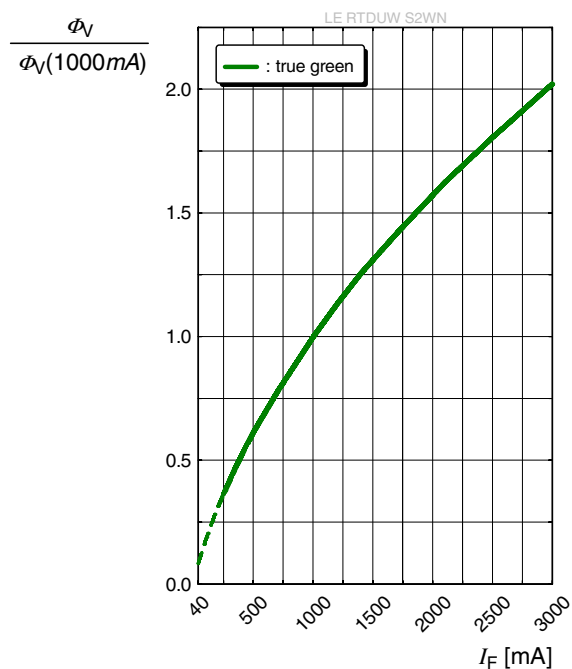**Relative Radiant Power** 4), 8)

$$\Phi_E / \Phi_E(1000 \text{ mA}) = f(I_F); T_J = 25^\circ \text{C}$$

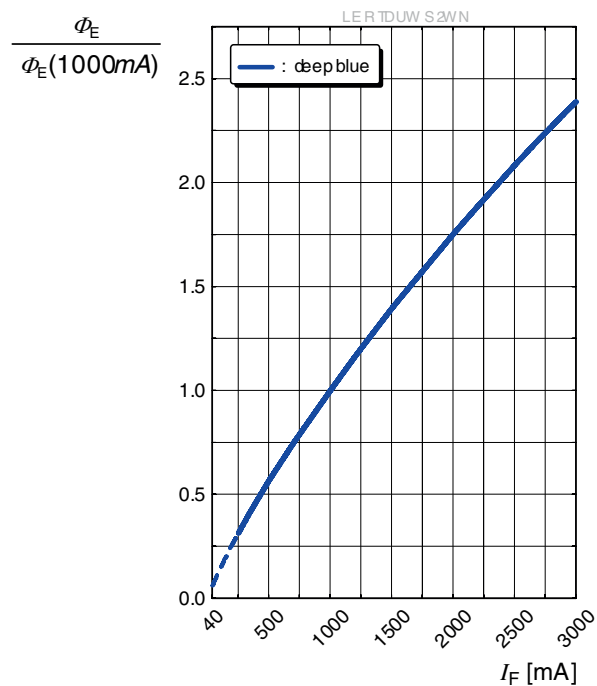
**Relative Luminous Flux** 4), 8)

$$\Phi_V / \Phi_V(1000 \text{ mA}) = f(I_F); T_J = 25^\circ \text{C}$$

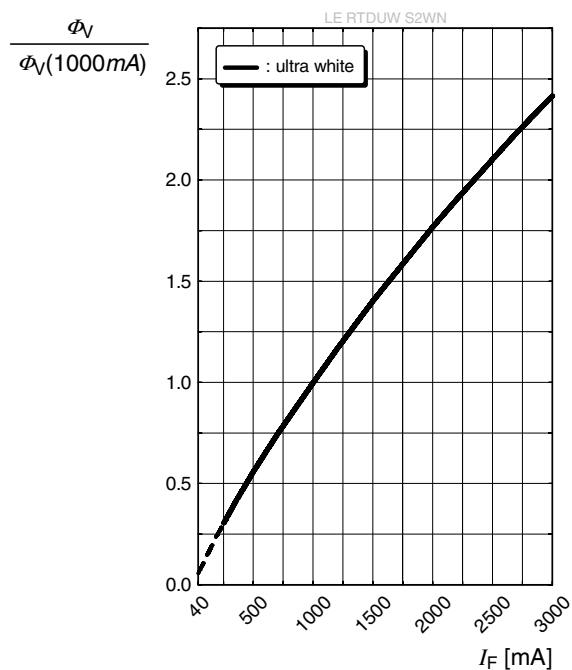


## Dominant Wavelength <sup>4)</sup>

$$\Delta\lambda_{\text{dom}} = f(I_F); T_J = 25\text{ °C}$$

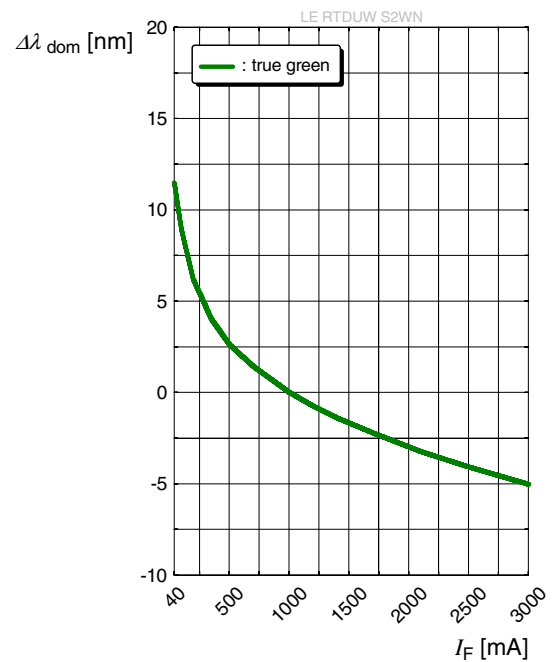


## Dominant Wavelength <sup>4)</sup>

$$\Delta\lambda_{\text{dom}} = f(I_F); T_J = 25\text{ °C}$$

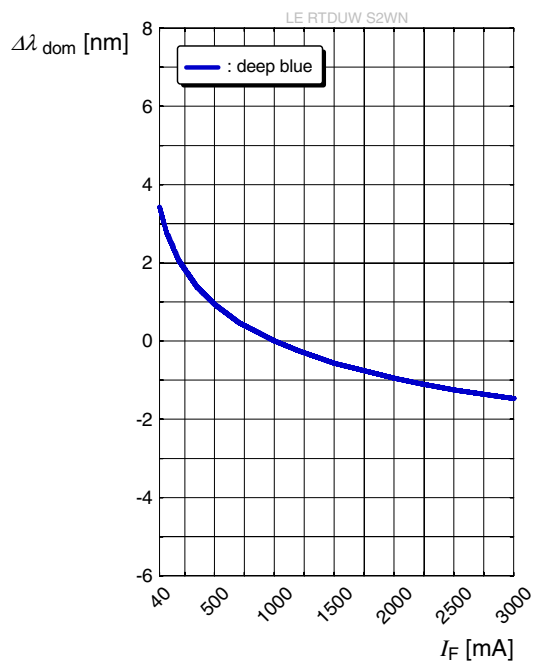


## Chromaticity Coordinate Shift <sup>4)</sup>

$$\Delta C_x, \Delta C_y = f(I_F); T_J = 25\text{ °C}$$

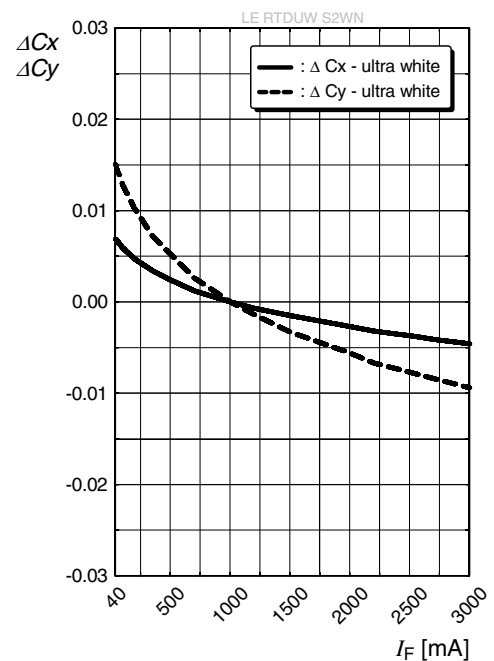


**Forward Voltage** <sup>4)</sup>


$$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j); I_F = 1000\text{ mA}$$

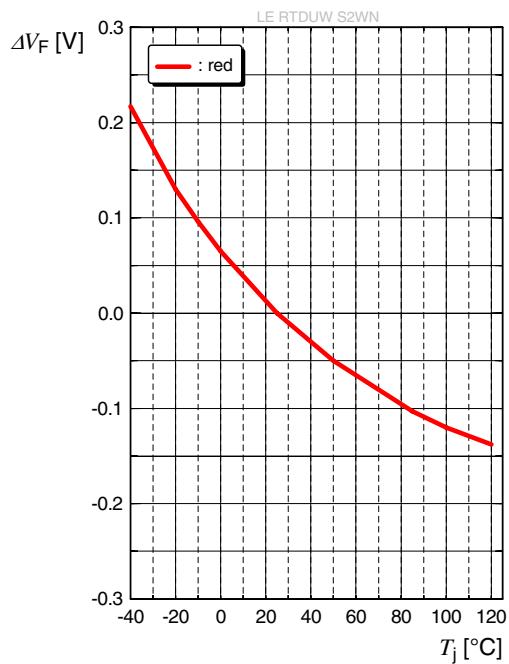**Forward Voltage** <sup>4)</sup>


$$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j); I_F = 1000\text{ mA}$$

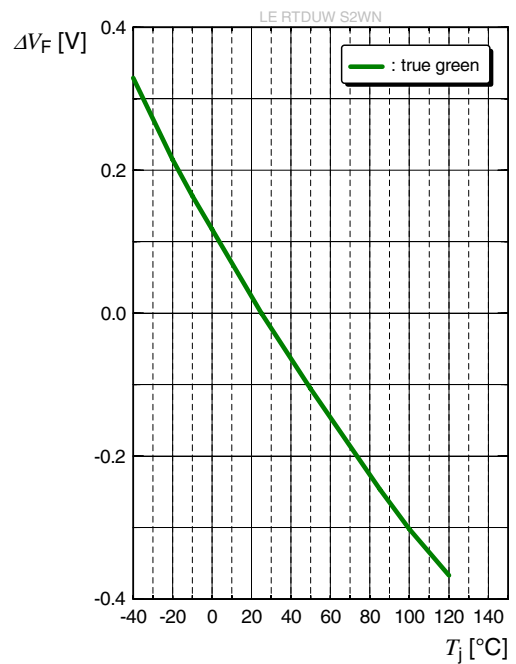**Forward Voltage** <sup>4)</sup>

$$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j); I_F = 1000\text{ mA}$$

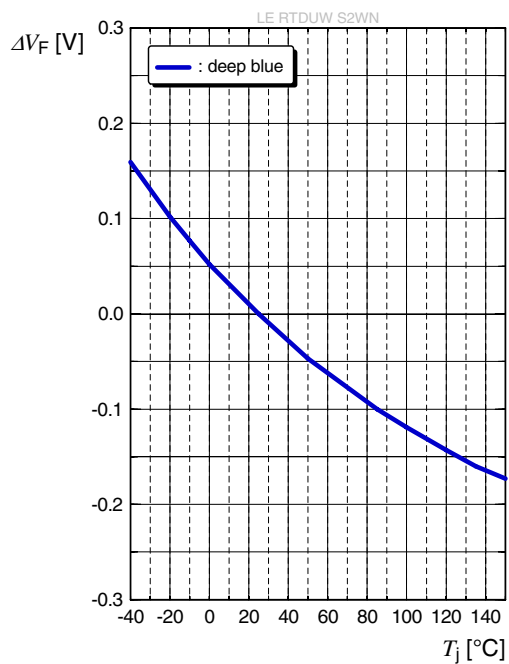
**Forward Voltage** <sup>4)</sup>

$$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j); I_F = 1000\text{ mA}$$

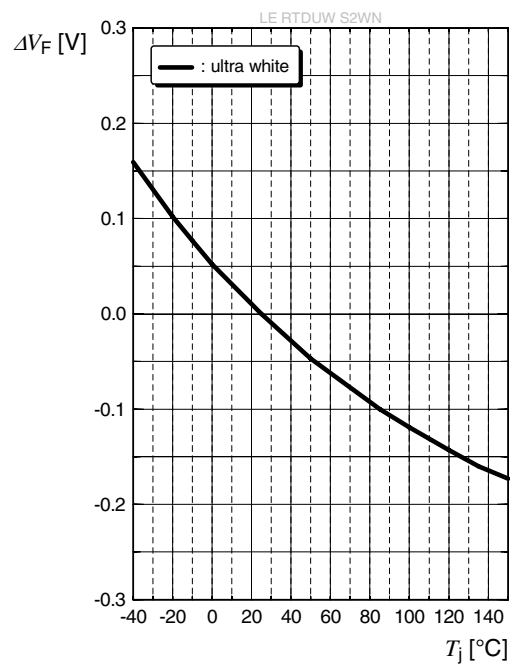


**Relative Luminous Flux** <sup>4)</sup>


$$\Phi_V/\Phi_V(25^\circ\text{C}) = f(T_j); I_F = 1000 \text{ mA}$$

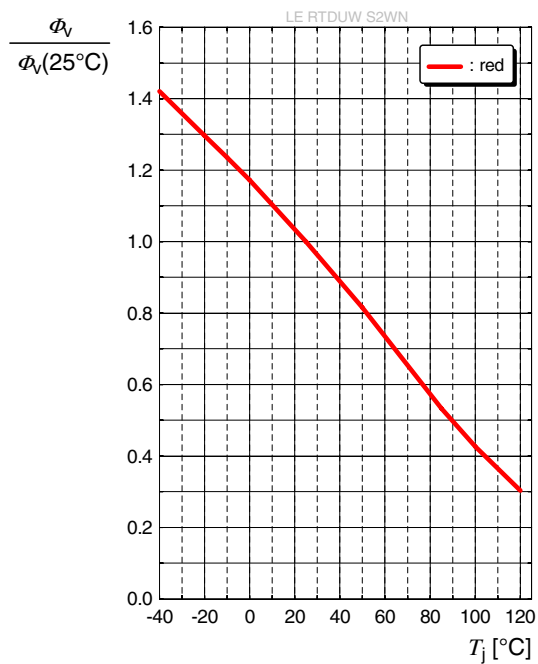**Relative Luminous Flux** <sup>4)</sup>


$$\Phi_V/\Phi_V(25^\circ\text{C}) = f(T_j); I_F = 1000 \text{ mA}$$

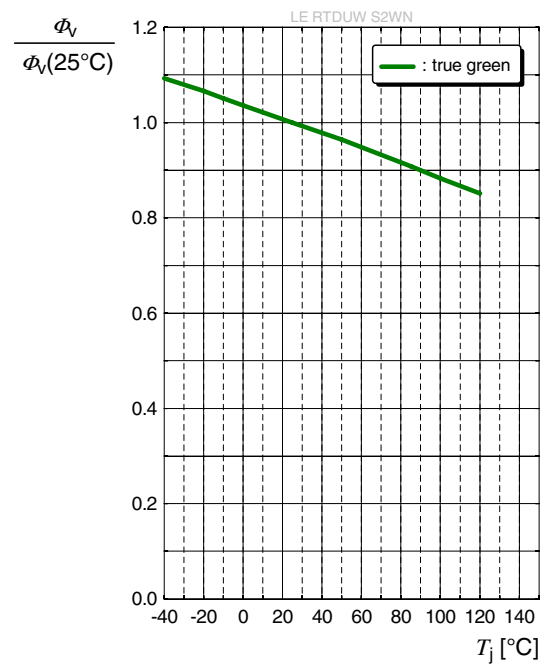**Relative Radiant Power** <sup>4)</sup>

$$\Phi_E/\Phi_E(25^\circ\text{C}) = f(T_j); I_F = 1000 \text{ mA}$$

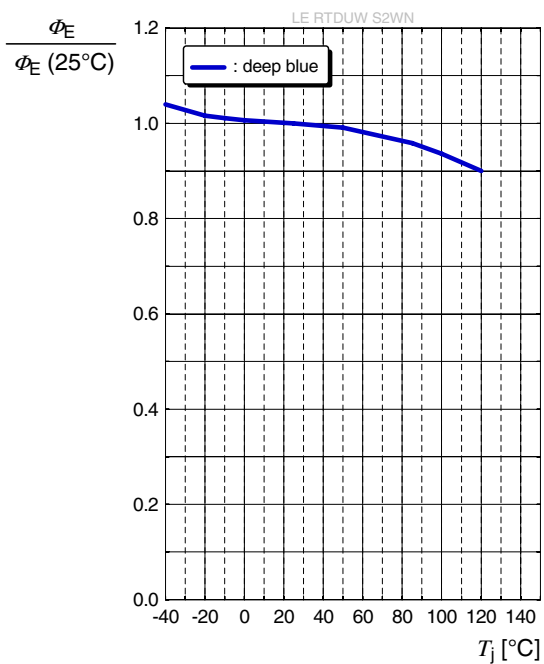
**Relative Luminous Flux** <sup>4)</sup>

$$\Phi_V/\Phi_V(25^\circ\text{C}) = f(T_j); I_F = 1000 \text{ mA}$$

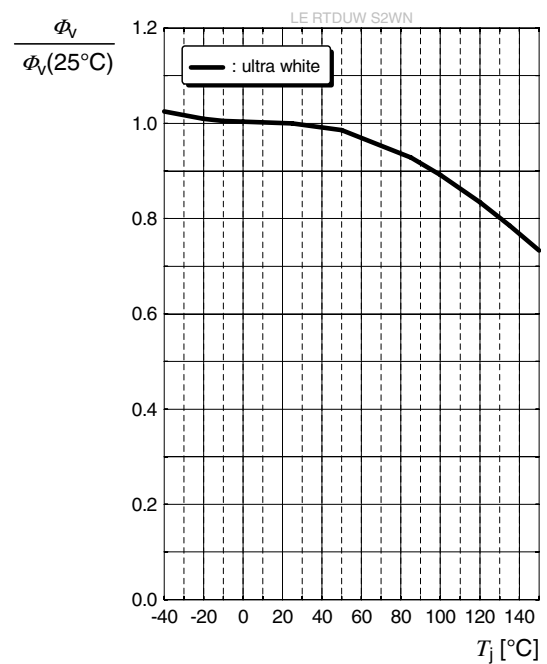


**Chromaticity Coordinate Shift** <sup>4)</sup>


$$\Delta C_x, \Delta C_y = f(T_j); I_F = 1000 \text{ mA}$$

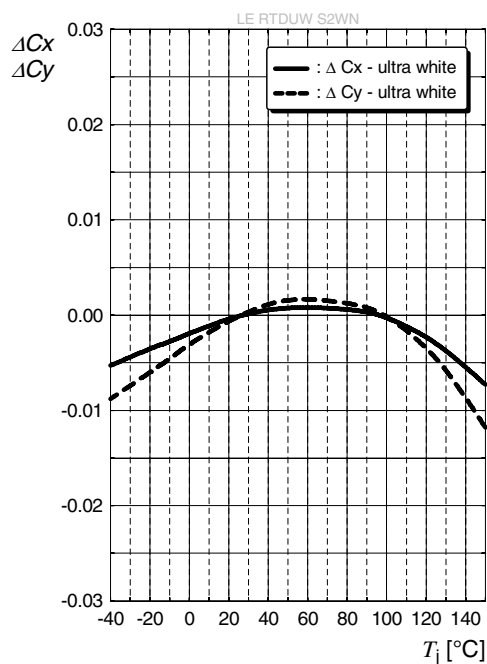**Dominant Wavelength** <sup>4)</sup>


$$\Delta \lambda_{\text{dom}} = \lambda_{\text{dom}} - \lambda_{\text{dom}}(25^\circ\text{C}) = f(T_j); I_F = 1000 \text{ mA}$$

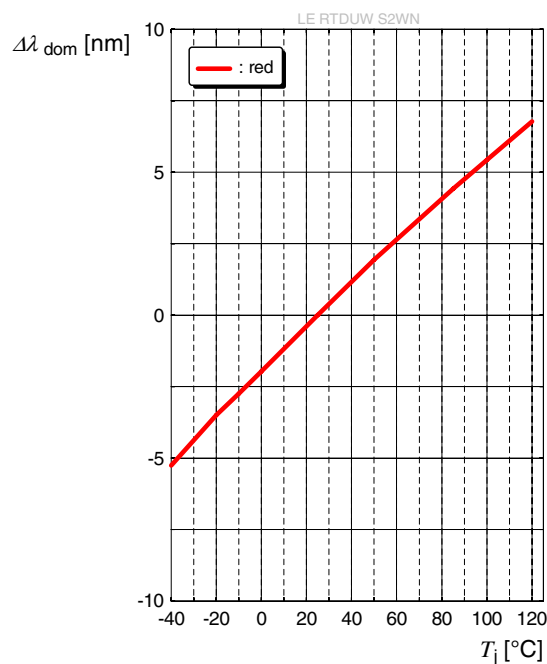**Dominant Wavelength** <sup>4)</sup>

$$\Delta \lambda_{\text{dom}} = \lambda_{\text{dom}} - \lambda_{\text{dom}}(25^\circ\text{C}) = f(T_j); I_F = 1000 \text{ mA}$$

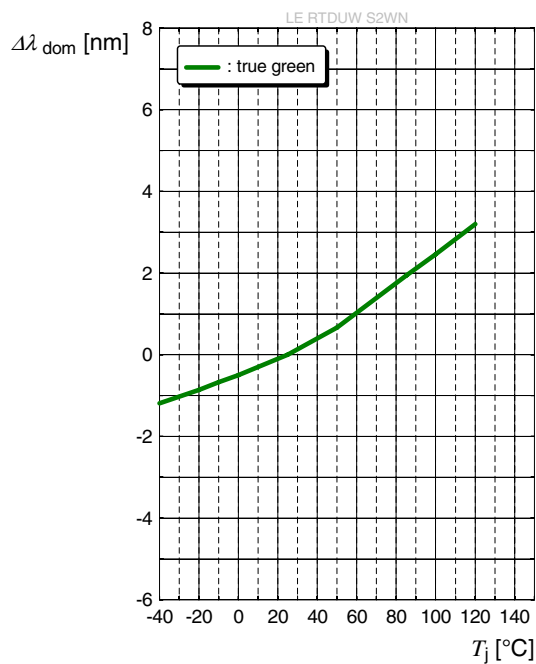
**Dominant Wavelength** <sup>4)</sup>

$$\Delta \lambda_{\text{dom}} = \lambda_{\text{dom}} - \lambda_{\text{dom}}(25^\circ\text{C}) = f(T_j); I_F = 1000 \text{ mA}$$

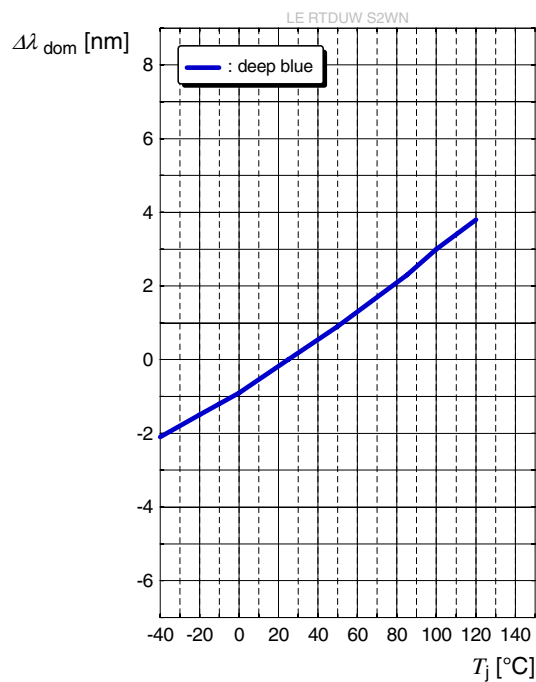


## Max. Permissible Forward Current

$$I_F = f(T)$$

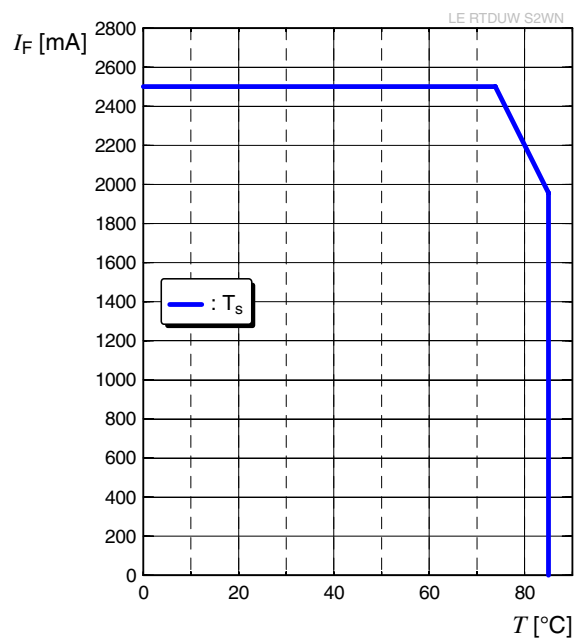

## Dimensional Drawing <sup>9)</sup>

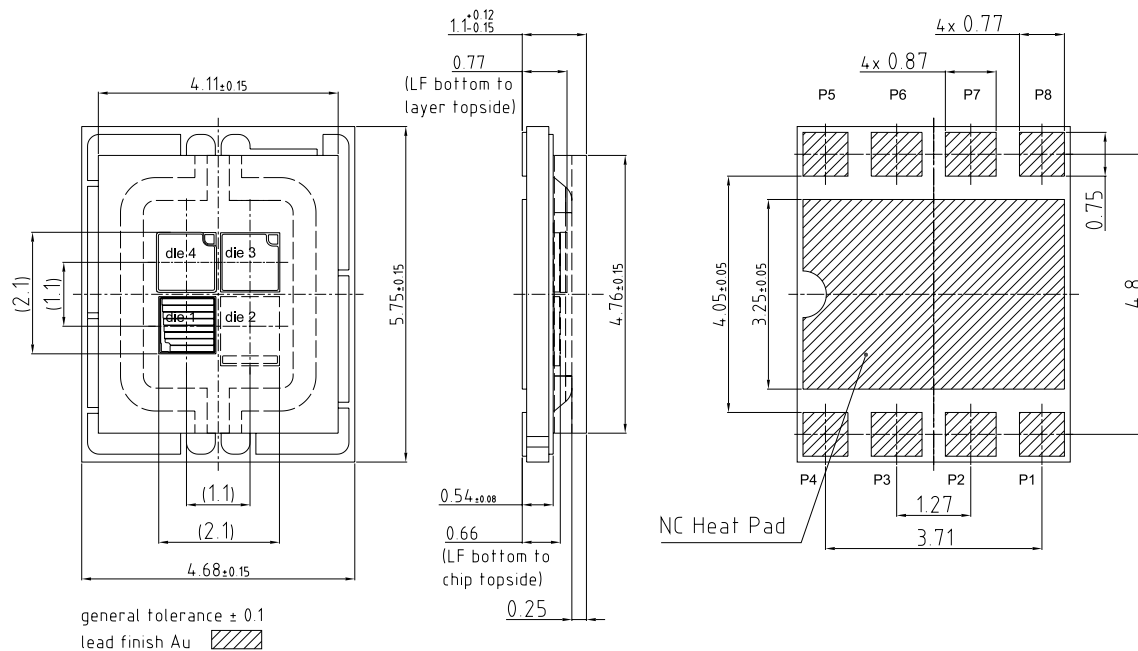

C67062-A4278-A3-03

**Approximate Weight:** 91.0 mg

**Corrosion test:** Class: 3B  
Test condition: 40°C / 90 % RH / 15 ppm H<sub>2</sub>S / 14 days (stricter then IEC 60068-2-43)

**ESD advice:** The device is protected by ESD device which is connected in parallel to the Chip.



## Electrical internal circuit

### Pinning :

P1 Cathode die 1

P2 Anode die 1

P5 Cathode die 3


P6 Anode die 3

P3 Cathode die 2

P4 Anode die 2

P7 Cathode die 4

P8 Anode die 4

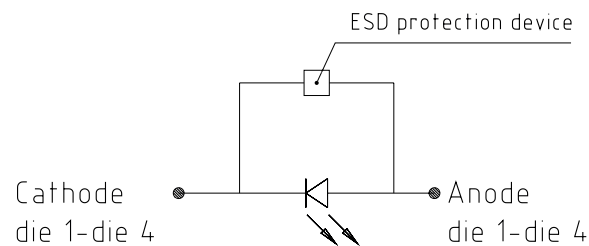

### Colors :


die 1: red

die 2: deep blue

die 3: true green

die 4: ultra white

## Recommended Solder Pad <sup>9)</sup>

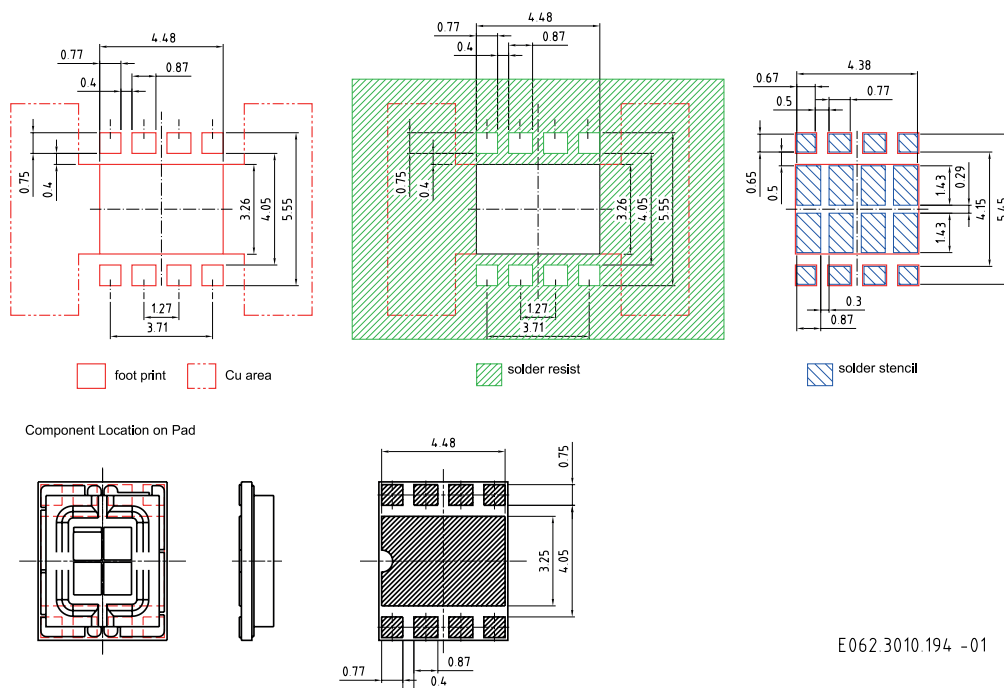


E062.3010.194 -01

For superior solder joint connectivity results we recommend soldering under standard nitrogen atmosphere. Package not suitable for any kind of wet cleaning or ultrasonic cleaning.

## Reflow Soldering Profile

Product complies to MSL Level 2 acc. to JEDEC J-STD-020E

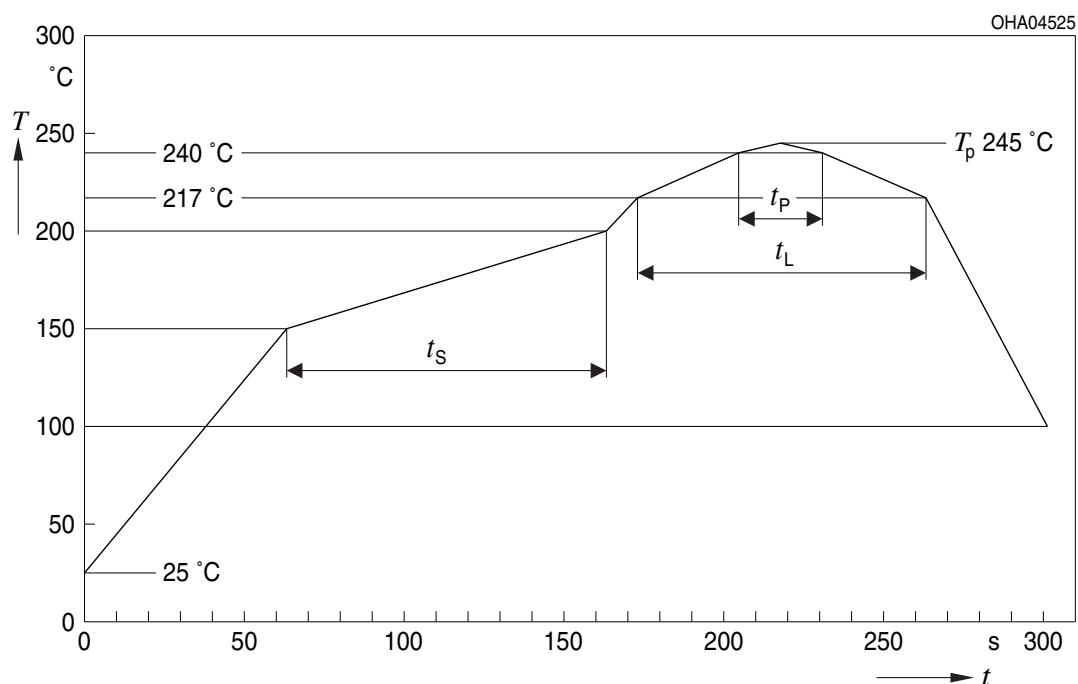


| Profile Feature                                                          | Symbol | Pb-Free (SnAgCu) Assembly |                |         | Unit |
|--------------------------------------------------------------------------|--------|---------------------------|----------------|---------|------|
|                                                                          |        | Minimum                   | Recommendation | Maximum |      |
| Ramp-up rate to preheat <sup>*)</sup><br>25 °C to 150 °C                 |        |                           | 2              | 3       | K/s  |
| Time $t_s$<br>$T_{Smin}$ to $T_{Smax}$                                   | $t_s$  | 60                        | 100            | 120     | s    |
| Ramp-up rate to peak <sup>*)</sup><br>$T_{Smax}$ to $T_p$                |        |                           | 2              | 3       | K/s  |
| Liquidus temperature                                                     | $T_L$  |                           | 217            |         | °C   |
| Time above liquidus temperature                                          | $t_L$  |                           | 80             | 100     | s    |
| Peak temperature                                                         | $T_p$  |                           | 245            | 260     | °C   |
| Time within 5 °C of the specified peak<br>temperature $T_p - 5\text{ K}$ | $t_p$  | 10                        | 20             | 30      | s    |
| Ramp-down rate*<br>$T_p$ to 100 °C                                       |        |                           | 3              | 6       | K/s  |
| Time<br>25 °C to $T_p$                                                   |        |                           |                | 480     | s    |

All temperatures refer to the center of the package, measured on the top of the component


\* slope calculation  $DT/Dt$ :  $Dt$  max. 5 s; fulfillment for the whole T-range

## Taping <sup>9)</sup>

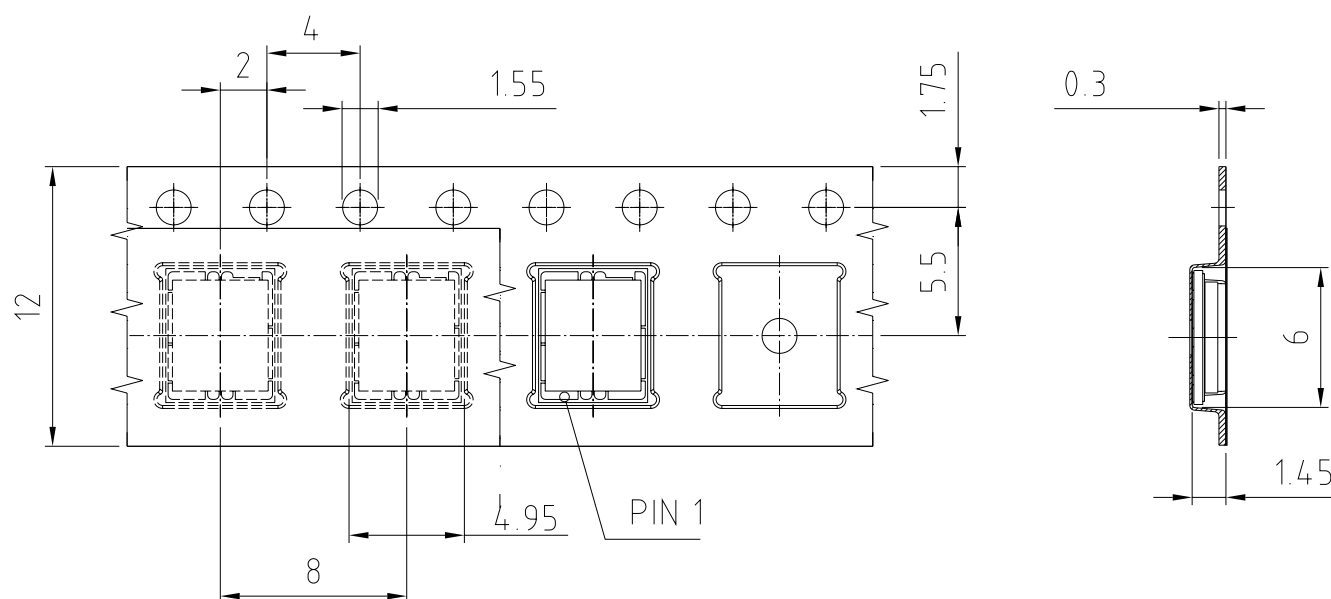

C63062-A4278-B22-01

## Tape and Reel <sup>10)</sup>

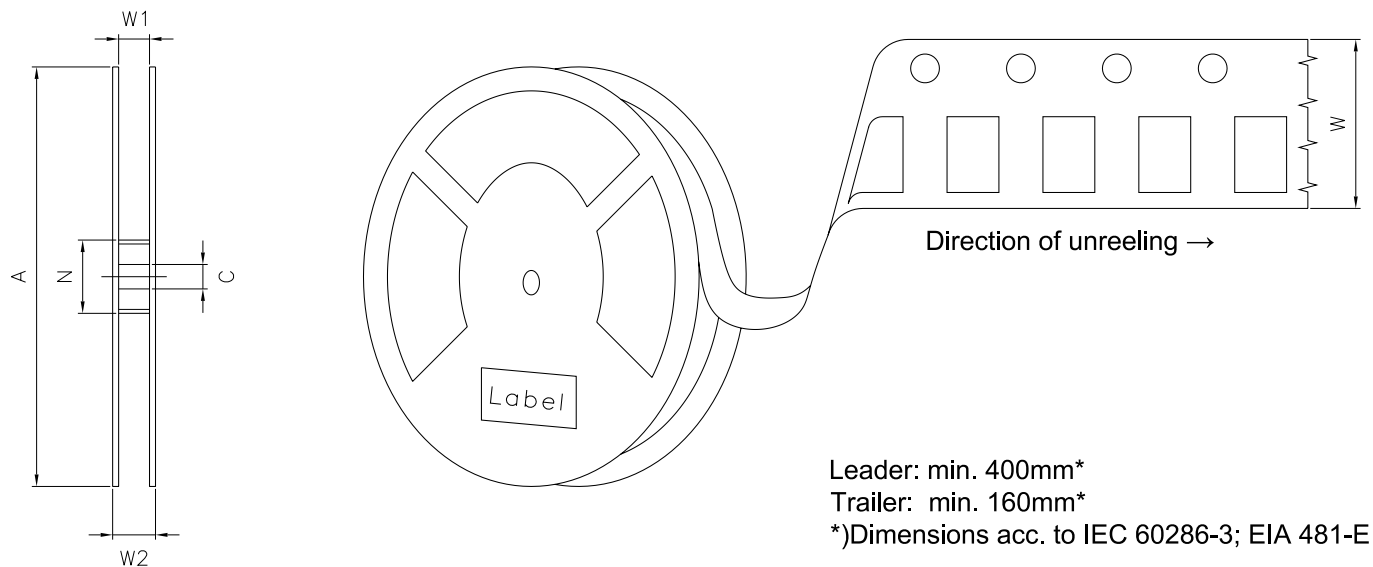

### Reel dimensions [mm]

| A      | W                | N <sub>min</sub> | W <sub>1</sub> | W <sub>2 max</sub> | Pieces per PU |
|--------|------------------|------------------|----------------|--------------------|---------------|
| 180 mm | 12 + 0.3 / - 0.1 | 60               | 12.4 + 2       | 18.4               | 500           |

Barcode-Product-Label (BPL)

OSRAM Opto  
Semiconductors

LX XXXX

BIN1: XX-XX-X-XXX-X

RoHS Compliant

(6P) BATCH NO: 1234567890

(1T) LOT NO: 1234567890

(X) PROD NO: 123456789(Q)QTY: 9999


(9D) D/C: 1234

ML Temp ST  
X XXX °C X

Pack: RXX  
DEMY XXX  
X\_X123\_1234.1234 X


OHA04563

## Dry Packing Process and Materials <sup>9)</sup>

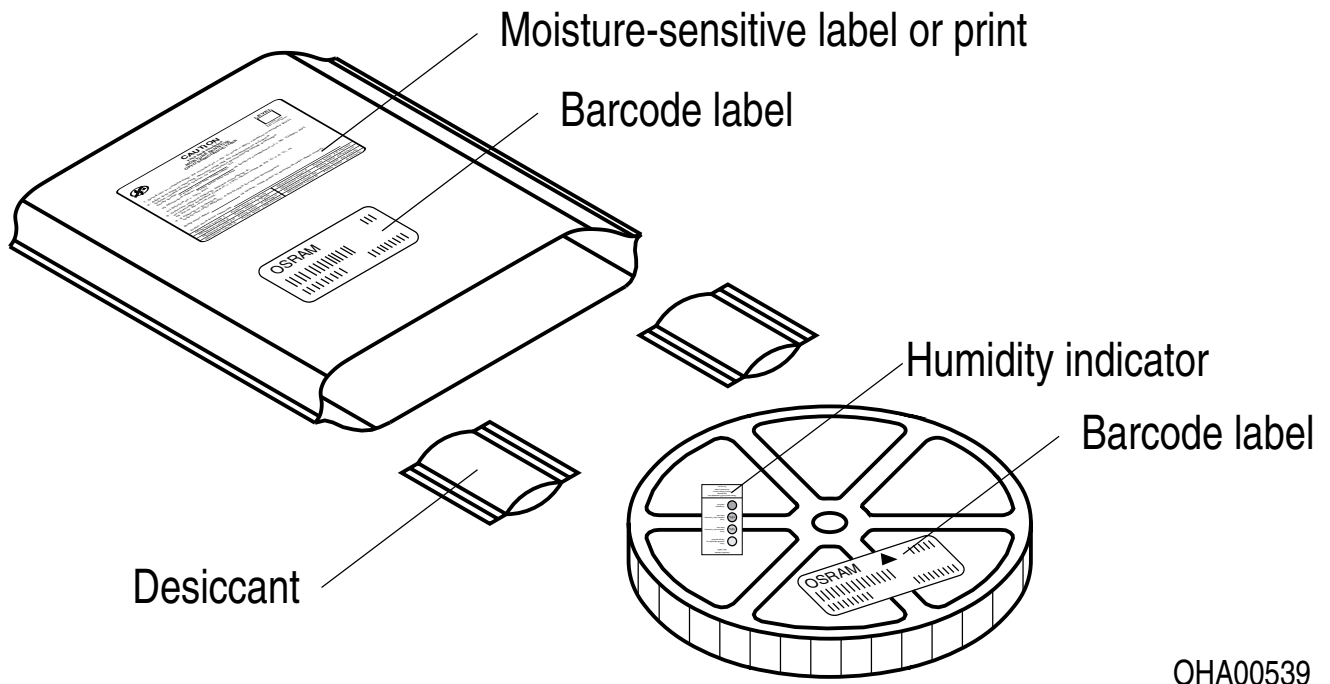

Moisture-sensitive product is packed in a dry bag containing desiccant and a humidity card according JEDEC-STD-033.

## Transportation Packing and Materials <sup>9)</sup>

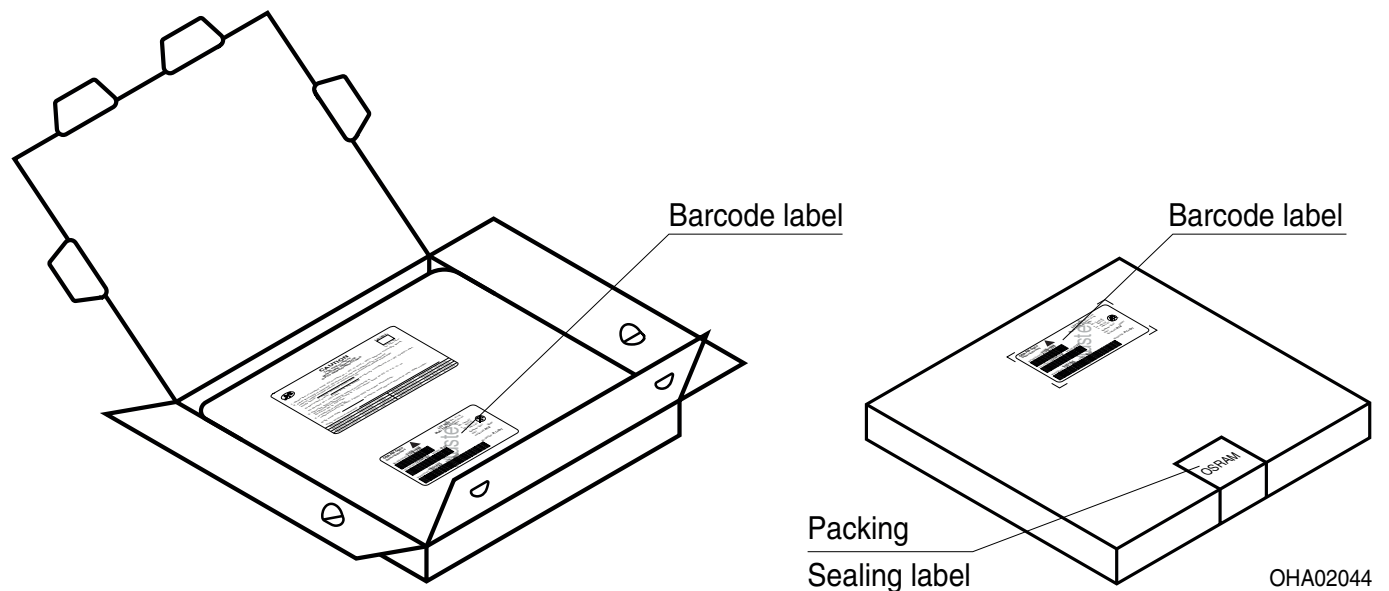

---


### Dimensions of transportation box in mm

| Width      | Length     | Height    |
|------------|------------|-----------|
| 195 ± 5 mm | 195 ± 5 mm | 30 ± 5 mm |

---



Type Designation System

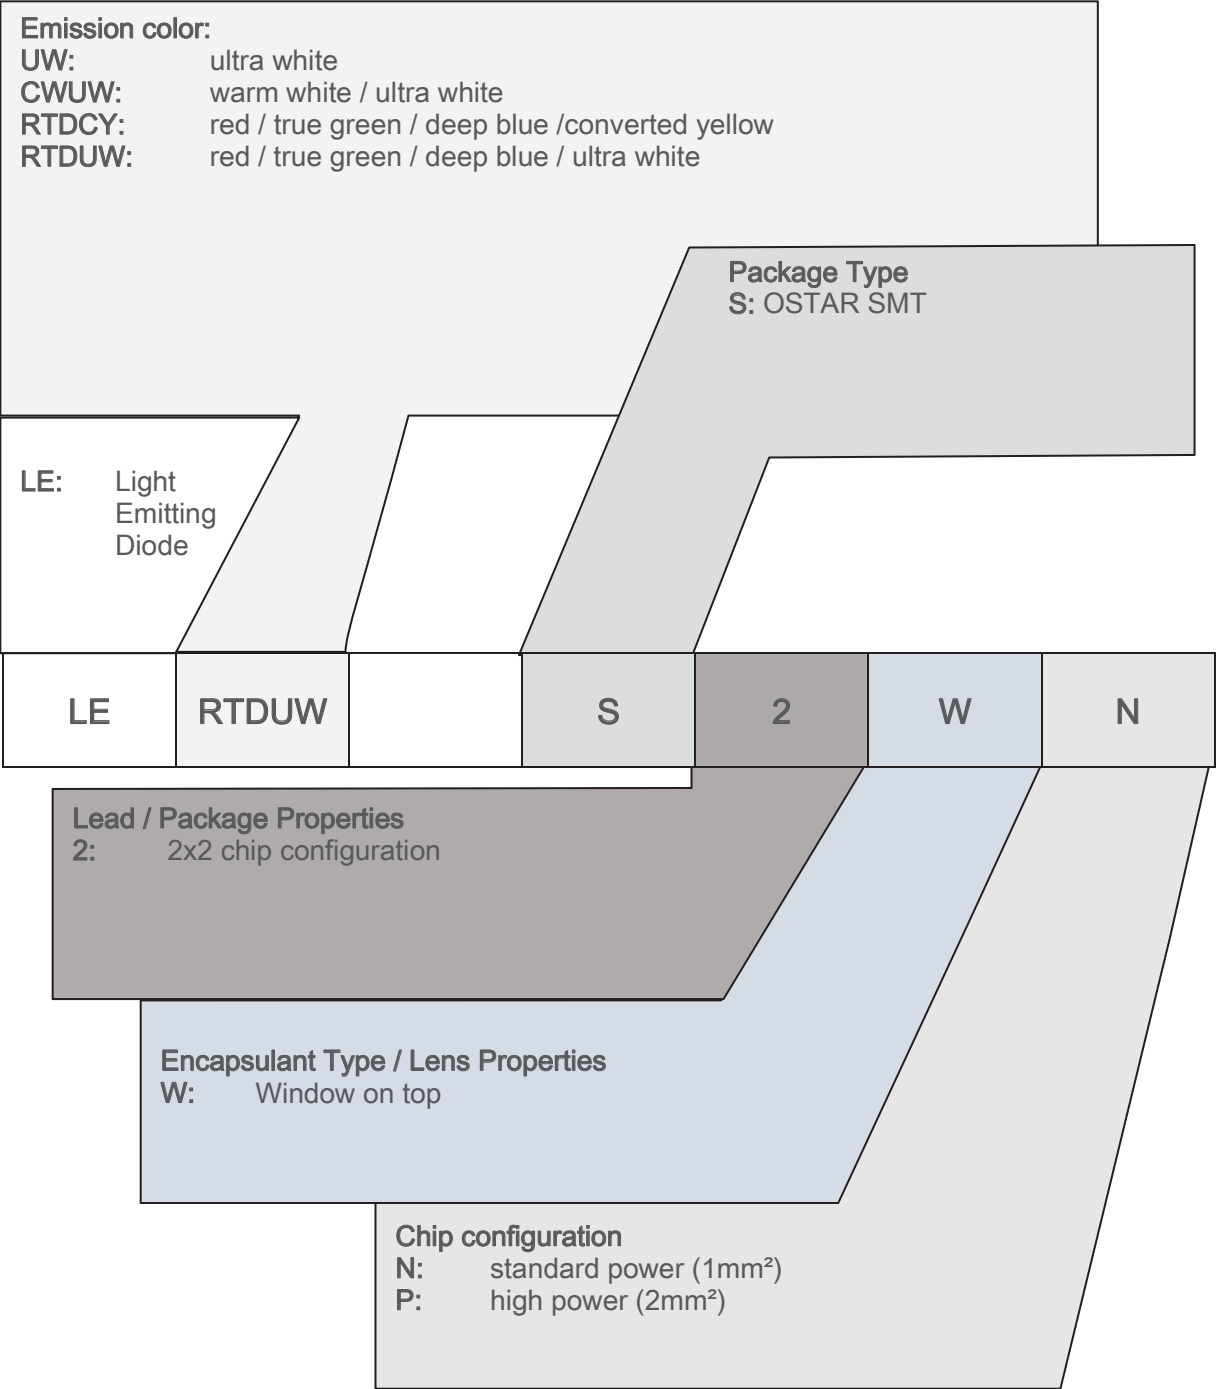



## Notes

The evaluation of eye safety occurs according to the standard IEC 62471:2006 (photo biological safety of lamps and lamp systems). Within the risk grouping system of this IEC standard, the device specified in this data sheet falls into the class **moderate risk (exposure time 0.25 s)**. Under real circumstances (for exposure time, conditions of the eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. When looking at bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment, and even accidents, depending on the situation.

Subcomponents of this device contain, in addition to other substances, metal filled materials including silver. Metal filled materials can be affected by environments that contain traces of aggressive substances. Therefore, we recommend that customers minimize device exposure to aggressive substances during storage, production, and use. Devices that showed visible discoloration when tested using the described tests above did show no performance deviations within failure limits during the stated test duration. Respective failure limits are described in the IEC60810.

For further application related informations please visit [www.osram-os.com/appnotes](http://www.osram-os.com/appnotes)

## Disclaimer

### Disclaimer

Language english will prevail in case of any discrepancies or deviations between the two language wordings.

### Attention please!

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version on the OSRAM OS website.

### Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office.

By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

### Product safety devices/applications or medical devices/applications

OSRAM OS components are not developed, constructed or tested for the application as safety relevant component or for the application in medical devices.

In case Buyer – or Customer supplied by Buyer– considers using OSRAM OS components in product safety devices/applications or medical devices/applications, Buyer and/or Customer has to inform the local sales partner of OSRAM OS immediately and OSRAM OS and Buyer and /or Customer will analyze and coordinate the customer-specific request between OSRAM OS and Buyer and/or Customer.

---

## Glossary

- 1) **Brightness:** Brightness values are measured during a current pulse of typically 25 ms, with an internal reproducibility of  $\pm 8\%$  and an expanded uncertainty of  $\pm 11\%$  (acc. to GUM with a coverage factor of  $k = 3$ ).
- 2) **Reverse Operation:** Reverse Operation of 10 hours is permissible in total. Continuous reverse operation is not allowed.
- 3) **Wavelength:** The wavelength is measured at a current pulse of typically 25 ms, with an internal reproducibility of  $\pm 0.5\text{ nm}$  and an expanded uncertainty of  $\pm 1\text{ nm}$  (acc. to GUM with a coverage factor of  $k = 3$ ).
- 4) **Typical Values:** Due to the special conditions of the manufacturing processes of semiconductor devices, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.
- 5) **Forward Voltage:** The forward voltage is measured during a current pulse of typically 8 ms, with an internal reproducibility of  $\pm 0.05\text{ V}$  and an expanded uncertainty of  $\pm 0.1\text{ V}$  (acc. to GUM with a coverage factor of  $k = 3$ ).
- 6) **Thermal Resistance:**  $R_{th\text{ max}}$  is based on statistic values ( $6\sigma$ ).
- 7) **Chromaticity coordinate groups:** Chromaticity coordinates are measured during a current pulse of typically 25 ms, with an internal reproducibility of  $\pm 0.005$  and an expanded uncertainty of  $\pm 0.01$  (acc. to GUM with a coverage factor of  $k = 3$ ).
- 8) **Characteristic curve:** In the range where the line of the graph is broken, you must expect higher differences between single devices within one packing unit.
- 9) **Tolerance of Measure:** Unless otherwise noted in drawing, tolerances are specified with  $\pm 0.1$  and dimensions are specified in mm.
- 10) **Tape and Reel:** All dimensions and tolerances are specified acc. IEC 60286-3 and specified in mm.

**Published by OSRAM Opto Semiconductors GmbH**  
**Leibnizstraße 4, D-93055 Regensburg**  
**www.osram-os.com © All Rights Reserved.**

EU RoHS and China RoHS compliant product



此产品符合欧盟 RoHS 指令的要求；  
按照中国的相关法规和标准，不含有毒有害物质或元素。

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А