Molded Precision Wirewound Resistors
Axial Leads

FEATURES

- 0.75 W to 3 W at 25 °C
- NF C 83-210
- CECC 40201-005
- Low temperature coefficient ≤ ± 50 ppm/°C
- Low ohmic values 15 mΩ available
- Excellent behavior against humidity
- Electrical insulation
- Mechanical strength
- Accurate sizes
- Termination = Sn/Ag/Cu or pure matte tin according to the ohmic value
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912

Pb-free
RoHS
COMPLIANT

High stability and low temperature coefficient are the main features of the precision wirewound resistors type RMB RMBS models just as maintenance parts. Their performances can be compared with those of the best film resistors but they have in addition a greater power rating. RMBS styles meet the more severe requirements of NF C 83-210 (all RMBS styles are approved) and characteristic U of MIL-R-26 E (approximate size of RW 70 and 79 resistors) specifications. The two models RMB and RMBS have a similar construction. RMBS are submitted, in addition to a process which further increases the stability. On request, non-inductive resistors are available under the reference RMB NI.

DIMENSIONS in millimeters

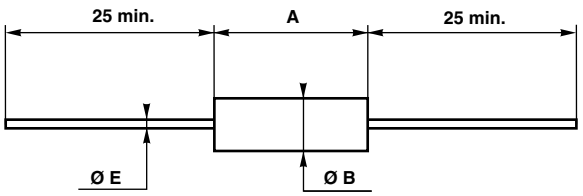

SERIES AND STYLE	A max.	Ø B max.	E ± 0.1	WEIGHT g
RMB0.75 RMBS0.5	7	2.5	0.6	0.3
RMB1.5 RMBS1	10.2	4	0.6	0.7
RMB3 RMBS2	16.2	6.4	0.8	1.5

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	SIZE	RESISTANCE RANGE Ω	RATED POWER $P_{25\,°C}$ W	LIMITING ELEMENT VOLTAGE V	TOLERANCE ± %
RMB0.75	075	0.1 to 2K	0.75	n/a	0.1, 0.5, 1, 2, 5
RMB1.5	105	0.1 to 6.81K	1.5	120	0.1, 0.5, 1, 2, 5
RMB3	300	0.051 to 13K	3	200	0.1, 0.5, 1, 2, 5
RMBS0.5	05	0.1 to 2K	0.5	n/a	0.1, 0.5, 1, 2, 5
RMBS1	10	0.1 to 6.81K	1	120	0.1, 0.5, 1, 2, 5
RMBS2	20	0.015 to 13K	2	200	0.1, 0.5, 1, 2, 5

Note

- Undergoes European Quality Insurance System (CECC)

For technical questions, contact: sferfixedresistors@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

TECHNICAL SPECIFICATIONS

VISHAY SFERNICE SERIES AND STYLE		RMB0.75	RMB1.5	RMB3	RMBS0.5	RMBS1	RMBS2
NF C 83-210		-	-	-	RP1	RP2	RP3
CECC 40201-005		-	-	-	A	B	C
Power Rating	at 25 °C	0.75 W	1.5 W	3 W	0.5 W	1 W	2 W
	at 70 °C	0.6 W	1.2 W	2.4 W	0.4 W	0.8 W	1.6 W
Ohmic Range in Relation to Tolerance	± 5 % E24	0.1 Ω to 2 kΩ	0.1 Ω to 6.81 kΩ	0.051 Ω to 13 kΩ	0.1 Ω to 2 kΩ	0.1 Ω to 6.81 kΩ	0.015 Ω to 13 kΩ
	± 2 % E48	0.1 Ω to 2 kΩ	0.1 Ω to 6.81 kΩ	0.08 Ω to 12.3 kΩ	0.1 Ω to 2 kΩ	0.1 Ω to 6.81 kΩ	0.078 Ω to 12.4 kΩ
	± 1 % E96	0.1 Ω to 2 kΩ	0.1 Ω to 6.81 kΩ	0.1 Ω to 12.4 kΩ	0.1 Ω to 2 kΩ	0.1 Ω to 6.81 kΩ	0.1 Ω to 12.4 kΩ
	± 0.5 % E96	0.4 Ω to 2 kΩ	0.4 Ω to 6.81 kΩ	0.3 Ω to 12.4 kΩ	0.4 Ω to 2 kΩ	0.4 Ω to 6.81 kΩ	0.3 Ω to 12.4 kΩ
	± 0.1 %	Please consult Vishay Sfernice					
Qualified Ohmic Range NF C 83-210		-	-	-	1 Ω to 174 Ω	1 Ω to 590 Ω	1 Ω to 1.3 kΩ
Limiting Element Voltage		Not applicable	120 V	200 V	Not applicable	120 V	200 V
Critical Resistance		Out of nominal ohmic range					

Note

- Undergoes European Quality Insurance System (CECC)

PERFORMANCE

TESTS	CONDITIONS	REQUIREMENTS		TYPICAL VALUES AND DRIFTS	
		MIL-R-26 E	NF C 83-210	RMB	RMBS
Dielectric W/s Voltage	500 V_{RMS}	± (0.1 % + 0.05 Ω)	-	± (0.05 % + 0.01 Ω)	± (0.05 % + 0.01 Ω)
Short Time Overload	5 P_n at 25 °C/5 s	± (0.2 % + 0.05 Ω)	± 0.25 % + 0.05 Ω	± (0.1 % + 0.01 Ω)	± (0.05 % + 0.01 Ω)
Climatic Sequence	NF C 83-210 -55 °C / +200 °C 5 cycles	-	± 0.25 % + 0.05 Ω Insulation R > 100 MΩ	± (0.1 % + 0.01 Ω) > 10^4 MΩ	± (0.05 % + 0.01 Ω) > 10^4 MΩ
Humidity (Steady State)	NF C 83-210 56 days 95 % RH	-	± 0.25 % + 0.05 Ω Insulation R > 100 MΩ	± (0.1 % + 0.01 Ω) > 10^4 MΩ	± (0.05 % + 0.01 Ω) > 10^4 MΩ
Thermal Shock	Load at 100 % P followed by cold temp. exposure at -55 °C	± (0.2 % + 0.05 Ω)	-	± (0.2 % + 0.01 Ω)	(0.1 % + 0.01 Ω)
Vibration	MIL-STD-202 Method 204 - Test D: 20 *g* 10/2000 Hz	± (0.2 % + 0.05 Ω)	± 0.25 % + 0.05 Ω	± (0.01 % + 0.01 Ω)	± (0.01 % + 0.01 Ω)
Load Life	MIL-STD-202 Method 108 Pr 2000 h	± (0.5 % + 0.05 Ω)	± 0.25 % + 0.05 Ω 1000 h at 25 °C	± (1 % + 0.01 Ω)	± (0.15 % + 0.01 Ω)
Moisture Resistance	MIL-STD-202 Method 106	± (0.2 % + 0.05 Ω) Insulation resistance > 100 MΩ	-	± (0.1 % + 0.01 Ω) > 10^3 MΩ	± (0.05 % + 0.01 Ω) > 10^3 MΩ
High Temperature	1000 h at +200 °C	± (0.5 % + 0.05 Ω)	± 0.5 % + 0.05 Ω Insulation R > 1 GΩ	± 1 %	± 0.3 %
Shock	MIL-STD-202 100 *g* Method 205 Test C	± (0.1 % + 0.05 Ω)	± 0.25 % + 0.05 Ω	± 0.05 %	± 0.05 %

TEMPERATURE COEFFICIENT IN THE RANGE -55 °C TO +200 °C

OHMIC RANGE	REQUIREMENTS NF C 83-210 MIL-R-26E	TYPICAL VALUES SFERNICE
	MIL	
$R_n < 1$	≤ ± 100 ppm/°C	± 50 ppm/°C
$1 \leq R_n < 10$	≤ ± 50 ppm/°C	
$R_n \geq 10$	≤ ± 25 ppm/°C	+0 °C to -20 ppm/°C

For technical questions, contact: sferfixedresistors@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

STABILITY AND POWER RATING

Stability changes slightly according to power rating and ambient temperature. This fact is specially important for users needing a life drift lower than the initial resistance tolerance. Typical drifts, after 2000 h life test made under the 90'/30' conditions and at a 25 °C ambient temperature are:

MODEL STYLE	RMBS 0.5	RMBS 1	RMBS 2	*R* %/*R* %	MODEL STYLE	RMB 0.75	RMB 1.5	RMB 3	*R* %/*R* %
P_n	0.5 W	1 W	2 W	0.15 %	$P_{max.}$	1 W	2 W	3.5 W	1 %
1/2 P_n	0.25 W	0.5 W	1 W	0.075 %	P_n	0.75 W	1.5 W	3 W	0.5 %
					1/3 P_n	0.4 W	0.75 W	1.5 W	0.3 %

POWER RATING

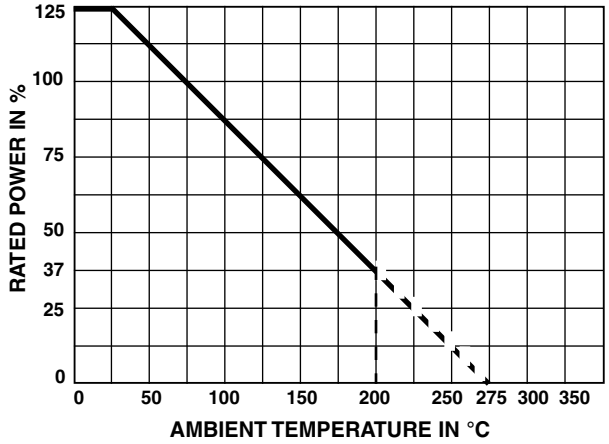

TEMPERATURE RISE

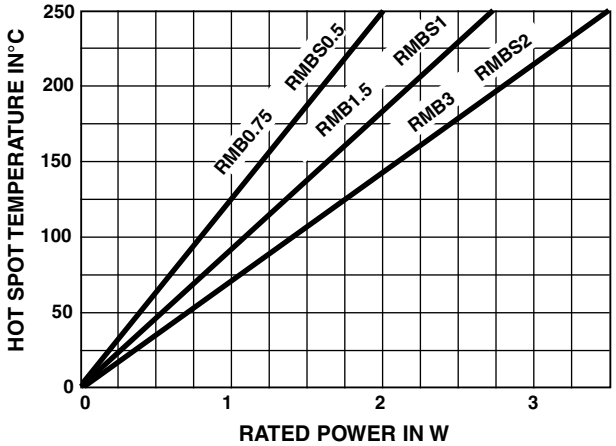

MARKING

Vishay Sfernice trademark, model, style, CECC style (if applicable) nominal resistance (in Ω), tolerance (in %), manufacturing date.

ORDERING INFORMATION

RMB	**105**	**R5000**	**J**	**S00**
RMBS	**05**	**22R00**	**J**	**S14**
MODEL	STYLE	OHMIC VALUE	TOLERANCE	PACKAGING

GLOBAL PART NUMBER INFORMATION

R	M	B	1	0	5	3	0	0	R	0	J	S	0	0

GLOBAL MODEL	SIZE	OPTION	OHMIC VALUE	TOLERANCE	PACKAGING	SPECIAL
RMB **RMBS**	**RMB:** 075 105 300 **RMBS:** 05 10 20	**N** = Non inductive winding	The first four digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point. **300R0** = 300 Ω **680R0** = 680 Ω **20301** = 20.3 kΩ **88R88** = 88.88 Ω ...	**F** = 1 % **J** = 5 %	**Standard Packaging:** **RMB:** Size 075 and 105: S14 = Bag, 100 pieces Size 300: S09 = Bag, 50 pieces **RMBS:** Size 05 and 10: S14 = Bag, 100 pieces Size 20: S09 = Bag, 50 pieces **Other packagings available**	As applicable **Ex** = MEX

For technical questions, contact: sferfixedresistors@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2017 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения **«JONHON»**, а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов **«FORSTAR»**.

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А