




**1 Form C / 2 Form C, 2 A,
200 mW Nominal operating
power relays**

DS RELAYS



RoHS compliant


FEATURES

1. 1 Form C / 2 Form C contact
2. Available 2 coil latching type
3. DIL terminal array enables use of IC sockets

TYPICAL APPLICATIONS

1. Telecommunications and measuring devices
2. Office equipment
3. Computers and related equipment
4. Industrial equipment

ORDERING INFORMATION

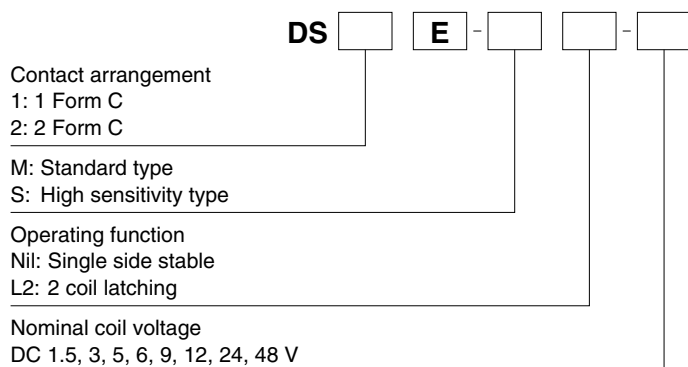

Note: * Nominal coil voltage 1.5V type are 1 Form C only.

TYPES

| Contact arrangement | Nominal coil voltage | High sensitivity type | | Standard type | |
|---------------------|----------------------|-------------------------|----------------------|-------------------------|----------------------|
| | | Single side stable type | 2 coil latching type | Single side stable type | 2 coil latching type |
| | | Part No. | Part No. | Part No. | Part No. |
| 1 Form C | 1.5 V DC | DS1E-S-DC1.5V | DS1E-SL2-DC1.5V | DS1E-M-DC1.5V | DS1E-ML2-DC1.5V |
| | 3 V DC | DS1E-S-DC3V | DS1E-SL2-DC3V | DS1E-M-DC3V | DS1E-ML2-DC3V |
| | 5 V DC | DS1E-S-DC5V | DS1E-SL2-DC5V | DS1E-M-DC5V | DS1E-ML2-DC5V |
| | 6 V DC | DS1E-S-DC6V | DS1E-SL2-DC6V | DS1E-M-DC6V | DS1E-ML2-DC6V |
| | 9 V DC | DS1E-S-DC9V | DS1E-SL2-DC9V | DS1E-M-DC9V | DS1E-ML2-DC9V |
| | 12 V DC | DS1E-S-DC12V | DS1E-SL2-DC12V | DS1E-M-DC12V | DS1E-ML2-DC12V |
| | 24 V DC | DS1E-S-DC24V | DS1E-SL2-DC24V | DS1E-M-DC24V | DS1E-ML2-DC24V |
| | 48 V DC | DS1E-S-DC48V | DS1E-SL2-DC48V | DS1E-M-DC48V | DS1E-ML2-DC48V |
| 2 Form C | 3 V DC | DS2E-S-DC3V | DS2E-SL2-DC3V | — | — |
| | 5 V DC | DS2E-S-DC5V | DS2E-SL2-DC5V | — | — |
| | 6 V DC | DS2E-S-DC6V | DS2E-SL2-DC6V | — | — |
| | 9 V DC | DS2E-S-DC9V | DS2E-SL2-DC9V | — | — |
| | 12 V DC | DS2E-S-DC12V | DS2E-SL2-DC12V | — | — |
| | 24 V DC | DS2E-S-DC24V | DS2E-SL2-DC24V | — | — |
| | 48 V DC | DS2E-S-DC48V | DS2E-SL2-DC48V | — | — |

Standard packing: Carton: 50 pcs.; Case: 500 pcs.

RATING

1. Coil data

1) Single side stable type

| Type | Nominal coil voltage | Pick-up voltage (at 20°C 68°F) | Drop-out voltage (at 20°C 68°F) | Nominal operating current [±10%] (at 20°C 68°F) | Coil resistance [±10%] (at 20°C 68°F) | Nominal operating power | Max. applied voltage (at 50°C 122°F) |
|---------------------------|----------------------|--|---|---|---------------------------------------|-------------------------|--|
| Standard (M) type | 1.5 V DC | 70%V or less of nominal voltage (Initial) | 10%V or more of nominal voltage (Initial) | 266.7 mA | 5.63 Ω | 400 mW | 1 Form C: 120%V of nominal voltage |
| | 3 V DC | | | 133.3 mA | 22.5 Ω | | |
| | 5 V DC | | | 80.0 mA | 62.5 Ω | | |
| | 6 V DC | | | 66.7 mA | 90 Ω | | |
| | 9 V DC | | | 44.4 mA | 203 Ω | | |
| | 12 V DC | | | 33.3 mA | 360 Ω | | |
| | 24 V DC | | | 16.7 mA | 1,440 Ω | | |
| High sensitivity (S) type | 1.5 V DC | 1 Form C: 80%V or less of nominal voltage | 10%V or more of nominal voltage (Initial) | 133.3 mA | 11.3 Ω | 200 mW | 1 Form C: 160%V of nominal voltage 2 Form C: 220%V of nominal voltage |
| | 3 V DC | | | 66.7 mA | 45 Ω | | |
| | 5 V DC | | | 40.0 mA | 125 Ω | | |
| | 6 V DC | 2 Form C: 70%V or less of nominal voltage (Initial) | | 33.3 mA | 180 Ω | | |
| | 9 V DC | | | 22.2 mA | 405 Ω | | |
| | 12 V DC | | | 16.7 mA | 720 Ω | | |
| | 24 V DC | | | 8.3 mA | 2,880 Ω | | |
| 48 V DC | 4.2 mA | 11,520 Ω | | | | | |

2) 2 coil latching type

| Type | Nominal coil voltage | Set voltage (at 20°C 68°F) | Reset voltage (at 20°C 68°F) | Nominal operating current [±10%] (at 20°C 68°F) | | Coil resistance [±10%] (at 20°C 68°F) | | Nominal operating power | | Max. applied voltage (at 50°C 122°F) |
|---------------------------|----------------------|--|--|---|------------|---------------------------------------|------------|-------------------------|------------|--|
| | | | | Set coil | Reset coil | Set coil | Reset coil | Set coil | Reset coil | |
| Standard (M) type | 1.5 V DC | 70%V or less of nominal voltage (Initial) | 70%V or less of nominal voltage (Initial) | 240 mA | 240 mA | 6.25 Ω | 6.25 Ω | 360 mW | 360 mW | 1 Form C: 120%V of nominal voltage |
| | 3 V DC | | | 120 mA | 120 mA | 25 Ω | 25 Ω | | | |
| | 5 V DC | | | 72 mA | 72 mA | 69.4 Ω | 69.4 Ω | | | |
| | 6 V DC | | | 60 mA | 60 mA | 100 Ω | 100 Ω | | | |
| | 9 V DC | | | 40 mA | 40 mA | 225 Ω | 225 Ω | | | |
| | 12 V DC | | | 30 mA | 30 mA | 400 Ω | 400 Ω | | | |
| | 24 V DC | | | 15 mA | 15 mA | 1,600 Ω | 1,600 Ω | | | |
| High sensitivity (S) type | 1.5 V DC | 1 Form C: 80%V or less of nominal voltage | 1 Form C: 80%V or less of nominal voltage | 120 mA | 120 mA | 12.5 Ω | 12.5 Ω | 180 mW | 180 mW | 1 Form C: 160%V of nominal voltage 2 Form C: 220%V of nominal voltage |
| | 3 V DC | | | 60 mA | 60 mA | 50 Ω | 50 Ω | | | |
| | 5 V DC | | | 36 mA | 36 mA | 139 Ω | 139 Ω | | | |
| | 6 V DC | 2 Form C: 70%V or less of nominal voltage (Initial) | | 30 mA | 30 mA | 200 Ω | 200 Ω | | | |
| | 9 V DC | | | 20 mA | 20 mA | 450 Ω | 450 Ω | | | |
| | 12 V DC | | | 15 mA | 15 mA | 800 Ω | 800 Ω | | | |
| | 24 V DC | | | 7.5 mA | 7.5 mA | 3,200 Ω | 3,200 Ω | | | |
| 48 V DC | 3.75 mA | 3.75 mA | 12,800 Ω | 12,800 Ω | | | | | | |

2. Specifications

| Characteristics | Item | | Specifications | |
|----------------------------|---|--------------------------|---|---------------------------|
| Contact | Arrangement | | 1 Form C | 2 Form C |
| | Initial contact resistance, max. | | Max. 50 mΩ (By voltage drop 6 V DC 1A) | |
| | Contact material | | Ag+Au clad | |
| Rating | Nominal switching capacity | | 2 A 30 V DC (resistive load) | |
| | Max. switching power | | 60 W, 125 VA (resistive load) | |
| | Max. switching voltage | | 220 V DC, 250 V AC | |
| | Max. carrying current | | 3 A | |
| | Min. switching capacity (Reference value)*1 | | 10μA 10m V DC | |
| | Nominal operating power | | Single side stable (M type: 400 mW, S type: 200 mW); latching (M type: 360 mW, S type: 180 mW) | |
| Electrical characteristics | Insulation resistance (Initial) | | Min. 100MΩ (at 500V DC) Measurement at same location as "Initial breakdown voltage" section. | |
| | Breakdown voltage (Initial) | Between open contacts | 1,000 Vrms for 1min. (500 Vrms for 1min: 1 Form C type) (Detection current: 10mA.) | |
| | | Between contact and coil | 1,500 Vrms for 1min. (1,000 Vrms for 1min: 1 Form C type) (Detection current: 10mA.) | |
| | Temperature rise | | Max. 65°C (By resistive method, nominal coil voltage applied to the coil, contact carrying current: 2A.) | |
| | Operate time [Set time] (at 20°C 68°F) | | Max. 10 ms [10 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.) | |
| | Release time [Reset time] (at 20°C 68°F) | | Max. 5 ms [10 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.) (without diode) | |
| Mechanical characteristics | Shock resistance | Functional*2 | Min. 490 m/s ² | Min. 490 m/s ² |
| | | Destructive | Min. 980 m/s ² (Half-wave pulse of sine wave: 6 ms.) | |
| | Vibration resistance | Functional | 10 to 55 Hz at double amplitude of 3.3 mm (Detection time: 10μs.) | |
| | | Destructive | 10 to 55 Hz at double amplitude of 5 mm | |
| Expected life | Mechanical | | Min. 10 ⁸ (10 ⁷ : 1 Form C latching type) (at 600 cpm) | |
| | Electrical | | Min. 5×10 ⁵ rated load (at 60 cpm) | |
| Conditions | Conditions for operation, transport and storage*3 | | Ambient temperature: -40°C to +70°C -40°F to +158°F Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature) | |
| | Max. operating speed (at rated load) | | 60 cpm | |
| Unit weight | | | Approx. 3 g .11 oz | Approx. 4g .14oz |


Notes: *1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load. TX/TX-S/TX-D relay AgPd contact type are available for low level load switching (10V DC, 10mA max. level).

*2 Half-wave pulse of sine wave: 1 ms; detection time: 10μs


*3 Refer to "AMBIENT ENVIRONMENT" in GENERAL APPLICATION GUIDELINES.

REFERENCE DATA

1. Maximum switching capacity

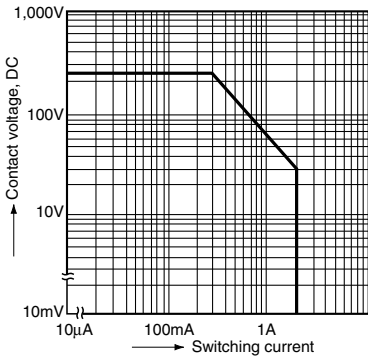


2. Life curve (Resistive load)

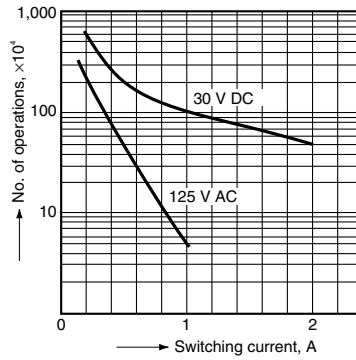


3. Contact reliability for AC loads

Tested sample: DS2E-S-DC24V 10 pcs.
Operating speed: 20 cpm.
Detection level: 200 mΩ

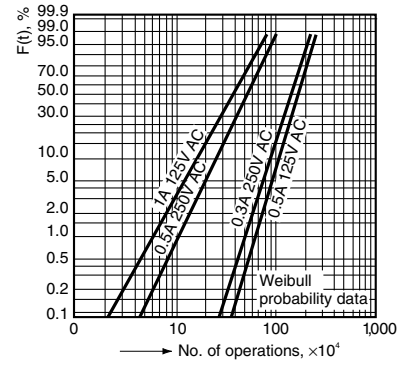


4. Operate and release time characteristics (2 Form C single side stable type)


Test condition: Without diode connected to coil in parallel

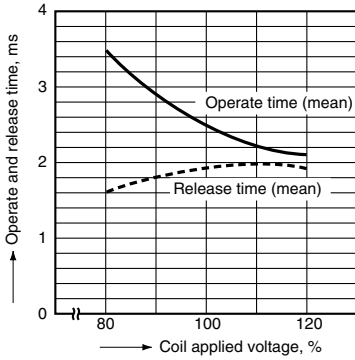

5-(1). Influence of adjacent mounting (1 Form C)

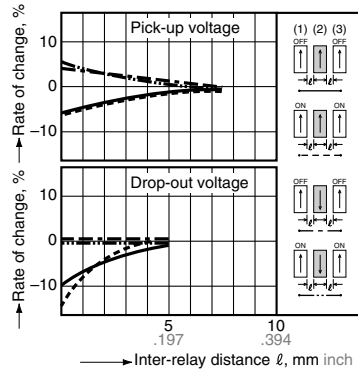

5-(2). Influence of adjacent mounting (2 Form C)

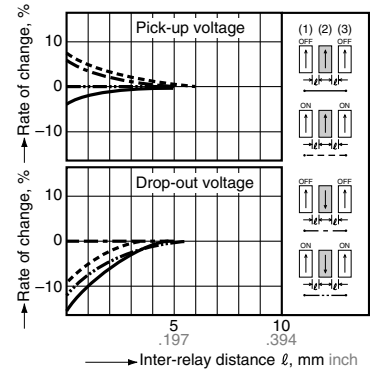


DIMENSIONS (mm inch)

DS (1 Form C)

Single side stable, 2 coil latching

CAD Data

External dimensions

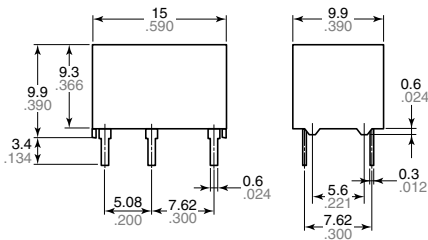


General tolerance: $\pm 0.3 \pm 0.012$

The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://industrial.panasonic.com/ac/e/>

PC board pattern (Bottom view)

Single side stable


2 coil latching

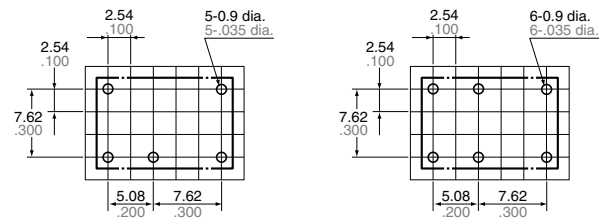


Schematic (Bottom view)

Single side stable

2 coil latching



(Deenergized condition)




(Reset condition)

Tolerance: $\pm 0.1 \pm 0.004$


DS (2 Form C)
 Single side stable

CAD Data


External dimensions

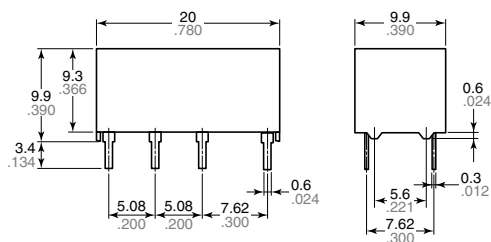
 General tolerance: $\pm 0.3 \pm 0.12$

PC board pattern (Bottom view)

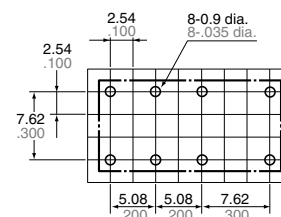

Schematic (Bottom view)




(Deenergized condition)


 Tolerance: $\pm 0.1 \pm 0.04$
DS (2 Form C)
 2 coil latching

CAD Data


External dimensions

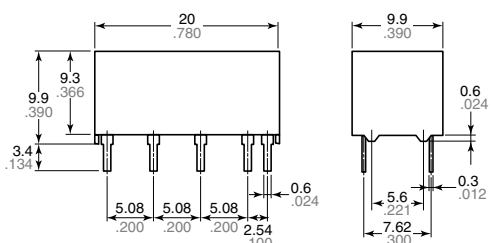
 General tolerance: $\pm 0.3 \pm 0.12$

PC board pattern (Bottom view)

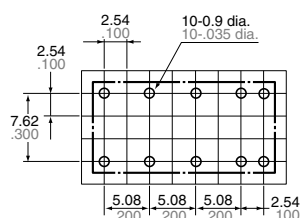

Schematic (Bottom view)



(Reset condition)

 Tolerance: $\pm 0.1 \pm 0.04$
NOTES
1. Coil connection

When connecting coils, refer to the wiring diagram to prevent mis-operation or malfunction.

For general cautions for use, please refer to the "Cautions for use of Signal Relays" or "General Application Guidelines".

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[DS1E-M-DC5V](#) [DS1E-S-DC5V](#) [DS2E-S-DC5V](#) [DS1E-M-DC12V](#) [DS1E-S-DC12V](#) [DS2E-S-DC12V](#) [DS2E-SL2-DC12V](#) [DS1E-M-DC24V](#) [DS1E-S-DC24V](#) [DS2E-S-DC24V](#) [DS2E-S-DC48V](#) [DS2E-S-DC3V](#) [DS2E-S-DC9V](#) [DS1E-M-DC1.5V](#) [DS1E-M-DC6V](#) [DS1E-S-DC1.5V](#) [DS1E-S-DC3V](#) [DS1E-SL2-DC1.5V](#) [DS1E-SL2-DC12V](#) [DS1E-SL2-DC24V](#) [DS1E-SL2-DC48V](#) [DS1E-SL2-DC5V](#) [DS1E-SL2-DC6V](#) [DS1E-SL2-DC9V](#) [DS2E-SL2-DC5V](#) [DS1E-M-DC12V-TB](#) [DS2E-SL2-DC24V](#) [DS1E-M-DC48V](#) [DS1E-S-DC9V](#) [DS2E-SL2-DC9V](#) [DS1E-S-DC6V](#) [DS1E-S-DC48V](#) [DS2E-SL2-DC6V](#) [DS1E-M-DC3V](#) [DS2E-S-DC6V](#) [DS1E-M-DC9V](#) [DS1E-SL2-DC3V](#) [DS1E-M-DC1.5V-R](#) [DS1E-M-DC12V-R](#) [DS1E-M-DC24V-R](#) [DS1E-M-DC24V-TB](#) [DS1E-M-DC5V-R](#) [DS1E-M-DC9V-R](#) [DS1E-S-DC12V-R](#) [DS1E-S-DC12V-TB](#) [DS1E-S-DC24V-R](#) [DS1E-S-DC5V-R](#) [DS1E-S-DC5V-TB](#) [DS1E-SL2-DC12V-R](#) [DS1E-SL2-DC3V-R](#) [DS1E-SL2-DC5V-R](#) [DS1E-SL2-DC9V-R](#) [DS1E-SL-DC1.5V](#) [DS1E-SL-DC12V](#) [DS1E-SL-DC24V](#) [DS1E-SL-DC3V](#) [DS1E-SL-DC48V](#) [DS1E-SL-DC5V](#) [DS1E-SL-DC5V-R](#) [DS1E-SL-DC6V](#) [DS2E-S-DC12V-TB](#) [DS2E-S-DC6V-TB](#) [DS2E-S-DC9V-TB](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А