

BFQ790

High Linearity High Gain 1/2 Watt RF Driver Amplifier

Data Sheet

Revision 2.0, 2014-08-26
Preliminary

Edition 2014-08-26

**Published by
Infineon Technologies AG
81726 Munich, Germany**

**© 2014 Infineon Technologies AG
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

BFQ790, High Linearity High Gain 1/2 Watt RF Driver Amplifier
Revision History: 2014-08-26, Revision 2.0

Page	Subjects (major changes since last revision)
	Preliminary datasheet based on measurements of engineering samples, replaces target datasheet.

Trademarks of Infineon Technologies AG

AURIX™, C166™, CanPAK™, CIPOS™, CIPURSE™, EconoPACK™, CoolMOS™, CoolSET™, CORECONTROL™, CROSSAVE™, DAVE™, DI-POL™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPIM™, EconoPACK™, EiceDRIVER™, eupec™, FCOS™, HITFET™, HybridPACK™, I²RF™, ISOFACE™, IsoPACK™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OptiMOS™, ORIGA™, POWERCODE™, PRIMARION™, PrimePACK™, PrimeSTACK™, PRO-SIL™, PROFET™, RASIC™, ReverSave™, SatRIC™, SIEGET™, SINDRION™, SIPMOS™, SmartLEWIS™, SOLID FLASH™, TEMPFET™, thinQ!™, TRENCHSTOP™, TriCore™.

Other Trademarks

Advance Design System™ (ADS) of Agilent Technologies, AMBA™, ARM™, MULTI-ICE™, KEIL™, PRIMECELL™, REALVIEW™, THUMB™, μVision™ of ARM Limited, UK. AUTOSAR™ is licensed by AUTOSAR development partnership. Bluetooth™ of Bluetooth SIG Inc. CAT-ig™ of DECT Forum. COLOSSUS™, FirstGPS™ of Trimble Navigation Ltd. EMV™ of EMVCo, LLC (Visa Holdings Inc.). EPCOS™ of Epcos AG. FLEXGO™ of Microsoft Corporation. FlexRay™ is licensed by FlexRay Consortium. HYPERTERMINAL™ of Hilgraeve Incorporated. IEC™ of Commission Electrotechnique Internationale. IrDA™ of Infrared Data Association Corporation. ISO™ of INTERNATIONAL ORGANIZATION FOR STANDARDIZATION. MATLAB™ of MathWorks, Inc. MAXIM™ of Maxim Integrated Products, Inc. MICROTEC™, NUCLEUS™ of Mentor Graphics Corporation. MIPI™ of MIPI Alliance, Inc. MIPS™ of MIPS Technologies, Inc., USA. muRata™ of MURATA MANUFACTURING CO., MICROWAVE OFFICE™ (MWO) of Applied Wave Research Inc., OmniVision™ of OmniVision Technologies, Inc. Openwave™ Openwave Systems Inc. RED HAT™ Red Hat, Inc. RFMD™ RF Micro Devices, Inc. SIRIUS™ of Sirius Satellite Radio Inc. SOLARIS™ of Sun Microsystems, Inc. SPANSION™ of Spansion LLC Ltd. Symbian™ of Symbian Software Limited. TAIYO YUDEN™ of Taiyo Yuden Co. TEAKLITE™ of CEVA, Inc. TEKTRONIX™ of Tektronix Inc. TOKO™ of TOKO KABUSHIKI KAISHA TA. UNIX™ of X/Open Company Limited. VERILOG™, PALLADIUM™ of Cadence Design Systems, Inc. VLYNQ™ of Texas Instruments Incorporated. VXWORKS™, WIND RIVER™ of WIND RIVER SYSTEMS, INC. ZETEX™ of Diodes Zetex Limited.

Last Trademarks Update 2011-11-11

Table of Contents

	Table of Contents	4
	List of Figures	5
	List of Tables	6
1	Product Brief	7
2	Features	8
3	Absolute Maximum Ratings	9
4	Recommended Operating Conditions	10
5	Thermal Characteristics	11
6	Electrical Performance in Application	12
7	Electrical Performance in Test Fixture	13
7.1	DC Parameter Table	13
7.2	AC Parameter Tables	14
7.3	Characteristic DC Diagrams	17
7.4	Characteristic AC Diagrams	19
8	Simulation Data	28
9	Package Information SOT89	29

List of Figures

Figure 5-1	Absolute Maximum Power Dissipation $P_{\text{diss,max}}$ vs. T_s	11
Figure 7-1	BFQ790 Testing Circuit	14
Figure 7-2	Collector Current I_C vs. V_{CE} , $I_B = \text{Parameter}$	17
Figure 7-3	DC Current Gain h_{FE} vs. I_C at $V_{CE} = 5 \text{ V}$	17
Figure 7-4	Collector Emitter Breakdown Voltage BV_{CER} vs. Resistor $R_{B/GND}$	18
Figure 7-5	Transition Frequency f_T vs. I_C , $V_{CE} = \text{Parameter}$	19
Figure 7-6	Collector Base Capacitance C_{CB} vs. I_C at $f = 30 \text{ MHz}$, $V_{CB} = \text{Parameter}$	19
Figure 7-7	Gain G_{ms} , G_{ma} , $ S_{21} ^2$ vs. f at $V_{CE} = 5 \text{ V}$, $I_C = 250 \text{ mA}$	20
Figure 7-8	Maximum Power Gain G_{max} vs. I_C at $V_{CE} = 5 \text{ V}$, $f = \text{Parameter}$	20
Figure 7-9	Maximum Power Gain G_{max} vs. V_{CE} at $I_C = 250 \text{ mA}$, $f = \text{Parameter}$	21
Figure 7-10	Output Reflection Coefficient S_{22} vs. f at $V_{CE} = 5 \text{ V}$, $I_C = \text{Parameter}$	21
Figure 7-11	Input Reflection Coefficient S_{11} vs. f at $V_{CE} = 5 \text{ V}$, $I_C = \text{Parameter}$	22
Figure 7-12	Source Impedance Z_{Sopt} for Minimum Noise Figure vs. f at $V_{CE} = 5 \text{ V}$, $I_C = \text{Parameter}$	22
Figure 7-13	Noise Figure NF_{min} vs. f at $V_{CE} = 5 \text{ V}$, $Z_S = Z_{\text{Sopt}}$, $I_C = \text{Parameter}$	23
Figure 7-14	Noise Figure NF_{min} vs. I_C at $V_{CE} = 5 \text{ V}$, $Z_S = Z_{\text{Sopt}}$, $f = \text{Parameter}$	23
Figure 7-15	Noise Figure NF_{50} vs. I_C at $V_{CE} = 5 \text{ V}$, $Z_S = 50 \Omega$, $f = \text{Parameter}$	24
Figure 7-16	Load Pull Contour $OP_{1\text{dB}}$ [dBm] at $V_{CE} = 5 \text{ V}$, $I_C = 250 \text{ mA}$, $f = 0.9 \text{ GHz}$, $Z_L = Z_{\text{opt}}$	24
Figure 7-17	Load Pull Contour $OIP3$ [dBm] at $V_{CE} = 5 \text{ V}$, $I_C = 250 \text{ mA}$, $f = 0.9 \text{ GHz}$, $Z_L = Z_{\text{opt}}$	25
Figure 7-18	Load Pull Contour Gain G [dB] at $V_{CE} = 5 \text{ V}$, $I_C = 250 \text{ mA}$, $f = 0.9 \text{ GHz}$, $Z_L = Z_{\text{opt}}$	25
Figure 7-19	P_{out} , Gain, I_C , PAE vs. P_{in} at $V_{CE} = 5 \text{ V}$, $I_{Cq} = 155 \text{ mA}$, $f = 0.9 \text{ GHz}$, $Z_L = Z_{\text{opt}}$	26
Figure 7-20	P_{out} , Gain, I_C , PAE vs. P_{in} at $V_{CE} = 5 \text{ V}$, $I_{Cq} = 250 \text{ mA}$, $f = 0.9 \text{ GHz}$, $Z_L = Z_{\text{opt}}$	26
Figure 7-21	P_{out} , Gain, I_C , PAE vs. P_{in} at $V_{CE} = 5 \text{ V}$, $I_{Cq} = 250 \text{ mA}$, $f = 2.6 \text{ GHz}$, $Z_L = Z_{\text{opt}}$	27
Figure 7-22	$OIP3$ vs. I_C at $V_{CE} = 5 \text{ V}$, $f = 0.9 \text{ GHz}$, $Z_L = Z_{\text{Lopt}}$	27
Figure 9-1	Package Outline	29
Figure 9-2	Package Footprint	29
Figure 9-3	Marking Example (Marking BFQ790: R3)	29
Figure 9-4	Tape Dimensions	29

List of Tables

Table 3-1	Absolute Maximum Ratings at $T_A = 25\text{ °C}$ (unless otherwise specified)	9
Table 4-1	Recommended Operating Conditions	10
Table 5-1	Thermal Resistance	11
Table 6-1	Application Notes	12
Table 7-1	DC Characteristics at $T_A = 25\text{ °C}$	13
Table 7-2	General AC Characteristics at $T_A = 25\text{ °C}$	14
Table 7-3	AC Characteristics, $V_{CE} = 5\text{ V}$, $f = 0.9\text{ GHz}$	15
Table 7-4	AC Characteristics, $V_{CE} = 5\text{ V}$, $f = 1.8\text{ GHz}$	15
Table 7-5	AC Characteristics, $V_{CE} = 5\text{ V}$, $f = 2.6\text{ GHz}$	15
Table 7-6	AC Characteristics, $V_{CE} = 5\text{ V}$, $f = 3.5\text{ GHz}$	16

1 Product Brief

The BFQ790 is a single stage high linearity high gain driver amplifier. The device is not internally matched and hence provides flexibility to be used for any application where high linearity is key. There are several application notes available, most of them for LTE frequencies, a summary can be found in chapter 6. The device is based on Infineon's reliable and cost effective NPN silicon germanium technology running in very high volume. The technology comprises lowohmic substrate contacts so that emitter bond wires can be omitted. Thereby the emitter inductance is minimized and the power gain optimized. For example one of the circuits provides an OIP3 of 41 dBm at 2650 MHz, with a power gain of 14 dB.


The datasheet describes the device mainly at 250 mA collector current I_C , operated in Class A mode. Under these conditions the BFQ790 provides ½ Watt RF power and highest linearity. If energy efficiency is in the focus it is recommended to operate the device in class AB mode. That means to adjust a quiescent current I_{Cq} lower than 250 mA and use the self biasing effect to get high linearity and efficiency when the input RF power is high. Please refer to figure 7-19, where as an example an I_{Cq} of 155 mA is adjusted. OIP3 vs. I_C is shown in figure 7-22.

For the BFQ790 an advanced large signal compact model is available. Further information please find in chapter 8. The BFQ790 is very rugged. A special collector design prevents from thermal runaway respectively 2nd breakdown. This leads to a high ruggedness against mismatch at the output. The collector design allows safe operation with a single 5 V supply. The special design of the emitter-base diode makes the input robust and yields a high maximum RF input power.

The chip is housed in a halogen free industry standard package SOT89. The high thermal conductivity of the silicon substrate and the low thermal resistance of the package add up to a thermal resistance of only 35 K/W, what leads to moderate junction temperatures even at high dissipated DC power values. Recommended operating conditions can be found in chapter 4. The proper die attach with good thermal contact is tested 100%, so that there is a minimum variation of thermal properties. The devices are 100% DC and RF tested.

2 Features

- High 3rd order intercept point OIP3 of 41 dBm @ 5 V, 250 mA in 1850 MHz and 2650 MHz Class A application circuits
- High compression point OP1dB of 27 dBm @ 5 V, 250 mA corresponding to 40% collector efficiency
- High power gain of 17 dB @ 5V, 250 mA in 1850 MHz Class A application circuit
- Low minimum noise figure of 2.6 dB @ 1800 MHz, 5 V, 70 mA
- Single stage, intended for external matching
- Exceptional ruggedness up to VSWR 10:1 at output
- High maximum RF input power PRFinmax of 18 dBm
- Safe operation with single 5 V supply
- 100% test of proper die attach for reproducible thermal contact
- 100% DC and RF tested
- Easy to use large signal compact (VBIC) model available
- Cost effective NPN SiGe technology running in very high volume
- Easy to use Pb-free (RoHS compliant) and halogen-free industry standard package SOT89, low RTHJS of 35 K/W



Applications

As

- High linearity driver or pre-driver in the transmit chain
- 2nd or 3rd stage LNA in the receive chain
- IF or LO buffer amplifier

In

- Commercial / industrial wireless infrastructure / basestations
- Repeaters
- Automated test equipment

For

- Cellular, PCS, DCS, UMTS, LTE, CDMA, WCDMA, GSM, GPRS
- WLAN, WiMAX, WLL and MMDS
- ISM, AMR
- UHF television, CATV, DBS

Attention: ESD (Electrostatic discharge) sensitive device, observe handling precautions

Product Name	Package	Pin Configuration			Marking
BFQ790	SOT89	1 = B	2 = E	3 = C	R3

3 Absolute Maximum Ratings

Table 3-1 Absolute Maximum Ratings at $T_A = 25\text{ °C}$ (unless otherwise specified)

Parameter	Symbol	Values		Unit	Note / Test Condition
		Min.	Max.		
Collector emitter voltage	V_{CE}		6.1 5.1	V	$T_A = 25\text{ °C}$ $T_A = -40\text{ °C}$
Collector base voltage	V_{CB}		18	V	
Instantaneous total base emitter reverse voltage	v_{BE}	-2.0		V	DC + RF swing
Instantaneous total collector current	i_C	–	600	mA	DC + RF swing
DC collector current	I_C	–	300	mA	
DC base current	I_B	–	10	mA	
RF input power	P_{RFIn}	–	18	dBm	In- and output matched
Mismatch at output	$VSWR$	–	10:1		In compression, over all phase angles
ESD stress pulse	V_{ESD}	-500	500	V	HBM, all pins, acc. to ANSI / ESDA / JEDEC JS-001-2012
Dissipated power	P_{diss}	–	1500	mW	$T_S \leq 97.5\text{ °C}^{1)}$, regard derating curve in figure 5-1
Junction temperature	T_J	–	150	°C	
Operating case temperature	T_A	-40	105 ²⁾	°C	
Storage temperature	T_{Stg}	-55	150	°C	

1) T_S is the soldering point temperature. T_S is measured on the emitter lead at the soldering point of the pcb.

2) At the same time regard $T_{J,max}$.

Attention: Stresses above the max. values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the integrated circuit.

4 Recommended Operating Conditions

This following table shows examples of recommended operating conditions. As long as maximum ratings are regarded operation outside these conditions is permitted, but increases failure rate and reduces lifetime. For further information refer to the quality report available on the BFQ790 internet page.

Table 4-1 Recommended Operating Conditions

Operating Mode	Ambient Temperature ¹⁾	Collector Current	DC Power ²⁾	RF Output Power ³⁾	Efficiency ⁴⁾	Dissipated Power ⁵⁾	Thermal Resistance of pcb ⁶⁾	Junction Temperature ⁷⁾
	T_A [°C]	I_C [mA]	P_{DC} [mW]	P_{RFout} [mW] (dBm)	η [%]	P_{diss} [mW]	R_{THSA} [K/W]	T_J [°C]
Compression	55	250	1250	500 (27)	40	750	35	110
Final stage	55	200	1000	250 (24)	25	750	35	110
High T_A	85	120	600	50 (17)	8.5	550	10	110
Maximum T_A	105	50	250	100 (20)	40	150	10	110
Linear	55	150	750	50 (17)	7	700	35	110
Very Linear	55	250	1250	50 (17)	4	1200	10	110

1) Is the operating case temperature respectively of the heat sink.

2) $P_{DC} = V_{CE} * I_C$ with $V_{CE} = 5V$.

3) RF power delivered to the load, $P_{RFout} = \eta * P_{DC}$.

4) Efficiency of the conversion from DC power to RF power, $\eta = P_{RFout} / P_{DC}$ (collector efficiency).

5) $P_{diss} = P_{DC} - P_{RFout}$. The RF output power P_{RFout} delivered to the load reduces the power P_{diss} to be dissipated by the device. This means a good output match is recommended.

6) R_{THSA} is the thermal resistance of the pcb including heat sink, that is between the soldering point S and the ambient A. Regard the impact of R_{THSA} on the junction temperature T_J , see below. The thermal design of the pcb, respectively R_{THSA} , has to be adjusted to the intended operating mode.

7) $T_J = T_A + P_{diss} * R_{THJA}$. $R_{THJA} = R_{THJS} + R_{THSA}$.


R_{THJA} is the thermal resistance between the transistor junction J and the ambient A.

R_{THJS} is the combined thermal resistance of die and package, which is 35 K/W for the BFQ790, see chapter 5.

5 Thermal Characteristics

Table 5-1 Thermal Resistance

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Junction - soldering point	R_{THJS}	–	35	–	K/W	–

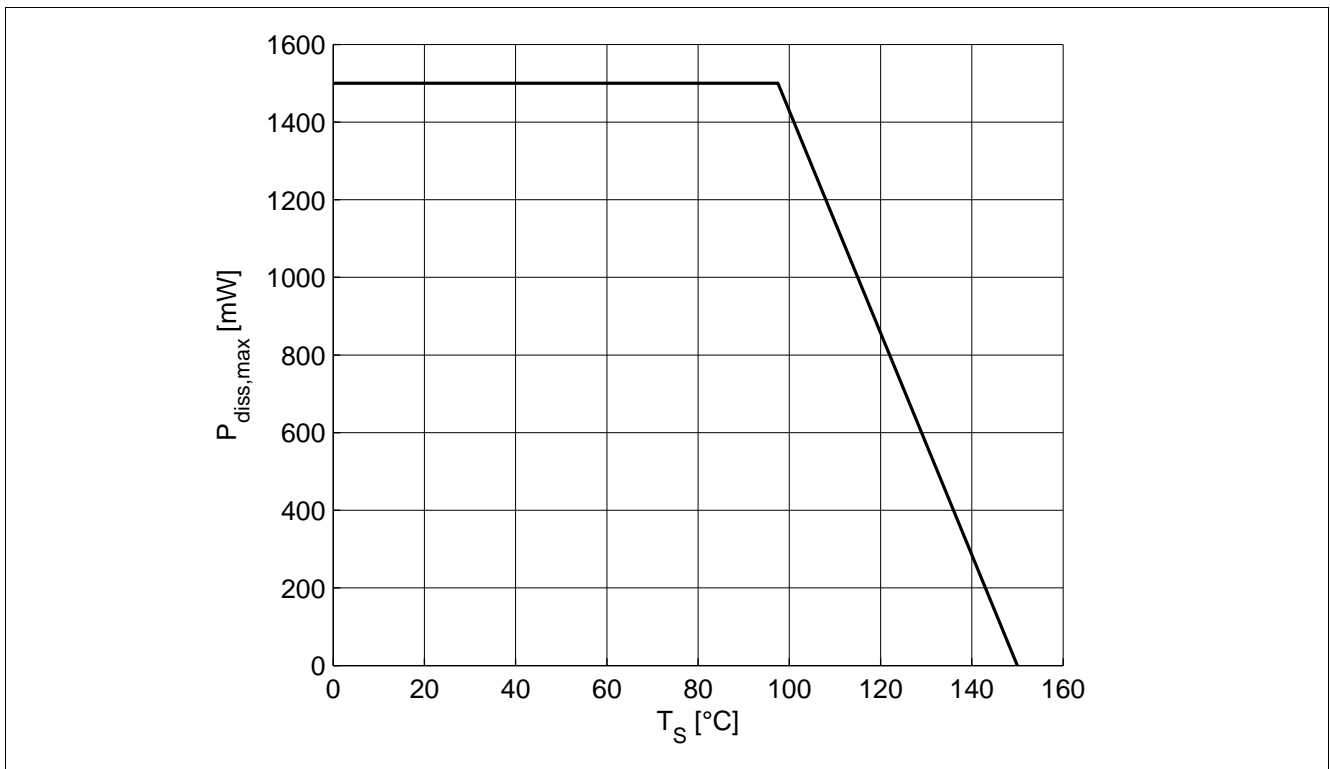
Figure 5-1 Absolute Maximum Power Dissipation $P_{diss,max}$ vs. T_s

Note: In the horizontal part of the derating curve the maximum power dissipation is given by $P_{diss,max} = V_{CE,max} \cdot I_{C,max}$. In this part the junction temperature T_j is lower than $T_{j,max}$. In the declining slope it is $T_j = T_{j,max}$. $P_{diss,max}$ has to be reduced according to the curve in order not to exceed $T_{j,max}$. It is $T_{j,max} = T_s + P_{diss,max} \cdot R_{THJS}$.

6 Electrical Performance in Application

The table shows the most important results of the application notes available for the BFQ790. In all cases the matching is better 10 dB, the isolation ~20 dB, the stability factor > 1 and $V_{CC} = 5V$. For more detailed information please refer to the BFQ790 internet page. Application notes for Class AB operating mode respectively lower quiescent currents I_{Cq} are in development.

Table 6-1 Application Notes

Application Note	Frequency	OP1dB	OIP3	Gain	Operating Mode	ICq
#	[MHz]	[dBm]	[dBm]	[dB]		[mA]
AN385	2620 - 2690	27	41	14	Class A	220
AN386	1805 - 1880	27	41	17	Class A	230

7 Electrical Performance in Test Fixture

7.1 DC Parameter Table

Table 7-1 DC Characteristics at $T_A = 25\text{ °C}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Collector emitter breakdown voltage	$V_{(BR)CEO}$	6.1	6.7	–	V	$I_C = 1\text{ mA}$, open base
Collector emitter leakage current	I_{CES}	–	1 0.1	40 ¹⁾ 3	nA μA	$V_{CE} = 8\text{ V}$, $V_{BE} = 0$ $V_{CE} = 18\text{ V}$, $V_{BE} = 0$ E-B short circuited
Collector base leakage current	I_{CBO}	–	1	40 ¹⁾	nA	$V_{CB} = 8\text{ V}$, $I_E = 0$ Open emitter
Emitter base leakage current	I_{EBO}	–	1	40 ¹⁾	nA	$V_{EB} = 0.5\text{ V}$, $I_C = 0$ Open collector
DC current gain	h_{FE}	60	120	180		$V_{CE} = 5\text{ V}$, $I_C = 250\text{ mA}$ Pulse measured ²⁾


1) Upper spec value limited by the cycle time of the 100% test.

2) Pulse width is 1 ms, duty cycle 10%. Regard that the current gain h_{FE} depends on the junction temperature T_J and T_J amongst others from the thermal resistance R_{THSA} of the pcb, see notes to table 4-1. Hence the h_{FE} specified in this datasheet must not be the same as in the application. It is highly recommended to apply circuit design techniques to make the collector current I_C independent on the h_{FE} production variation and temperature effects.

7.2 AC Parameter Tables
Table 7-2 General AC Characteristics at $T_A = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Transition frequency	f_T	–	20	–	GHz	$V_{CE} = 5\text{ V}$, $I_C = 250\text{ mA}$, $f = 0.5\text{ GHz}$
Collector base capacitance	C_{CB}	–	1.1	–	pF	$V_{CB} = 5\text{ V}$, $V_{BE} = 0$ $f = 1\text{ MHz}$ Emitter grounded
Collector emitter capacitance	C_{CE}	–	2.2	–	pF	$V_{CE} = 5\text{ V}$, $V_{BE} = 0$ $f = 1\text{ MHz}$ Base grounded
Emitter base capacitance	C_{EB}	–	9.4	–	pF	$V_{EB} = 0.5\text{ V}$, $V_{CB} = 0$ $f = 1\text{ MHz}$ Collector grounded

Measurement setup for the AC characteristics shown in tables 7-3 to 7-6 is a test fixture with Bias T's and tuners to adjust the source and load impedances in a $50\text{ }\Omega$ system, $T_A = 25\text{ }^\circ\text{C}$.

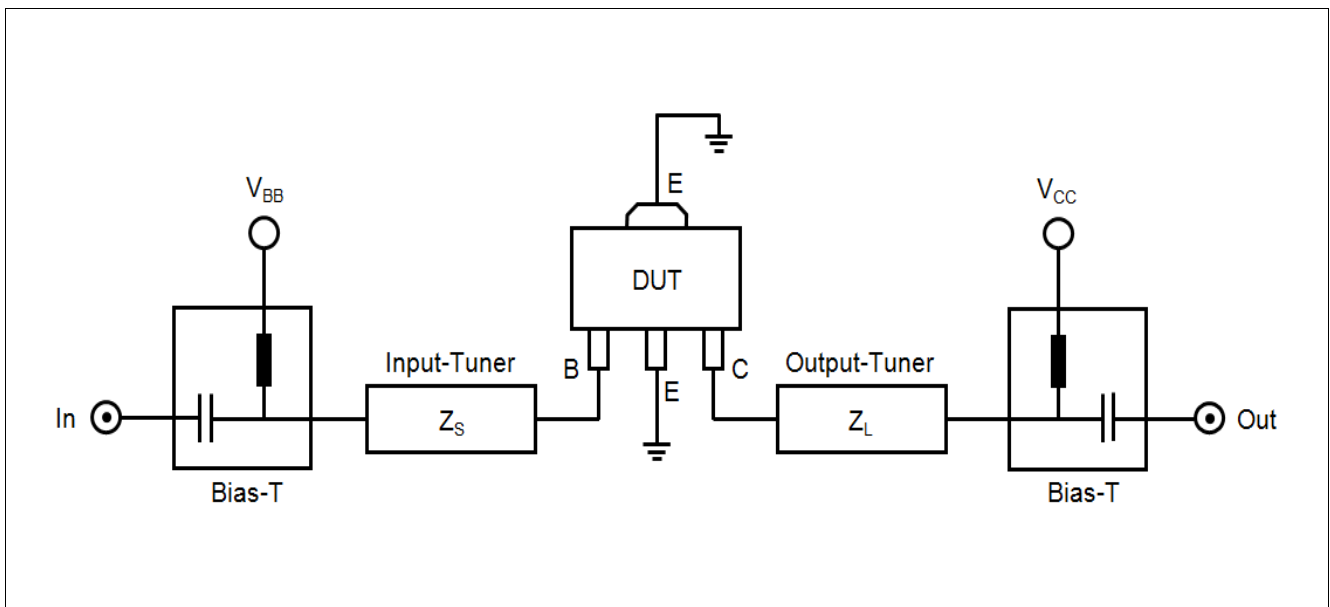
Figure 7-1 BFQ790 Testing Circuit

Electrical Performance in Test Fixture

 Table 7-3 AC Characteristics, $V_{CE} = 5\text{ V}$, $f = 0.9\text{ GHz}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Power gain						
Maximum power gain	G_{ma}	–	23	–	dB	$I_C = 250\text{ mA}$
Transducer gain	$ S_{21} ^2$	–	13	–		$I_C = 250\text{ mA}$
Minimum Noise Figure						
Minimum noise figure	NF_{min}	–	2.5	–	dB	$Z_S = Z_{Sopt}$ $I_C = 70\text{ mA}$
Linearity						
1 dB compression point at output	$OP1dB$	–	27	–	dBm	$Z_L = Z_{Lopt}$ $I_C = 250\text{ mA}$
3rd order intercept point at output	$OIP3$	–	38.5	–		$I_C = 250\text{ mA}$

 Table 7-4 AC Characteristics, $V_{CE} = 5\text{ V}$, $f = 1.8\text{ GHz}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Power gain						
Maximum power gain	G_{ma}	–	18.5	–	dB	$I_C = 250\text{ mA}$
Transducer gain	$ S_{21} ^2$	–	7.5	–		$I_C = 250\text{ mA}$
Minimum Noise Figure						
Minimum noise figure	NF_{min}	–	2.6	–	dB	$Z_S = Z_{Sopt}$ $I_C = 70\text{ mA}$
Linearity						
1 dB compression point at output	$OP1dB$	–	27	–	dBm	$Z_L = Z_{Lopt}$ $I_C = 250\text{ mA}$
3rd order intercept point at output	$OIP3$	–	38.5	–		$I_C = 250\text{ mA}$

 Table 7-5 AC Characteristics, $V_{CE} = 5\text{ V}$, $f = 2.6\text{ GHz}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Power gain						
Maximum power gain	G_{ma}	–	16	–	dB	$I_C = 250\text{ mA}$
Transducer gain	$ S_{21} ^2$	–	5.5	–		$I_C = 250\text{ mA}$
Minimum Noise Figure						
Minimum noise figure	NF_{min}	–	3.0	–	dB	$Z_S = Z_{Sopt}$ $I_C = 70\text{ mA}$
Linearity						
1 dB compression point at output	$OP1dB$	–	27	–	dBm	$Z_L = Z_{Lopt}$ $I_C = 250\text{ mA}$
3rd order intercept point at output	$OIP3$	–	38.5	–		$I_C = 250\text{ mA}$

Table 7-6 AC Characteristics, $V_{CE} = 5\text{ V}$, $f = 3.5\text{ GHz}$

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Power gain						
Maximum power gain	G_{ma}	–	13	–	dB	$I_C = 250\text{ mA}$
Transducer gain	$ S_{21} ^2$	–	3	–		$I_C = 250\text{ mA}$
Minimum Noise Figure						
Minimum noise figure	NF_{min}	–	3.4	–	dB	$Z_S = Z_{Sopt}$ $I_C = 70\text{ mA}$
Linearity						
1 dB compression point at output	$OP1dB$	–	27	–	dBm	$Z_L = Z_{Lopt}$ $I_C = 250\text{ mA}$
3rd order intercept point at output	$OIP3$	–	38.5	–		$I_C = 250\text{ mA}$

7.3 Characteristic DC Diagrams

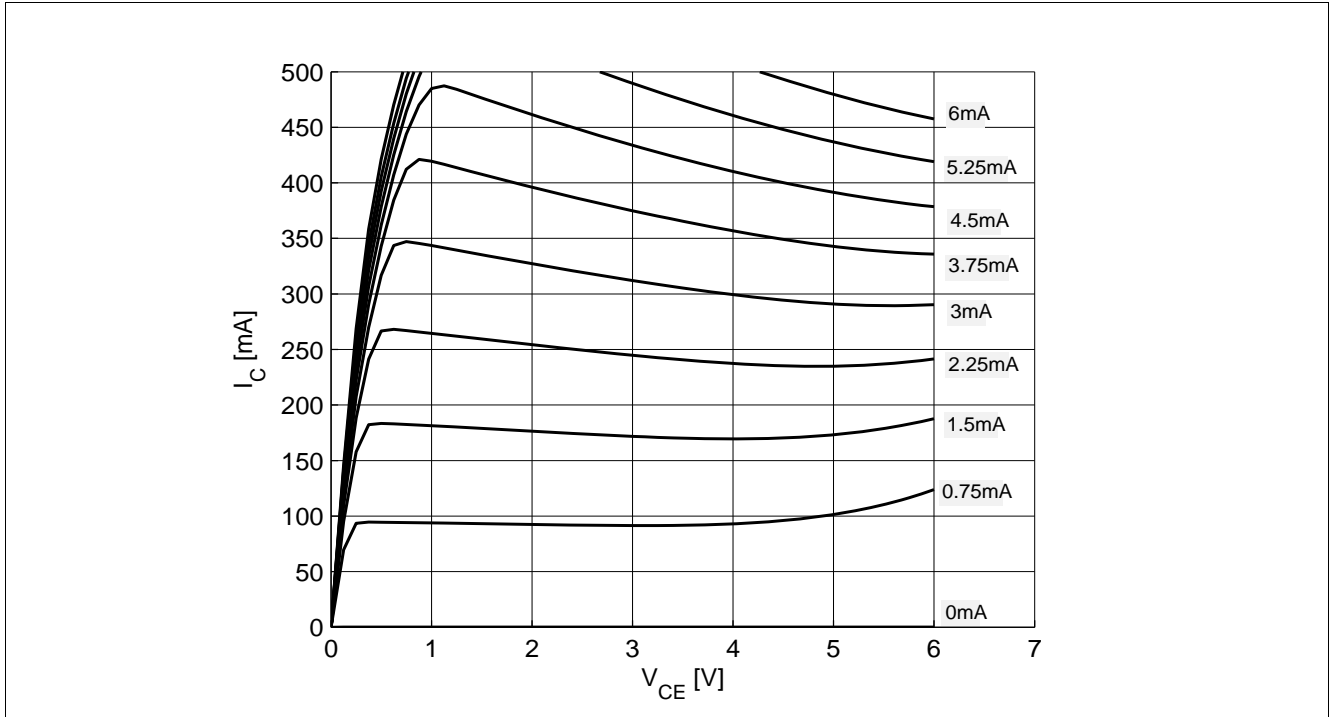


Figure 7-2 Collector Current I_C vs. V_{CE} , I_B = Parameter

Note: Regard absolute maximum ratings for I_C , V_{CE} and P_{diss}

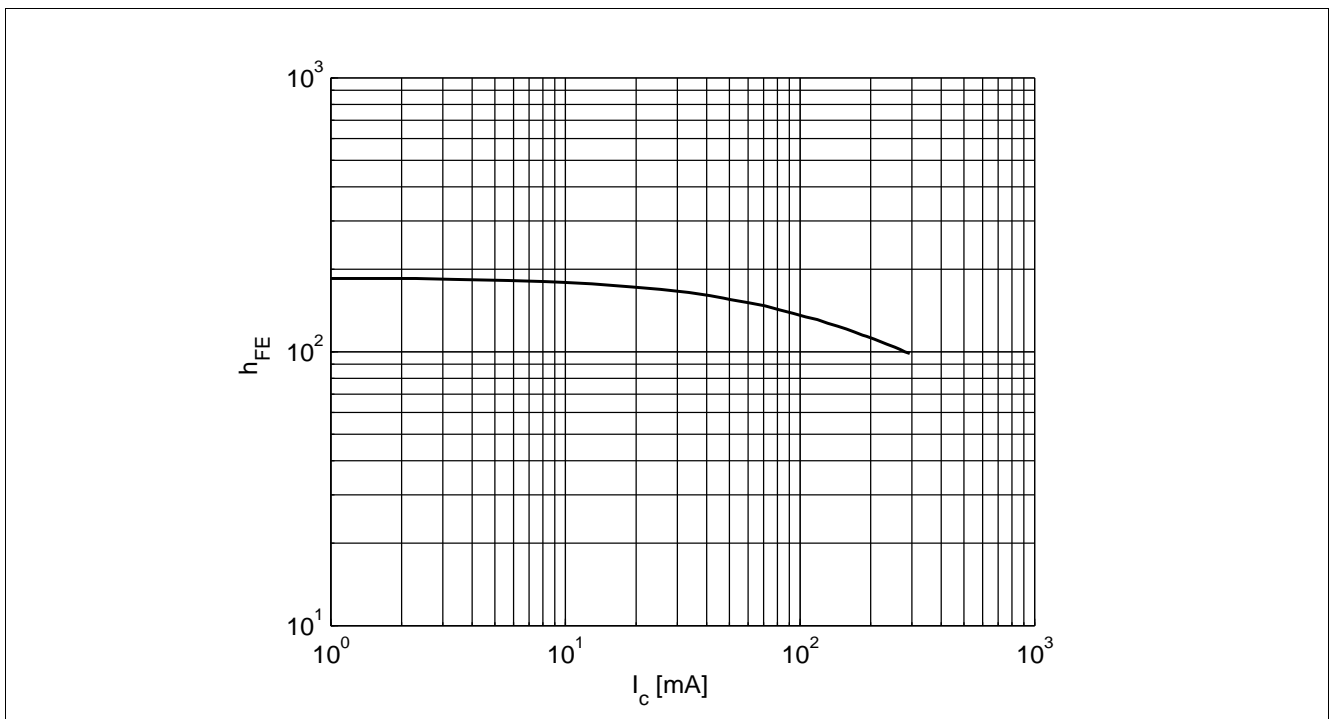


Figure 7-3 DC Current Gain h_{FE} vs. I_C at $V_{CE} = 5\text{ V}$

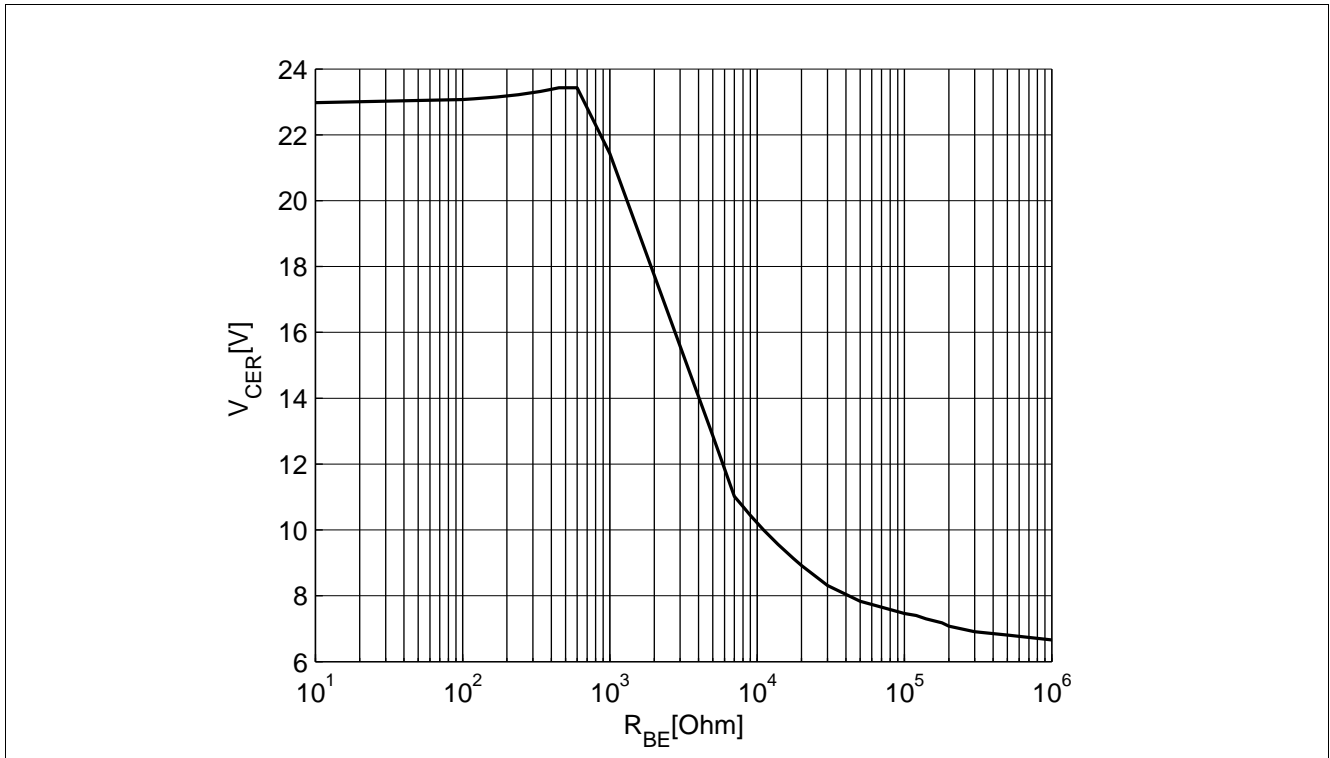


Figure 7-4 Collector Emitter Breakdown Voltage BV_{CER} vs. Resistor $R_{B/GND}$

Note: The above figure shows the collector-emitter breakdown voltage BV_{CER} with a resistor $R_{B/GND}$ between base and emitter. Only for very high $R_{B/GND}$ values ("open base") the breakdown voltage is as low as BV_{CEO} (here 6.7 V). With decreasing $R_{B/GND}$ values BV_{CER} increases, e.g. at $R_{B/GND}=10$ kOhm to $BV_{CER}=10$ V. In the application the biasing base resistance together with block capacitors take over the function of $R_{B/GND}$ and allows the RF voltage amplitude to swing up to voltages much higher than BV_{CEO} , no clipping occurs. Due to this effect the transistor can be biased at $V_{CE}=5$ V and still high RF output powers achieved, see the OP1dB values reported in chapter 7.2.

7.4 Characteristic AC Diagrams

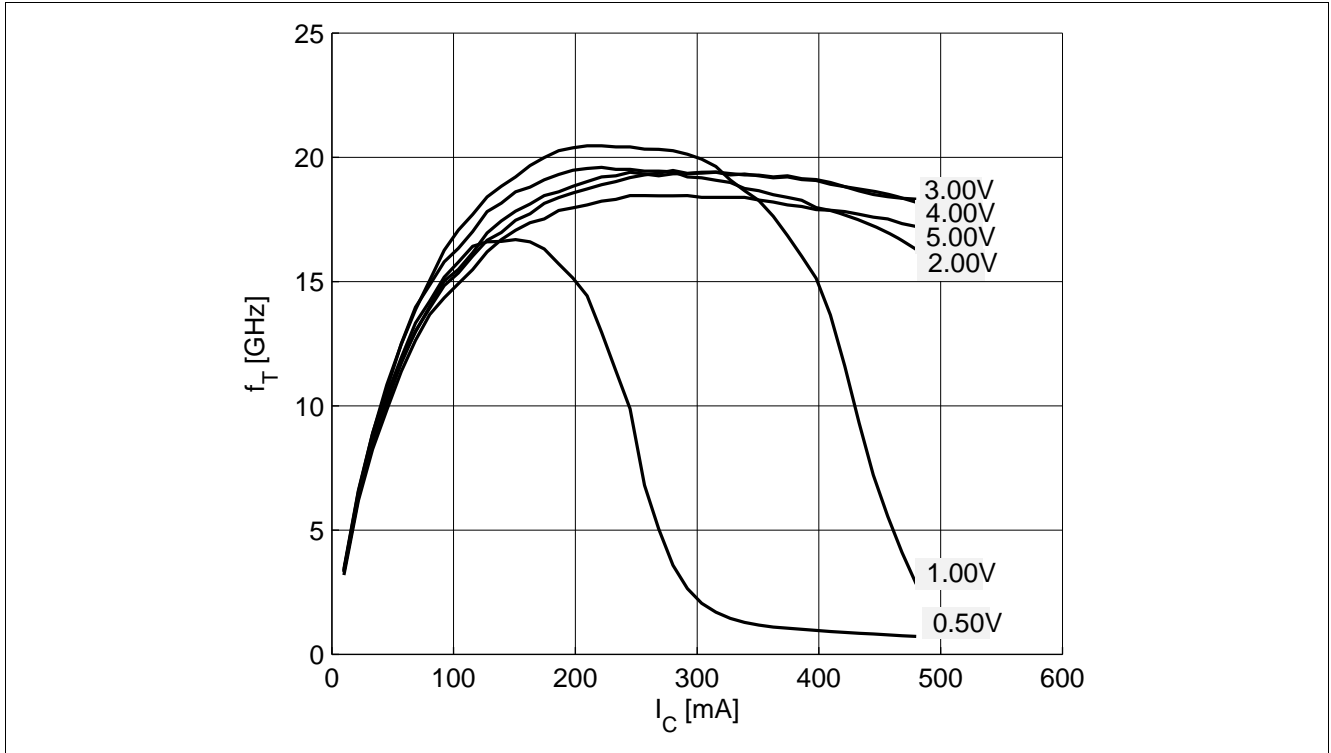


Figure 7-5 Transition Frequency f_T vs. I_C , V_{CE} = Parameter

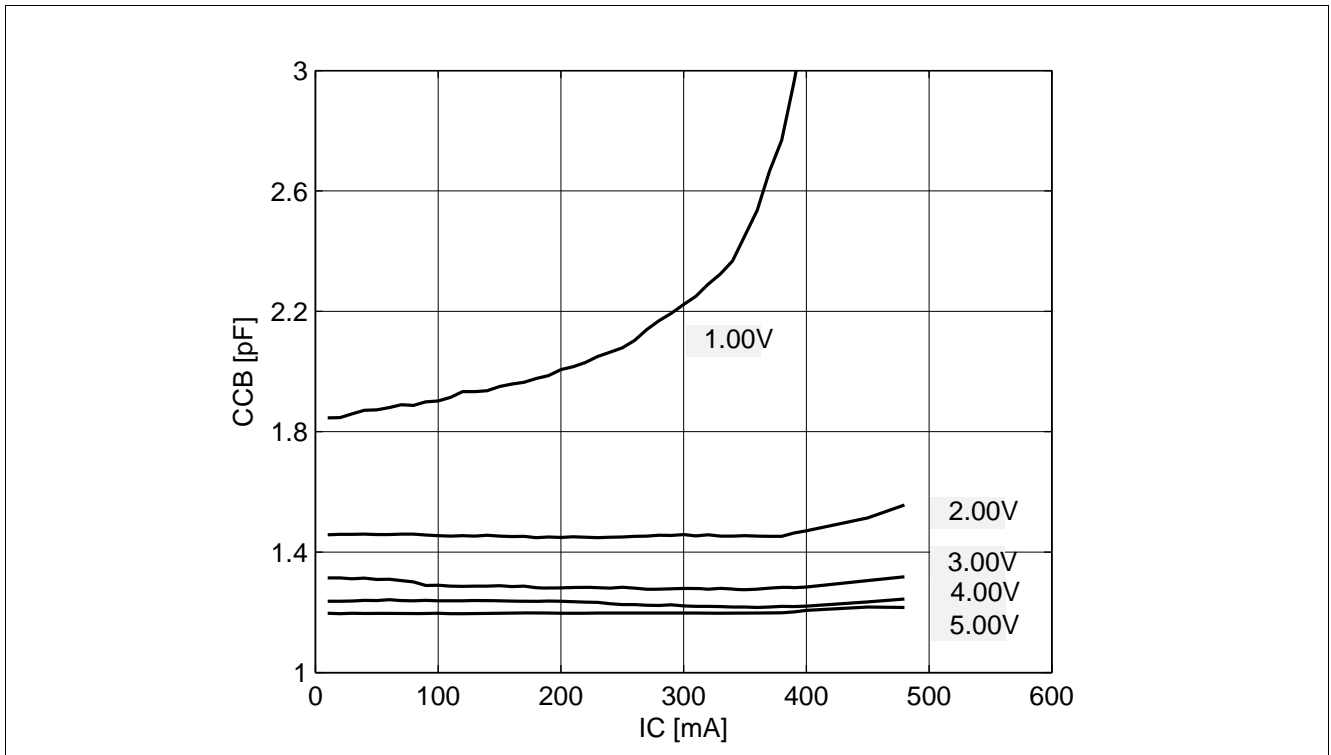


Figure 7-6 Collector Base Capacitance C_{CB} vs. I_C at $f = 30$ MHz, V_{CB} = Parameter

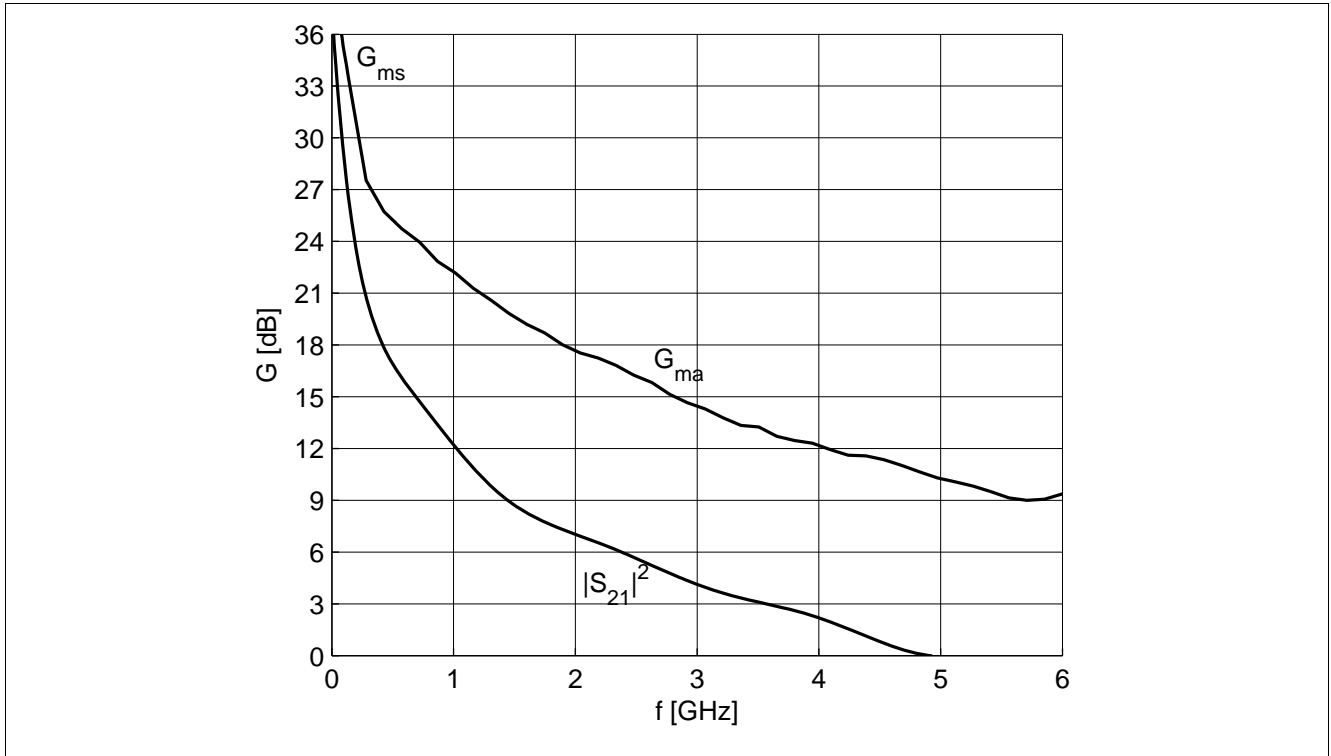


Figure 7-7 Gain G_{ms} , G_{ma} , $|S_{21}|^2$ vs. f at $V_{CE} = 5\text{ V}$, $I_C = 250\text{ mA}$

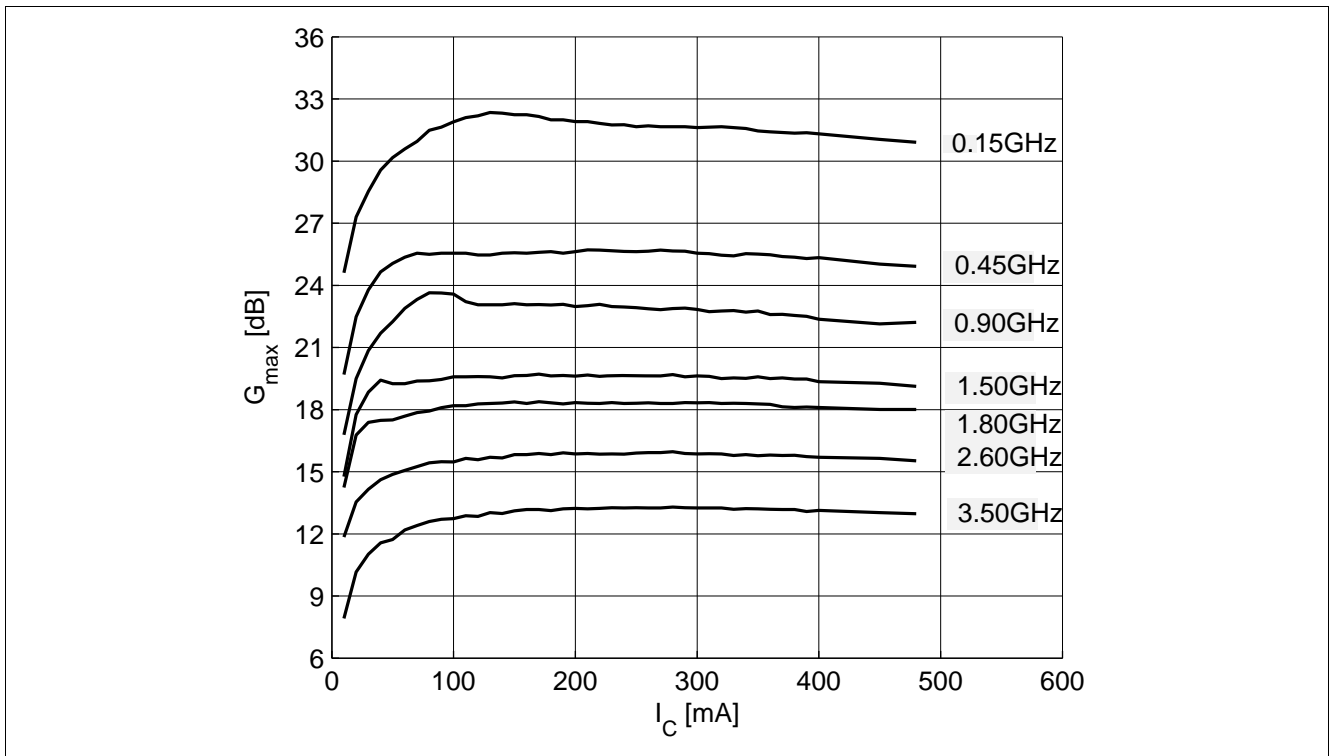


Figure 7-8 Maximum Power Gain G_{max} vs. I_C at $V_{CE} = 5\text{ V}$, $f = \text{Parameter}$

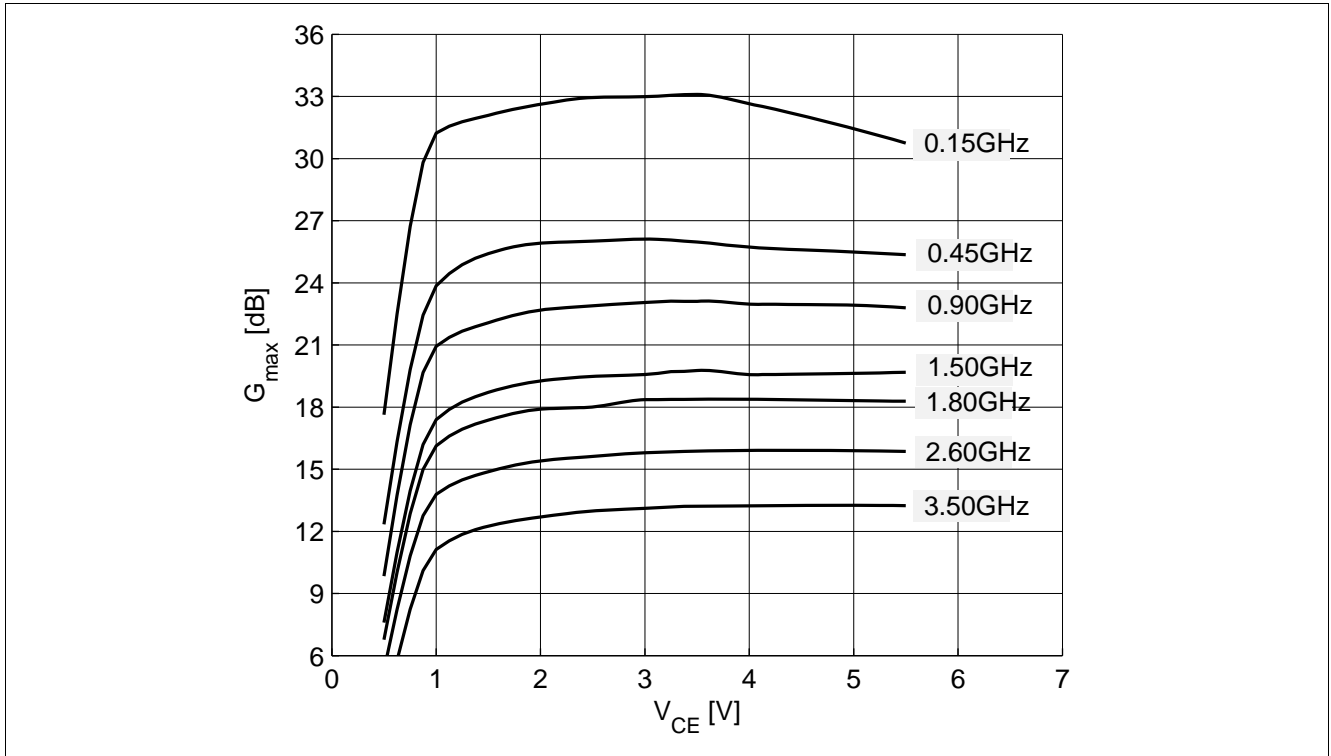


Figure 7-9 Maximum Power Gain G_{max} vs. V_{CE} at $I_C = 250$ mA, $f =$ Parameter

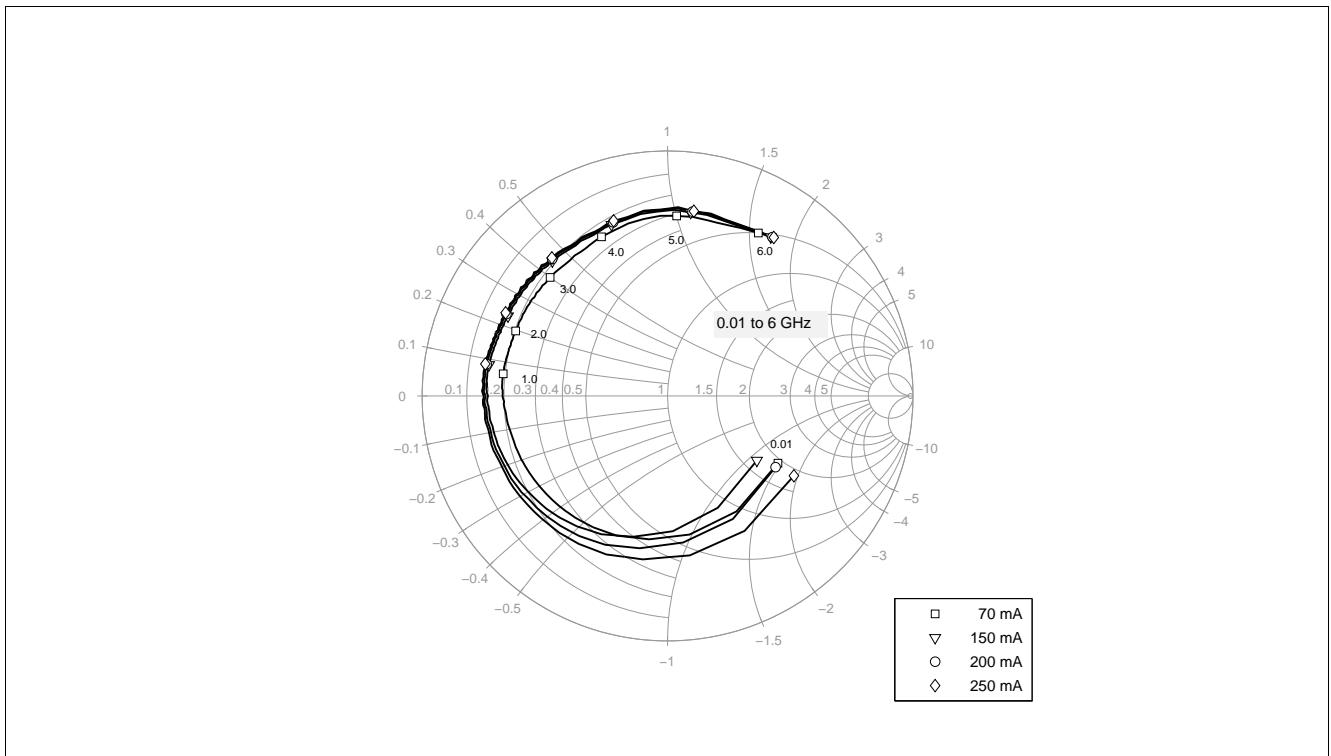


Figure 7-10 Output Reflection Coefficient S_{22} vs. f at $V_{CE} = 5$ V, $I_C =$ Parameter

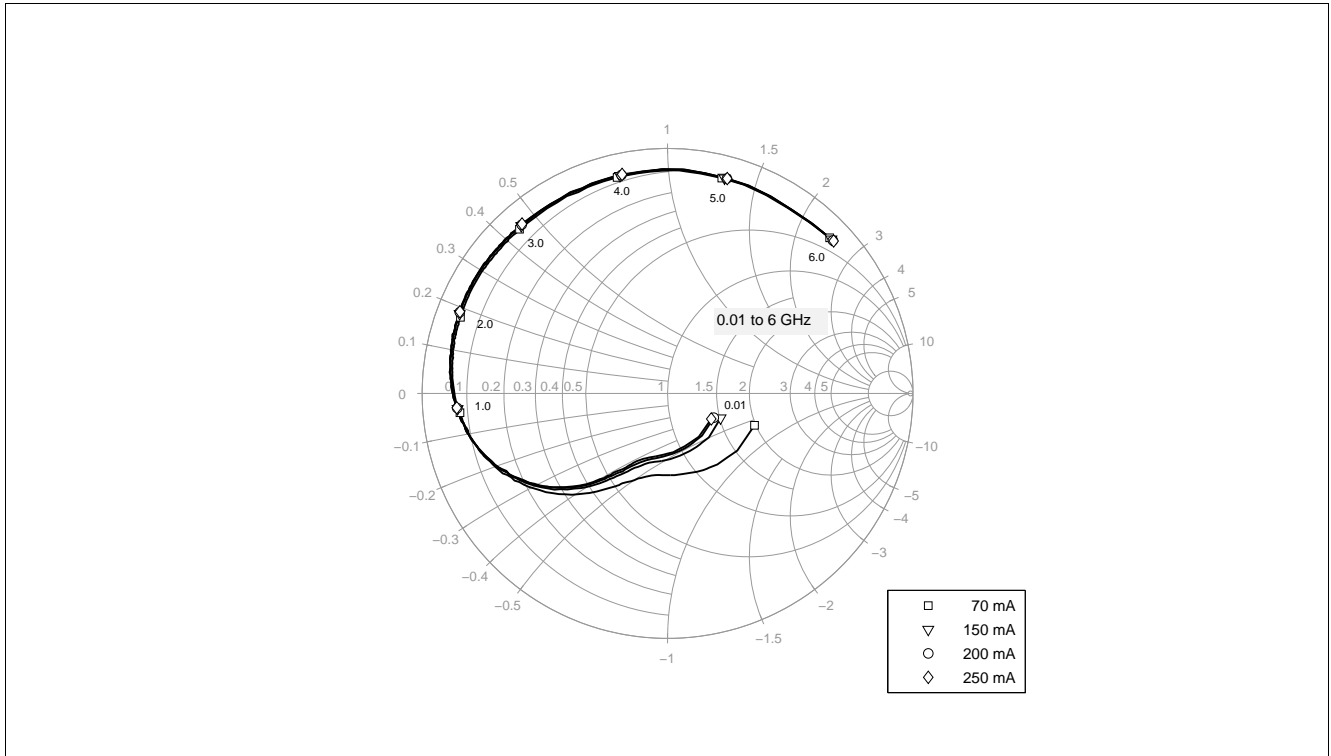


Figure 7-11 Input Reflection Coefficient S_{11} vs. f at $V_{CE} = 5\text{ V}$, $I_C = \text{Parameter}$

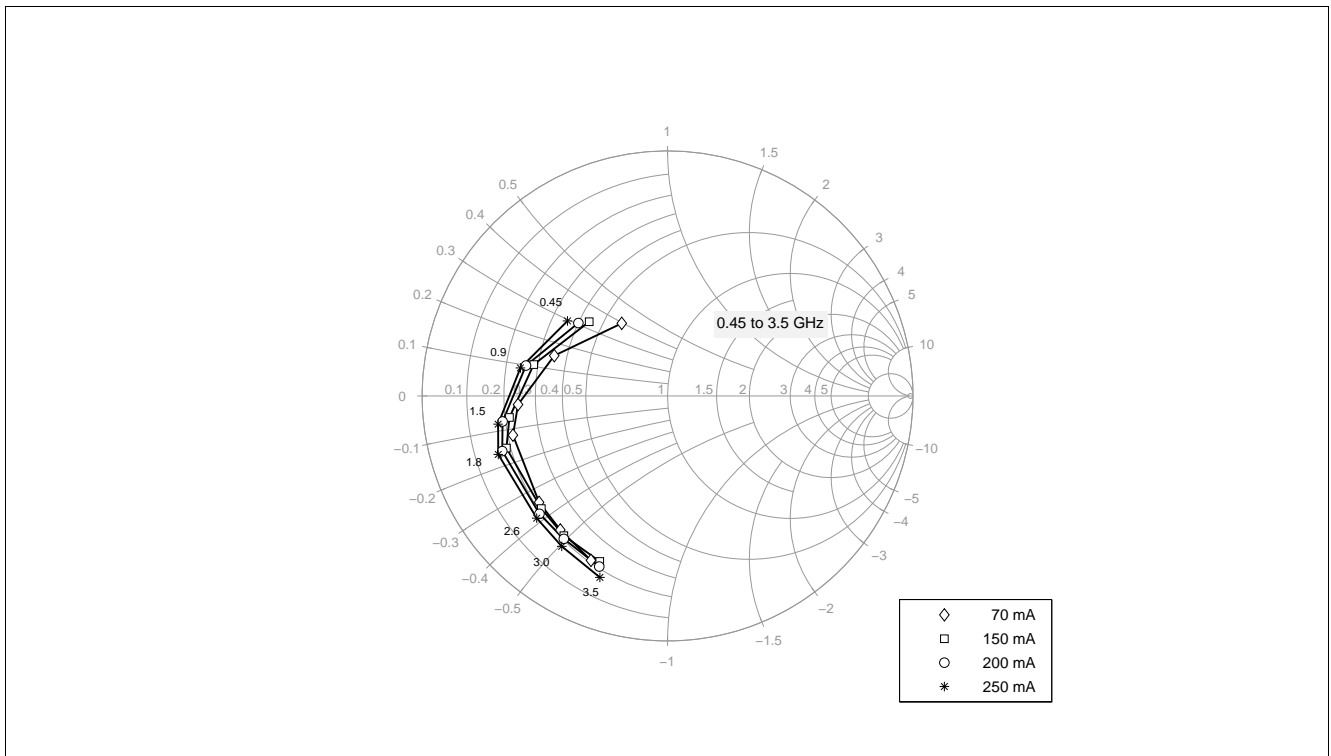


Figure 7-12 Source Impedance Z_{Sopt} for Minimum Noise Figure vs. f at $V_{CE} = 5\text{ V}$, $I_C = \text{Parameter}$

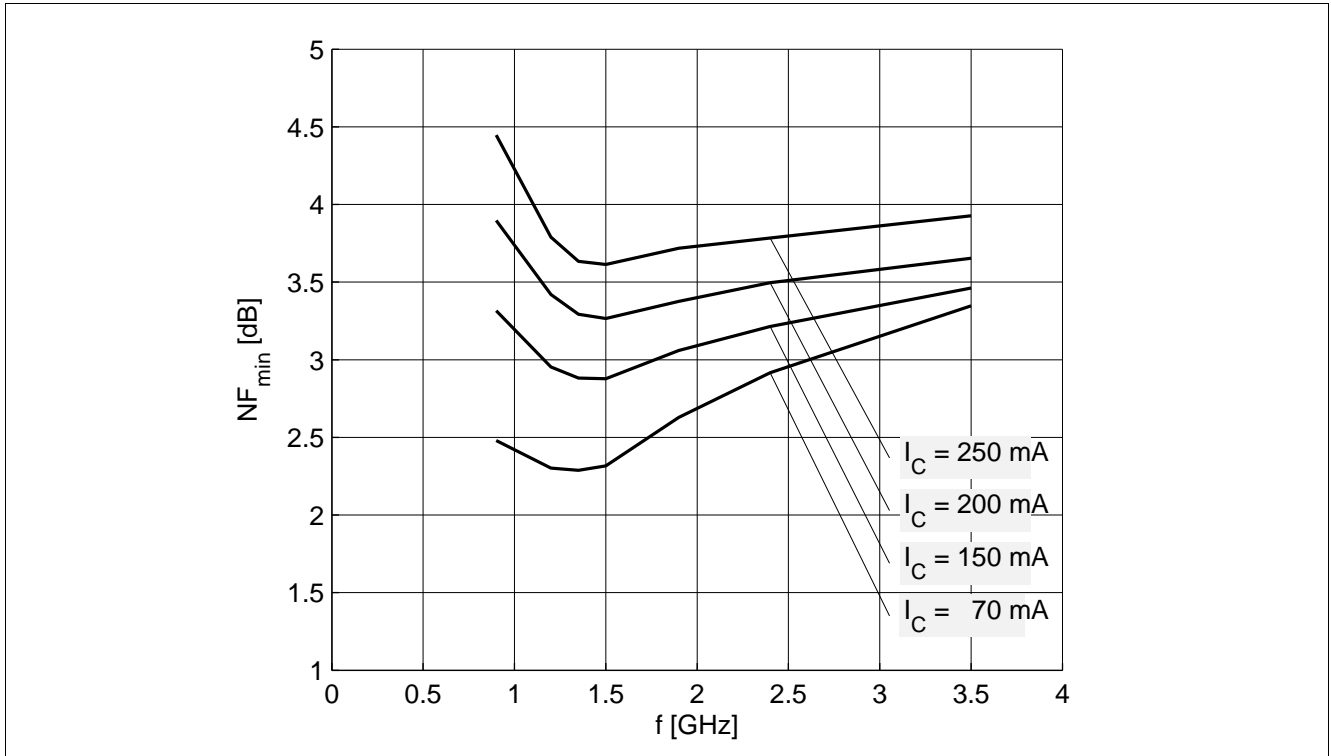


Figure 7-13 Noise Figure NF_{min} vs. f at $V_{CE} = 5$ V, $Z_S = Z_{Sopt}$, $I_C =$ Parameter

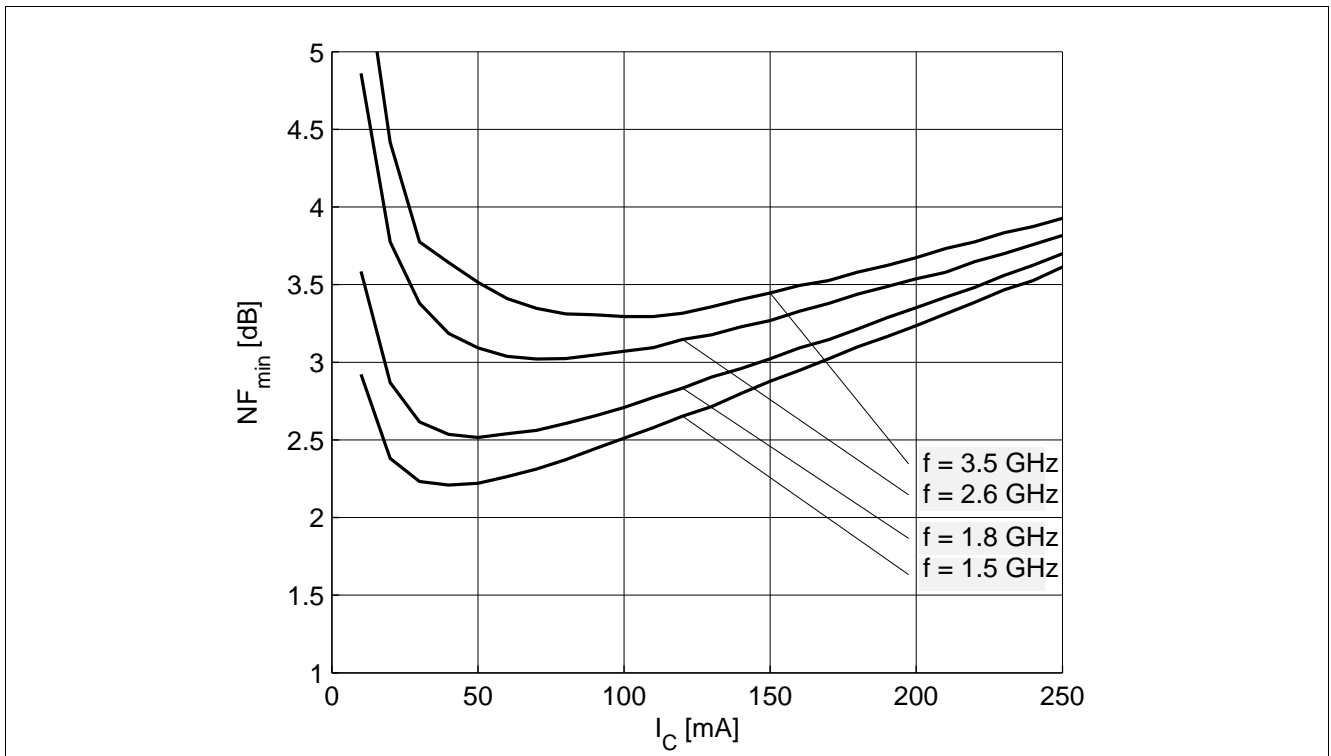


Figure 7-14 Noise Figure NF_{min} vs. I_C at $V_{CE} = 5$ V, $Z_S = Z_{Sopt}$, $f =$ Parameter

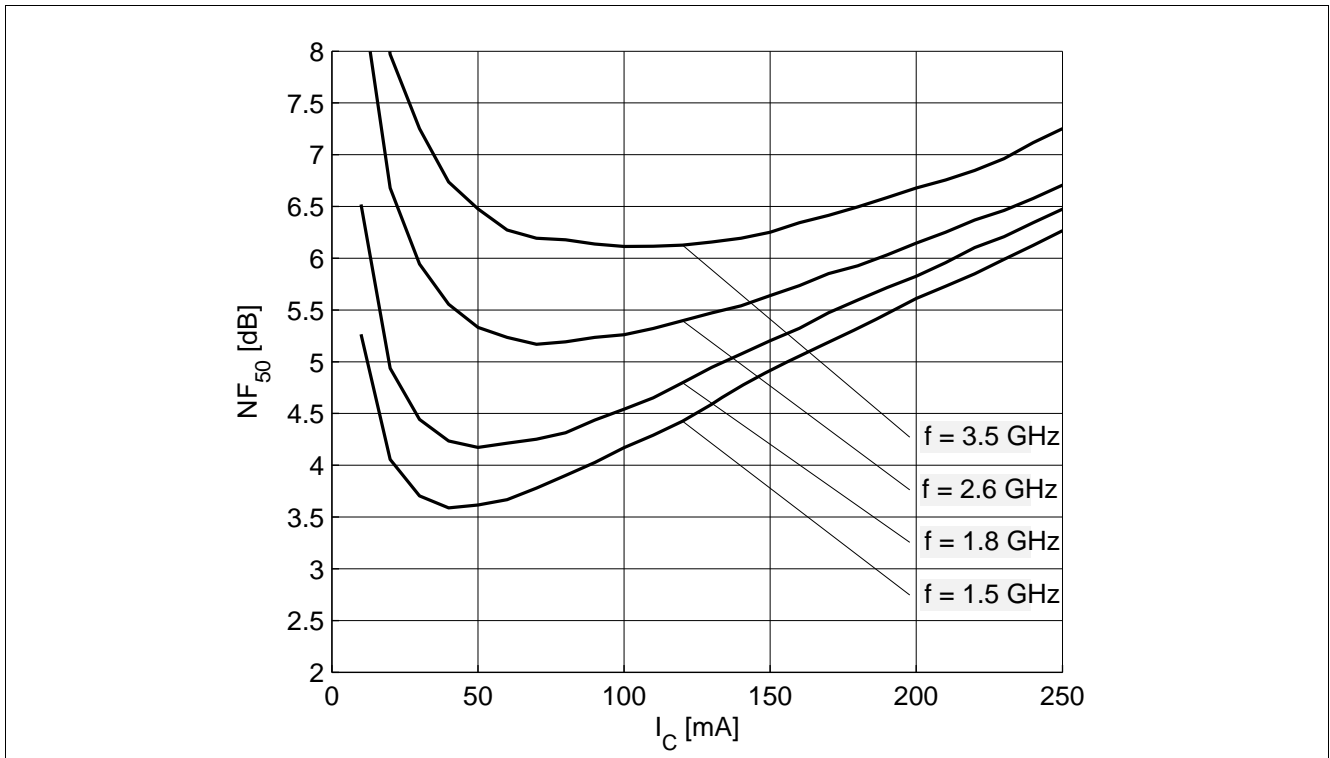


Figure 7-15 Noise Figure NF_{50} vs. I_C at $V_{CE} = 5$ V, $Z_S = 50 \Omega$, $f =$ Parameter

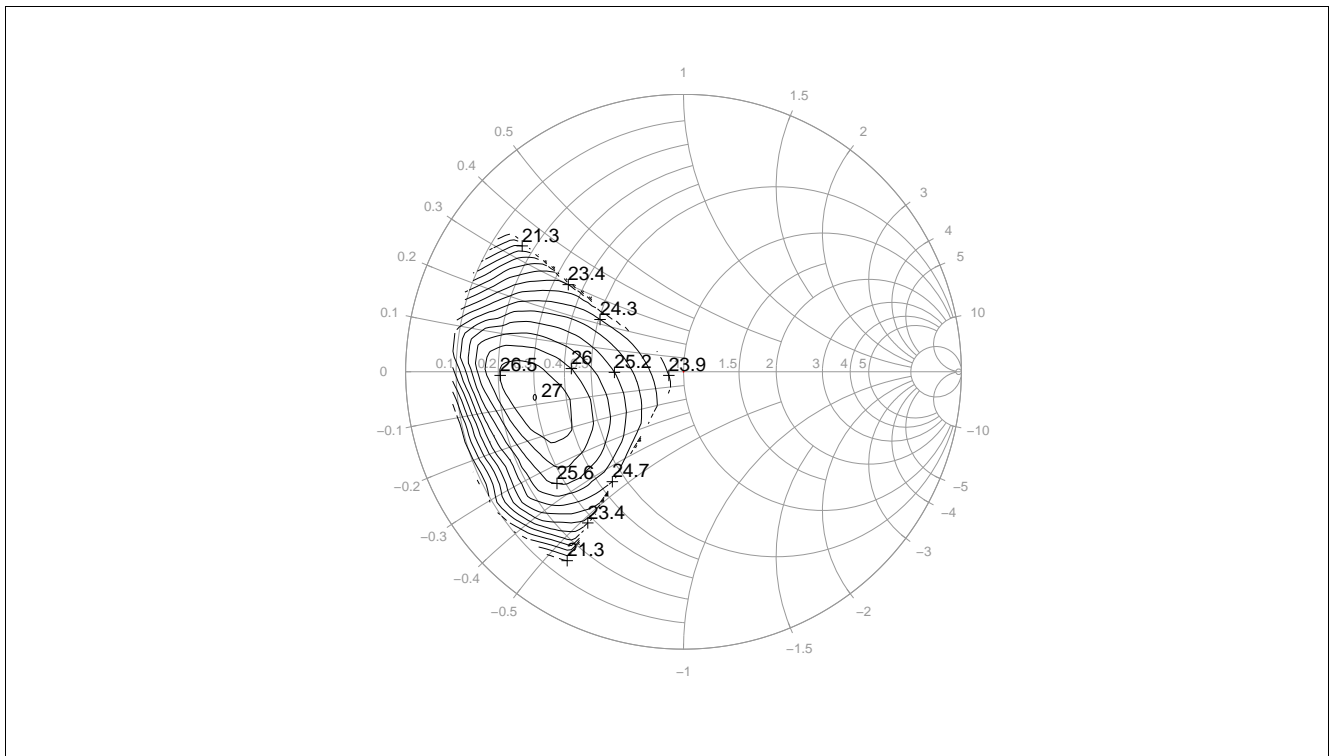


Figure 7-16 Load Pull Contour OP_{1dB} [dBm] at $V_{CE} = 5$ V, $I_C = 250$ mA, $f = 0.9$ GHz, $Z_1 = Z_{opt}$

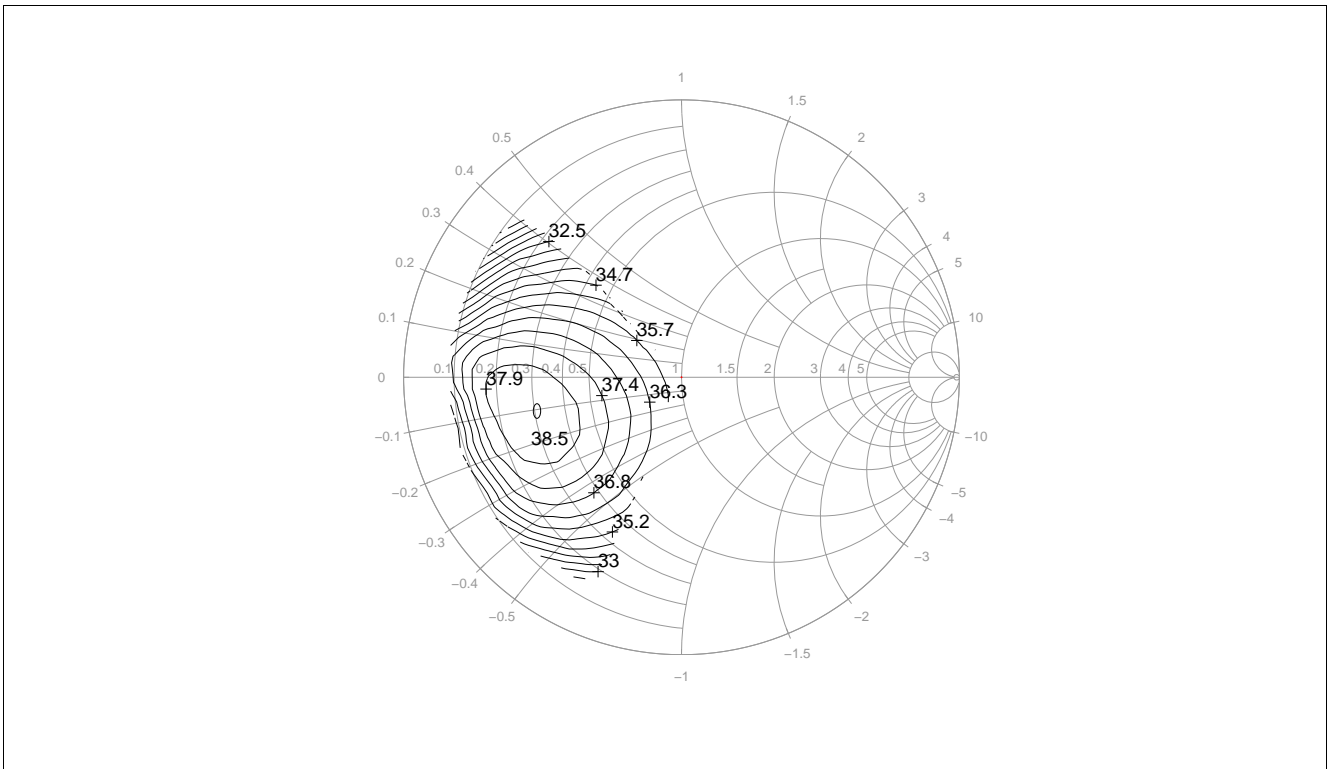


Figure 7-17 Load Pull Contour $OIP3$ [dBm] at $V_{CE} = 5\text{ V}$, $I_C = 250\text{ mA}$, $f = 0.9\text{ GHz}$, $Z_l = Z_{opt}$

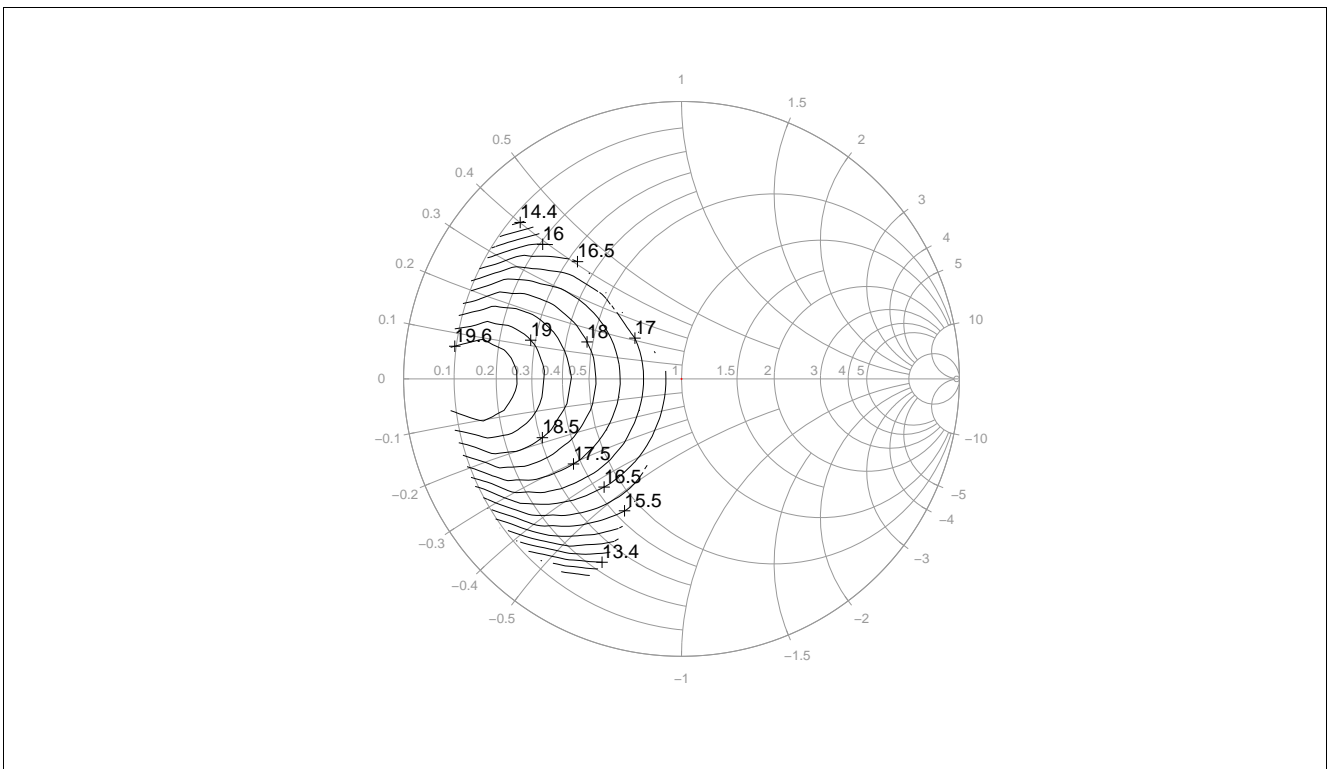


Figure 7-18 Load Pull Contour Gain G [dB] at $V_{CE} = 5\text{ V}$, $I_C = 250\text{ mA}$, $f = 0.9\text{ GHz}$, $Z_l = Z_{opt}$

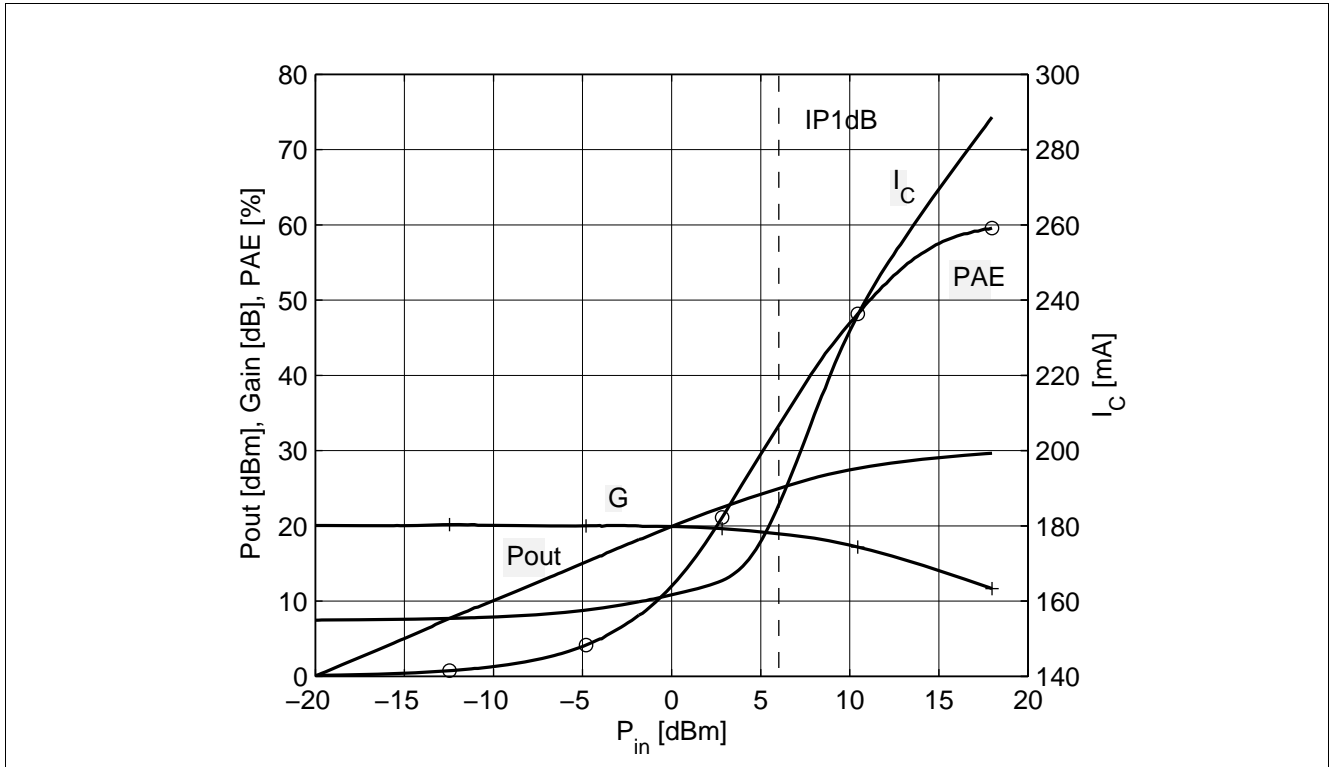


Figure 7-19 P_{out} , Gain, I_C , PAE vs. P_{in} at $V_{CE} = 5\text{ V}$, $I_{Cq} = 155\text{ mA}$, $f = 0.9\text{ GHz}$, $Z_l = Z_{opt}$

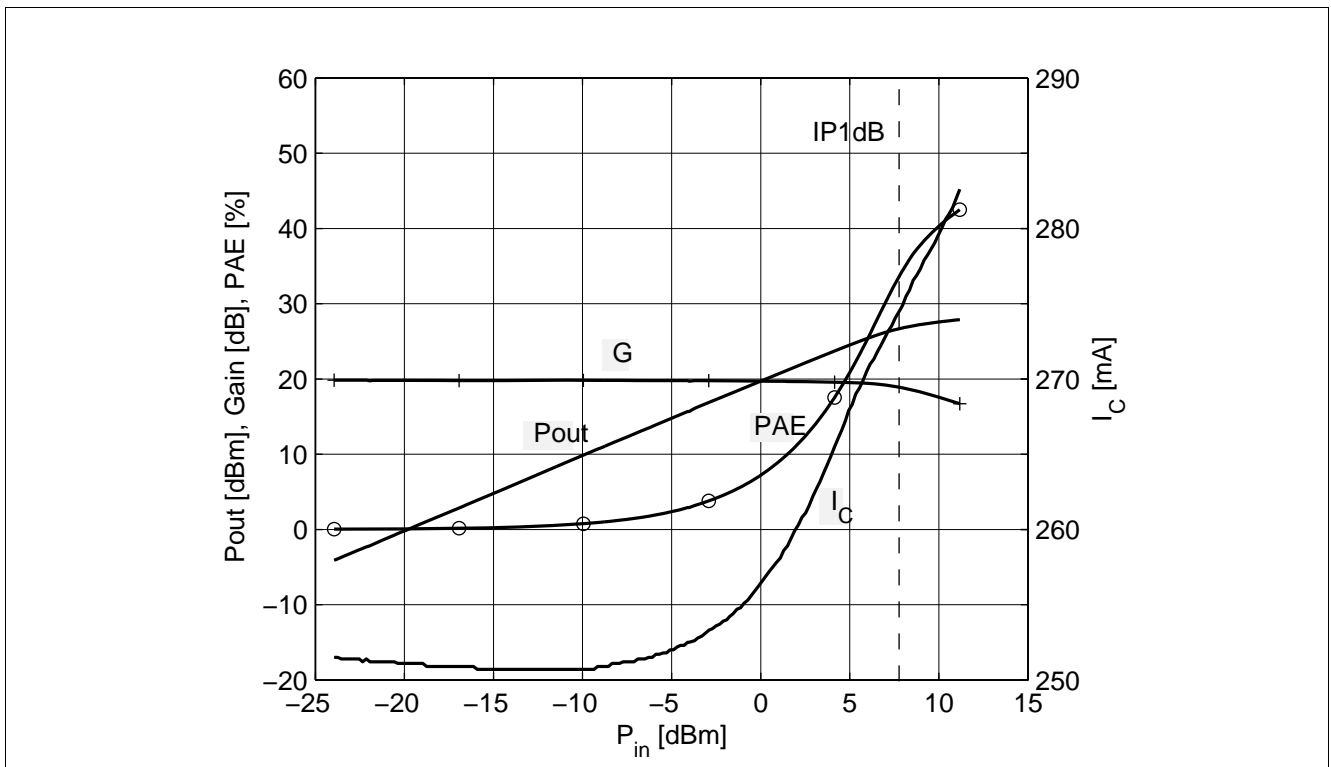


Figure 7-20 P_{out} , Gain, I_C , PAE vs. P_{in} at $V_{CE} = 5\text{ V}$, $I_{Cq} = 250\text{ mA}$, $f = 0.9\text{ GHz}$, $Z_l = Z_{opt}$

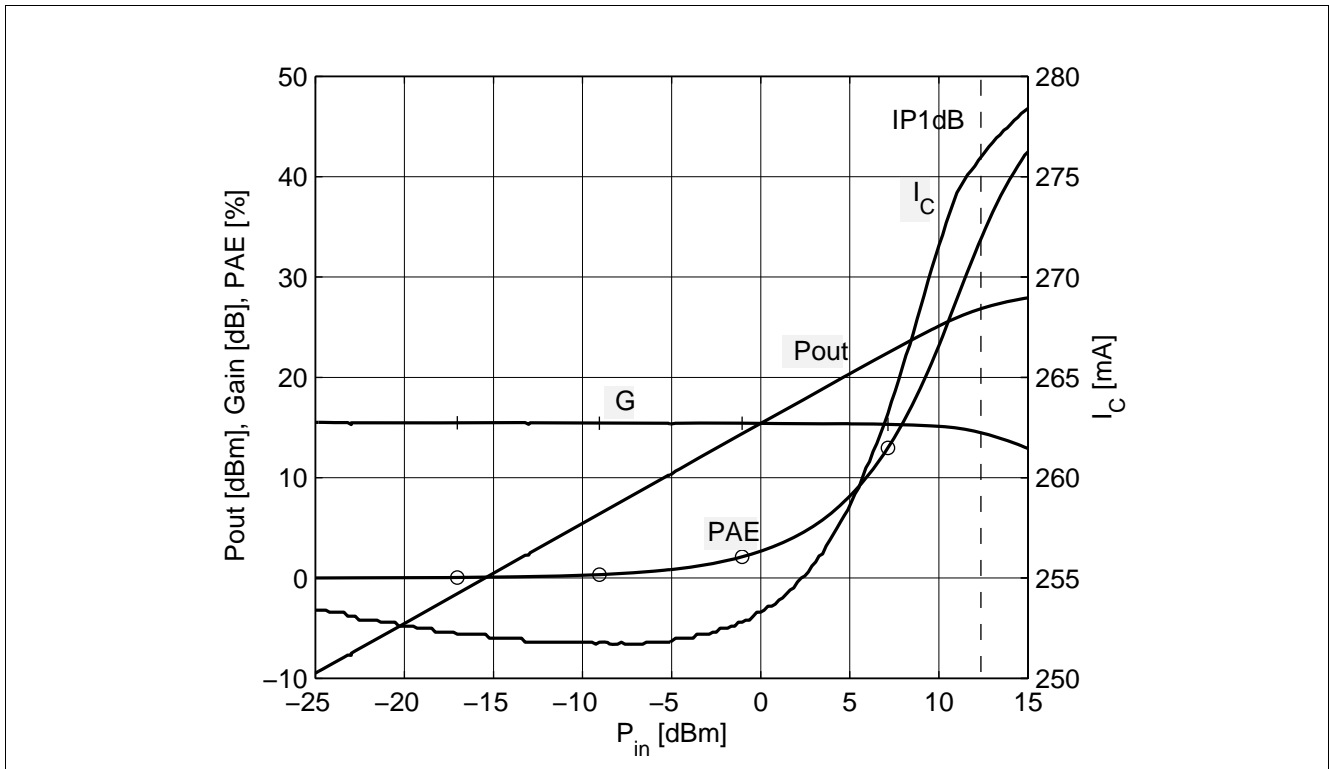


Figure 7-21 P_{out} , Gain, I_C , PAE vs. P_{in} at $V_{CE} = 5\text{ V}$, $I_{Cq} = 250\text{ mA}$, $f = 2.6\text{ GHz}$, $Z_L = Z_{opt}$

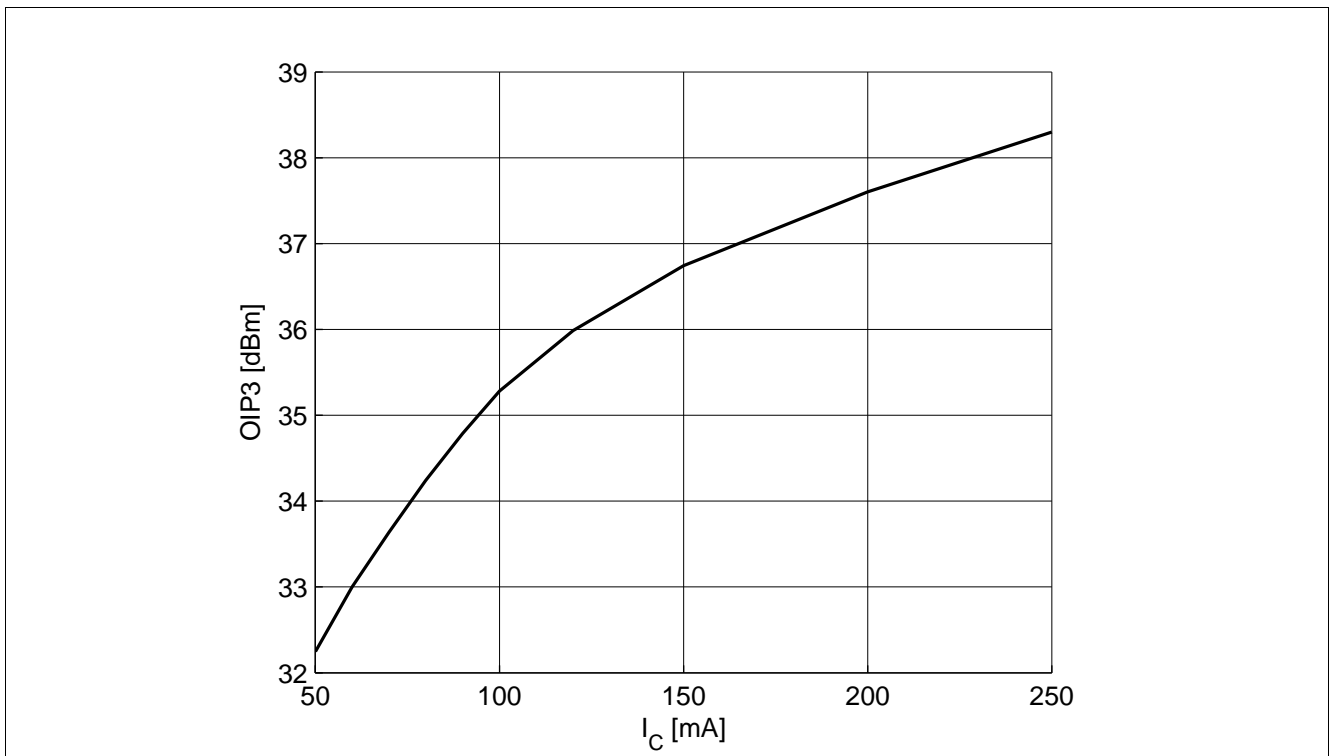


Figure 7-22 $OIP3$ vs. I_C at $V_{CE} = 5\text{ V}$, $f = 0.9\text{ GHz}$, $Z_L = Z_{Lopt}$

Note: The curves shown in this chapter have been generated using typical devices but shall not be understood as a guarantee that all devices have identical characteristic curves. $T_A = 25\text{ }^\circ\text{C}$.

8 Simulation Data

For the BFQ790 a large signal model exists. It is a VBIC model, which is an advancement of the SPICE Gummel-Poon model. It covers properties of a power transistor which are not known by the standard SPICE Gummel-Poon model, such as self-heating, quasi-saturation and voltage breakdown. The VBIC model can be used in standard simulation tools such as ADS and MWO as easily as the SPICE Gummel-Poon model. On the BFQ790 internet page the VBIC model is provided as a netlist. The model already contains the package parasitics and is ready to use for DC and high frequency simulations. Besides the DC characteristics all S-parameters in magnitude and phase, noise figure (including optimum source impedance and equivalent noise resistance), intermodulation and compression have been extracted.

On the BFQ790 internet page you also find the S-parameters (including noise parameters) for linear simulation. In any case please consult our website and download the latest versions before actually starting your design.

9 Package Information SOT89

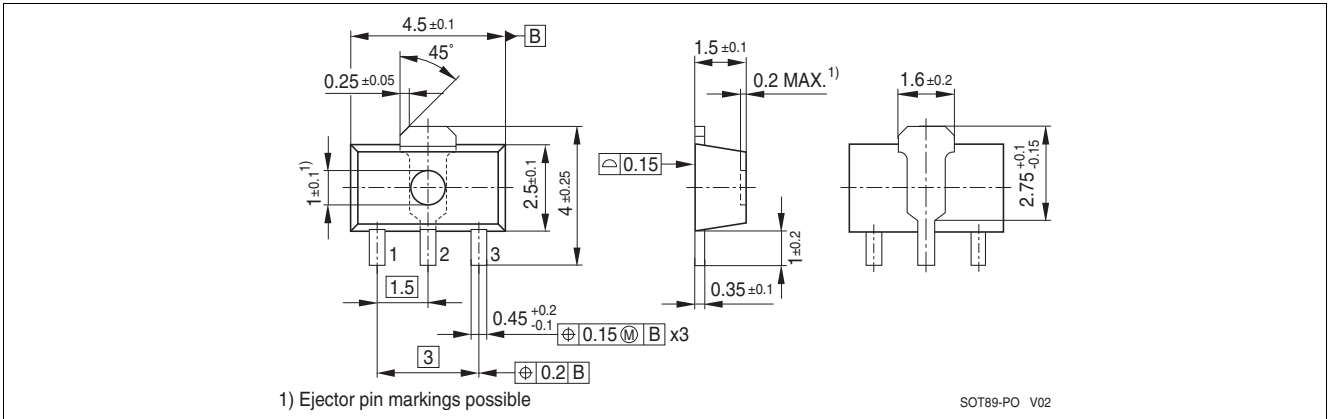


Figure 9-1 Package Outline

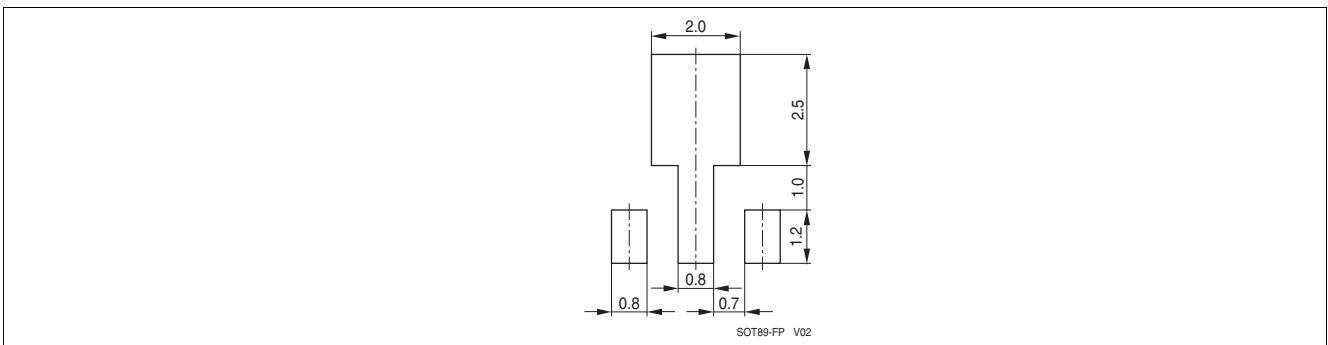


Figure 9-2 Package Footprint

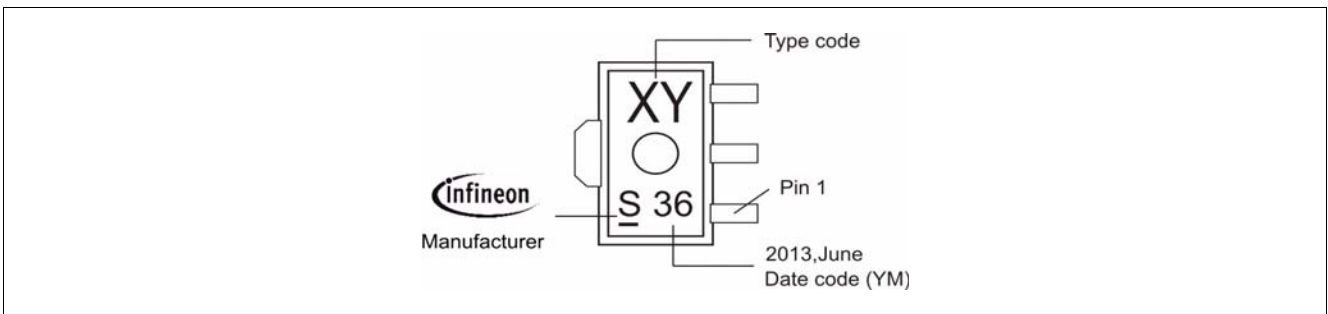


Figure 9-3 Marking Example (Marking BFQ790: R3)

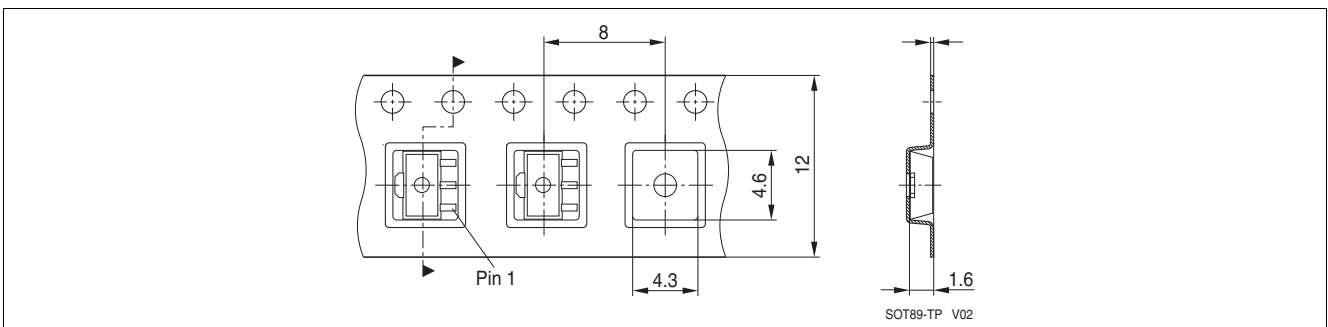


Figure 9-4 Tape Dimensions

www.infineon.com

Published by Infineon Technologies AG

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А