

Description

The GM78L00 series in positive voltage regulators are cost effective devices to provide a simple solution for a wide variety of application, which requires a regulated supply of up to 100mA

These virtually indestructible positive voltage regulators are protected by thermal shut down and internal current limiting. Most applications require no external components.


The GM78L00 is very versatile, which can be used as fixed voltage regulators in a wide range of application, including both local and on-card regulation for elimination of noise and distribution problems associated with single-point regulation. They can also be used with power pass elements to make high current voltage regulators.

The GM78L00 series offer impressive performance advantages over traditional zener diode and resistor combinations, provide lower output impedance and reduced quiescent current.


Features

- ◆ Maximum output current up to 100mA
- ◆ Fixed output voltage options: 5V, 6V, 8V, 9V, 10V, 12V, 15V, 18V and 24V
- ◆ No external components required
- ◆ Internal thermal overload protection
- ◆ Internal short circuit current limiting
- ◆ Available in TO-92, SOT-89 and SOP-8 packages

Typical Application Circuit

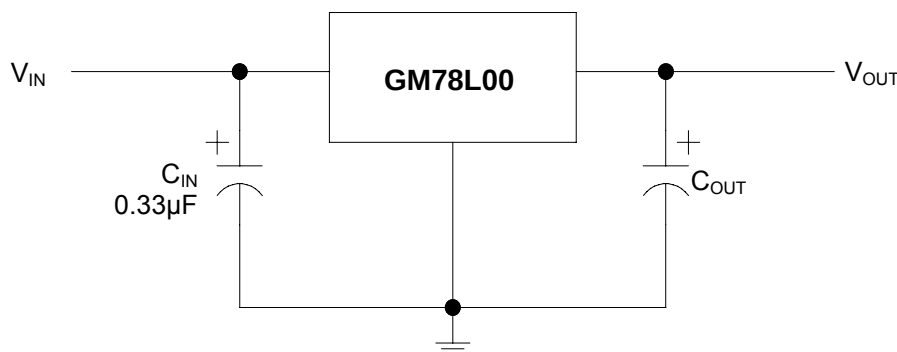

Marking Information and Pin Configurations (Top View)

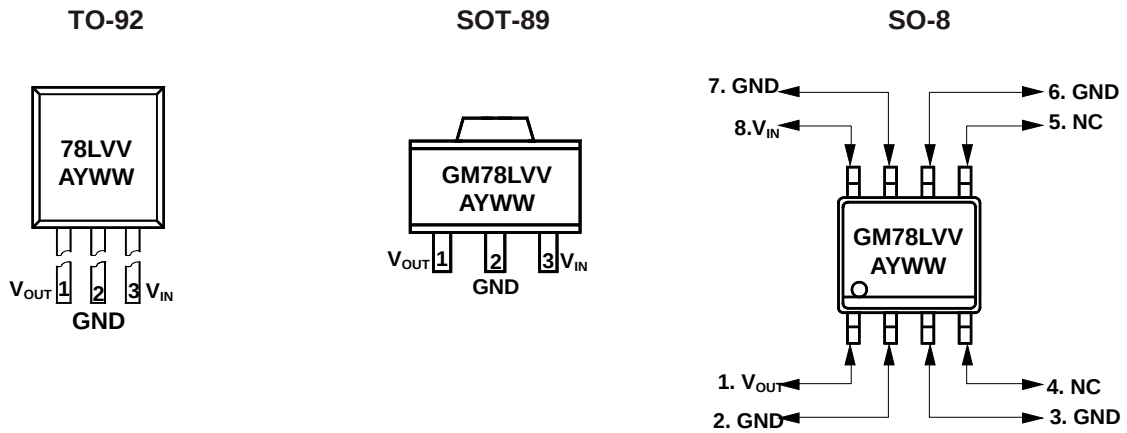

VV: Output Voltage Codes (05: 5.0V, ...12:12V)
A: Assembly/Test Site Code
Y: Year
WW: Week


Ordering Information

Ordering Number	V _{OUT}	Package	Shipping
GM78L00T92B	00 = 5.0V 6.0V 8.0V 9.0V 10.0V 12.0V 15.0V 18.0V 24.0V	TO-92	1,000 Units/ESD Bag
GM78L00T92RL		TO-92	2,000 Units/Ammo Pack (Tape)
GM78L00ST89R		SOT-89	1,000 Units/Tape and Reel
GM78L00S8T		SO-8	100 Units/Tube
GM78L00S8R		SO-8	2,500 Units/Tape & Reel

Absolute Maximum Ratings

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage	GM78L05 to GM78L10	V_{IN}	30	V
	GM78L12 to GM78L18		35	
	GM78L24		40	
Operating Ambient Temperature		T_A	- 40 to 125	°C
Storage Temperature		T_{stg}	- 60 to 150	°C

Block Diagram

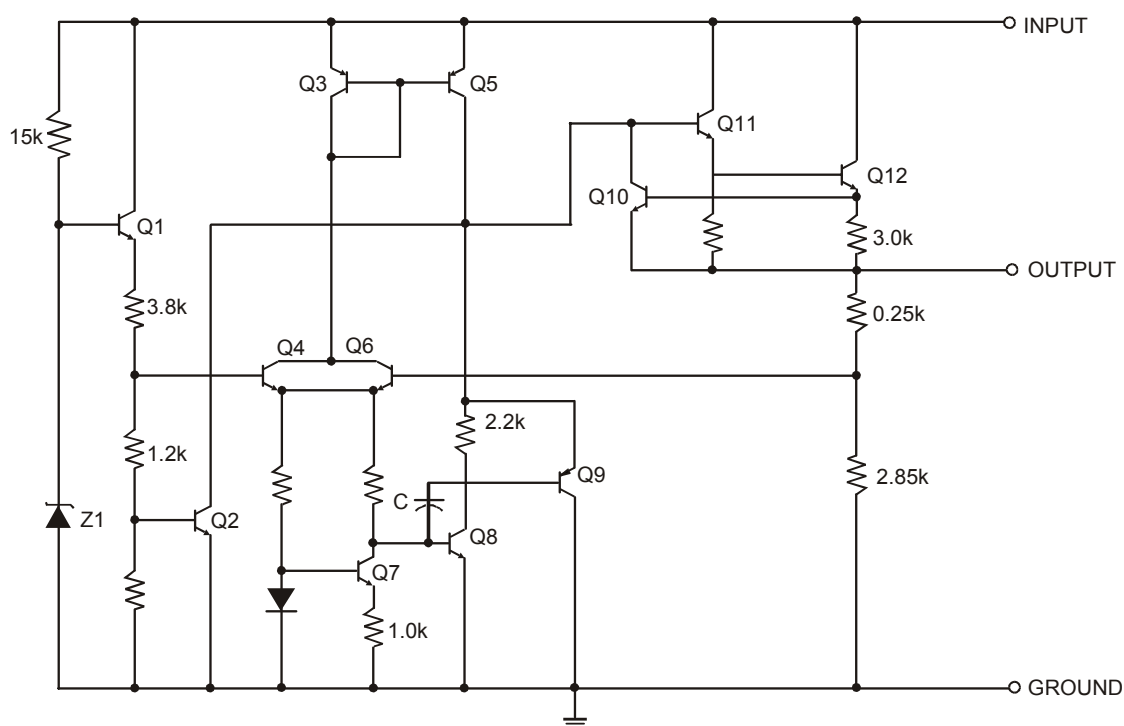

GM78L05 Electrical Characteristics ($V_I = 10V$, $I_O = 40mA$ unless otherwise noted)

Parameter	Test Condition		Min	Typ	Max	Unit
Output Voltage		25°C	4.8	5.0	5.2	V
	$I_O = 1mA$ to 40mA $V_I = 7V$ to 20V	0°C to 125°C	4.75	5.0	5.25	
	$I_O = 1mA$ to 70mA		4.75	5.0	5.25	
Input Regulation	$V_I = 7V$ to 20V	25°C		32	150	mV
	$V_I = 8V$ to 20V			26	100	
Ripple Rejection	$V_I = 8V$ to 18V, $f = 120KHz$	25°C	41	49		dB
Output Regulation	$I_O = 1mA$ to 100mA	25°C		15	60	mV
	$I_O = 1mA$ to 40mA			8	30	
Output Noise Voltage	$F = 10Hz$ to 100KHz	25°C		42		µV
Bias Current		25°C		3.8	6	mA
		125°C			5.5	
Bias Current Change	$V_I = 8V$ to 20V	0°C to 125°C			1.5	mA
	$I_O = 1mA$ to 40mA				0.1	

GM78L06 Electrical Characteristics ($V_I = 11V$, $I_O = 40mA$ unless otherwise noted)

Parameter	Test Condition		Min	Typ	Max	Unit
Output Voltage		25°C	5.75	6.0	6.25	V
	$I_O = 1mA$ to 40mA $V_I = 8V$ to 20V	0°C to 125°C	5.70	6.0	6.30	
	$I_O = 1mA$ to 70mA		5.70	6.0	6.30	
Input Regulation	$V_I = 8V$ to 20V	25°C		35	175	mV
	$V_I = 9V$ to 20V			29	125	
Ripple Rejection	$V_I = 9V$ to 18V, $f = 120KHz$	25°C	10	18		dB
Output Regulation	$I_O = 1mA$ to 100mA	25°C		16	80	mV
	$I_O = 1mA$ to 40mA			9	40	
Output Noise Voltage	$F = 10Hz$ to 100KHz	25°C		46		µV
Bias Current		25°C		3.9	6	mA
		125°C			5.5	
Bias Current Change	$V_I = 9V$ to 20V	0°C to 125°C			1.5	mA
	$I_O = 1mA$ to 40mA				0.1	

GM78L08 Electrical Characteristics ($V_I = 14V$, $I_O = 40mA$ unless otherwise noted)

Parameter	Test Condition		Min	Typ	Max	Unit
Output Voltage		25°C	7.7	8.0	8.3	V
	$I_O = 1mA$ to 40mA $V_I = 10.5V$ to 23V	0°C to 125°C	7.6	8.0	8.4	
	$I_O = 1mA$ to 70mA		7.6	8.0	8.4	
Input Regulation	$V_I = 10.5V$ to 23V	25°C		42	175	mV
	$V_I = 11V$ to 23V			36	125	
Ripple Rejection	$V_I = 13V$ to 23V, $f = 120KHz$	25°C	37	46		dB
Output Regulation	$I_O = 1mA$ to 100mA	25°C		18	80	mV
	$I_O = 1mA$ to 40mA			10	40	
Output Noise Voltage	$F = 10Hz$ to 100KHz	25°C		54		μV
Dropout Voltage		25°C		1.7		V
Bias Current		25°C		4	6	mA
		125°C			5.5	
Bias Current Change	$V_I = 11V$ to 23V	0°C to 125°C			1.5	mA
	$I_O = 1mA$ to 40mA				0.1	

GM78L09 Electrical Characteristics ($V_I = 16V$, $I_O = 40mA$ unless otherwise noted)

Parameter	Test Condition		Min	Typ	Max	Unit
Output Voltage		25°C	8.6	9.0	9.4	V
	$I_O = 1mA$ to 40mA $V_I = 12V$ to 24V	0°C to 125°C	8.55	9.0	9.45	
	$I_O = 1mA$ to 70mA		8.55	9.0	9.45	
Input Regulation	$V_I = 12V$ to 24V	25°C		45	175	mV
	$V_I = 13V$ to 24V			40	125	
Ripple Rejection	$V_I = 15V$ to 25V, $f = 120KHz$	25°C	38	44		dB
Output Regulation	$I_O = 1mA$ to 100mA	25°C		19	90	mV
	$I_O = 1mA$ to 40mA			11	40	
Output Noise Voltage	$F = 10Hz$ to 100KHz	25°C		58		μV
Dropout Voltage		25°C		1.7		V
Bias Current		25°C		4.1	6	mA
		125°C			5.5	
Bias Current Change	$V_I = 13V$ to 24V	0°C to 125°C			1.5	mA
	$I_O = 1mA$ to 40mA				0.1	

GM78L10 Electrical Characteristics ($V_I = 17V$, $I_O = 40mA$ unless otherwise noted)

Parameter	Test Condition		Min	Typ	Max	Unit
Output Voltage		25°C	9.6	10	10.4	V
	$I_O = 1mA$ to 40mA $V_I = 13V$ to 25V	0°C to 125°C	9.5	10	10.5	
	$I_O = 1mA$ to 70mA		9.5	10	10.5	
Input Regulation	$V_I = 13V$ to 25V	25°C		51	175	mV
	$V_I = 14V$ to 24V			42	125	
Ripple Rejection	$V_I = 15V$ to 25V, $f = 120KHz$	25°C	38	44		dB
Output Regulation	$I_O = 1mA$ to 100mA	25°C		20	90	mV
	$I_O = 1mA$ to 40mA			11	40	
Output Noise Voltage	$F = 10Hz$ to 100KHz	25°C		62		μV
Dropout Voltage		25°C		1.7		V
Bias Current		25°C		4.2	6	mA
		125°C			5.5	
Bias Current Change	$V_I = 14V$ to 25V	0°C to 125°C			1.5	mA
	$I_O = 1mA$ to 40mA				0.1	

GM78L12 Electrical Characteristics ($V_I = 19V$, $I_O = 40mA$ unless otherwise noted)

Parameter	Test Condition		Min	Typ	Max	Unit
Output Voltage		25°C	11.5	12	12.5	V
	$I_O = 1mA$ to 40mA $V_I = 14V$ to 27V	0°C to 125°C	11.4	12	12.6	
	$I_O = 1mA$ to 70mA		11.4	12	12.6	
Input Regulation	$V_I = 14.5V$ to 27V	25°C		55	250	mV
	$V_I = 16V$ to 27V			49	200	
Ripple Rejection	$V_I = 16V$ to 27V, $f = 120KHz$	25°C	37	42		dB
Output Regulation	$I_O = 1mA$ to 100mA	25°C		22	100	mV
	$I_O = 1mA$ to 40mA			13	50	
Output Noise Voltage	$F = 10Hz$ to 100KHz	25°C		70		μV
Dropout Voltage		25°C		1.7		V
Bias Current		25°C		4.3	6.5	mA
		125°C			6	
Bias Current Change	$V_I = 16V$ to 27V	0°C to 125°C			1.5	mA
	$I_O = 1mA$ to 40mA				0.1	

GM78L15 Electrical Characteristics ($V_I = 23V$, $I_O = 40mA$ unless otherwise noted)

Parameter	Test Condition		Min	Typ	Max	Unit
Output Voltage		25°C	14.4	15	15.6	V
	$I_O = 1mA$ to 40mA $V_I = 17.5V$ to 30V	0°C to 125°C	14.25	15	15.75	
	$I_O = 1mA$ to 70mA		14.25	15	15.75	
Input Regulation	$V_I = 17.5V$ to 30V	25°C		65	300	mV
	$V_I = 19V$ to 30V			58	250	
Ripple Rejection	$V_I = 18.5V$ to 28.5V, $f = 120KHz$	25°C	34	39		dB
Output Regulation	$I_O = 1mA$ to 100mA	25°C		25	150	mV
	$I_O = 1mA$ to 40mA			15	75	
Output Noise Voltage	$F = 10Hz$ to 100KHz	25°C		82		μV
Dropout Voltage		25°C		1.7		V
Bias Current		25°C		4.6	6.5	mA
		125°C			6	
Bias Current Change	$V_I = 19V$ to 30V	0°C to 125°C			1.5	mA
	$I_O = 1mA$ to 40mA				0.1	

GM78L18 Electrical Characteristics ($V_I = 26V$, $I_O = 40mA$ unless otherwise noted)

Parameter	Test Condition		Min	Typ	Max	Unit
Output Voltage		25°C	17.3	18	18.7	V
	$I_O = 1mA$ to 40mA $V_I = 20.5V$ to 33V	0°C to 125°C	17.1	18	18.9	
	$I_O = 1mA$ to 70mA		17.1	18	18.9	
Input Regulation	$V_I = 20.5V$ to 33V	25°C		70	360	mV
	$V_I = 22V$ to 33V			64	300	
Ripple Rejection	$V_I = 21.5V$ to 31.5V, $f = 120KHz$	25°C	32	36		dB
Output Regulation	$I_O = 1mA$ to 100mA	25°C		27	180	mV
	$I_O = 1mA$ to 40mA			19	90	
Output Noise Voltage	$F = 10Hz$ to 100KHz	25°C		89		μV
Dropout Voltage		25°C		1.7		V
Bias Current		25°C		4.7	6.5	mA
		125°C			6	
Bias Current Change	$V_I = 22V$ to 33V	0°C to 125°C			1.5	mA
	$I_O = 1mA$ to 40mA				0.1	

GM78L24 Electrical Characteristics ($V_I = 32V$, $I_O = 40mA$ unless otherwise noted)

Parameter	Test Condition		Min	Typ	Max	Unit
Output Voltage		25°C	23	24	25	V
	$I_O = 1mA$ to 40mA $V_I = 26.5V$ to 39V	0°C to 125°C	22.8	24	25.2	
	$I_O = 1mA$ to 70mA		22.8	24	25.2	
Input Regulation	$V_I = 26.5V$ to 39V	25°C		95	480	mV
	$V_I = 29V$ to 39V			78	400	
Ripple Rejection	$V_I = 21.5V$ to 31.5V, $f = 120KHz$	25°C	32	36		dB
Output Regulation	$I_O = 1mA$ to 100mA	25°C		41	240	mV
	$I_O = 1mA$ to 40mA			28	120	
Output Noise Voltage	$F = 10Hz$ to 100KHz	25°C		97		μV
Dropout Voltage		25°C		1.7		V
Bias Current		25°C		4.8	6.5	mA
		125°C			6	
Bias Current Change	$V_I = 26V$ to 39V	0°C to 125°C			1.5	mA
	$I_O = 1mA$ to 40mA				0.1	

Typical Performance Characteristics

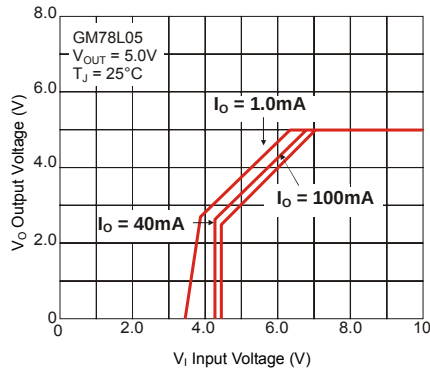


Figure 1. Dropout Characteristics

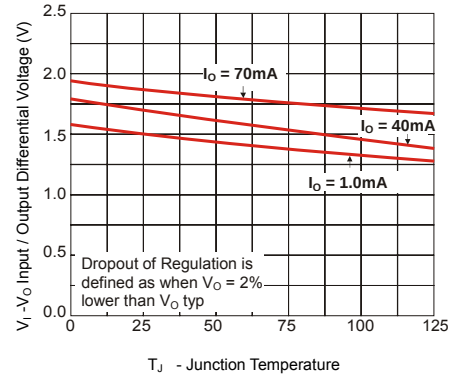


Figure 2. Dropout Voltage vs. Junction Temperature

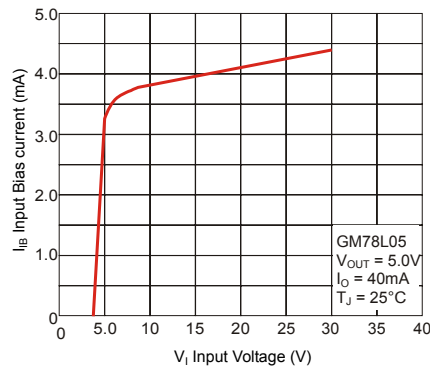


Figure 3. Input Bias Current vs. Input Voltage



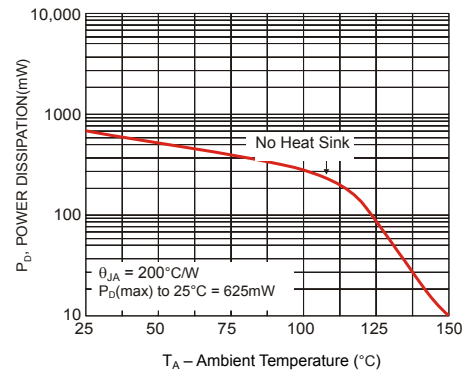


Figure 4. Maximum Average Power Dissipation vs. Ambient Temperature TO-92 Package

Package Outline Dimensions – SOT 89

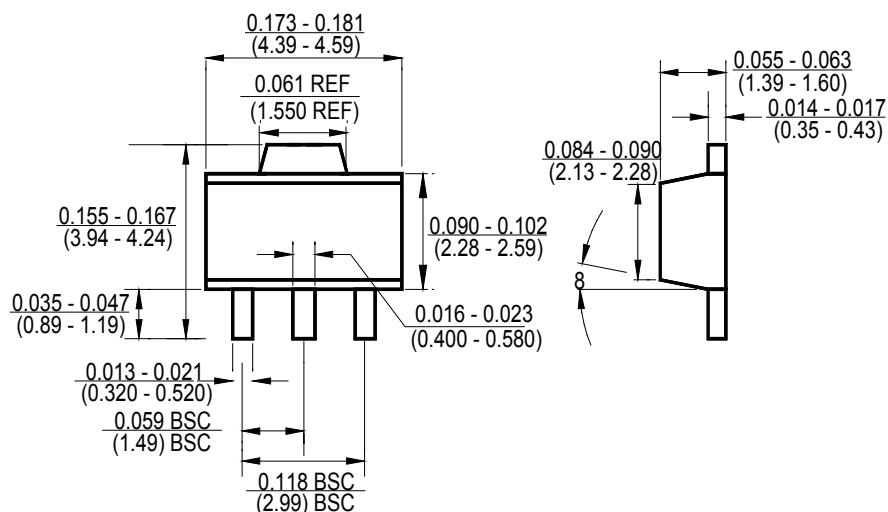


Package Outline Dimensions – TO 92

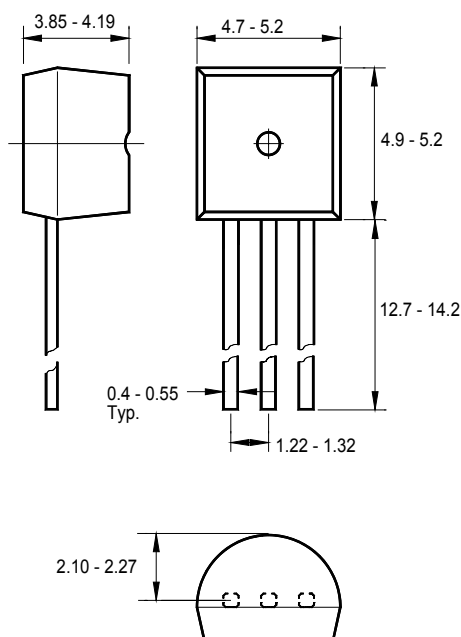

Dimensions are in millimeters

Package Outline Dimensions – SO 8

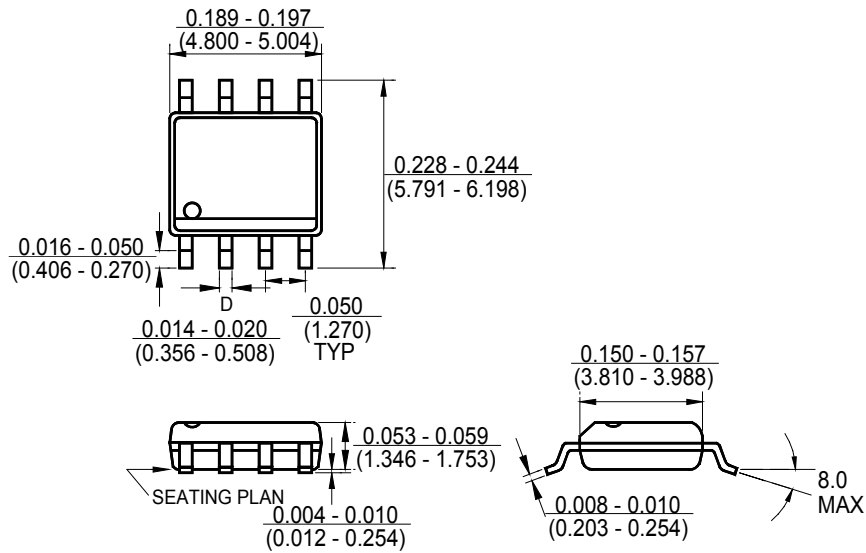

Ordering Number

<u>GM</u>	<u>78L</u>	<u>05</u>	<u>T92</u>	<u>B</u>
APM Gamma Micro	Circuit Type	Output Voltages	Package Type	Shipping Type
		05: 5.0V 06: 6.0V 08: 8.0V 09: 9.0V 10: 10V 12: 12V 15: 15V 18: 18V 24: 24V	T92: TO-92 ST89: SOT-89 S8: SO-8	B: Bag RL: Ammo Pack (Tape) T: Tube R: Tape & Reel

Note:

Pb-free products:

- ◆ RoHS compliant and compatible with the current requirements of IPC/JEDEC J-STD-020.
- ◆ Suitable for use in Pb-free soldering processes with 100% matte tin (Sn) plating.

Green products:

- ◆ Lead-free (RoHS compliant)
- ◆ Halogen free (Br or Cl does not exceed 900ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500ppm by weight)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А