BC846, BC847, BC848

General Purpose Transistors

NPN Silicon

These transistors are designed for general purpose amplifier applications. They are housed in the SC−70/SOT−323 which is designed for low power surface mount applications.

Features

- S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC−Q101 Qualified and PPAP Capable
- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}		V
BC846		65	
BC847		45	
BC848		30	
Collector-Base Voltage	V_{CBO}		V
BC846		80	
BC847		50	
BC848		30	
Emitter-Base Voltage	V_{EBO}		V
BC846		6.0	
BC847		6.0	
BC848		5.0	
Collector Current − Continuous	I_C	100	mAdc

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR−5 Board, (Note 1) T_A = 25°C	P_D	200	mW
Thermal Resistance, Junction−to−Ambient	$R_{\theta JA}$	620	°C/W
Junction and Storage Temperature	T_J, T_{stg}	−55 to +150	°C

1. FR−5 = 1.0 x 0.75 x 0.062 in.

ON Semiconductor®

www.onsemi.com





SC−70/SOT−323
CASE 419
STYLE 3

MARKING DIAGRAM



XX = Specific Device Code
M = Month Code
▪ = Pb−Free Package
(Note: Microdot may be in either location)

ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 12 of this data sheet.

© Semiconductor Components Industries, LLC, 2015

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector−Emitter Breakdown Voltage (I_C = 10 mA)	BC846 Series	$V_{(BR)CEO}$	65	−	−	V
	BC847 Series		45	−	−	
	BC848 Series		30	−	−	
Collector−Emitter Breakdown Voltage (I_C = 10 μA, V_{EB} = 0)	BC846 Series	$V_{(BR)CES}$	80	−	−	V
	BC847 Series		50	−	−	
	BC848 Series		30	−	−	
Collector−Base Breakdown Voltage (I_C = 10 μA)	BC846 Series	$V_{(BR)CBO}$	80	−	−	V
	BC847 Series		50	−	−	
	BC848 Series		30	−	−	
Emitter−Base Breakdown Voltage (I_E = 1.0 μA)	BC846 Series	$V_{(BR)EBO}$	6.0	−	−	V
	BC847 Series		6.0	−	−	
	BC848 Series		5.0	−	−	
Collector Cutoff Current (V_{CB} = 30 V)		I_{CBO}	−	−	15	nA
(V_{CB} = 30 V, T_A = 150°C)			−	−	5.0	μA
ON CHARACTERISTICS						
DC Current Gain (I_C = 10 μA, V_{CE} = 5.0 V)	BC846A, BC847A, BC848A	h_{FE}	−	90	−	−
	BC846B, BC847B, BC848B		−	150	−	
	BC847C, BC848C		−	270	−	
(I_C = 2.0 mA, V_{CE} = 5.0 V)	BC846A, BC847A, BC848A		110	180	220	
	BC846B, BC847B, BC848B		200	290	450	
	BC847C, BC848C		420	520	800	
Collector−Emitter Saturation Voltage (I_C = 10 mA, I_B = 0.5 mA)		$V_{CE(sat)}$	−	−	0.25	V
(I_C = 100 mA, I_B = 5.0 mA)			−	−	0.6	
Base−Emitter Saturation Voltage (I_C = 10 mA, I_B = 0.5 mA)		$V_{BE(sat)}$	−	0.7	−	V
(I_C = 100 mA, I_B = 5.0 mA)			−	0.9	−	
Base−Emitter Voltage (I_C = 2.0 mA, V_{CE} = 5.0 V)		$V_{BE(on)}$	580	660	700	mV
(I_C = 10 mA, V_{CE} = 5.0 V)			−	−	770	
SMALL−SIGNAL CHARACTERISTICS						
Current−Gain − Bandwidth Product (I_C = 10 mA, V_{CE} = 5.0 Vdc, f = 100 MHz)		f_T	100	−	−	MHz
Output Capacitance (V_{CB} = 10 V, f = 1.0 MHz)		C_{obo}	−	−	4.5	pF
Noise Figure (I_C = 0.2 mA, V_{CE} = 5.0 Vdc, R_S = 2.0 kΩ, f = 1.0 kHz, BW = 200 Hz)		NF	−	−	10	dB

BC846A, BC847A, BC848A

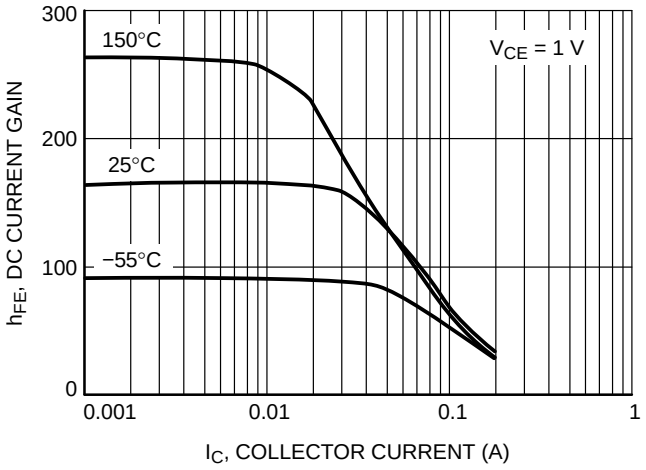

Figure 1. DC Current Gain vs. Collector Current

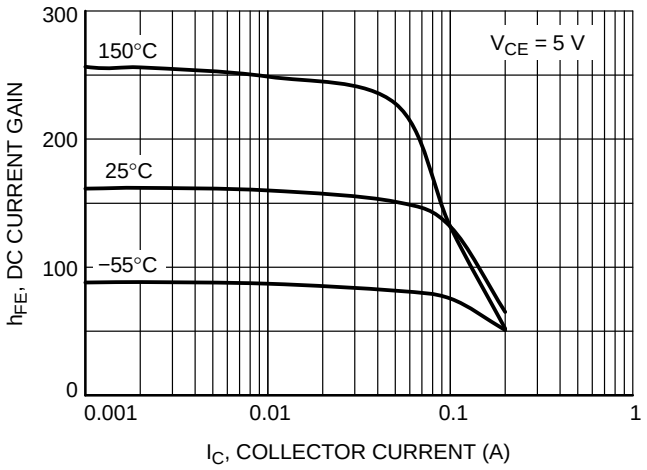

Figure 2. DC Current Gain vs. Collector Current

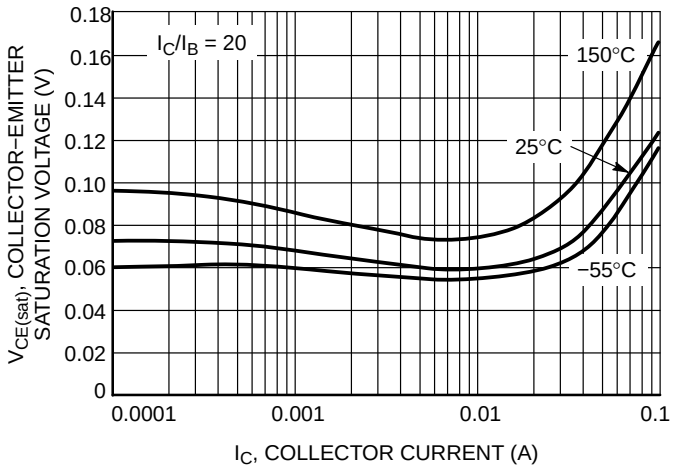

Figure 3. Collector Emitter Saturation Voltage vs. Collector Current

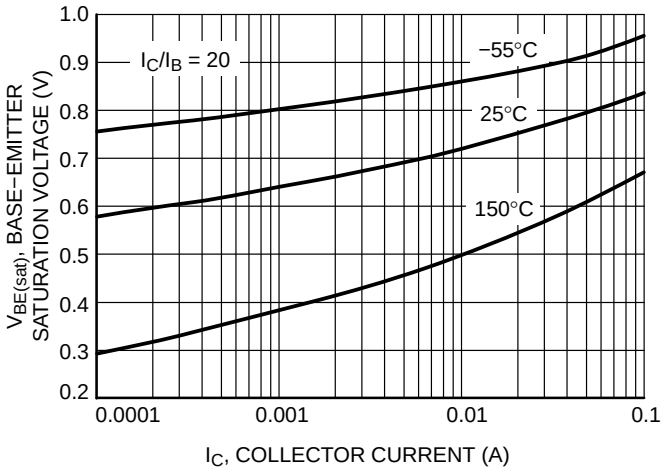

Figure 4. Base Emitter Saturation Voltage vs. Collector Current

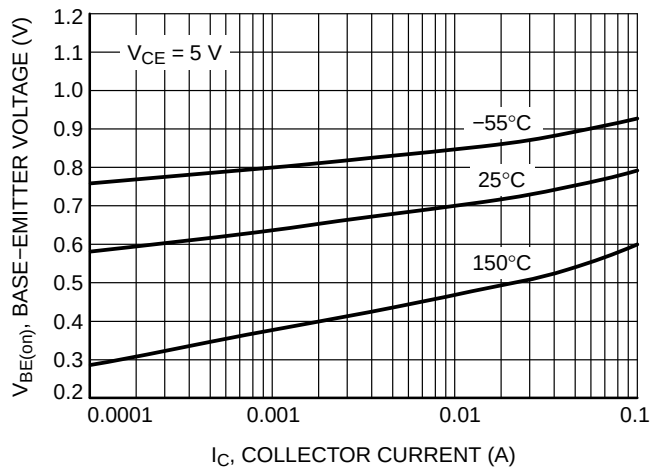

Figure 5. Base Emitter Voltage vs. Collector Current

BC846A, BC847A, BC848A

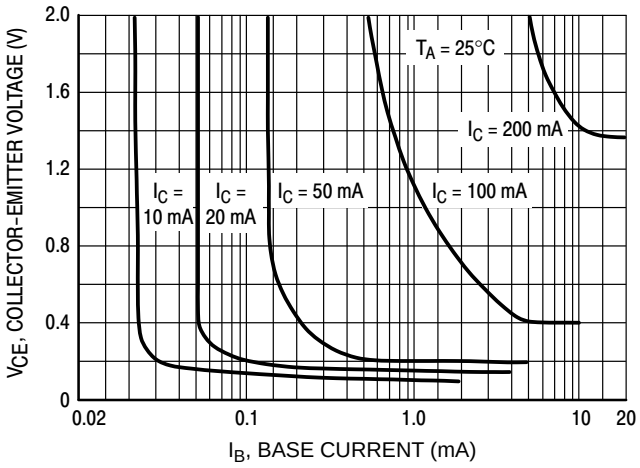

Figure 6. Collector Saturation Region

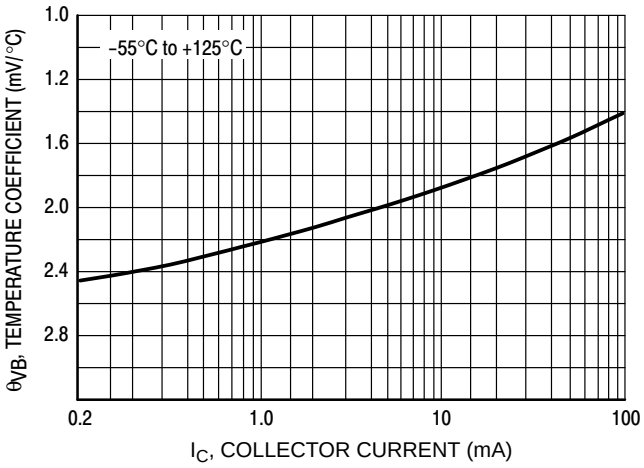

Figure 7. Base−Emitter Temperature Coefficient

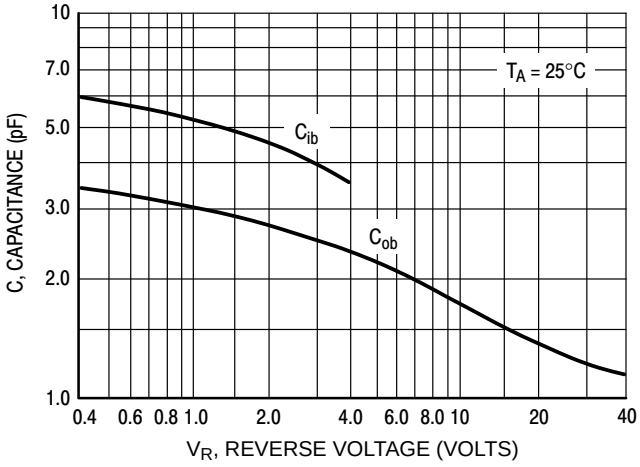

Figure 8. Capacitances

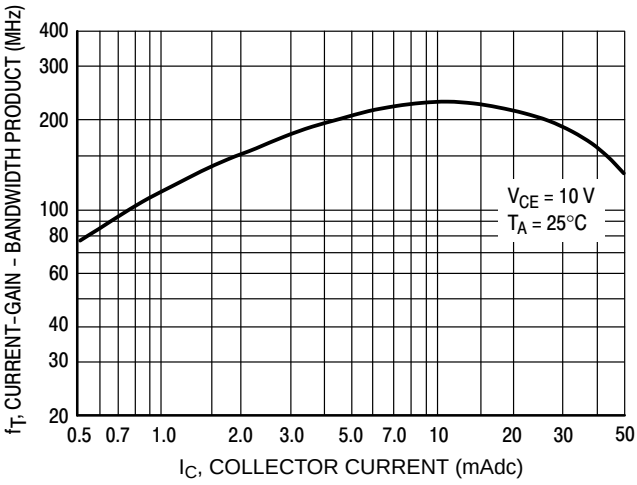

Figure 9. Current−Gain − Bandwidth Product

BC846B

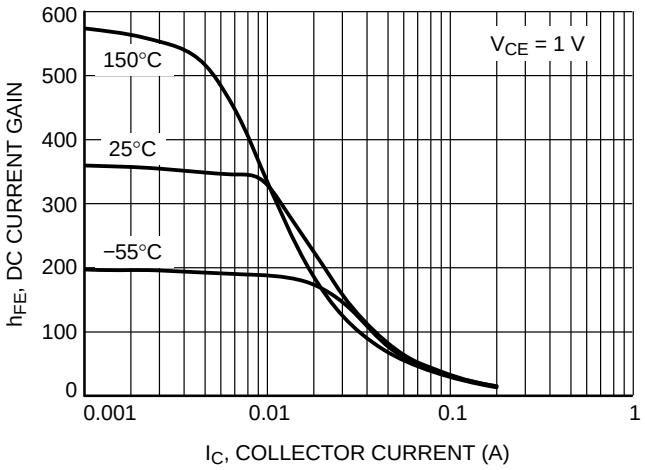

Figure 10. DC Current Gain vs. Collector Current

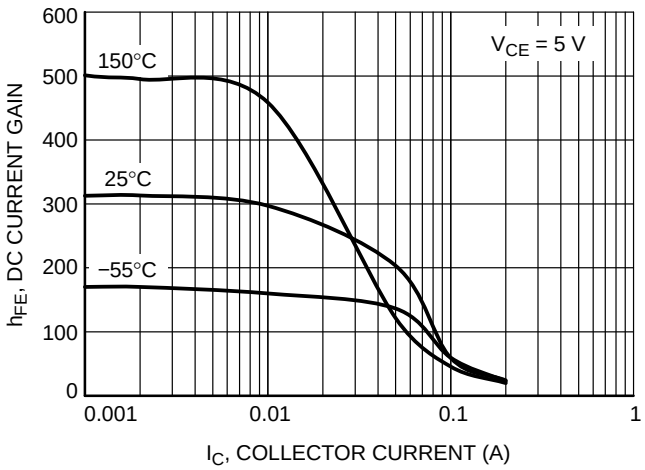

Figure 11. DC Current Gain vs. Collector Current

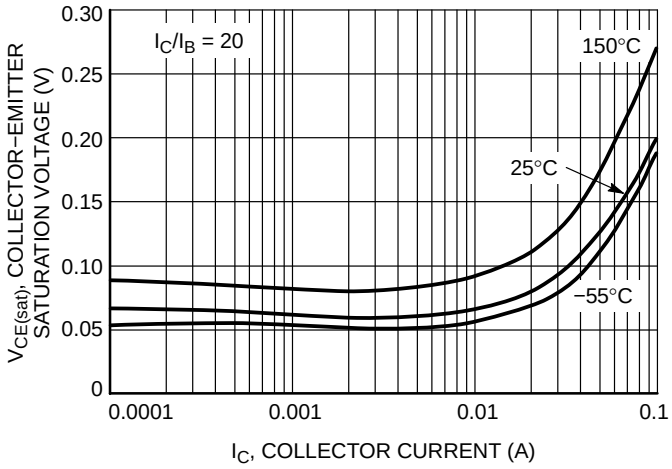

Figure 12. Collector Emitter Saturation Voltage vs. Collector Current

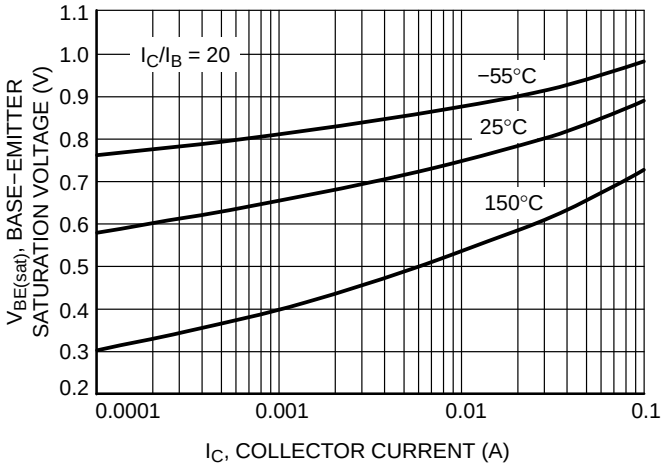

Figure 13. Base Emitter Saturation Voltage vs. Collector Current

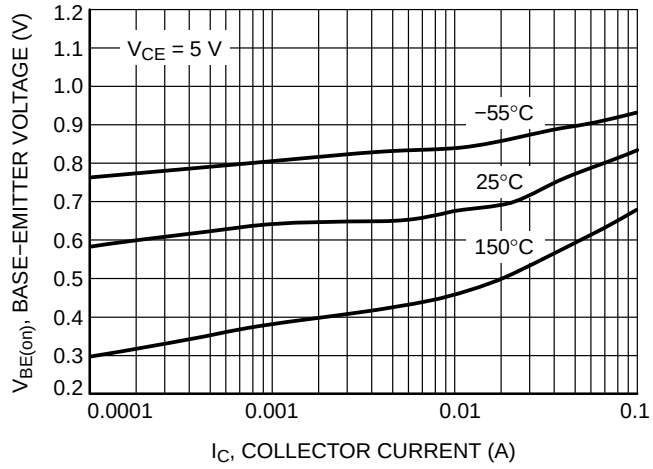

Figure 14. Base Emitter Voltage vs. Collector Current

BC846B

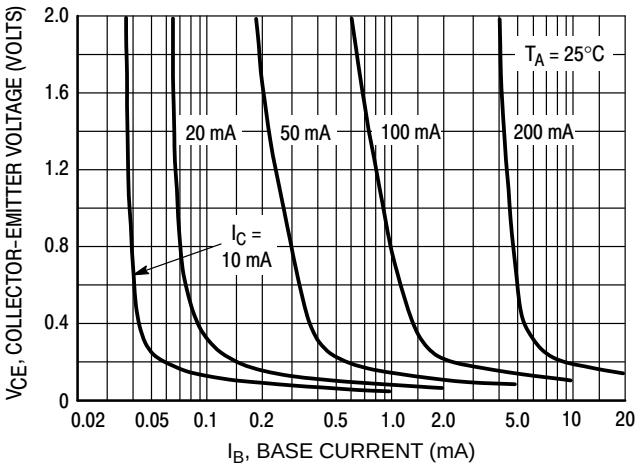

Figure 15. Collector Saturation Region

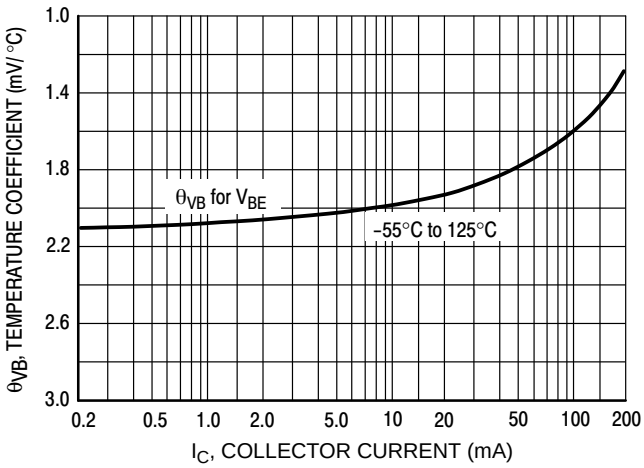

Figure 16. Base−Emitter Temperature Coefficient

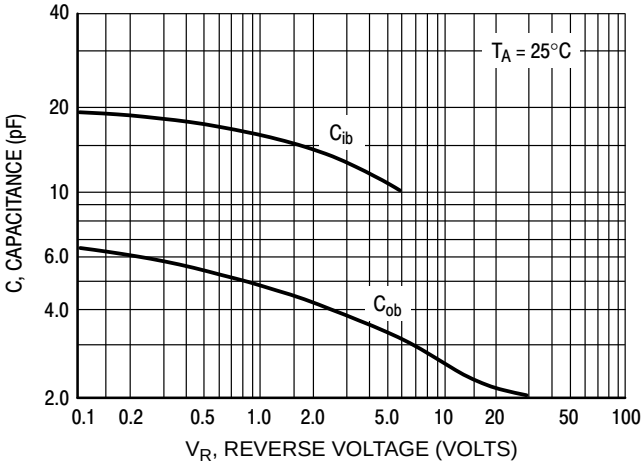

Figure 17. Capacitance

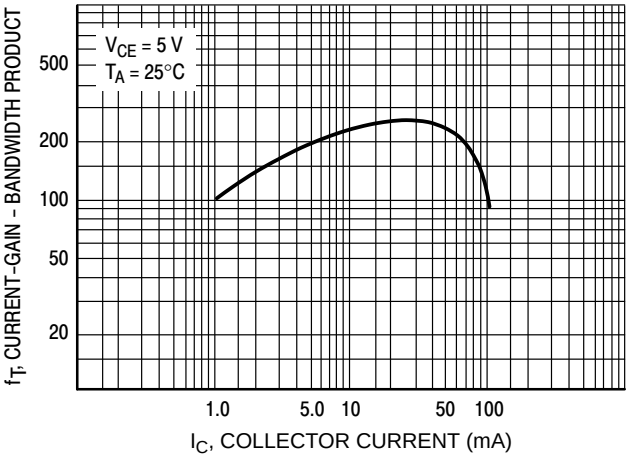

Figure 18. Current−Gain − Bandwidth Product

BC847B, BC848B

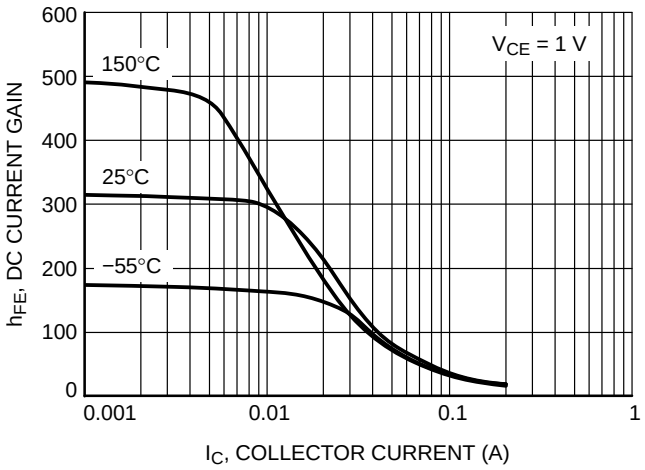

Figure 19. DC Current Gain vs. Collector Current

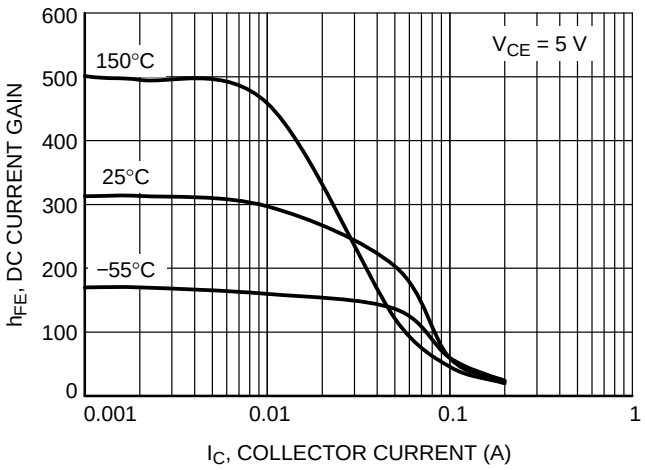

Figure 20. DC Current Gain vs. Collector Current

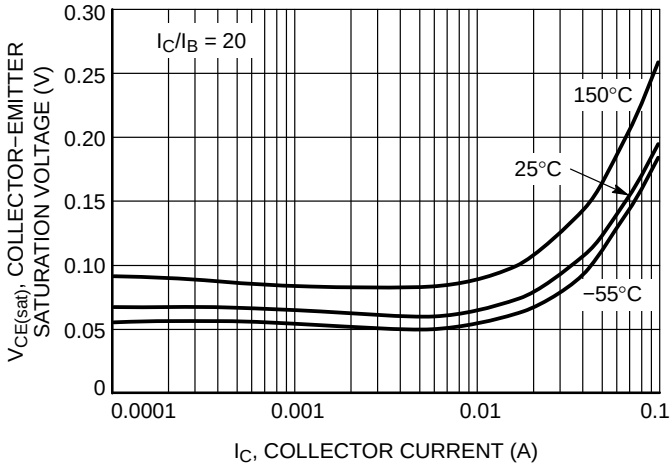

Figure 21. Collector Emitter Saturation Voltage vs. Collector Current

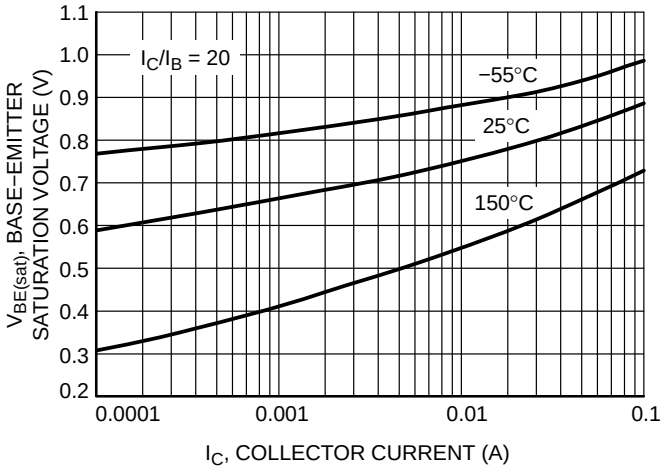

Figure 22. Base Emitter Saturation Voltage vs. Collector Current

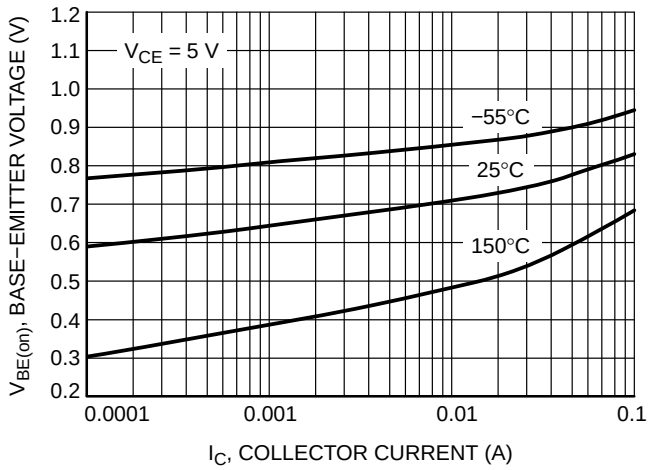

Figure 23. Base Emitter Voltage vs. Collector Current

BC847B, BC848B

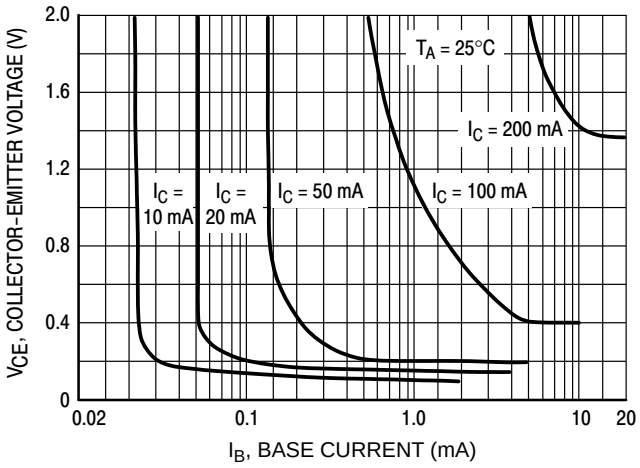

Figure 24. Collector Saturation Region

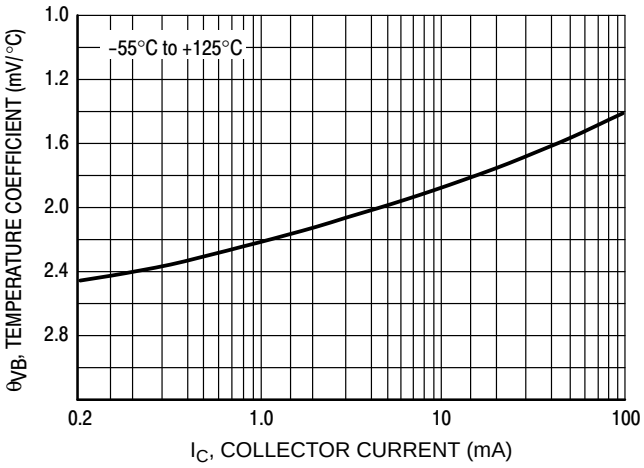

Figure 25. Base−Emitter Temperature Coefficient

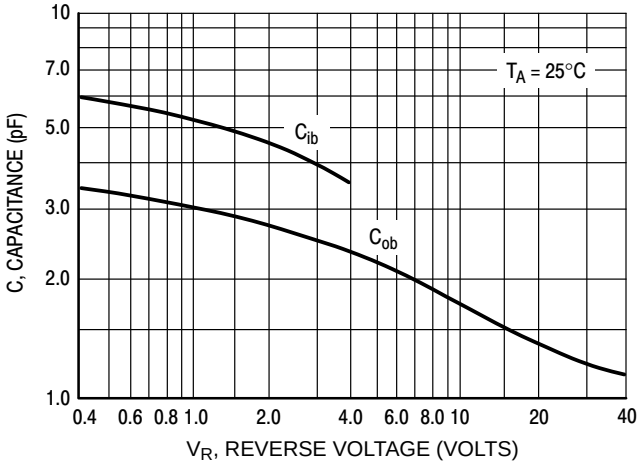

Figure 26. Capacitances

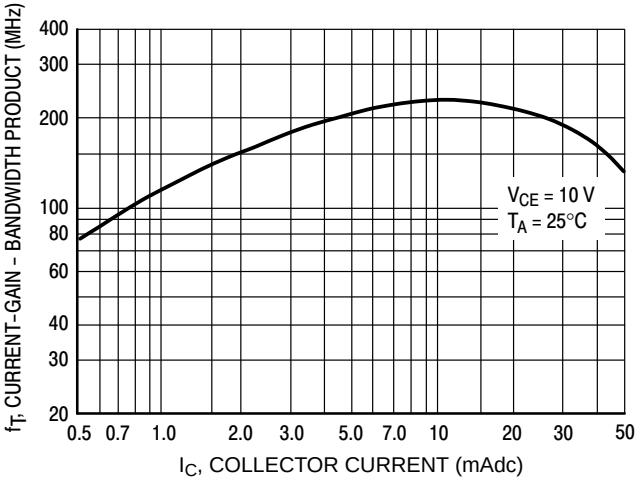

Figure 27. Current−Gain − Bandwidth Product

BC847C, BC848C

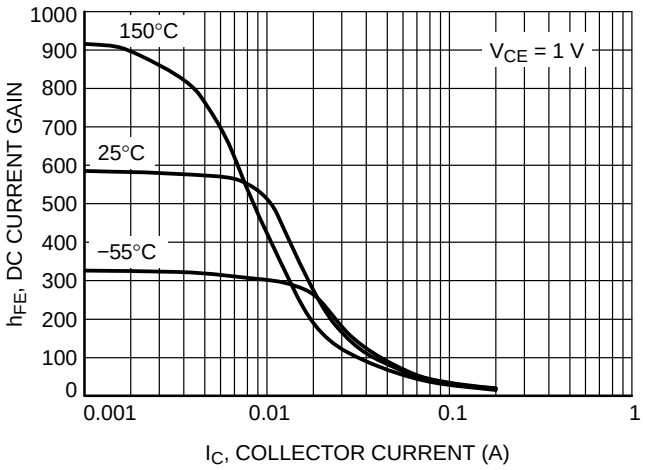

Figure 28. DC Current Gain vs. Collector Current

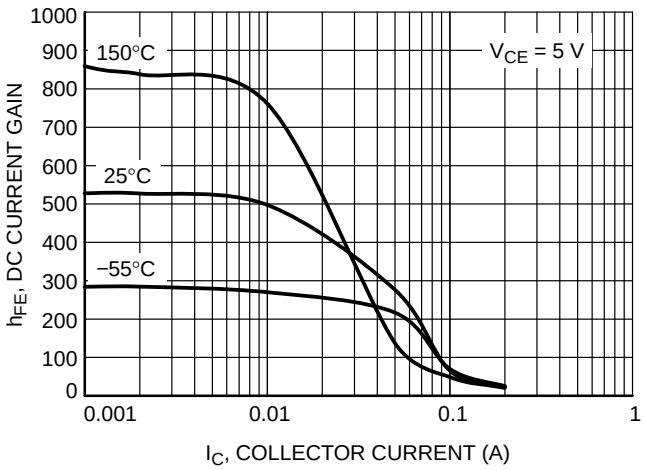

Figure 29. DC Current Gain vs. Collector Current

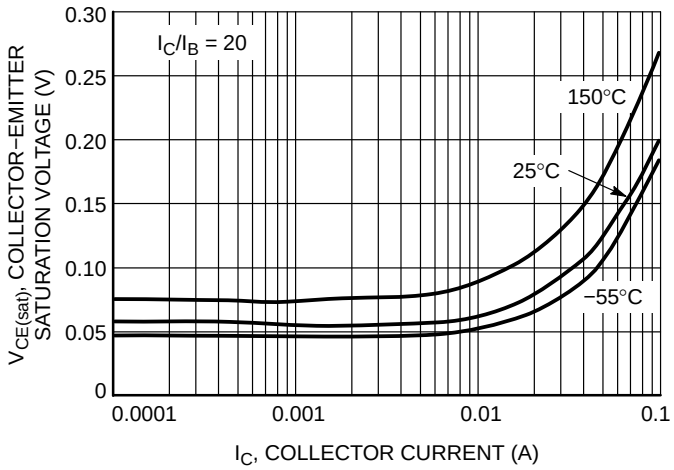

Figure 30. Collector Emitter Saturation Voltage vs. Collector Current

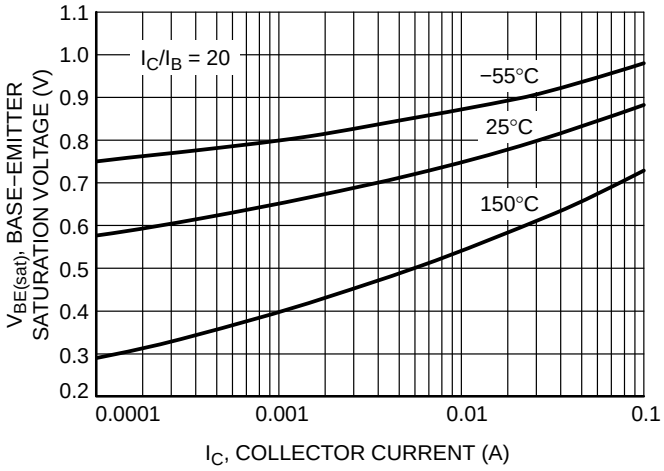

Figure 31. Base Emitter Saturation Voltage vs. Collector Current

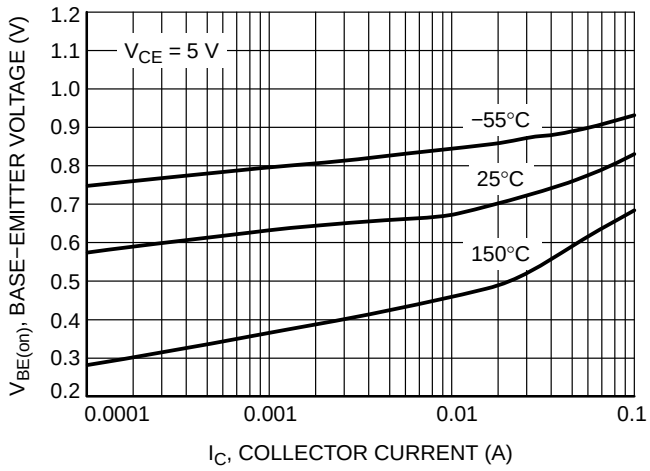

Figure 32. Base Emitter Voltage vs. Collector Current

BC847C, BC848C

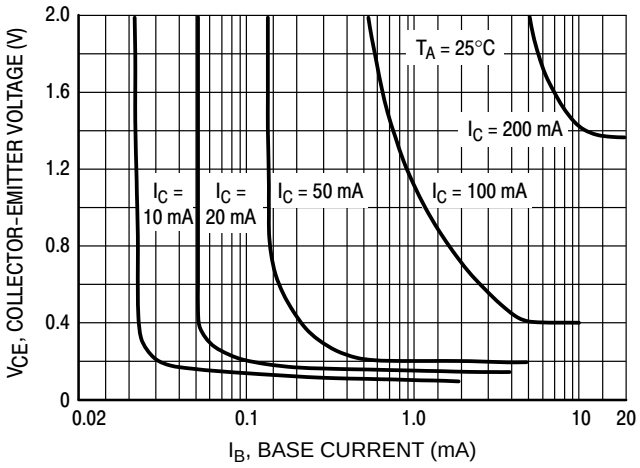

Figure 33. Collector Saturation Region

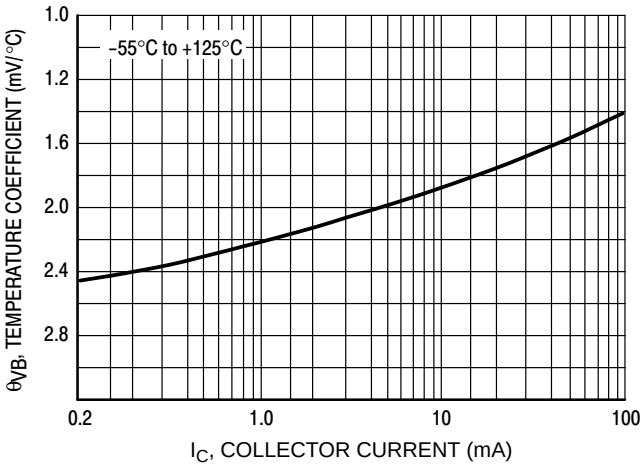

Figure 34. Base−Emitter Temperature Coefficient

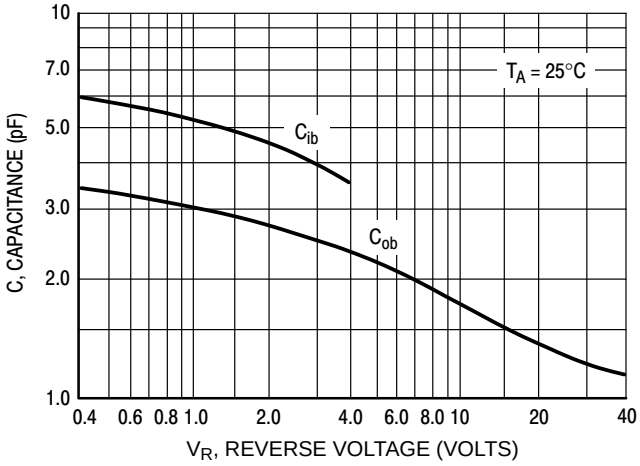

Figure 35. Capacitances

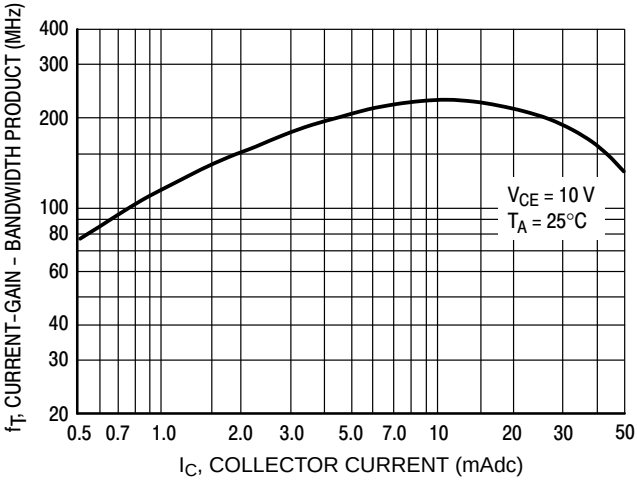

Figure 36. Current−Gain − Bandwidth Product

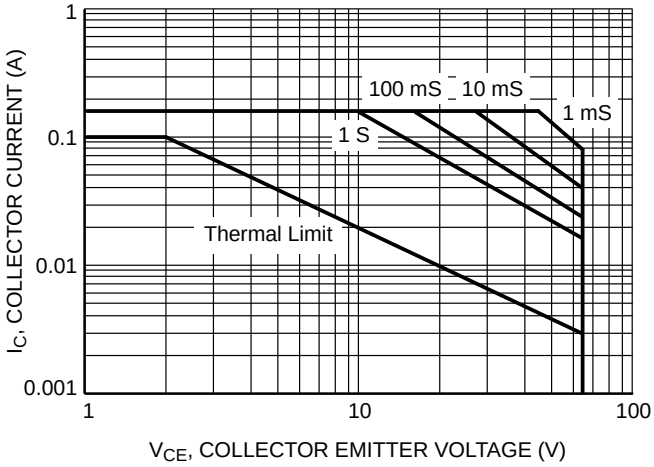

Figure 37. Safe Operating Area for BC846A, BC846B

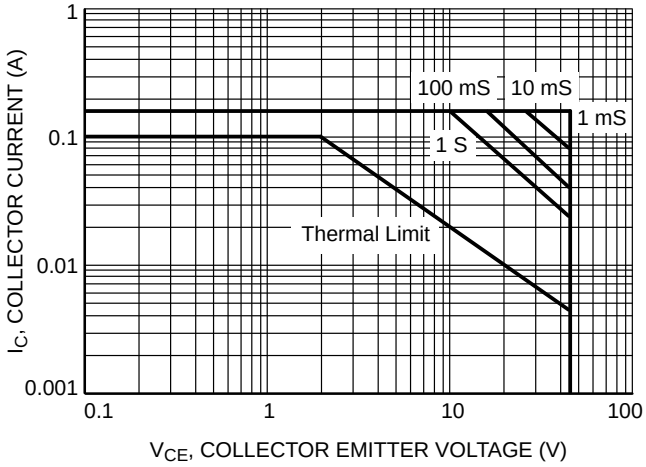

Figure 38. Safe Operating Area for BC847A, BC847B, BC847C

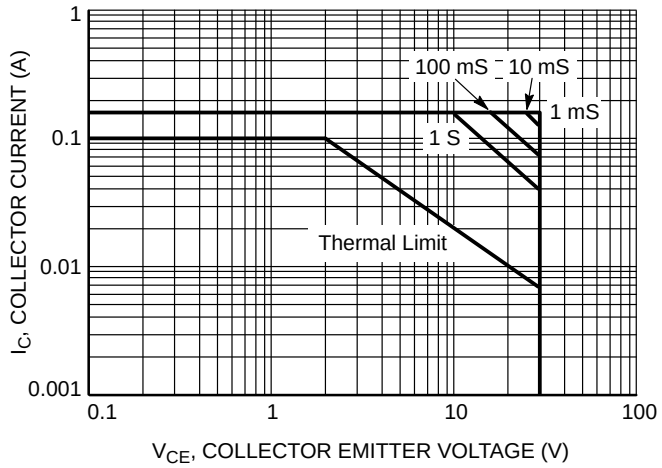

Figure 39. Safe Operating Area for BC848A, BC848B, BC848C

DEVICE ORDERING AND SPECIFIC MARKING INFORMATION

Device	Specific Marking Code	Package	Shipping†
BC846BWT1G	1B	SC−70 (SOT−323) (Pb−Free)	3,000 / Tape & Reel
SBC846BWT1G*			
BC847AWT1G	1E		3,000 / Tape & Reel
SBC847AWT1G*			
BC847BWT1G	1F		3,000 / Tape & Reel
SBC847BWT1G*			
BC847CWT1G	1G		3,000 / Tape & Reel
SBC847CWT1G*			
BC847CWT3G	1G		10,000 / Tape & Reel
SBC847CWT3G*			
BC848BWT1G	1K		3,000 / Tape & Reel
NSVBC848BWT1G*			
BC848CWT1G	1L		

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

*S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC−Q101 Qualified and PPAP Capable.

PACKAGE DIMENSIONS

SC−70 (SOT−323)
CASE 419−04
ISSUE N

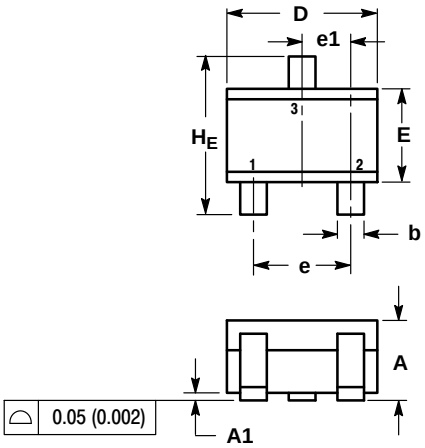



NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	MILLIMETERS			INCHES		
DIM	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.90	1.00	0.032	0.035	0.040
A1	0.00	0.05	0.10	0.000	0.002	0.004
A2		0.70 REF			0.028 REF	
b	0.30	0.35	0.40	0.012	0.014	0.016
c	0.10	0.18	0.25	0.004	0.007	0.010
D	1.80	2.10	2.20	0.071	0.083	0.087
E	1.15	1.24	1.35	0.045	0.049	0.053
e	1.20	1.30	1.40	0.047	0.051	0.055
e1		0.65 BSC			0.026 BSC	
L	0.20	0.38	0.56	0.008	0.015	0.022
H_E	2.00	2.10	2.40	0.079	0.083	0.095

STYLE 3:
PIN 1. BASE
2. EMITTER
3. COLLECTOR

SOLDERING FOOTPRINT*

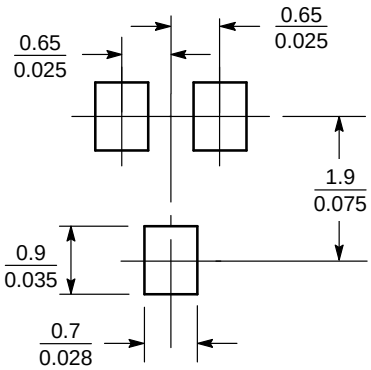

SCALE 10:1 $\left(\frac{\text{mm}}{\text{inches}}\right)$

*For additional information on our Pb−Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and ON are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303−675−2175 or 800−344−3860 Toll Free USA/Canada
Fax: 303−675−2176 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81−3−5817−1050

ON Semiconductor Website: **www.onsemi.com**

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

BC846AWT1/D

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А