


G5NB-EL

PCB Power Relay

A slim compact Relay with 7 A switching capacity

- 7 A (250 VAC), 5 A (30 VDC) high capacity switching with compact size.
- Minimum 200,000 operations durability at 5 A (250 VAC) switching.
- IEC/EN 60335-1 conformed.
- Ambient operating temperature: max. 85°C
- IEC/EN 60079-15 conformed. (Only for G5NB-1A4-EL-HA Model)

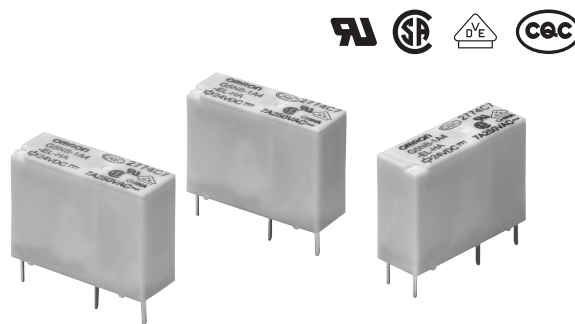

RoHS Compliant

Model Number Legend

G5NB-□□□-□□-□□-□□
1 2 3 4 5 6 7 8

1. Number of Poles

1 : 1-pole

2. Contact Form

A : SPST-NO (1a)

3. Enclosure rating

4 : Fully sealed

4. Classification

EL : High capacity and electrical durability

5. Conformity standard

HA : IEC/EN 60335-1 conformed

6. Coil Holding Voltage

None : Not supported

PW : Supported

7. High temperature rating

None : Not supported

A85 : High temperature rating at 85°C

8. Packing

None : Tray Packing

SP : Tube Packing

G
5
N
B
-
E
L

Application Examples

- Home appliances
- Industrial equipment
- Building automation

Ordering Information

Classification	Contact form	Enclosure rating	Model	Rated coil voltage	Minimum packing unit
Single stable relay	SPST-NO (1a)	Fully Sealed	G5NB-1A4-EL-HA(-SP)	DC5,12,24V	100pcs./Tray
			G5NB-1A4-EL-HA-PW(-SP)		50pcs./Tube
		Flux protection	G5NB-1A-EL-HA-A85		100pcs./Tray

Note 1. When ordering, add the rated coil voltage to the model number.

Example: G5NB-1A4-EL-HA DC12

Rated coil voltage

However, the notation of the coil voltage on the product case as well as on the packing will be marked as □□ VDC.

Note 2. When ordering tape packing, add "-SP" to the model number.

Be sure since "-SP" is not part of the relay model number, it is not marked on the relay case.

■ Ratings

● Coil

Rated voltage	Rated current (mA)	Coil resistance (Ω)	Must operate voltage (V)	Must release voltage (V)	Max. voltage (V)	Power consumption (mW)
5 VDC	40	125	75% max.	10% min. 10 to 39%*	160% (at 23°C)	Approx. 200 Approx. 50*
12 VDC	16.7	720				
24 VDC	8.3	2880				

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

Note 2. The operating characteristics are measured at a coil temperature of 23°C.

Note 3. The "Max. voltage" is the maximum voltage that can be applied to the relay coil.

* These numbers are only for -PW type. Power consumption with Holding Voltage is approx. 50mW. Please confirm the detail in page 4 Coil Voltage Reduction (Holding Voltage).

● Contacts

Item	Load	Resistive load
Contact Type		Single
Contact material		Ag-alloy (Cd free)
Rated load		5 A at 250 VAC, 7 A at 250 VAC
		5 A at 30 VDC
Rated carry current		5 A at DC, 7 A at AC
Max. switching voltage		250 VAC, 30 VDC
Max. switching current		5 A at DC, 7 A at AC

■ Characteristics

Contact resistance *1		100 mΩ max.
Operate time		10 ms max.
Release time		10 ms max.
Insulation resistance *2		1,000 MΩ min.
Dielectric strength	Between coil and contacts	4,000 VAC, 50/60 Hz for 1 min
	Between contacts of the same polarity	750 VAC, 50/60 Hz for 1 min
Insulation distance	Between coil and contacts	Clearance: 6 mm, Creepage: 6 mm
Impulse withstand voltage	Between coil and contacts	10 kV (1.2 x 50 μs)
Vibration resistance	Destruction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
	Malfunction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
Shock resistance	Destruction	1,000 m/s ²
	Malfunction	100 m/s ²
Durability	Mechanical	5,000,000 operations min.
	Electrical (resistive load)	- Standard, Coil holding voltage type 200,000 operations at 250 VAC, 5 A 50,000 operations at 250 VAC, 7 A 100,000 operations at 30 VDC, 5 A - High temperature rating type (G5NB-1A-EL-HA-A85) 100,000 operations at 250 VAC, 5 A at 85°C 50,000 operations at 250 VAC, 7 A at 85°C
Failure rate (P level) (reference value) *3		DC5V 10mA
Ambient operating temperature		-40°C to 85°C (with no icing or condensation)
Ambient operating humidity		5% to 85%
Weight		Approx. 4 g

Note. The data shown above are initial value.


*1. Measurement conditions: 5 VDC, 1 A, voltage drop method

*2. Measurement conditions: Measured at the same points as the dielectric strength using a 500 VDC ohmmeter.


*3. This value was measured at a switching frequency of 120 operations/min.

Engineering Data


Maximum Switching Capacity

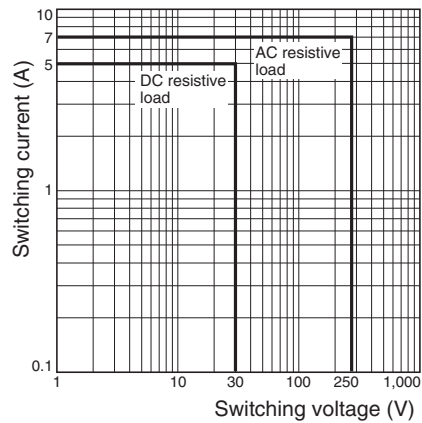

Durability

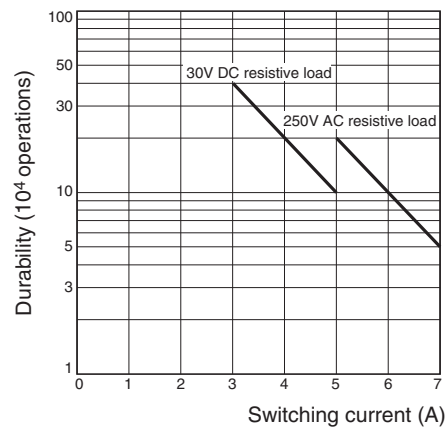


Ambient Temperature vs. Maximum Coil Voltage

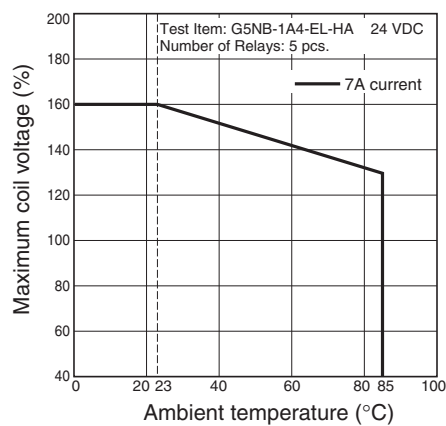

Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.


Shock malfunction

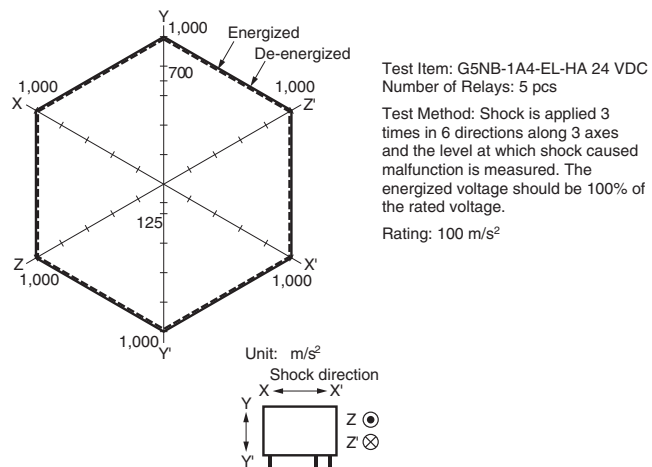


Dimensions

(Unit: mm)


G5NB-1A4-EL-HA(-PW)
G5NB-1A-EL-HA-A85

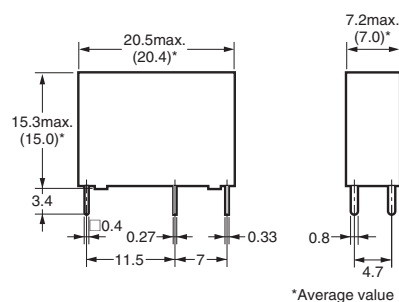

PCB Mounting Holes
(Bottom View)
Tolerance: ± 0.1 mm



Terminal Arrangement/
Internal Connections
(Bottom View)



(No coil polarity)

Approved Standards

The approval rating values for overseas standards are different from the performance values determined individually. Confirm the values before use.

- UL Recognized: (File No. E41515)
- CSA Certified: (File No. LR31928)

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G5NB-1A4-EL-HA(-PW) G5NB-1A-EL-HA-A85	SPST-NO (1a)	5 to 24V DC	7A 250V AC (General Purpose) 85°C	30,000
			5A 250V AC (General Purpose) 85°C	50,000
			5A 30V DC (Resistive) 85°C	6,000

- EN/IEC, VDE Certified (Certificate No. 137575)

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G5NB-1A4-EL-HA(-PW) G5NB-1A-EL-HA-A85	SPST-NO (1a)	5, 12, 24V DC	7A 250V AC (Resistive) 85°C	10,000
			5A 30V DC (Resistive) 85°C	


Precautions

- Please refer to “PCB Relays Common Precautions” for correct use.

Correct Use

- Coil Voltage Reduction (Holding Voltage) after Relay operation

- If the coil voltage is reduced to the holding voltage after Relay operation, first apply the rated voltage to the coil for at least 100 ms, as shown below.
- A voltage of at least 50% of the rated voltage is required for the coil holding voltage. Do not allow voltage fluctuations to cause the coil holding voltage to fall below this level.

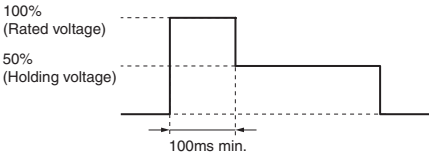

	Applied coil voltage	Coil resistance*	Power consumption
Rated voltage	100%	125Ω (5 VDC) 720Ω (12 VDC)	Approx.200 mW
Holding voltage	50%	2880Ω (24 VDC)	Approx.50 mW

* The coil resistance were measured at a coil temperature of 23°C with tolerances of ±10%.

G5NB-EL

■Other data

Creepage distance	6.0 mm
Clearance distance	6.0 mm
Insulation Material Group	III a
Type of insulation coil-contact circuit	Reinforced
open contact circuit	Micro disconnection
Rated Insulation Voltage	250V
Pollution degree	3
Rated voltage system	250V
Overvoltage category	III
Category of protection according to IEC 61810-1	RT III
Glow wire according to IEC 60335-1	<HA Models only> GWT 750°C min. (IEC 60695-2-11) / GWF1 850°C min. (IEC 60695-2-12)
Tracking Index of relay base	PTI 250V min. (housing Parts)
Flammability class according to UL94	V-0

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Electronic and Mechanical Components Company

Regional Contact

Americas

<https://www.components.omron.com/>

Asia-Pacific

<https://ecb.omron.com.sg/>

Korea

<https://www.omron-ecb.co.kr/>

Europe

<http://components.omron.eu/>

China

<https://www.ecb.omron.com.cn/>

Japan

<https://www.omron.co.jp/ecb/>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[G5NB-1A4-EL-HA DC12](#) [G5NB-1A4-EL-HA DC24](#) [G5NB-1A4-EL-HADC5](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А