

# DATA SHEET

## CURRENT SENSOR - LOW TCR

PA0603 series

5%, 1%

sizes 0603

RoHS compliant & Halogen free



## SCOPE

This specification describes  
PA0603 series current sensor -  
low TCR with lead-free terminations  
metal substrate.

## APPLICATIONS

- Consumer goods
- Computer
- Telecom / Datacom
- Industrial / Power supply
- Alternative Energy
- Car electronics

## FEATURES

- AEC-Q200 qualified
- Halogen-free Epoxy
- RoHS compliant
- Reduce environmentally hazardous wastes
- High component and equipment reliability
- Non-forbidden materials used in products/production
- Low resistances applied to current sensing
- Moisture sensitivity level: MSL 1

## ORDERING INFORMATION - GLOBAL PART NUMBER

Global part numbers are identified by the series, size, tolerance, packing type, temperature coefficient, taping reel and resistance value.

### GLOBAL PART NUMBER

PA XXXX X X X XX XXXX L  
(1) (2) (3) (4) (5) (6) (7)

#### (1) SIZE

0603

#### (2) TOLERANCE

F =  $\pm 1\%$

J =  $\pm 5\%$

#### (3) PACKAGING TYPE

R = Paper taping reel

#### (4) TEMPERATURE COEFFICIENT OF RESISTANCE

E =  $\pm 50$  ppm/ $^{\circ}\text{C}$

M =  $\pm 75$  ppm/ $^{\circ}\text{C}$

L =  $\pm 150$  ppm/ $^{\circ}\text{C}$

P =  $\pm 500$  ppm/ $^{\circ}\text{C}$

#### (5) TAPING REEL

07 / 7W / 7T / 47 / 57 = 7 inch dia. Reel and specific rated power

Detailed power rating are shown in the Table 2.

#### (6) RESISTANCE VALUE

1 m $\Omega$  to 20 m $\Omega$

#### (7) DEFAULT CODE

Letter L is the system default code for ordering only. (Note)

| Resistance rule of global part number |                      |
|---------------------------------------|----------------------|
| Resistance code rule                  | Example              |
| 0RXXX                                 | 0R001 = 1 m $\Omega$ |
| (1 to 20 m $\Omega$ )                 | 0R02 = 20 m $\Omega$ |

## ORDERING EXAMPLE

The ordering code for a PA0603 0.5W chip resistor, TC75 value 0.01 $\Omega$  (10mR) with  $\pm 1\%$  tolerance, supplied in 7-inch tape reel with 5Kpcs quantify is:  
PA0603FRM570R01L.

## NOTE

1. All our RChip products are RoHS compliant. "LFP" of the internal 2D reel label mentions "Lead-Free Process"

**MARKING**

PA0603



No Marking

**CONSTRUCTION**

The resistors are constructed using outstanding TCR level material, which makes Yageo PA resistors excellent for current sensing application in battery charger circuit & DC-DC converter.

The composition of the resistive material is adjusted to give the approximate required resistance and is covered with a protective coating. Marking is printed on the top side of the resistor.

Finally, the three external terminations (Cu / Ni / matte Tin) are added, as shown in Fig. 2.

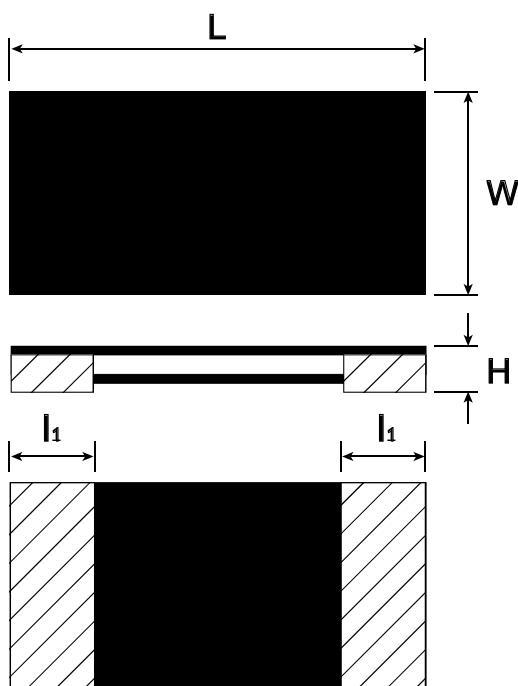
**Outlines**

Fig. 2 Chip resistor outlines

**DIMENSION**

Table 1 For outlines, please refer to Fig. 4

| TYPE   | RESISTANCE RANGE | POWER RATING | L (mm)    | W (mm)         | H (mm)    | L <sub>1</sub> (mm) |
|--------|------------------|--------------|-----------|----------------|-----------|---------------------|
| PA0603 | 1mΩ ≤ R ≤ 20mΩ   | 1/10 W       | 1.60±0.20 | 0.80+0.1/-0.20 | 0.45±0.15 | 0.38±0.12           |
|        |                  | 1/5 W        |           |                |           |                     |
|        |                  | 3/10 W       |           |                |           |                     |
|        |                  | 2/5 W        |           |                |           |                     |
|        |                  | 1/2 W        |           |                |           |                     |

Note:

1. For relevant physical dimensions, please refer to construction outlines.

2. Please contact with sales offices, distributors and representatives in your region before ordering.

**ELECTRICAL CHARACTERISTICS**

Table 2

| SERIES | SIZE | POWER RATING |      |       |      |      | TOLERANCE | RESISTANCE RANGE | TEMPERATURE COEFFICIENT OF RESISTANCE |
|--------|------|--------------|------|-------|------|------|-----------|------------------|---------------------------------------|
|        |      | 07           | 7W   | 7T    | 47   | 57   |           |                  |                                       |
| PA     | 0603 | 1/10W        | 1/5W | 3/10W | 2/5W | 1/2W | ±1%, ±5%  | 1mΩ              | ±500 ppm/°C                           |
|        |      |              |      |       |      |      |           | 2mΩ / 2.5mΩ      | ±150 ppm/°C                           |
|        |      |              |      |       |      |      |           | 3mΩ ≤ R ≤ 20mΩ   | ±50 ppm/°C, ±75 ppm/°C                |

Note: Please contact with sales offices, distributors and representatives in your region before ordering.

**FUNCTIONAL DESCRIPTION****OPERATING TEMPERATURE RANGE**

PA0603 Range: -55°C to +155°C

**POWER RATING**

Standard rated power at 70°C:

For detail power value, please refer to Table 2.

**RATED VOLTAGE**

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$$V = \sqrt{P \times R}$$

Where

V = Continuous rated DC or AC (rms) working voltage (V)

P = Rated power (W)

R = Resistance value (Ω)

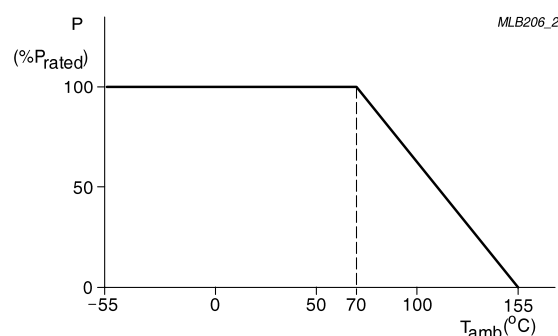
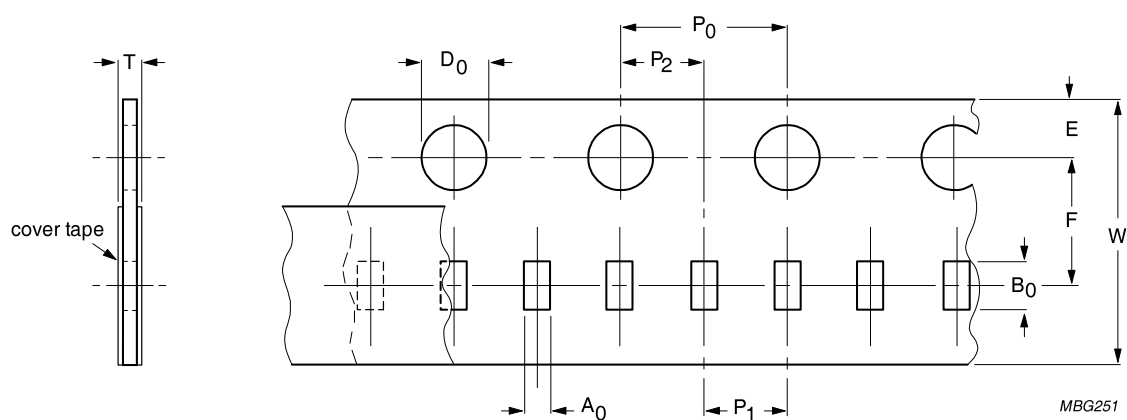



Fig. 3 Maximum dissipation ( $P_{max}$ ) in percentage of rated power as a function of the operating ambient temperature ( $T_{amb}$ )

**PACKING STYLE AND PACKAGING QUANTITY****Table 3** Packing style and packaging quantity


| PACKING STYLE         | REEL DIMENSION | PA0603 |
|-----------------------|----------------|--------|
| Paper taping reel (R) | 7" (178 mm)    | 5,000  |

**PAPER TAPE****Fig. 4** Paper Tape**Table 4** Dimensions of paper tape for relevant chip resistors size

| SIZE   | SYMBOL          |                 |                 |                 |                 |                 |                |                 |                   |                   | Unit: mm        |
|--------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------|-----------------|-------------------|-------------------|-----------------|
|        | $A_0$           | $B_0$           | $W$             | $E$             | $F$             | $P_0$           | $P_1$          | $P_2$           | $\varnothing D_0$ | $\varnothing D_1$ | $T$             |
| PA0603 | $1.08 \pm 0.10$ | $1.90 \pm 0.10$ | $8.00 \pm 0.10$ | $1.75 \pm 0.10$ | $3.50 \pm 0.10$ | $4.00 \pm 0.10$ | $2.0 \pm 0.10$ | $2.00 \pm 0.10$ | $1.55 \pm 0.05$   | $1.50 \pm 0.10$   | $0.60 \pm 0.10$ |

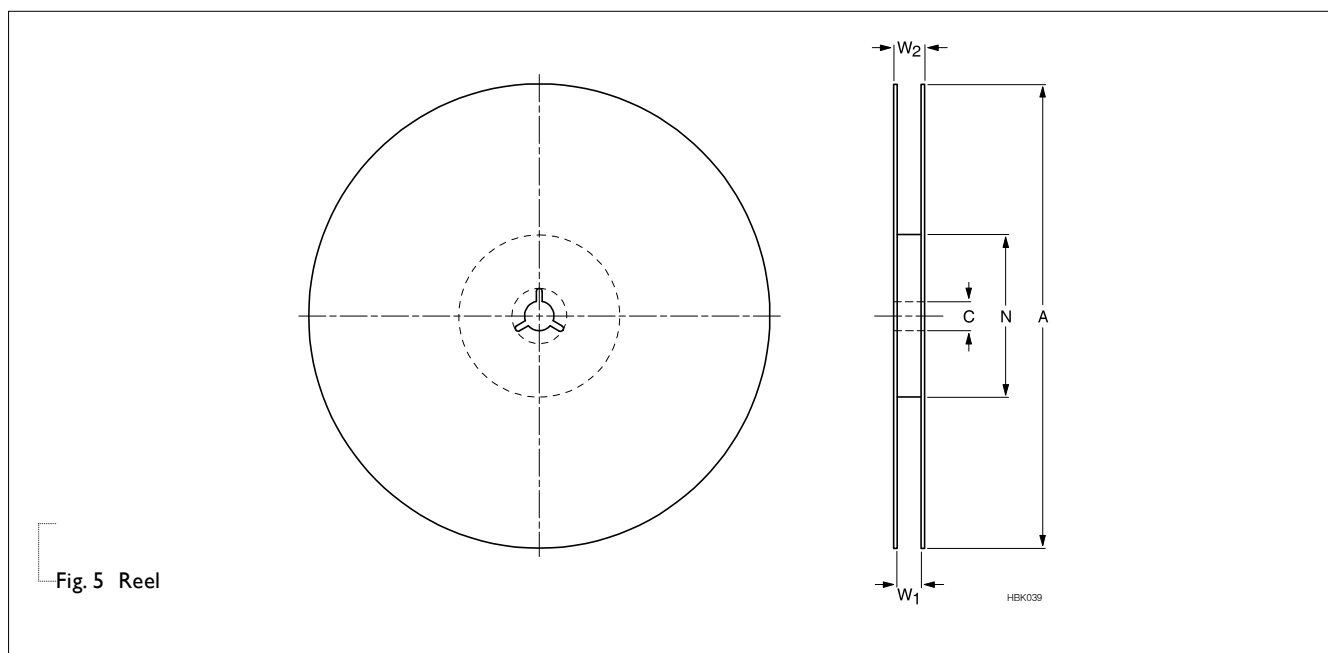**REEL SPECIFICATION**

**Table 5** Dimensions of reel specification for relevant chip resistors size
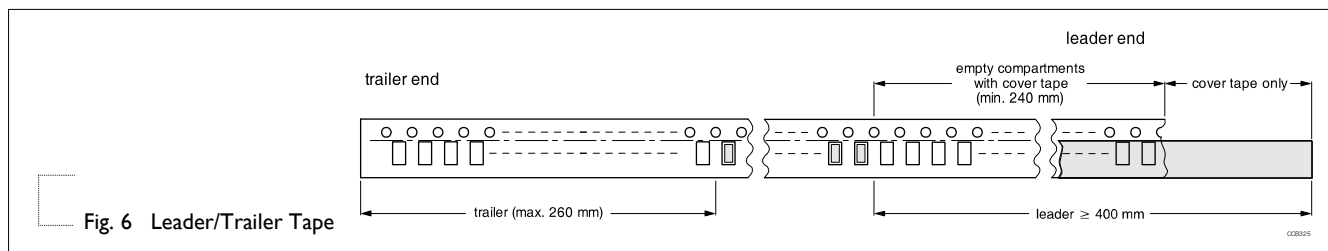
| SIZE   | QUANTITY<br>PER REEL | REEL SIZE                     | SYMBOL          |                |                 |                |               | Unit: mm       |  |
|--------|----------------------|-------------------------------|-----------------|----------------|-----------------|----------------|---------------|----------------|--|
|        |                      | 8 mm<br>TAPE WIDE             | A               | N              | C               | D              | $W_1$         | $W_2$ MAX.     |  |
| PA0603 | 5,000                | 7"<br>( $\varnothing 178$ mm) | $178.0 \pm 1.0$ | $60.0 \pm 1.0$ | $13.50 \pm 0.5$ | $21.0 \pm 0.8$ | $9.0 \pm 0.5$ | $12.0 \pm 0.2$ |  |

**LEADER/TRAILER TAPE SPECIFICATION**


## FOOTPRINT AND SOLDERING PROFILES

For recommended soldering profiles, please refer to data sheet “Chip resistors mounting”.

### FOOTPRINT

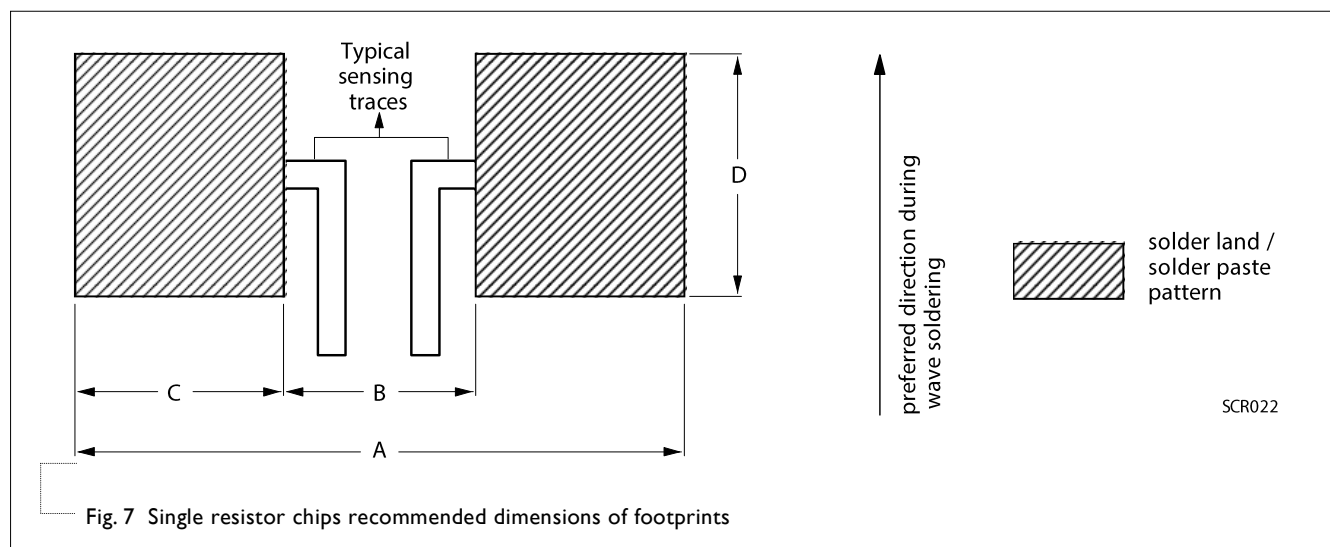


Table 6 Footprint dimensions

| SIZE   | RESISTANCE RANGE                               | Unit: mm |     |     |     |
|--------|------------------------------------------------|----------|-----|-----|-----|
|        |                                                | A        | B   | C   | D   |
| PA0603 | $1\text{m}\Omega \leq R \leq 20\text{m}\Omega$ | 2.2      | 0.8 | 0.7 | 0.9 |

**TESTS AND REQUIREMENTS**

Table 8 Test condition, procedure and requirements

| TEST                         | TEST METHOD                                  | PROCEDURE                                                                                                                                                                                                                                            | REQUIREMENT                                            |
|------------------------------|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| Short time overload          | IEC60115-1 4.13                              | 2.5 times of rated power for 5 seconds at room temperature                                                                                                                                                                                           | $\pm(1\%+0.0005\Omega)$<br>No visible damage           |
| High Temperature Exposure    | MIL-STD-202-Method 108                       | 1,000 hours at maximum operating temperature depending on specification, unpowered<br><br>No direct impingement of forced air to the parts Tolerances: $155\pm5^{\circ}\text{C}$                                                                     | $\pm(1.0\%+0.0005\Omega)$                              |
| Moisture Resistance          | MIL-STD-202-Method 106                       | Each temperature / humidity cycle is defined at 8 hours (method 106F), 3 cycles / 24 hours for 10d with $25^{\circ}\text{C}$ / $65^{\circ}\text{C}$ 95% R.H, without steps 7a & 7b, unpowered                                                        | $\pm(0.5\%+0.0005\Omega)$                              |
| Operational Life/ Endurance  | MIL-STD-202 Method 108<br>IEC 60115-1 4.25.1 | 1,000 hours at $70\pm2^{\circ}\text{C}$ applied RCWV<br>1.5 hours on, 0.5 hour off, still air required                                                                                                                                               | $\pm(1.0\%+0.0005\Omega)$                              |
| Resistance to Soldering Heat | MIL-STD-202-method 210                       | Condition B, no pre-heat of samples<br>Leadfree solder, $260^{\circ}\text{C}$ , 10 seconds immersion time<br><br>Procedure 2 for SMD: devices fluxed and cleaned with isopropanol                                                                    | $\pm(0.5\%+0.0005\Omega)$<br>No visible damage         |
| Thermal Shock                | MIL-STD-202 Method 107                       | $-55/+125^{\circ}\text{C}$ , Number of cycles is 300.<br><br>Devices mounted.<br><br>Maximum transfer time is 20 seconds.<br><br>Dwell time is 15 minutes. Air -Air                                                                                  | $\pm(1\%+0.0005\Omega)$<br>No visible damage           |
| Solderability - Wetting      | J-STD-002 test B                             | Electrical Test not required<br>Magnification 50X<br>SMD conditions:<br>1st step : method B, aging 4 hours at $155^{\circ}\text{C}$ dry heat<br>2nd step : leadfree solder bath at $245\pm3^{\circ}\text{C}$<br><br>Dipping time: $3\pm 0.5$ seconds | Well tinned<br>( $>95\%$ covered)<br>No visible damage |
| Board Flex / Bending         | IEC 60115-1 4.33                             | Chips mounted on a 90mm glass epoxy resin PCB (FR4), Bending for $0603=3$ mm<br><br>Holding time: Min.60 seconds                                                                                                                                     | $\pm(1.0\%+0.0005\Omega)$                              |



REVISION HISTORY

| REVISION  | DATE          | CHANGE NOTIFICATION | DESCRIPTION                                                          |
|-----------|---------------|---------------------|----------------------------------------------------------------------|
| Version 0 | Jan. 09, 2018 | -                   | - New datasheet for automotive grade current sensor – PA0603 series. |

“Yageo reserves all the rights for revising the content of this datasheet without further notification, as long as the products itself are unchanged. Any product change will be announced by PCN.”

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Yageo:

[PA0603-R-070RL](#) [PA0603FRE570R005L](#) [PA0603FRE7T0R01L](#) [PA0603FRE7T0R02L](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А