

Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

Features:

- 860-930MHz
- Impedance 50 Ohm
- Plastic support helical antenna
- Length 29.5mm,
- Gain 2dBi
- SMD Mounting on PCB
- RoHS Compliant

Applications:

- 868MHz and 915MHz ISM Band Systems
- IoT systems
- Metering, Automation
- Security, surveillance
- Remote controls, toys



All dimensions are in mm / inches

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel: 1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Do, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg, 4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998



Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

ELECTRICAL SPECIFICATIONS

| | |
|--------------------|------------------|
| Antenna Type | Helical monopole |
| Frequency | 860-930MHz |
| Nominal Impedance | 50 Ω |
| VSWR | Max 2.5 |
| Radiation Pattern | Omn |
| Gain | 2 dBi |
| Efficiency | 65% |
| Polarization | Linear |
| Power Withstanding | 2W |

MECHANICAL SPECIFICATIONS

| | |
|--------------------------|-------------------------|
| Overall Length | 29.5mm |
| Weight | 2.52g |
| Antenna Color / Material | White |
| Fix system | SMD+Glue |
| Recommended Glue | Resinlab EP1320LV Black |
| Solder Paste Thickness | Min 0.15mm |
| MSL | 3 |

ENVIRONMENTAL SPECIFICATIONS

| | |
|-----------------------|---------------|
| Operating Temperature | -40° C~+85° C |
| Storage Temperature | -40° C~+85° C |
| RoHS Compliant | Yes |

OTHER SPECIFICATIONS

Issue: 1943


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 860-930MHz Embedded Helical Antenna
Series: SMD Helical Antenna
PART NUMBER: W3136

MECHANICAL DRAWING

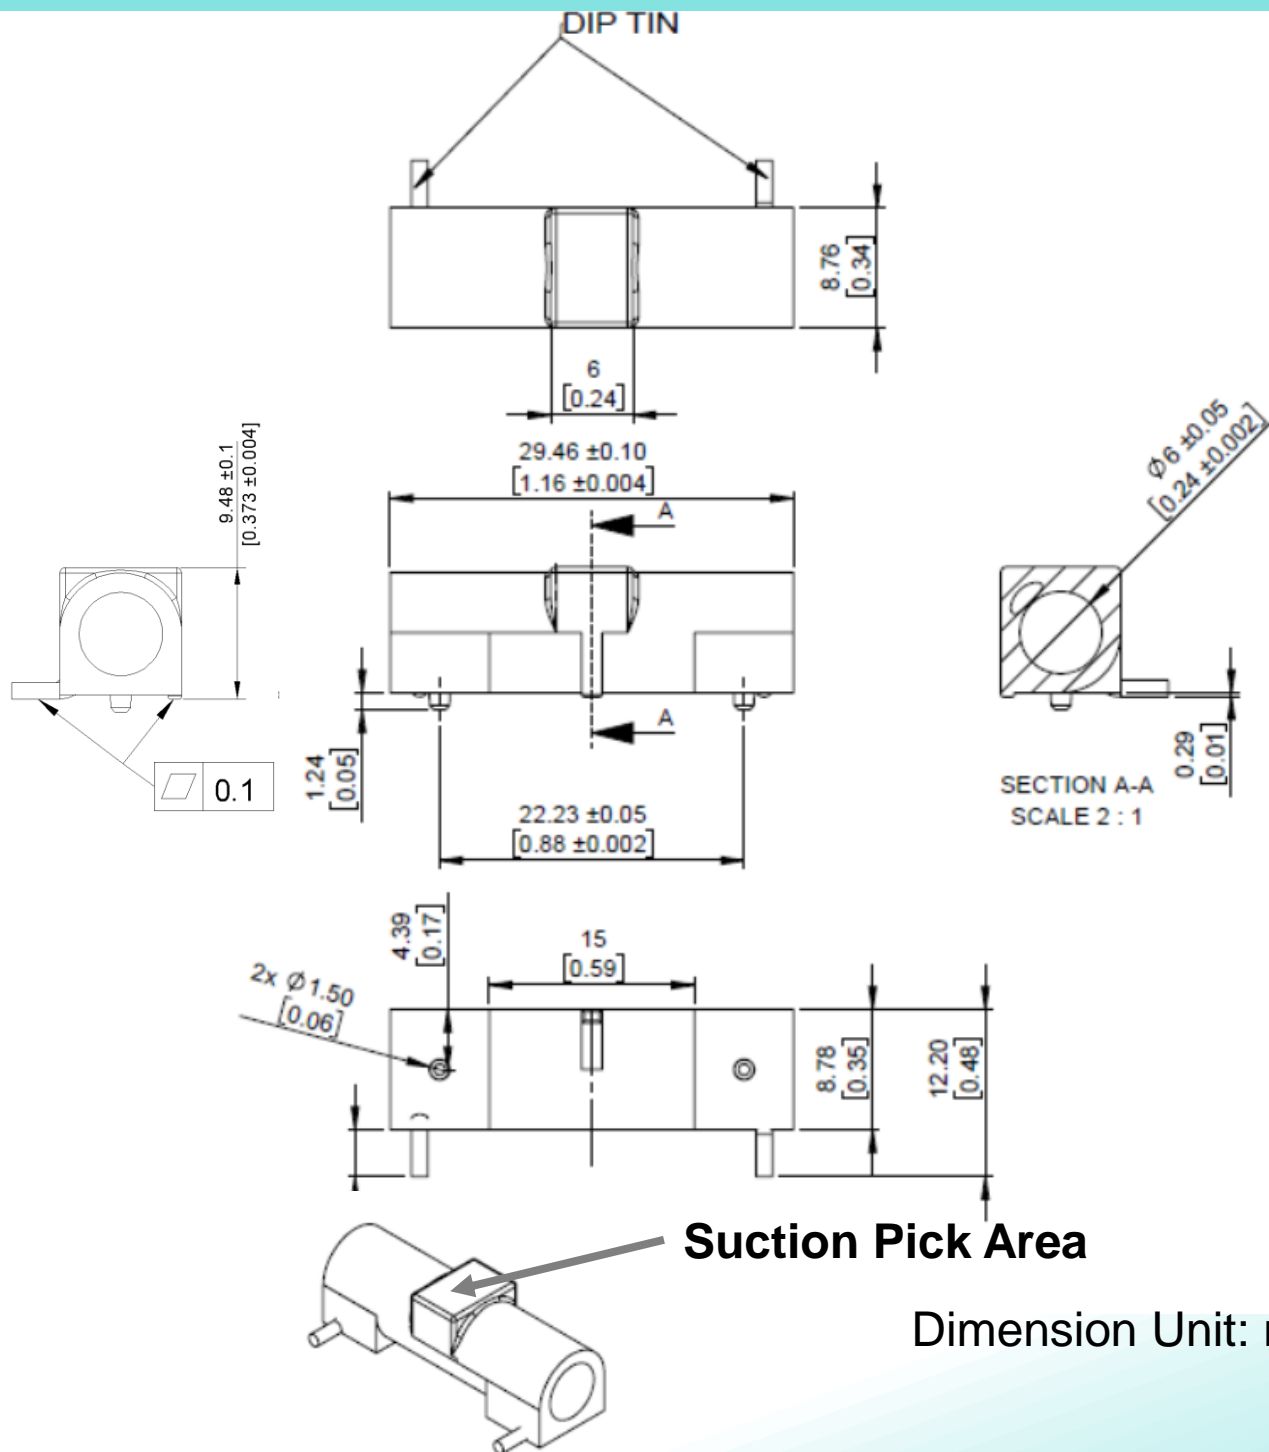

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 860-930MHz Embedded Helical Antenna

Series: SMD Helical Antenna

PART NUMBER: W3136

FIX SYSTEM RECOMMENDATION

Fix system


1. SMD process
2. Solder paste thickness: minimum 0.15mm
3. Glue is required, Recommended Glue: Resinlab EP1320LV Black, usage and position see below recommended area.

Solder
paste

Glue



Recommended
Glue Type

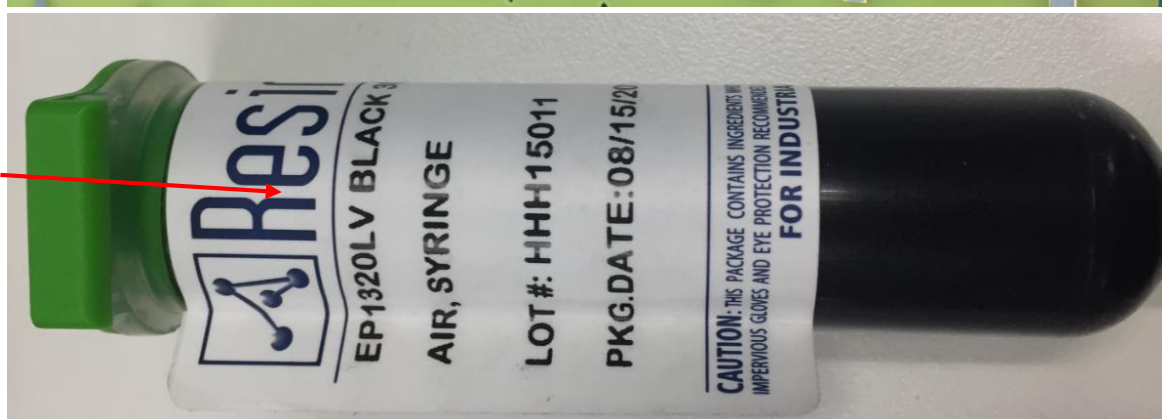

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 860-930MHz Embedded Helical Antenna

Series: SMD Helical Antenna


PART NUMBER: W3136

FIX SYSTEM RECOMMENDATION

Fix system

1. Glue position on PCB for recommendation

Glue position on PCB for recommendation

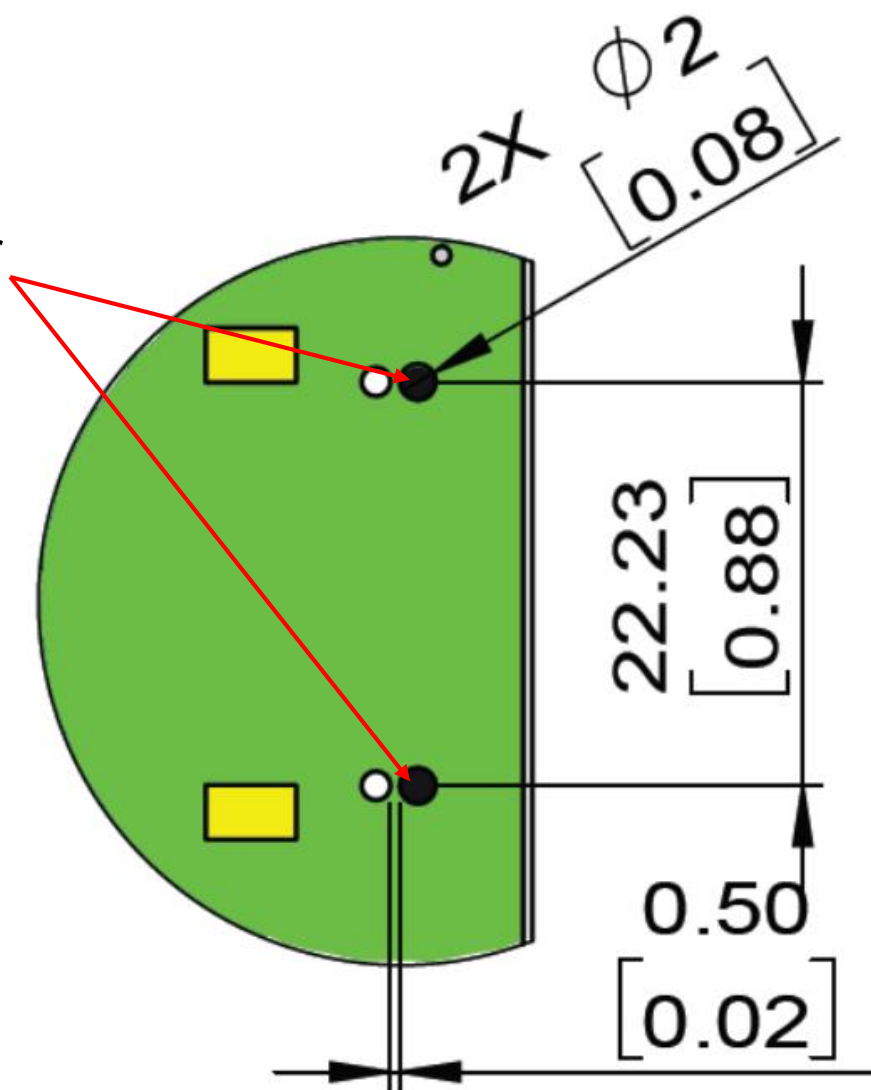

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Description: 860-930MHz Embedded Helical Antenna

Series: SMD Helical Antenna


PART NUMBER: W3136

FIX SYSTEM RECOMMENDATION

Solder effect

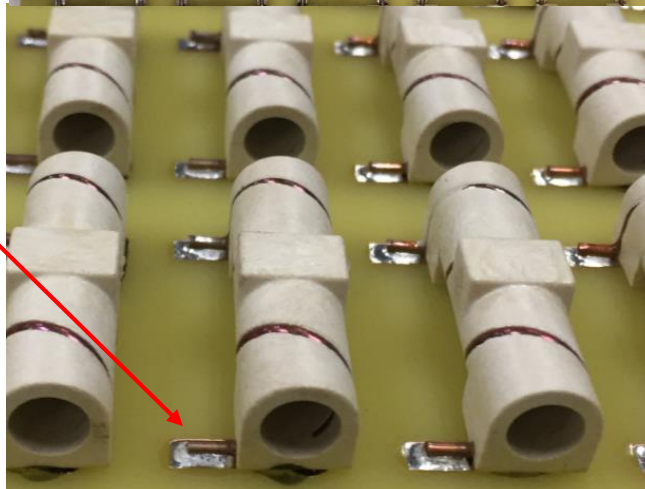

Back view of
glue area

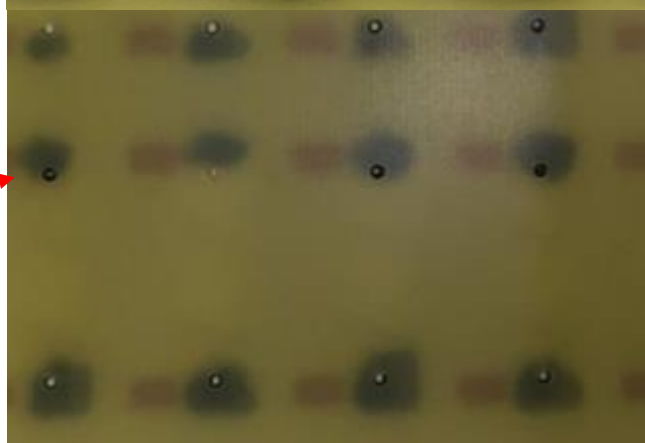

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.



Description: 860-930MHz Embedded Helical Antenna

Series: SMD Helical Antenna

PART NUMBER: W3136

TEST SETUP

PWB Layout for W3136 SMD Helical Antenna

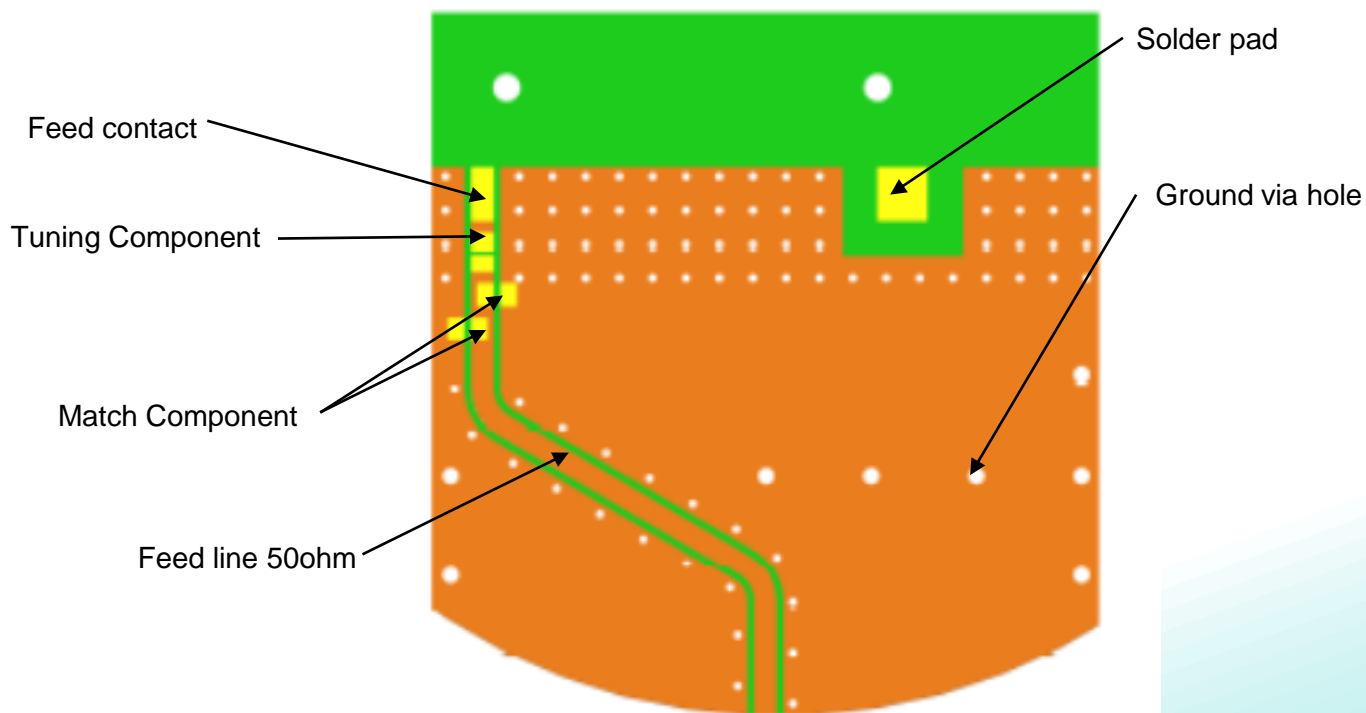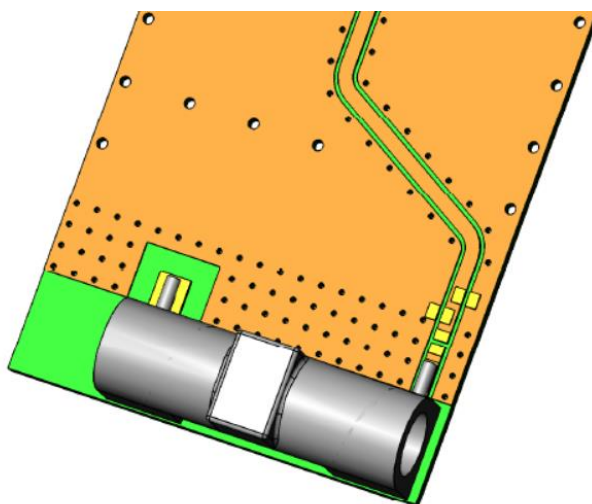

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 860-930MHz Embedded Helical Antenna


Series: SMD Helical Antenna

PART NUMBER: W3136

TEST SETUP

PWB ground clearance area (Top): 40x9.5mm

PWB ground clearance area (Bottom): 40x9.5mm

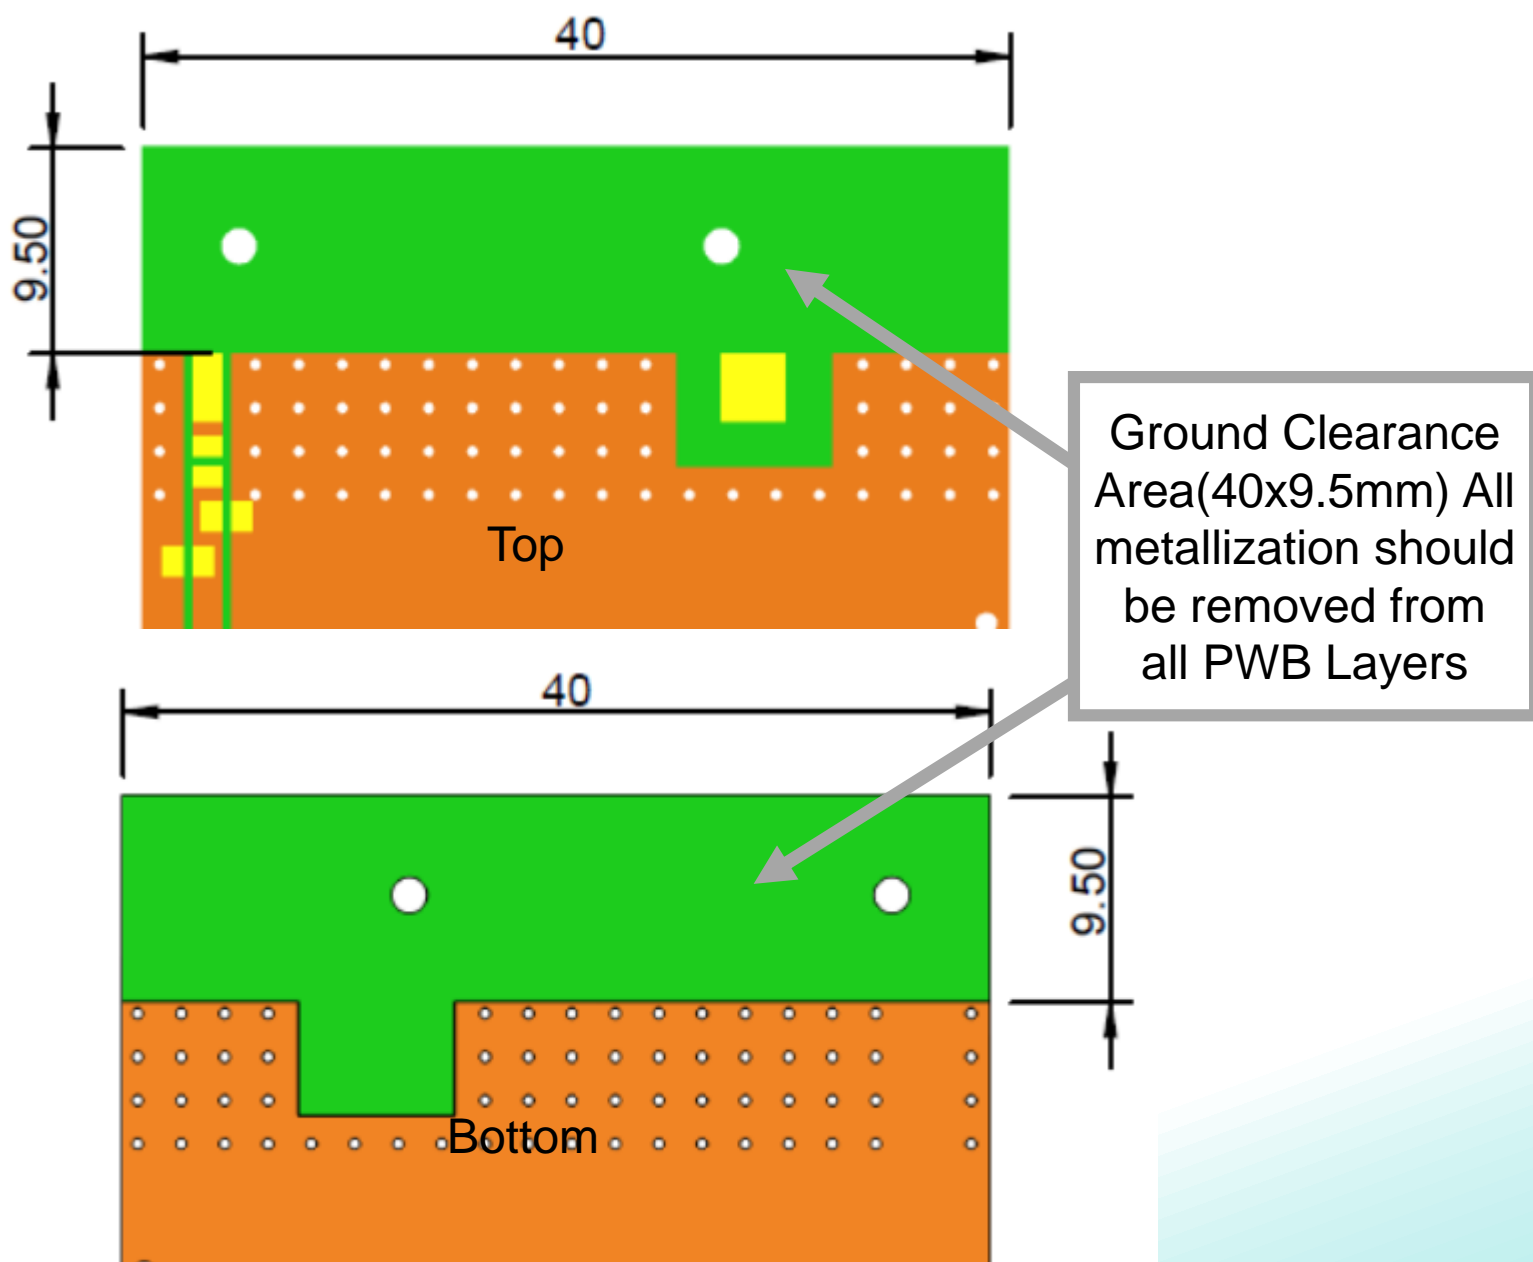

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

TEST SETUP

PWB Pad dimension in top copper

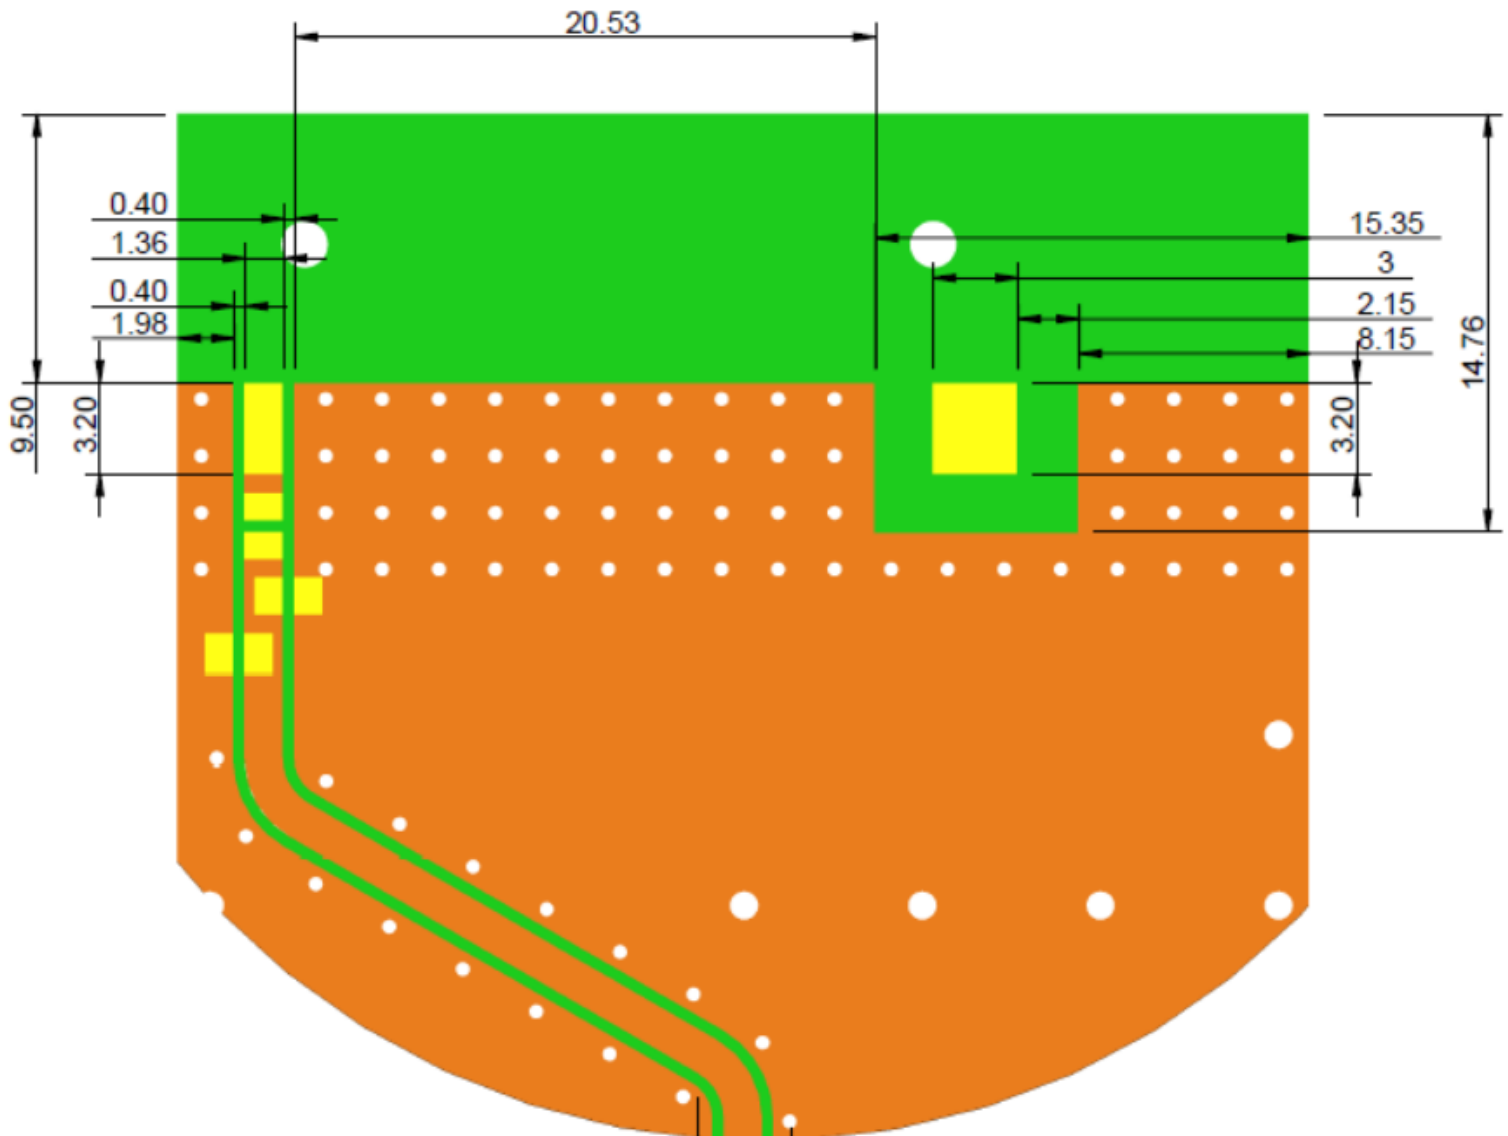

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

TEST SETUP

PWB Layout, Pulse PWB size: 121x40mm, Thickness 1.0mm, other size boards can be used depending on customer size.

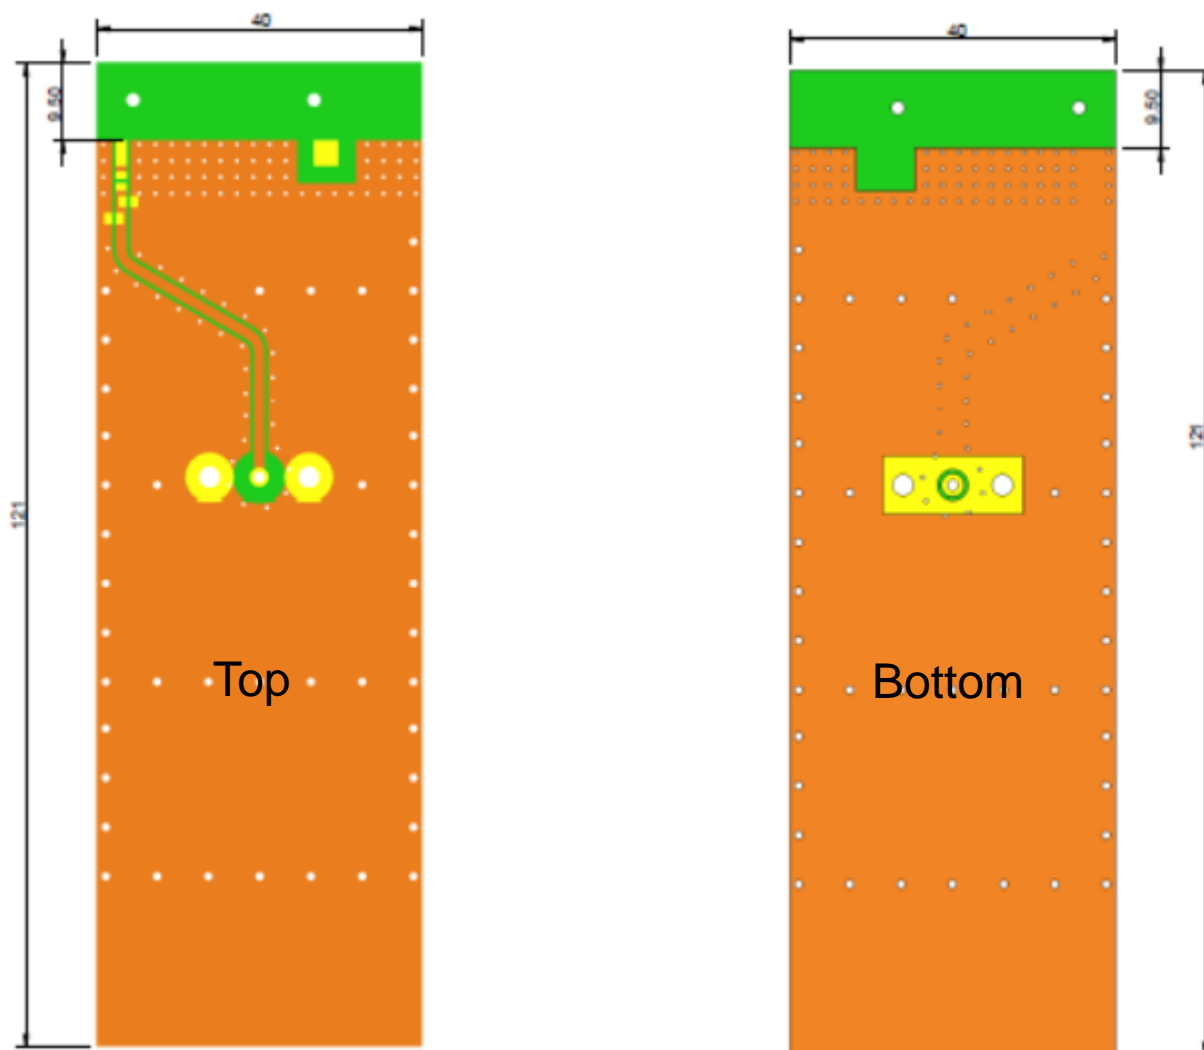

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136


TEST SETUP

PWB Layout, Pulse PWB size:121x40mm, Thickness 1.0mm, other size boards can be used depending on customer size.

Antenna feed point

Capacitance for S11 matching , 3.6pF, series

Inductance for S11 matching , 8.2nH, shunt

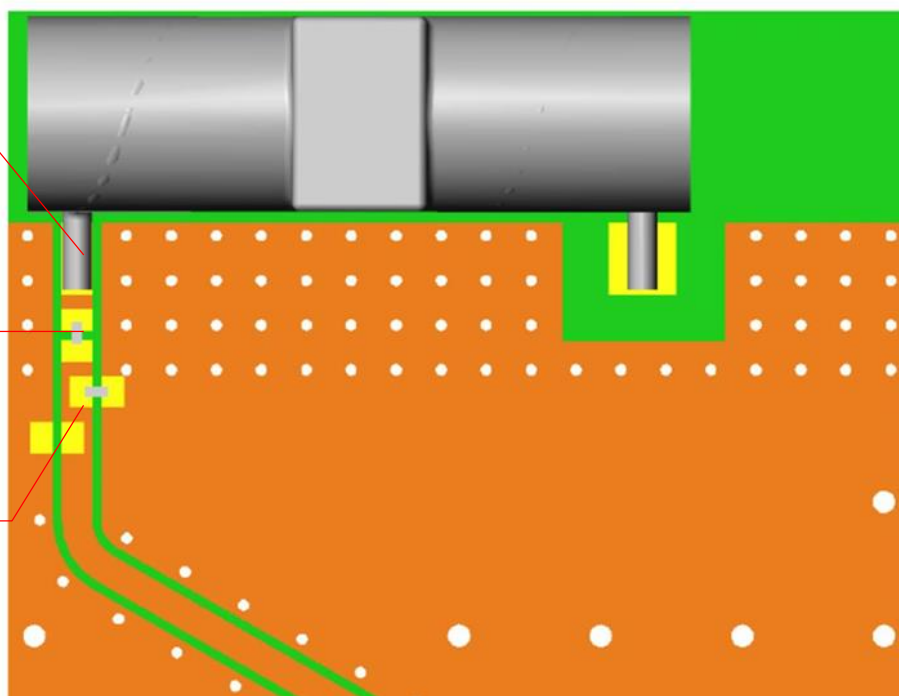

Note : Exact matching and tuning components value depend on application , board size ,cover etc.

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

CHARTS

Measured on the 121x40mm test board with tuning and matching circuit

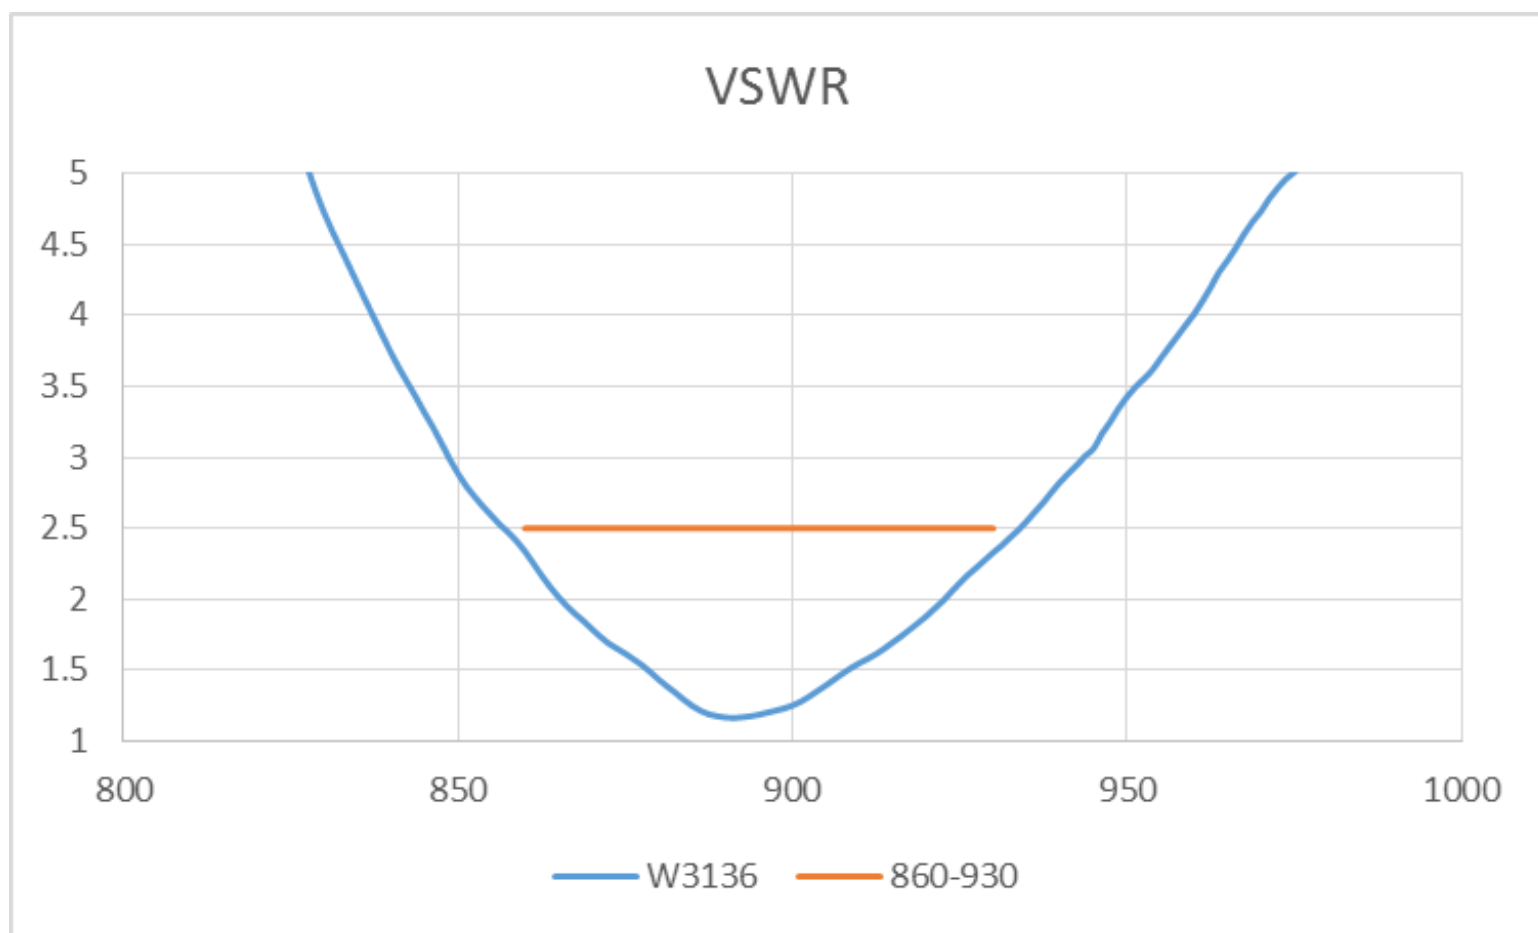

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Series: SMD Helical Antenna


Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

TEST SETUP

Measured on the 121x40mm test board with tuning and matching circuit.

Test in PSU China Chamber.

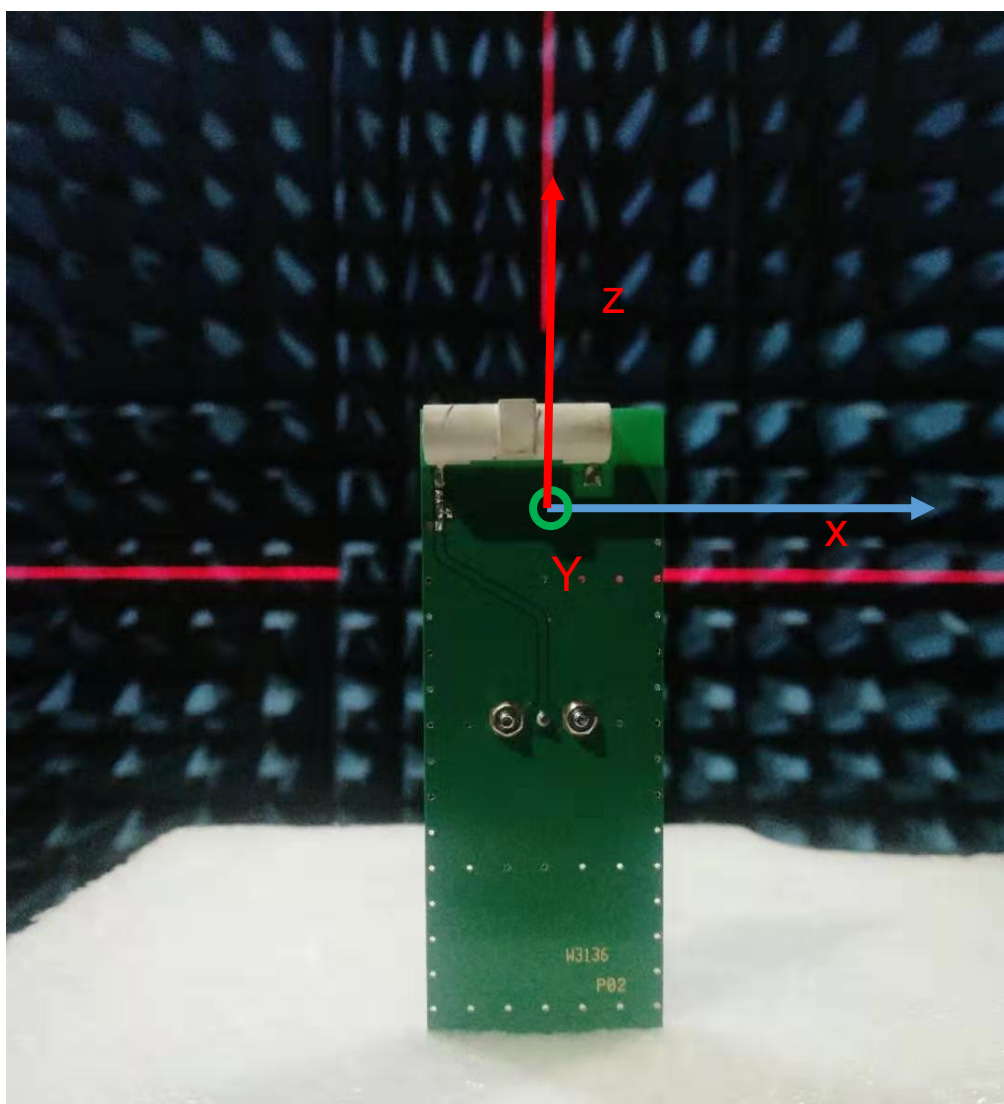

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION


This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

CHARTS

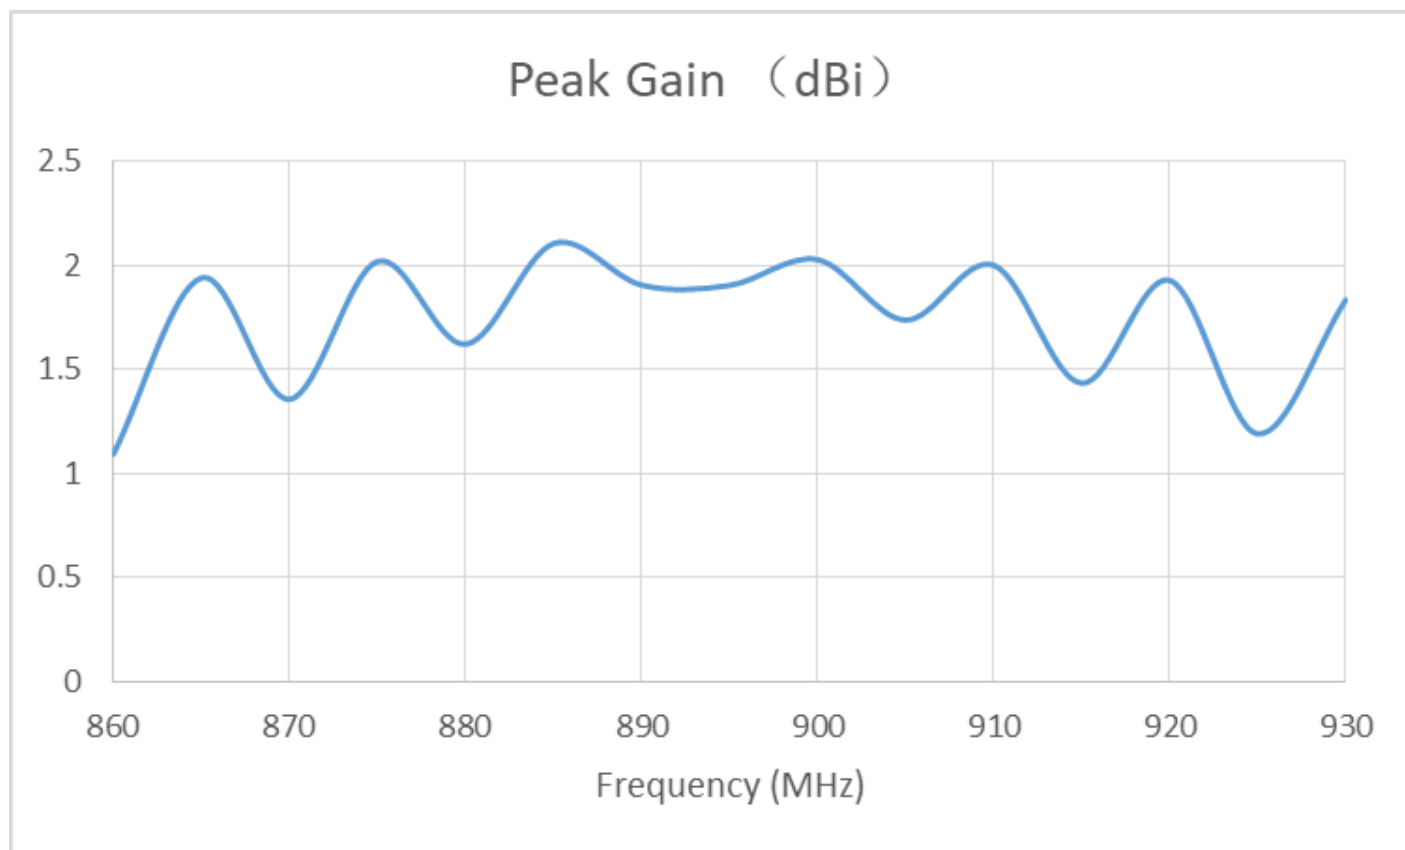

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION


This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

CHARTS

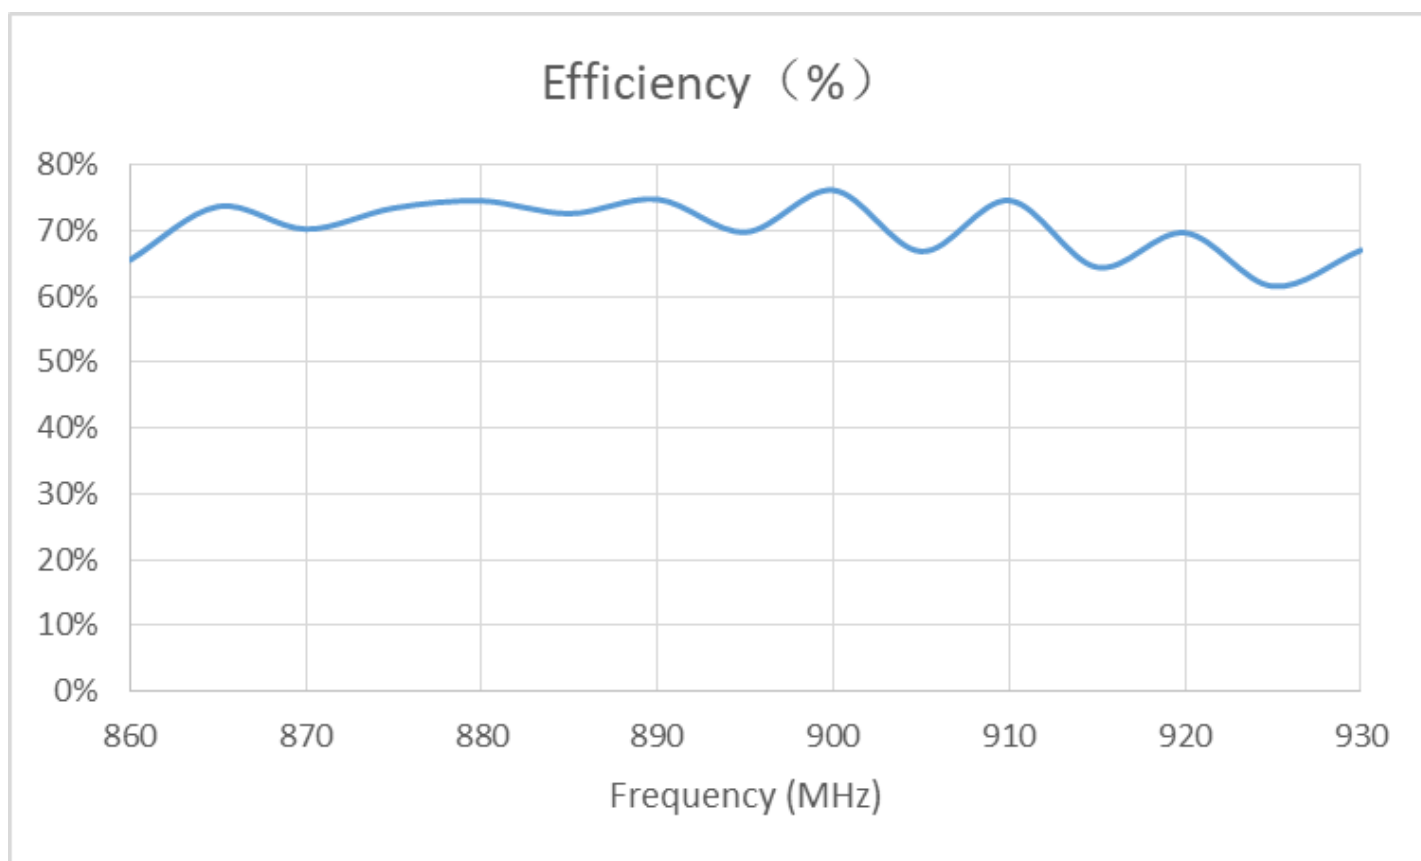

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

CHARTS

Typical radiation pattern in free space

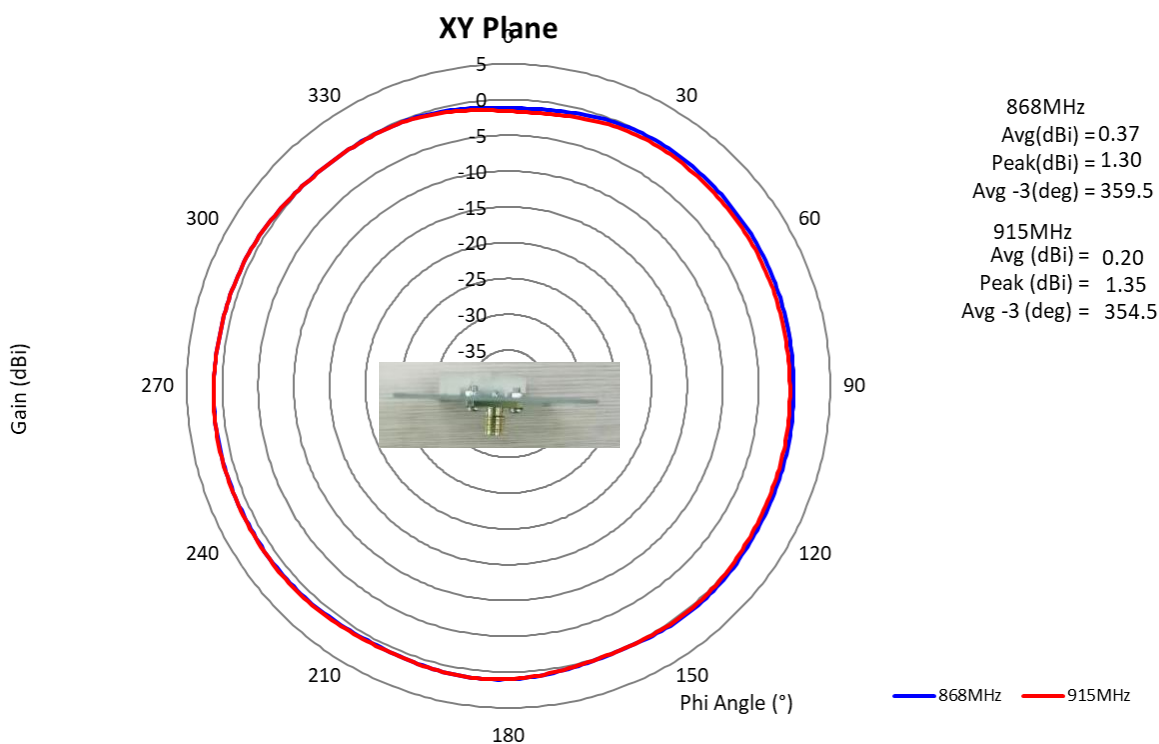

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

CHARTS

Typical radiation pattern in free space

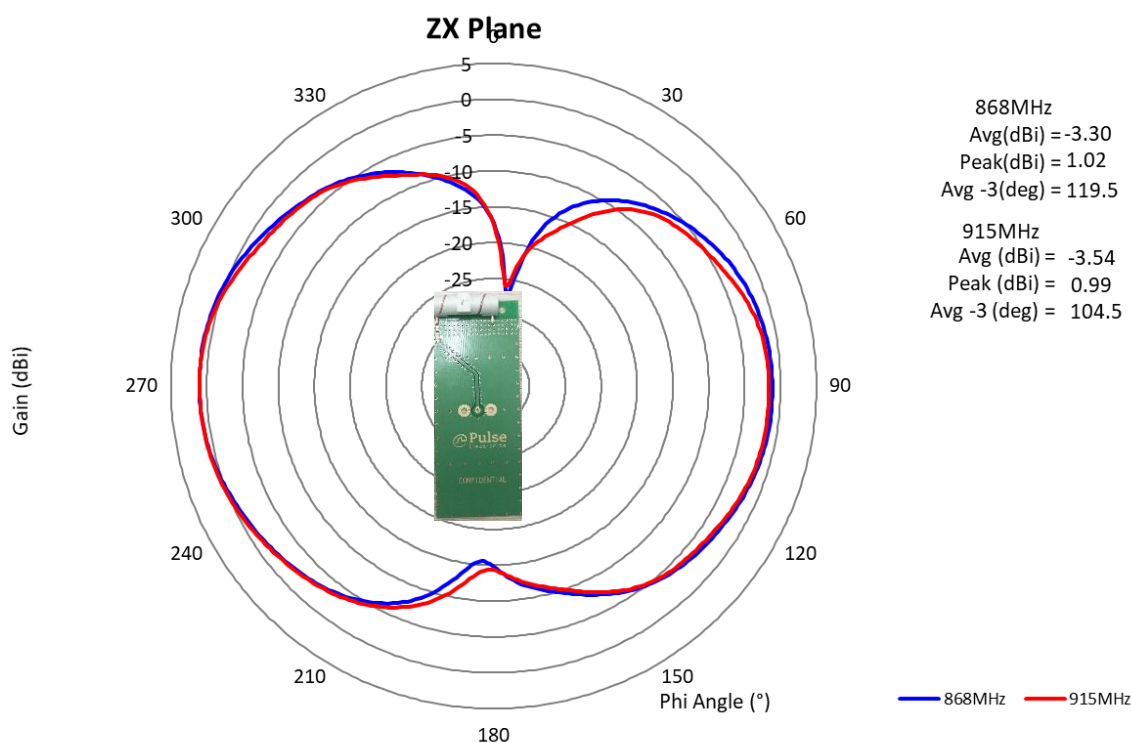

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Series: SMD Helical Antenna

Description: 860-930MHz Embedded Helical Antenna

PART NUMBER: W3136

CHARTS

Typical radiation pattern in free space

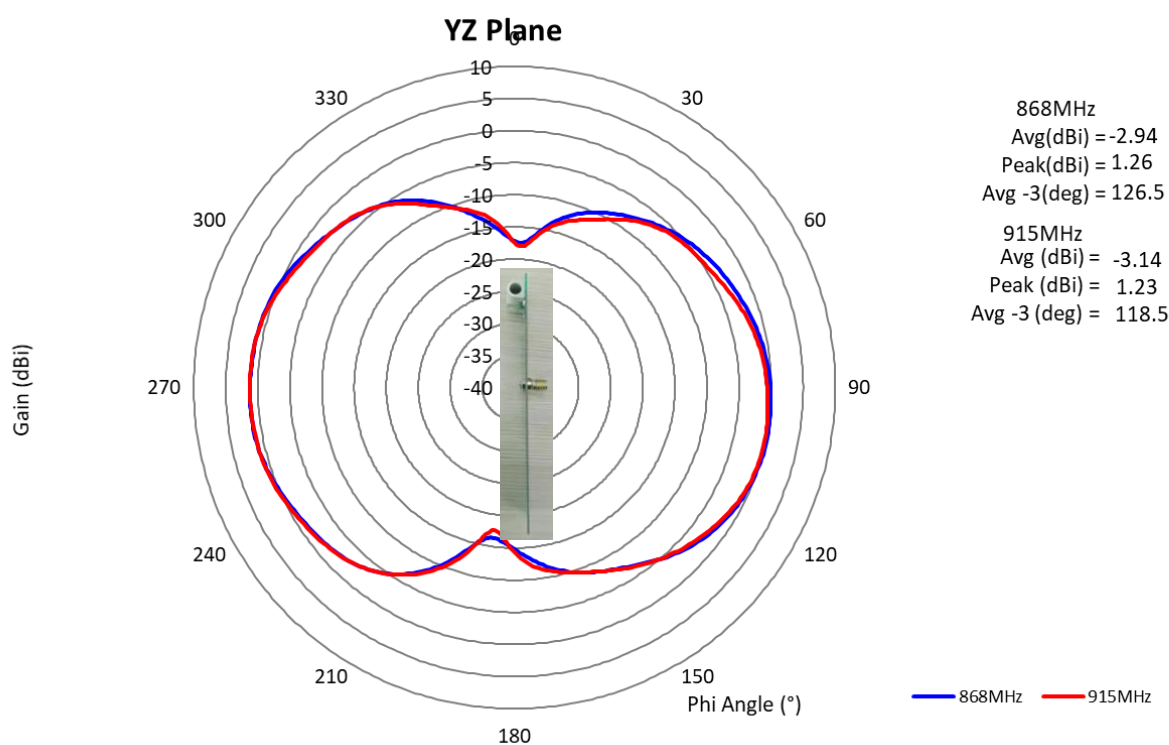

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 860-930MHz Embedded Helical Antenna
Series: SMD Helical Antenna
PART NUMBER: W3136

Recommendation for reflow soldering process

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile

presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

| | Method of heat transfer | Controlled hot air convection |
|---|--|-------------------------------|
| 1 | Average temperature gradient in preheating | 2.5 °C/s |
| 2 | Soak time | 2-3 minutes |
| 3 | Max temperature gradient in reflow | 3 °C/s |
| 4 | Time above 217 °C | Max 30 sec |
| 5 | Peak temperature in reflow | 230 °C for 10 seconds |
| 6 | Temperature gradient in cooling | Max -5 °C/s |


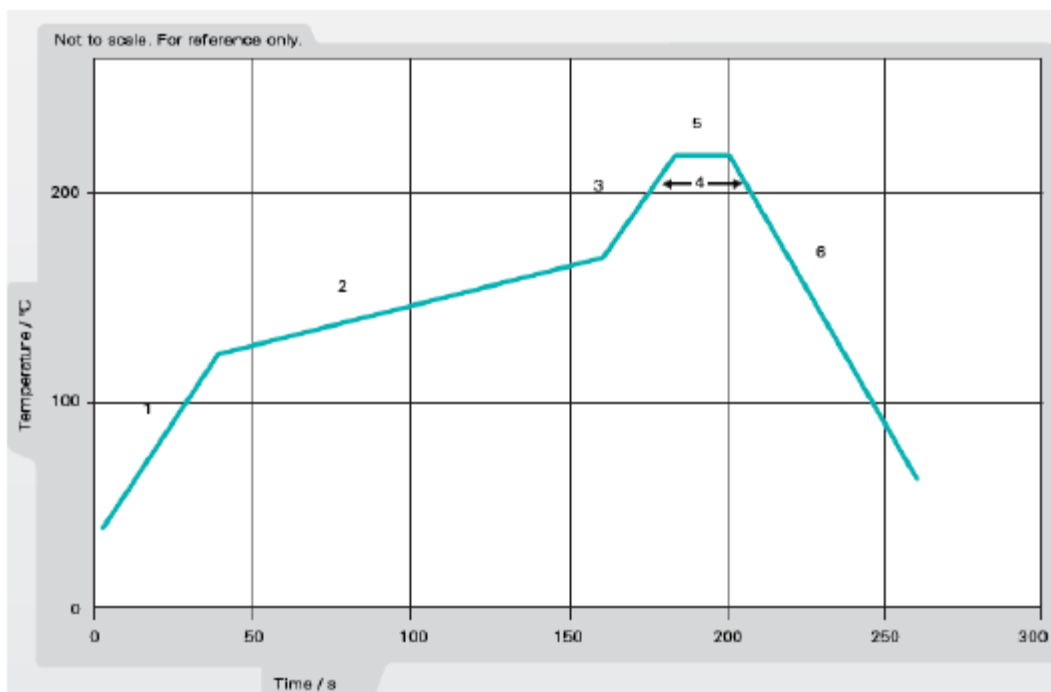


Figure 1. Minimum temperature profile recommendation for reflow soldering process

Description: 860-930MHz Embedded Helical Antenna
Series: SMD Helical Antenna
PART NUMBER: W3136

Recommendation for reflow soldering process

| | Method of heat transfer | Controlled hot air convection |
|---|--|-------------------------------|
| 1 | Average temperature gradient in preheating | 2.5 °C/s |
| 2 | Soak time | 2-3 minutes |
| 3 | Max temperature gradient in reflow | 3 °C/s |
| 4 | Time above 217 °C | Max 60 sec |
| 5 | Time above 230 °C | Max 50 sec |
| 6 | Time above 250 °C | Max 10 sec |
| 7 | Peak temperature in reflow | 260 °C for 5 seconds |
| 8 | Temperature gradient in cooling | Max -5 °C/s |

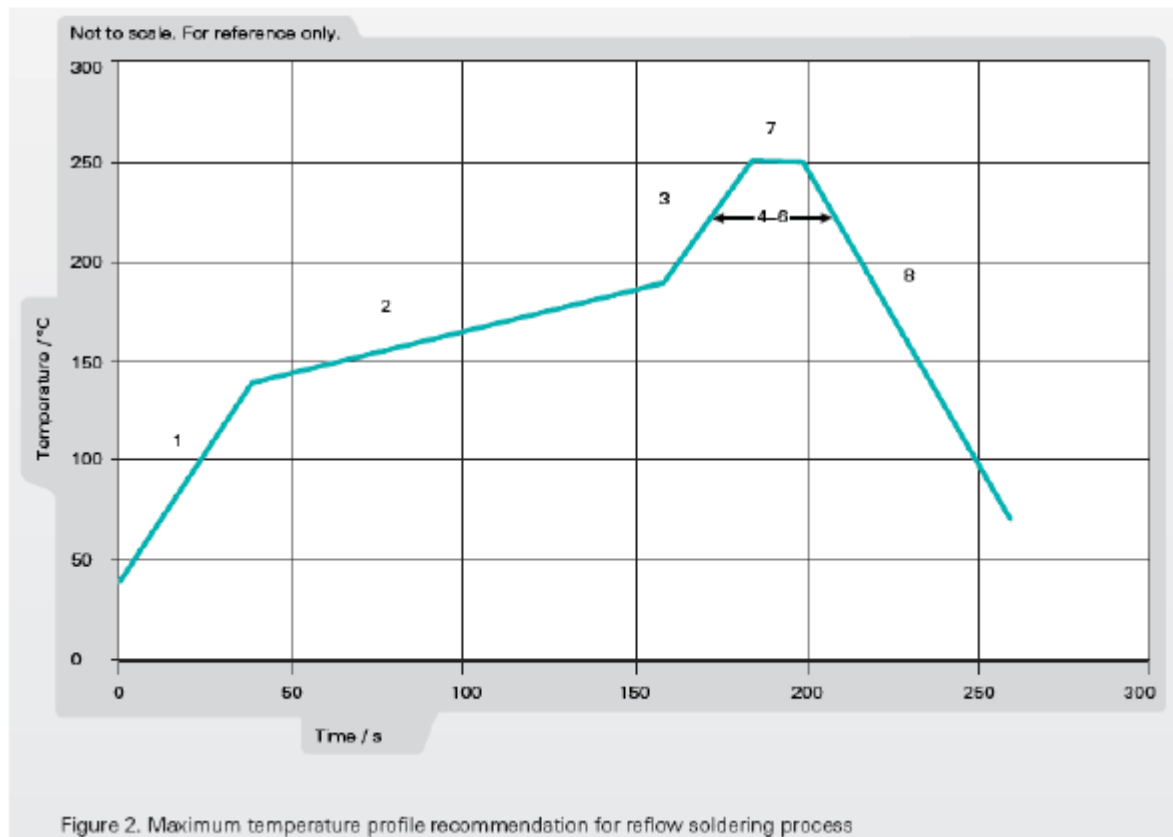

Issue: 1943




In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Series: SMD Helical Antenna **Description: 860-930MHz Embedded Helical Antenna**
PART NUMBER: W3136

PACKAGING

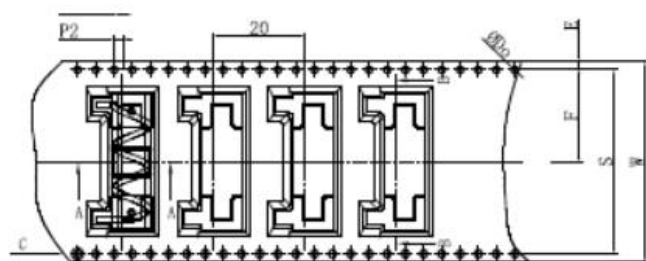

REFERENCE VIEW



6. Loading within 250 mm length maximum curvature is less than 1 mm (see chart).



Notes:

1. 10 side hole of the cumulative tolerance cannot be more than + / - 0.2 mm.
2. Material specifications: PS black antistatic, thickness of 0.50 mm.
3. 13 inches (100) axis reel package length: 4.6 m. (the front air bag length: 0.33 m, parts packing length: 4 m, after a period of empty packet length: 0.33 meters).
4. 13 inches (100) axis reel packaging components to the total number of stars: 230. (the front air bag star count: 15, actual packing parts the number: 200, after a period of empty bag star count: 15).

| Manufacture Data | |
|------------------|--------|
| Total PCS | 230PCS |
| Reel | 13"/44 |
| Package Qty | 200PCS |

Total 200 PCS In Reel
Reel Size: 330MM[13INCH]
Total 2 PCS Reel In Package Box
Package Box Size:350x350x120mm

Issue: 1943

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А