



NETWORK-ATTACHED  
USB HUB



# ANYWHEREUSB®

Network-attached USB hub connects USB peripheral devices anywhere on a LAN – without a locally-attached host PC

AnywhereUSB products are network-attached USB hubs that connect USB peripheral devices to a PC over a Local Area Network. The AnywhereUSB TS model also adds four RS-232 serial ports, enabling the mixing of USB and serial ports over the same network connection.

The AnywhereUSB software drivers are loaded onto a host PC or server so that USB devices attached to the AnywhereUSB hub may communicate with the host PC without changing existing device application software. AnywhereUSB drivers work equally well on physical servers or virtual machines in virtualized environments. Peripheral USB devices can be

centrally managed and monitored from a remote server or PC. The Multi-Host Connections feature allows multiple host PCs to establish connections with the AnywhereUSB hub concurrently, where each PC takes ownership of a group of USB ports on the AnywhereUSB hub.


Relocating the host PC to a remote location translates to smaller workstations, enabling deployment without a local PC in kiosks, ATMs, restaurant kitchens, manufacturing lines or any hostile or non-secure area where having a local PC is not practical.

USB storage devices and USB modems are not supported.  
Digi's Edgeport/1 USB-to-serial converter may be used to connect a serial modem.


## BENEFITS

- Network-attached USB hub easily connects remote USB devices to a LAN
- Ideal for connecting USB devices over the network in virtualized environments such as VMware®
- AnywhereUSB/14 rack mountable product has two built-in power supplies and two Ethernet connections for redundancy
- Access and monitor USB and serial devices over a TCP/IP connection
- Compatible with bulk or interrupt type USB devices
- Multi-Host connections (on select models)

## RELATED PRODUCTS

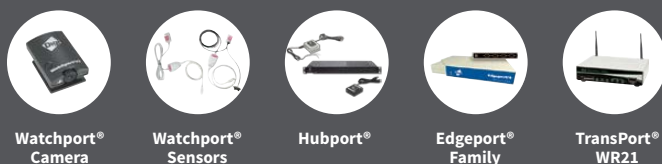

## APPLICATION EXAMPLE

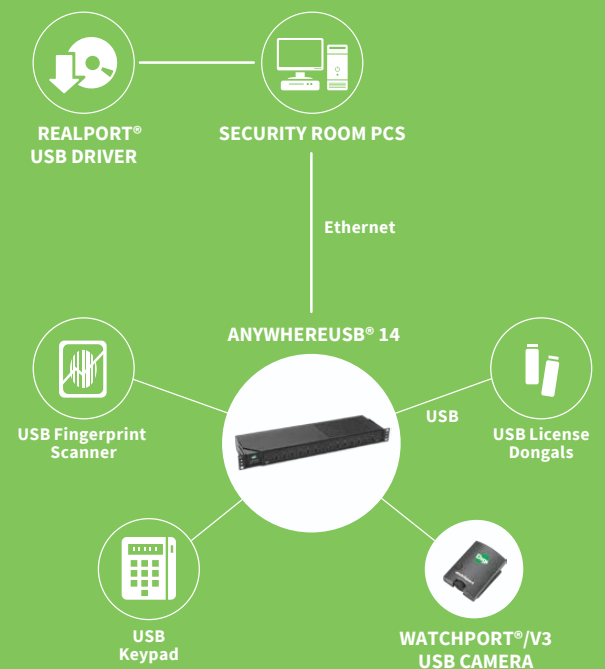

SPECIFICATIONS	AnywhereUSB®/2	AnywhereUSB®/5	AnywhereUSB®/5M	AnywhereUSB® TS	AnywhereUSB®/14
----------------	----------------	----------------	-----------------	-----------------	-----------------


INTERFACES					
------------	--	--	--	--	--

<b>10/100BASE-T ETHERNET</b>	1 RJ-45	1 RJ-45	1 RJ-45	1 RJ-45	2 RJ-45
<b>USB</b>	2	5	5	4	14
<b>SERIAL</b>	N/A	N/A	N/A	4 RS-232 RJ-45	1 RS-232 DB9


FEATURES					
----------	--	--	--	--	--

<b>IP ADDRESS</b>	1 static (fixed) address per unit				
<b>LEDS</b>	System and Port status				
<b>POWER SUPPLY</b>	Ships with 120-240 VAC 50-60 Hz at 5 VDC @ 3 amps max w/ locking barrel	Ships with 120-240 VAC 50-60 Hz at 5 VDC @ 3 amps max w/ locking barrel	Ships with 120-240 VAC 50-60 Hz at 5 VDC @ 3 amps max w/ locking barrel	Ships with 120-240 VAC 50-60 Hz at 5 VDC @ 3 amps max w/ locking barrel	Includes 2 120-230 VAC 50-60 Hz @ 8 amps max
<b>MANAGEMENT</b>	CLI and AnywhereUSB web configuration tool				
<b>SECURITY</b>	OpenSSL w/ AES-128				
<b>OTHER SHARED FEATURES</b>	Remote configuration utility; Multiple units supported per server; Field-upgradable software and firmware; Patented RealPort® (serial over IP) and RealPort USB (USB over IP)				
<b>SERIAL DATA RATES</b>	N/A	N/A	N/A	Up to 230 Kbps per port	Up to 230 Kbps per port
<b>USB DOWNSTREAM POWER</b>	500 mA per USB device				
<b>USB COMPATIBILITY</b>	USB 2.0, 1.1, 1.0 Note: USB storage devices and USB modems are not supported. Digi's Edgeport®/1 USB-to-serial converter may be used to connect a serial modem.				
<b>OPERATING SYSTEMS</b>	Windows® 10, Windows® 8, Windows® 7, Windows Vista®, Windows Server® 2012 R2, Windows® Server 2008 R2, Windows® Server 2003, Windows XP®, Windows XP® Embedded				
<b>MULTI-HOST CONNECTIONS</b>	N/A	N/A	Yes	N/A	Yes
<b>DIMENSIONS (L X W X H)</b>	2.38 in x 3.9 in x 1.0 in (6.04 cm x 10.0 cm x 2.54 cm)	4.35 in x 7.20 in x 1.03 in (11.05 cm x 18.29 cm x 2.61 cm)	4.35 in x 7.20 in x 1.03 in (11.05 cm x 18.29 cm x 2.61 cm)	4.35 in x 7.20 in x 1.03 in (11.05 cm x 18.29 cm x 2.61 cm)	4.97 in x 17.00 in x 1.74 in (12.62 cm x 43.18 cm x 4.42 cm), Rack mountable 1U
<b>WEIGHT</b>	5.0 oz (141.8 g)	10.0 oz (283.5 g)	10.0 oz (283.5 g)	10.0 oz (283.5 g)	40 oz (1134 g)
ENVIRONMENTAL					
<b>OPERATING TEMPERATURE</b>	32° F to 140° F (0° C to 60° C)	32° F to 140° F (0° C to 60° C)	32° F to 140° F (0° C to 60° C)	32° F to 140° F (0° C to 60° C)	32° F to 131° F (0° C to 55° C)
<b>STORAGE TEMPERATURE</b>	-40° F to +185° F (-40° C to +85° C)				
<b>RELATIVE HUMIDITY</b>	0% to 95% (non-condensing)				
NETWORK AND DEVICE RECOMMENDATIONS					
<b>NETWORK TYPE</b>	10/100 Mb switched Ethernet	10/100 Mb switched Ethernet	10/100 Mb switched Ethernet	10/100 Mb switched Ethernet	Dual 10/100 Mb switched Ethernet
<b>USB DEVICE TYPES</b>	Compatible with bulk or interrupt type USB devices; Isochronous devices not supported				
REGULATORY APPROVALS					
<b>SAFETY</b>	UL 1950/CSA 2.2 No. 950, EN60950, IEC-950				
<b>EMISSIONS/IMMUNITY</b>	CE, FCC Part 15 (Class B), EN55022, EN55024				


AnywhereUSB/5 AnywhereUSB/5M - Front




AnywhereUSB/2 - Front




AnywhereUSB TS - Front




AnywhereUSB/14 - Front




AnywhereUSB/5 AnywhereUSB/5M - Back




AnywhereUSB TS - Front



AnywhereUSB TS - Back



AnywhereUSB/14 - Front



PART NUMBERS	DESCRIPTION
<b>14-PORT MODEL</b>	
AW-USB-14	AnywhereUSB/14 with Multi-Host Connections
AW-USB-14-W	AnywhereUSB/14 with Multi-Host Connections (International)
<b>2-PORT MODEL</b>	
AW-USB-2	AnywhereUSB/2
AW-USB-2-W	AnywhereUSB/2 (International)
<b>5-PORT MODEL</b>	
AW-USB-5	AnywhereUSB/5 Gen 2
AW-USB-5M	AnywhereUSB/5 with Multi-Host Connections
AW-USB-5M-W	AnywhereUSB/5 with Multi-Host Connections (International)
AW-USB-5-W	AnywhereUSB/5 Gen 2 (International)
<b>TS MODEL</b>	
AW-TS-44	AnywhereUSB TS - 4 serial and 4 USB ports
AW-TS-44-W	AnywhereUSB TS - 4 serial and 4 USB ports (International)

FOR MORE INFORMATION  
PLEASE VISIT [WWW.DIGI.COM](http://WWW.DIGI.COM)

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2015 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91001219  
F1/915

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL FRANCE**  
+33-1-55-61-98-98 / [www.digi.fr](http://www.digi.fr)

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А